

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD  
CENTRAL VALLEY REGION

ORDER NO. R5-2006-0046

WASTE DISCHARGE REQUIREMENTS  
FOR  
COUNTY OF KERN  
FOR  
CLOSURE AND POST-CLOSURE MAINTENANCE  
LOST HILLS SANITARY LANDFILL  
KERN COUNTY

The California Regional Water Quality Control Board, Central Valley Region, (hereafter Central Valley Water Board) finds that:

1. The County of Kern (hereafter Discharger) owns and operates a municipal solid waste landfill about four miles west of Lost Hills, in Section 30, T26S, R21E, MDB&M, as shown in Attachment A, which is incorporated herein and made part of this Order.
2. The 537-acre facility contains of one existing unlined waste management unit (Unit) covering 6.7 acres, as shown in Attachment B, which is incorporated herein and made part of this Order. The facility is comprised of Assessor's Parcel Numbers (APN) 58-180-28, 58-180-29, 58-180-43, and 58-240-46.
3. On 25 August 1972, the Central Valley Water Board adopted Waste Discharge Requirements, Order No. 73-57, in which the facility was classified as a Class II-2 waste disposal site for the discharge of nonhazardous solid wastes in accordance with Title 23, Chapter 3, Subchapter 15 of the California Administrative Code.
4. On 17 September 1993, the Central Valley Water Board adopted Order No. 93-200, amending Order No. 73-57 and implementing State Water Resources Control Board Resolution No. 93-62, Policy for Regulation of Discharges of Municipal Solid Waste.
5. On 14 June 2001, the Central Valley Water Board adopted Order No. 5-01-161 which classified the Unit as a Class III landfill as defined in Title 27, California Code of Regulations, §20005, et seq. (Title 27).
6. This Order revises the existing Waste Discharge Requirements to provide for the construction of a final cover and regulate post-closure maintenance of the facility.

**SITE DESCRIPTION**

7. The measured hydraulic conductivity of the native soils underlying the Unit ranges between  $1 \times 10^{-6}$  and  $1 \times 10^{-5}$  cm/sec.

8. The San Andreas Fault Zone is located approximately 22 miles west of the landfill. The magnitude of the maximum probable earthquake is 8.25. The peak horizontal ground acceleration at the site would be 0.234g.
9. Land within 1,000 feet of the facility is used for natural grazing, petroleum production, and mining.
10. The facility receives an average of 5.74 inches of precipitation per year as reported by Kern County Water Agency. The annual average reference evapotranspiration from a grass surface is 57.06 inches per year as measured at the California Irrigation Management Information System Lost Hills Station.
11. The 100-year, 24-hour precipitation event is estimated to be two inches, based on the *Kern County Hydrology Manual, 1992*.
12. The waste management facility is not within a 100-year flood plain based on the Federal Emergency Management Agency's (FEMA) Flood Insurance Rate Map, Community-Panel Number 060075 0375 B, dated 29 September 1986.
13. There are no municipal, domestic, industrial, or agricultural groundwater supply wells within one mile of the site. Groundwater monitoring wells are located within one mile of the facility to the north. Petroleum production wells exist approximately one half mile east of the facility. No surface springs or other sources of groundwater supply have been observed.

#### **SURFACE AND GROUND WATER CONDITIONS**

14. The *Water Quality Control Plan for the Tulare Lake Basin, Second Edition* (hereafter Basin Plan), designates beneficial uses, establishes water quality objectives, and contains implementation plans and policies for all waters of the Basin.
15. Surface drainage is toward an unnamed creek in the Lost Hills in the Antelope Plain Hydrologic Area (558.60) of the Tulare Lake Basin. Surface waters in the Antelope Plain Hydrologic Area are designated as Valley Floor Waters in the Basin Plan.
16. The designated beneficial uses of the Valley Floor Waters, as specified in the Basin Plan, are agricultural, industrial service, and process supply; water contact and non-contact water recreation; warm fresh water habitat; preservation of rare, threatened and endangered species; and groundwater recharge.
17. The first encountered groundwater is about 100 to 105 feet below the native ground surface. Groundwater elevations range from 314 feet to 315 feet MSL. The groundwater is unconfined. The depth to groundwater does not fluctuate significantly on a seasonal basis.

18. Monitoring data indicates background groundwater quality has an electrical conductivity (EC) ranging between 4,500 and 6,000 micromhos/cm, with total dissolved solids (TDS) ranging between 3,300 and 4,000 mg/l.
19. The direction of groundwater flow varies seasonally between the southwest and the south. The average groundwater gradient is approximately 0.003 feet per foot. The average groundwater velocity is 20 feet per year.
20. The designated beneficial uses of the groundwater, as specified in the Basin Plan, are domestic and municipal, agricultural, and industrial supply.

### **WASTE AND SITE CLASSIFICATION**

21. The Discharger disposed of nonhazardous solid wastes as defined in §20164 of Title 27. Nonhazardous solid waste includes municipal solid wastes, as referred to in the Code of Federal Regulations, Title 40, Part 258.2.
22. The site characteristics where the Unit is located (see Finding No. 7) do not meet the siting criteria for a new Class III landfill contained in §20260(a) and (b)(1) of Title 27. As such, the site is not suitable for operating new Units or lateral expansions of existing Units for the discharge and containment of the wastes described in Finding No. 21, without the construction of additional waste containment features in accordance with §20260(b)(2) of Title 27 and State Water Resources Control Board Resolution No. 93-62.

### **GROUNDWATER AND VADOSE ZONE MONITORING**

23. The run-off of storm water at the facility constitutes a discharge of waste that has the potential to affect the quality of surface and ground waters of the state. To ensure compliance with State Water Resources Control Board Resolution No. 68-16 and Basin Plan Antidegradation requirements, Facility Specification B.7 of this Order requires compliance with Storm Water Pollution Prevention Plan and Monitoring Program and Reporting Requirements of the State Water Resources Control Board's General Industrial Storm Water Permit (Order No. 97-03-DWQ, Sections A and B). Compliance with Sections A and B of Order No. 97-03-DWQ satisfies the Best Practicable Treatment or Control requirement of Resolution No. 68-16.
24. The groundwater detection monitoring system consists of three monitoring wells. Monitoring well LH1-03 is used to collect background water quality data. Monitoring wells LH1-04 and LH1-06 are used to collect water quality data at the point of compliance.
25. The detection monitoring program does not include an unsaturated zone monitoring system in accordance with Title 27. The Unit was constructed prior to the adoption of requirements for unsaturated zone monitoring and the Discharger demonstrated that it is infeasible to retrofit the Unit with an unsaturated monitoring zone system.

WASTE DISCHARGE REQUIREMENTS ORDER NO. R5-2006-0046  
COUNTY OF KERN  
FOR CLOSURE AND POST-CLOSURE MAINTENANCE  
LOST HILLS SANITARY LANDFILL  
KERN COUNTY

-4-

26. A Water Quality Protection Standard has been established for the Unit. The concentration limits for the constituents of concern are listed on Table VII of Monitoring and Reporting Program No. R5-2005-0046.
27. The Discharger's detection monitoring program for groundwater at this Unit satisfies the requirements contained in Title 27.
28. Volatile organic compounds (VOCs) are often detected in a release from a landfill, and are the primary waste constituents detected in groundwater beneath a municipal solid waste landfill. Since volatile organic compounds are not naturally occurring and thus have no background value, they are not amenable to the statistical analysis procedures contained in Title 27 for the determination of a release of wastes from a Unit.
29. Sections 20415(e)(8) and (9) of Title 27 provide for the non-statistical evaluation of monitoring data that will provide the best assurance of the earliest possible detection of a release from a Unit in accordance with §20415(b)(1)(B)2.-4. of Title 27. However, Title 27 does not specify a specific method for non-statistical evaluation of monitoring data.
30. The Central Valley Water Board may specify a non-statistical data analysis method pursuant to Section 20080(a)(1) of Title 27. Section 13360(a)(1) of the California Water Code allows the Central Valley Water Board to specify requirements to protect underground or surface waters from leakage from a solid waste site, which includes a method to provide the best assurance of determining the earliest possible detection of a release.
31. In order to provide the best assurance of the earliest possible detection of a release of non-naturally occurring waste constituents from a Unit, this Order specifies a non-statistical method for the evaluation of monitoring data.
32. The specified non-statistical method for evaluation of monitoring data, for non-naturally occurring waste constituents, provides two criteria (or triggers) for making the determination that there has been a release of waste constituents from a Unit. The presence of two non-naturally occurring waste constituents above their respective method detection limit (MDL), or one non-naturally occurring waste constituent detected above its practical quantitation limit (PQL), indicates that a release of waste from a Unit has occurred. Following an indication of a release, verification testing will be conducted to determine whether there has been a release from the Unit, or there is a source of the detected constituents other than the landfill, or the detection was a false detection. Although the detection of one waste constituent above its MDL is sufficient to provide for the earliest possible detection of a release, the detection of two waste constituents above the MDL as a trigger is appropriate due to the higher risk of false-positive analytical results and the corresponding increase in sampling and analytical expenses from the use of one non-naturally occurring waste constituent above its MDL as a trigger.

**FINAL COVER CONSTRUCTION AND ENGINEERED ALTERNATIVE**

33. The current interim cover on the landfill consists of an average of 1.8 foot thick layer of soil placed on top of refuse. The current cover does not meet the final cover system requirements of Title 27.
34. Closure and post-closure maintenance requirements for landfills are contained in §21090 of Title 27. The prescriptive standard for the final cover is contained in §21090(a) of Title 27.
35. Section 20080(b) of Title 27 allows the Central Valley Water Board to consider the approval of an engineered alternative to the prescriptive standard. In order to approve an engineered alternative in accordance with §20080(c)(1) and (2), the Discharger must demonstrate that the prescriptive design is unreasonably and unnecessarily burdensome and will cost substantially more than an alternative which will meet the criteria contained in §20080(b), or would be impractical and would not promote attainment of applicable performance standards. The Discharger must also demonstrate that the proposed engineered alternative cover system is consistent with the performance goals addressed by the particular prescriptive standard, and provides protection against water quality impairment equivalent to the prescriptive standard in accordance with §20080(b)(2) of Title 27.
36. Section 13360(a)(1) of the California Water Code allows the Central Valley Water Board to specify the design, type of construction, and/or particular manner in which compliance must be met in waste discharge requirements or orders for the discharge of waste at solid waste disposal facilities.
37. The Discharger submitted a design plan for the proposed closure of the landfill in a Final Closure Plan dated February 2003. The Final Closure and Post-Closure Maintenance Plans were determined to be adequate in a letter from the Central Valley Water Board dated 9 April 2004. The plan proposed the construction of an engineered alternative in lieu of the prescriptive cover design specified in §21090(a) of Title 27. The proposed engineered alternative is an evapo-transpirative design consisting of a vegetated soil layer.
38. The Discharger adequately demonstrated that construction of a Title 27 prescriptive standard cover would be unreasonable and unnecessarily burdensome when compared to the proposed engineered alternative design. There is no clay source on-site or nearby and the cost of importing clay from off-site or mixing on-site soils with bentonite would cost substantially more than the alternative design.
39. The performance of an evapo-transpirative cover design can be adequately predicted by using a computer model that utilizes the Richards Equation and laboratory-derived parameters from samples of soil that will be used in the construction of the cover.

40. An evapo-transpirative final cover constructed according to a design derived in the above manner can be monitored to observe its actual performance. Adjustments can be made to the vegetation or thickness of the soil layer if a trend of under-performance is observed as part of the post-closure maintenance of the cover.
41. Section 21090(a)(4)(A) of Title 27 requires that a periodic leak search, including a method for identifying and repairing breaches in “the low-hydraulic conductivity layer”, be a component of the cover maintenance plan.
42. A common way to conduct a leak search on a cover that utilizes a low-hydraulic conductivity layer as part of its design is to monitor the surface of the cover for landfill gas emissions.
43. In an evapo-transpirative cover design, the low-hydraulic conductivity layer is replaced by a vegetated soil layer that is engineered and constructed to absorb moisture during precipitation events and expel moisture by evaporation and transpiration before it flows through the base of the cover.
44. Landfill gas emissions do not definitively indicate a leak in an evapo-transpirative cover. A leak in this kind of cover would be detected by using a device that directly measures moisture flux through the cover, such as a pan lysimeter. A pan lysimeter can also be used to monitor the performance of the final cover. This Order requires the Discharger to construct a pan lysimeter(s) beneath the final cover.
45. The Discharger will submit the final construction and design plans for the final cover, and the Construction Quality Assurance Plan, for review and approval of the Executive Officer prior to construction of the final cover.
46. Construction will proceed only after all applicable construction quality assurance plans have been approved by the Executive Officer.

#### **CEQA AND OTHER CONSIDERATIONS**

47. The action to revise waste discharge requirements for this existing facility is exempt from the provisions of the California Environmental Quality Act (CEQA), Public Resource Code §21000, et seq., and the CEQA guidelines, in accordance with Title 14, CCR, §15301.
48. This order implements:
  - a. *The Water Quality Control Plan for the Tulare Lake Basin, Second Edition;*
  - b. The prescriptive standards and performance goals of Chapters 1 through 7, Subdivision A, Division 2, Title 27, of the California Code of Regulations, effective 18 July 1997, and subsequent revisions;

- c. The prescriptive standards and performance criteria of RCRA Subtitle D, Part 258; and
- d. State Water Resources Control Board Resolution No. 93-62, *Policy for Regulation of Discharges of Municipal Solid Waste*, adopted 17 June 1993.

### **PROCEDURAL REQUIREMENTS**

49. All local agencies with jurisdiction to regulate land use, solid waste disposal, air pollution, and to protect public health have approved the use of this site for the discharges of waste to land stated herein.
50. The Central Valley Water Board notified the Discharger and interested agencies and persons of its intent to prescribe waste discharge requirements for this discharge, and has provided them with an opportunity for a public hearing and an opportunity to submit their written views and recommendations.
51. The Central Valley Water Board, in a public meeting, heard and considered all comments pertaining to the discharge.
52. Any person affected by this action of the Central Valley Water Board may petition the State Water Resources Control Board to review the action in accordance with Sections 2050 through 2068, Title 23, California Code of Regulations. The petition must be received by the State Water Resources Control Board, Office of Chief Counsel, P.O. Box 100, Sacramento, California 95812, within 30 days of the date of issuance of this Order. Copies of the laws and regulations applicable to the filing of a petition are available on the Internet at [http://www.waterboards.ca.gov/water\\_laws/index.html](http://www.waterboards.ca.gov/water_laws/index.html) and will be provided on request.

IT IS HEREBY ORDERED, pursuant to Sections 13263 and 13267 of the California Water Code, that Order No. 5-01-161 is rescinded, and that the County of Kern, its agents, successors, and assigns, in order to meet the provisions of Division 7 of the California Water Code and the regulations adopted thereunder, shall comply with the following:

#### **A. PROHIBITIONS**

1. The discharge of any additional waste at this facility is prohibited.
2. The discharged wastes shall not cause the release of pollutants, or waste constituents in a manner which could cause a condition of nuisance, degradation, contamination, or pollution of groundwater to occur, as indicated by the most appropriate statistical or nonstatistical data analysis method and retest method listed in this Order, the Monitoring and Reporting Program, or the Standard Provisions and Reporting Requirements.

3. The discharge of solid waste, liquid waste, leachate, or waste constituents shall neither cause nor contribute to any degradation, contamination, pollution, or nuisance to surface waters, ponded water, or surface water drainage courses.
4. The discharge shall not cause any increase in the concentration of waste constituents in soil-pore gas, soil-pore liquid, soil, or other geologic materials outside of the Unit if such waste constituents could migrate to waters of the State — in either the liquid or the gaseous phase — and cause a condition of nuisance, degradation, contamination, or pollution.

**B. FACILITY SPECIFICATIONS**

1. The Discharger shall, in a timely manner, remove and relocate any wastes discharged at this facility in violation of this Order.
2. The Discharger shall immediately notify the Central Valley Water Board of any flooding, unpermitted discharge of waste off-site, equipment failure, slope failure, or other change in site conditions that could impair the integrity of waste or leachate containment facilities or precipitation and drainage control structures.
3. Water used for facility maintenance shall be limited to the minimum amount necessary for dust control, fire suppression, construction, and establishing cover vegetation.
4. The Discharger shall maintain in good working order any facility, control system, or monitoring device installed to achieve compliance with these waste discharge requirements.
5. Methane and other landfill gases shall be adequately vented, removed from the Unit, or otherwise controlled to prevent the danger of adverse health effects, nuisance conditions, or the impairment of the beneficial uses of surface water or groundwater due to migration through the unsaturated zone.
6. Surface drainage within the waste management facility shall either be contained on-site or be discharged in accordance with applicable storm water regulations.
7. The Discharger shall maintain a *Storm Water Pollution Prevention Plan and Monitoring Program and Reporting Requirements* in accordance with State Water Resources Control Board Order No. 97-03-DWQ, or retain all stormwater on-site, until closure of the landfill is complete.

**C. CONSTRUCTION SPECIFICATIONS**

1. The Discharger shall submit for review and approval prior to construction, a plan for determining the final design of the evapo-transpirative or monolithic cover.



2. The Discharger shall submit for Executive Officer review and approval prior to construction, design plans and specifications for a final cover system that includes a Construction Quality Assurance Plan meeting the requirements of §20324 of Title 27.
3. By **31 December 2008**, the final cover system shall be constructed with an engineered alternative design known as an evapo-transpirative or monolithic design. The cover shall consist of a vegetated soil layer placed over the existing interim cover soil. The soil layer shall be placed in such a manner that vegetative growth is assured while structural integrity is maintained.
4. One or more pan lysimeters shall be constructed on the upper deck of the Unit beneath the vegetated soil layer to monitor the effectiveness of the final cover in accordance with a plan approved by the Executive Officer.
5. The Discharger may propose changes to the final cover system design prior to construction, provided that approved components are not eliminated, the engineering properties of the components are not substantially reduced, and the proposed final cover system results in the protection of water quality equal to or greater than the design prescribed by Title 27 and this Order. The proposed changes may be made following approval by the Executive Officer. Substantive changes to the design require reevaluation as an engineered alternative and approval by the Central Valley Water Board.
6. Construction shall proceed only after all applicable construction quality assurance plans have been approved by Executive Officer.
7. By **31 March 2009**, following the completion of construction of the final cover system, the final documentation required in §20324(d)(1)(C) of Title 27 shall be submitted to the Executive Officer for review and approval. The report shall be certified by a registered civil engineer or a certified engineering geologist. It shall contain sufficient information and test results to verify that construction was in accordance with the design plans and specifications, with this order, and with the standards and performance goals of Title 27.
8. A third party independent of both the Discharger and the construction contractor shall perform all of the construction quality assurance (CQA) monitoring and testing during the construction of the cover system. The CQA program shall be supervised by a registered civil engineer or a certified engineering geologist who shall be designated the CQA officer.

#### **D. DETECTION MONITORING SPECIFICATIONS**

1. The Discharger shall comply with Monitoring and Reporting Program No. R5-2005-0046, which is incorporated into and made part of this Order.

WASTE DISCHARGE REQUIREMENTS ORDER NO. R5-2006-0046  
COUNTY OF KERN  
FOR CLOSURE AND POST-CLOSURE MAINTENANCE  
LOST HILLS SANITARY LANDFILL  
KERN COUNTY

-10-

2. The Discharger shall comply with the detection monitoring program provisions of Title 27 for groundwater, surface water, and the unsaturated zone, and in accordance with Monitoring and Reporting Program No. R5-2005-0046.
3. The Discharger shall provide Central Valley Water Board staff a minimum of one week notification prior to commencing any field activities related to the installation, repair, or abandonment of monitoring devices. At the beginning of each sampling period, in accordance with B. Reporting in Monitoring and Reporting Program No. R5-2005-0046, a schedule shall be submitted listing anticipated sampling dates for that reporting period. If Central Valley Water Board staff wishes to observe sampling activities, the Discharger will be notified at least one week prior to the scheduled date.
4. The Discharger shall comply with the Water Quality Protection Standard (as defined in §20390 of Title 27) which is specified in Monitoring and Reporting Program No. R5-2005-0046 and the Standard Provisions and Reporting Requirements, dated April 2000.
5. The Water Quality Protection Standard for organic compounds which are not naturally occurring shall be taken as the detection limit of the analytical method used (i.e., US-EPA methods 8260 and 8270). The presence of non-naturally occurring organic compounds in samples from detection monitoring wells is evidence of a release from the Unit unless the Discharger can demonstrate that the Unit is not the cause pursuant to §20420(k)(7) of Title 27.
6. The concentrations of the constituents of concern in waters passing the Point of Compliance shall not exceed the concentration limits established pursuant to Monitoring and Reporting Program No. R5-2005-0046.
7. For each monitoring event, the Discharger shall determine whether the landfill is in compliance with the Water Quality Protection Standard using procedures specified in Monitoring and Reporting Program No. R5-2005-0046 and §20415(e) of Title 27.
8. For any given monitored medium, the samples taken from all monitoring points and background monitoring points to satisfy the data analysis requirements for a given reporting period shall all be taken within a span not to exceed 30 days, unless the Executive Officer approves a longer time period, and shall be taken in a manner that ensures sample independence to the greatest extent feasible.
9. Specific methods of collection and analysis must be identified. Sample collection, storage, and analysis shall be performed according to the most recent version of USEPA Methods, such as the latest editions, as applicable, of: (1) *Methods for the Analysis of Organics in Water and Wastewater* (USEPA 600 Series), (2) *Test Methods for Evaluating Solid Waste* (SW-846, latest edition), and (3) *Methods for Chemical Analysis of Water and Wastes*

(USEPA 600/4-79-020), and in accordance with the approved Sample Collection and Analysis Plan.

10. If methods other than USEPA-approved methods or Standard Methods are used, the exact methodology shall be submitted for review and approval by the Executive Officer prior to use.
11. The methods of analysis and the detection limits used shall be appropriate for the expected concentrations. For the monitoring of any constituent or parameter that is found in concentrations which produce more than 90% non-numerical determinations (i.e., “trace” or “ND”) in data from Background Monitoring Points for that medium, the analytical method having the lowest method detection limit (MDL) shall be selected from among those methods which would provide valid results in light of any matrix effects or interferences.
12. “Trace” results - results falling between the MDL and the practical quantitation limit (PQL) - shall be reported as such, and shall be accompanied both by the estimated MDL and PQL values for that analytical run.
13. MDLs and PQLs shall be derived by the laboratory for each analytical procedure, according to State of California laboratory accreditation procedures. These MDLs and PQLs shall reflect the detection and quantitation capabilities of the specific analytical procedure and equipment used by the lab, rather than simply being quoted from USEPA analytical method manuals. In relatively interference-free water, laboratory-derived MDLs and PQLs are expected to closely agree with published USEPA MDLs and PQLs.
14. If the laboratory suspects that, due to a change in matrix or other effects, the true detection limit or quantitation limit for a particular analytical run differs significantly from the laboratory-derived MDL/PQL values, the results shall be flagged accordingly, along with estimates of the detection limit and quantitation limit actually achieved. The MDL shall always be calculated such that it represents the lowest achievable concentration associated with a 99% reliability of a nonzero result. The PQL shall always be calculated such that it represents the lowest constituent concentration at which a numerical value can be assigned with reasonable certainty that it represents the constituent’s actual concentration in the sample. Normally, PQLs should be set equal to the concentration of the lowest standard used to calibrate the analytical procedure.
15. The QA/QC data shall be reported, along with the sample results to which they apply, including the method, equipment, and analytical detection and quantitation limits, the percent recovery, an explanation for any recovery that falls outside the QC limits, the results of equipment and method blanks, the results of spiked and surrogate samples, the frequency of quality control analysis, and the name and qualifications of the person(s) performing the analyses. Sample results shall be reported unadjusted for blank results or spike recoveries.

In cases where contaminants are detected in QA/QC samples (i.e., field, trip, or lab blanks), the accompanying sample results shall be appropriately flagged.

16. Unknown chromatographic peaks shall be reported, along with an estimate of the concentration of the unknown analyte. When unknown peaks are encountered, second column or second method confirmation procedures shall be performed to attempt to identify and more accurately quantify the unknown analyte.
17. The statistical method shall account for data below the practical quantitation limit (PQL) with one or more statistical procedures that are protective of human health and the environment. Any PQL validated pursuant to §20415(e)(7) of Title 27 that is used in the statistical method shall be the lowest concentration (or value) that can be reliably achieved within limits of precision and accuracy specified in the WDRs for routine laboratory operating conditions that are available to the facility. The Discharger's technical report, pursuant to §20415(e)(7) of Title 27, shall consider the PQLs listed in Appendix IX to Chapter 14 of Division 4.5 of Title 22, California Code of Regulations, for guidance when specifying limits of precision and accuracy. For any given constituent monitored at a background or downgradient monitoring point, an indication that falls between the method detection limit (MDL) and the PQL for that constituent (hereinafter called a "trace" detection) shall be identified and used in appropriate statistical or nonstatistical tests. Nevertheless, for a statistical method that is compatible with the proportion of censored data (trace and ND indications) in the data set, the Discharger can use the laboratory's concentration estimates in the trace range (if available) for statistical analysis, in order to increase the statistical power by decreasing the number of "ties".
18. The Discharger may propose an alternate statistical method [to the methods listed under 27 CCR §20415(e)(8)(A-D)] in accordance with §20415(e)(8)(E) of Title 27, for review and approval by the Executive Officer. Upon receiving written approval from the Executive Officer, alternate statistical procedures may be used for determining the significance of analytical results for common laboratory contaminants (i.e., methylene chloride, acetone, diethylhexyl phthalate, and di-n-octyl phthalate). The analytical results involving detection of these analytes in any background or downgradient sample shall be reported and flagged for easy reference by Central Valley Water Board staff.
19. The Discharger shall use the following nonstatistical method specified in Detection Monitoring Specification D.20 for all constituents which are not amenable to the statistical tests above (i.e., less than 10% of the data from background samples that equal or exceed their respective MDL). This includes all constituents in the Monitoring Parameters and for all Constituents of Concern (COC) found in groundwater and unsaturated zone (in soil-pore liquid or -gas). Each constituent at a monitoring point shall be determined to meet this criterion based on either:

- a. The results from a single sample for that constituent, taken during that reporting period from that monitoring point; or
- b. If more than one sample has been taken during a reporting period from a monitoring point, the results from the sample which contains the largest number of qualifying constituents shall be used.
- c. Background for water samples shall be represented by the data from all samples taken from applicable background monitoring points during that reporting period (at least one sample from each background monitoring point). The Discharger may propose an alternate statistical method [to the methods listed under 27 CCR §20415(e)(8)(A-D)] in accordance with §20415(e)(8)(E) of Title 27, for review and approval by the Executive Officer.

20. The nonstatistical method shall be implemented as follows:

- a. For every compliance well, regardless of the monitoring program, the Discharger shall use this data analysis method, jointly, for all monitoring parameters and COCs that are detected in less than 10% of background samples. Any COC that triggers a discrete retest per this method shall be added to the monitoring parameter list:

Triggers — From the monitoring parameters and COC list identify each constituent in the current sample that exceeds either its respective MDL or PQL. The Discharger shall conclude that the exceedance provides a preliminary indication [or, for a retest, provide a measurably significant indication] of a change in the nature or extent of the release, at that well, if either:

- 1) The data contains two or more qualifying monitoring parameters and/or COCs that are detected in less than 10% of background samples that equal or exceed their respective MDLs; or
  - 2) The data contains one qualifying monitoring parameter and/or COC that equals or exceeds its PQL.
- b. Discrete Retest [27CCR §20415(e)(8)(E)]:
    - 1) In the event that the Discharger concludes (pursuant to paragraph 20.a., above) that there is a preliminary indication, then the Discharger shall immediately notify Central Valley Water Board staff by phone or e-mail and, within 30 days of such indication, shall collect two new (retest) samples from the indicating compliance well.

- 2) For any given compliance well retest sample, the Discharger shall include, in the retest analysis, only the laboratory analytical results for those constituents indicated in that well's original test. As soon as the retest data are available, the Discharger shall apply the same test [under 20.a.], to separately analyze each of the two suites of retest data at that compliance well.
  - 3) If either (or both) of the retest samples meets either (or both) of the triggers under 20.a., then the Discharger shall conclude that there is a measurably significant increase at that well for the constituent(s) indicated in the validating retest sample(s).
21. If the Executive Officer determines, after reviewing the submitted report, that the detected constituent(s) most likely originated from the Unit(s), the Discharger shall immediately implement the requirements of XI. Response To A Release, C. Release Has Been Verified, contained in the Standard Provisions and Reporting Requirements.

#### **E. FINAL COVER MAINTENANCE AND MONITORING**

1. The Discharger shall monitor the final cover in accordance with the Post-Closure Maintenance Plan and the Monitoring and Reporting Program.
2. Monitoring of the final cover shall include inspecting and recording the volume of moisture collected by the pan lysimeter(s) (see Construction Specification C.4).
3. By **31 March 2009**, the Discharger shall submit a report for Executive Officer review and approval proposing what amount of moisture would constitute significant infiltration through the final cover as measured by the pan lysimeter(s) with supporting documentation.
4. In the event the pan lysimeter(s) detects significant moisture infiltration, then, **within 120 days**, the Discharger shall submit a plan and time schedule, for Executive Officer review and approval, to evaluate the problem, and recommend and implement corrective measures.

#### **F. PROVISIONS**

1. The Discharger shall maintain a copy of this Order at the offices of the Kern County Waste Management Department, and make it available during working hours to facility operating personnel, who shall be familiar with its contents, and to regulatory agency personnel.
2. The Discharger shall comply with all applicable provisions of Title 27 that are not specifically referred to in this Order.
3. The Discharger shall comply with the applicable portions of the *Standard Provisions and Reporting Requirements for Waste Discharge Requirements for Nonhazardous Solid Waste*

WASTE DISCHARGE REQUIREMENTS ORDER NO. R5-2006-0046  
COUNTY OF KERN  
FOR CLOSURE AND POST-CLOSURE MAINTENANCE  
LOST HILLS SANITARY LANDFILL  
KERN COUNTY

-15-

*Discharges Regulated by Title 27 and/or Subtitle D (27 CCR §20005 et seq. and 40 CFR 258 et seq.), dated April 2000, which are hereby incorporated into this Order.*

4. In the event the Discharger does not comply or will be unable to comply with any prohibition or limitation of this Order for any reason, the Discharger shall notify the appropriate Central Valley Water Board office by telephone as soon as it or its agents have knowledge of such noncompliance or potential for noncompliance, and shall confirm this notification in writing within two weeks. The written notification shall state the nature, time, and cause of noncompliance, and shall describe the measures being taken to prevent recurrences and shall include a timetable for corrective actions.
5. All reports and transmittal letters shall be signed by persons identified below:
  - a. For a corporation: by a principal executive officer of at least the level of senior vice-president.
  - b. For a partnership or sole proprietorship: by a general partner or the proprietor.
  - c. For a municipality, state, federal or other public agency: by either a principal executive officer or ranking elected or appointed official.
  - d. A duly authorized representative of a person designated in a, b or c above if;
    - 1) the authorization is made in writing by a person described in a, b, or c of this provision;
    - 2) the authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity, such as the position of plant manager, operator of a Unit, superintendent, or position of equivalent responsibility. (A duly authorized representative may thus be either a named individual or any individual occupying a named position); and
    - 3) the written authorization is submitted to the Central Valley Water Board.
  - e. Any person signing a document under this Section shall make the following certification:

“I certify under penalty of law that I have personally examined and am familiar with the information submitted in this document and all attachments and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.”

WASTE DISCHARGE REQUIREMENTS ORDER NO. R5-2006-0046  
COUNTY OF KERN  
FOR CLOSURE AND POST-CLOSURE MAINTENANCE  
LOST HILLS SANITARY LANDFILL  
KERN COUNTY

-16-

6. The Discharger shall take all reasonable steps to minimize any adverse impact to the waters of the State resulting from noncompliance with this Order. Such steps shall include accelerated or additional monitoring as necessary to determine the nature, extent, and impact of the noncompliance.
7. The owner of the waste management facility shall have the continuing responsibility to assure protection of waters of the state from discharged wastes and from gases and leachate generated by discharged waste during the active life, closure, and post-closure maintenance period of the Unit(s) and during subsequent use of the property for other purposes.
8. The fact that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with this Order shall not be regarded as a defense for the Discharger's violations of the Order.
9. To assume ownership or operation under this Order, the succeeding owner or operator must apply in writing to the Central Valley Water Board requesting transfer of the Order within 14 days of assuming ownership or operation of this facility. The request must contain the requesting entity's full legal name, the State of incorporation if a corporation, the name and address and telephone number of the persons responsible for contact with the Central Valley Water Board, and a statement. The statement shall comply with the signatory requirements contained in Provision F.5 and state that the new owner or operator assumes full responsibility for compliance with this Order. Failure to submit the request shall be considered a discharge without requirements, a violation of the California Water Code. Transfer of this Order shall be approved or disapproved by the Central Valley Water Board.
10. The Discharger shall conduct an annual review of the financial assurance for initiating and completing corrective action, and submit a report for Executive Officer review and approval. The assurances of financial responsibility shall provide that funds for corrective action shall be available to the Central Valley Water Board upon the issuance of any order under California Water Code, Division 7, Chapter 5. The Discharger shall adjust the cost annually to account for inflation and any changes in facility design, construction, or operation.
11. The Discharger shall conduct an annual review of the financial assurance for closure and post-closure maintenance, and submit a report for Executive Officer review and approval. The assurances of financial responsibility shall provide that funds for closure and post-closure maintenance shall be available to the Central Valley Water Board upon the issuance of any order under California Water Code, Division 7, Chapter 5. The Discharger shall adjust the cost annually to account for inflation and any changes in facility design, construction, or operation.
12. The Discharger shall complete the tasks contained in these waste discharge requirements in accordance with the following time schedule:



<u>Task</u>	<u>Compliance Date</u>
<b>A. Cover Design Plan</b>	
Submit a plan for determining the design of the final cover for Executive Officer review and approval. (see Construction Specification C.1)	<b>Prior to construction</b>
<b>B. Construction Plans</b>	
Submit construction and design plans for Executive Officer review and approval. (see Construction Specification C.2)	<b>Prior to construction</b>
<b>C. Final Cover Construction</b>	
Complete final cover construction in accordance with approved construction plans. (see Construction Specification C.3)	<b>31 December 2008</b>
<b>D. Construction Report</b>	
Submit a construction report upon completion demonstrating construction was in accordance with approved construction plans for Executive Officer review and approval. (see Construction Specification C.7)	<b>31 March 2009</b>

<u>Task</u>	<u>Compliance Date</u>
<b>E. Infiltration Report</b>	
Submit a report proposing what amount of moisture would constitute significant infiltration through the final cover as measured by the pan lysimeter(s) for Executive officer review and approval.	<b>31 March 2009</b>

WASTE DISCHARGE REQUIREMENTS ORDER NO. R5-2006-0046  
COUNTY OF KERN  
FOR CLOSURE AND POST-CLOSURE MAINTENANCE  
LOST HILLS SANITARY LANDFILL  
KERN COUNTY

-18-

(See Final Cover Maintenance and Monitoring E.3)

**F. Financial Assurance Review**

1. Annual Review of Financial Assurance for initiating and completing corrective action (see Provision F.10.) **30 April each year**
  
2. Annual Review of Financial Assurance for closure and post-closure maintenance (see Provision F.11.) **30 April each year**

If, in the opinion of the Executive Officer, the Discharger fails to comply with the provision of this Order, the Executive Officer may apply to the Attorney General for judicial enforcement or issue a complaint for Administrative Civil Liability.


I, PAMELA C. CREEDON, Executive Officer, do hereby certify that the foregoing is a full, true, and correct copy of an Order adopted by the California Regional Water Quality Control Board, Central Valley Region, on 5 May 2006.

Original signed by

---

PAMELA C. CREEDON, Executive Officer

REH:fmc: 5 /5/06

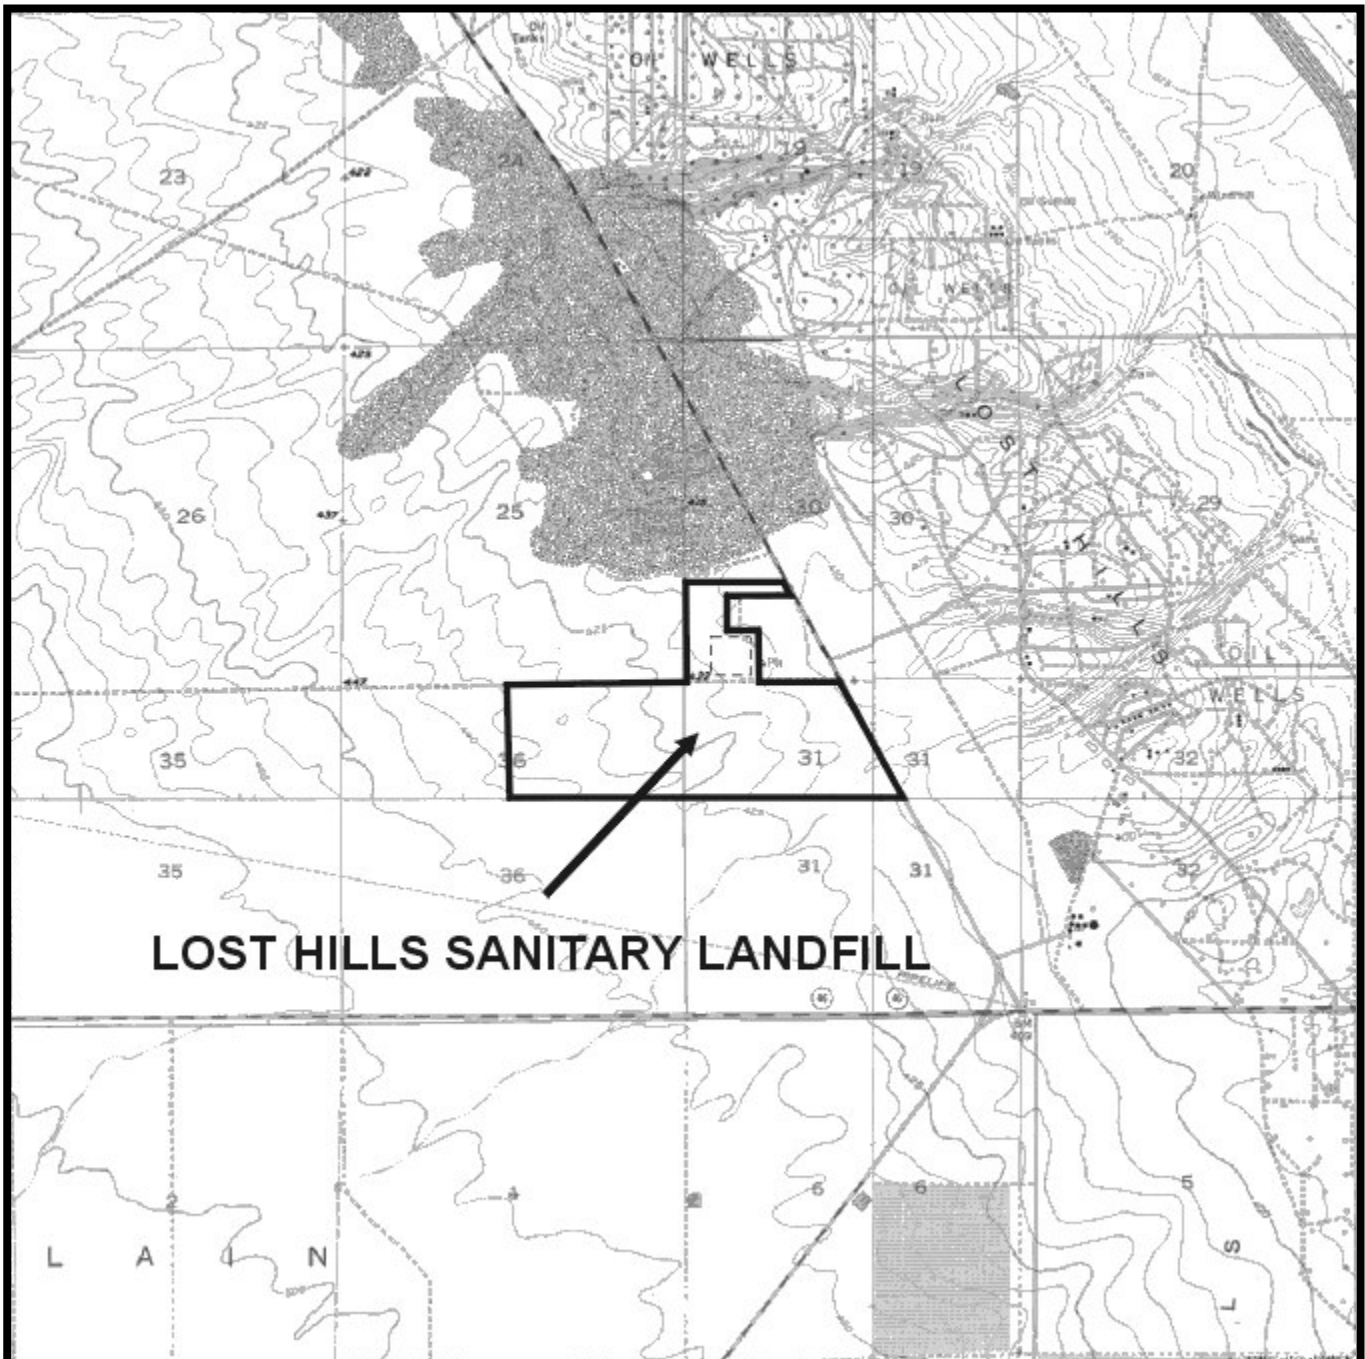

**LOST HILLS SANITARY LANDFILL**

# ATTACHMENT A

## EXPLANATION



WASTE MANAGEMENT FACILITY



WASTE MANAGEMENT UNIT




## LOCATION MAP

ORDER NO. R5-2006-0046

WASTE DISCHARGE REQUIREMENTS  
FOR COUNTY OF KERN

FOR CLOSURE  
AND POST-CLOSURE MAINTENANCE

LOST HILLS SANITARY LANDFILL  
KERN COUNTY

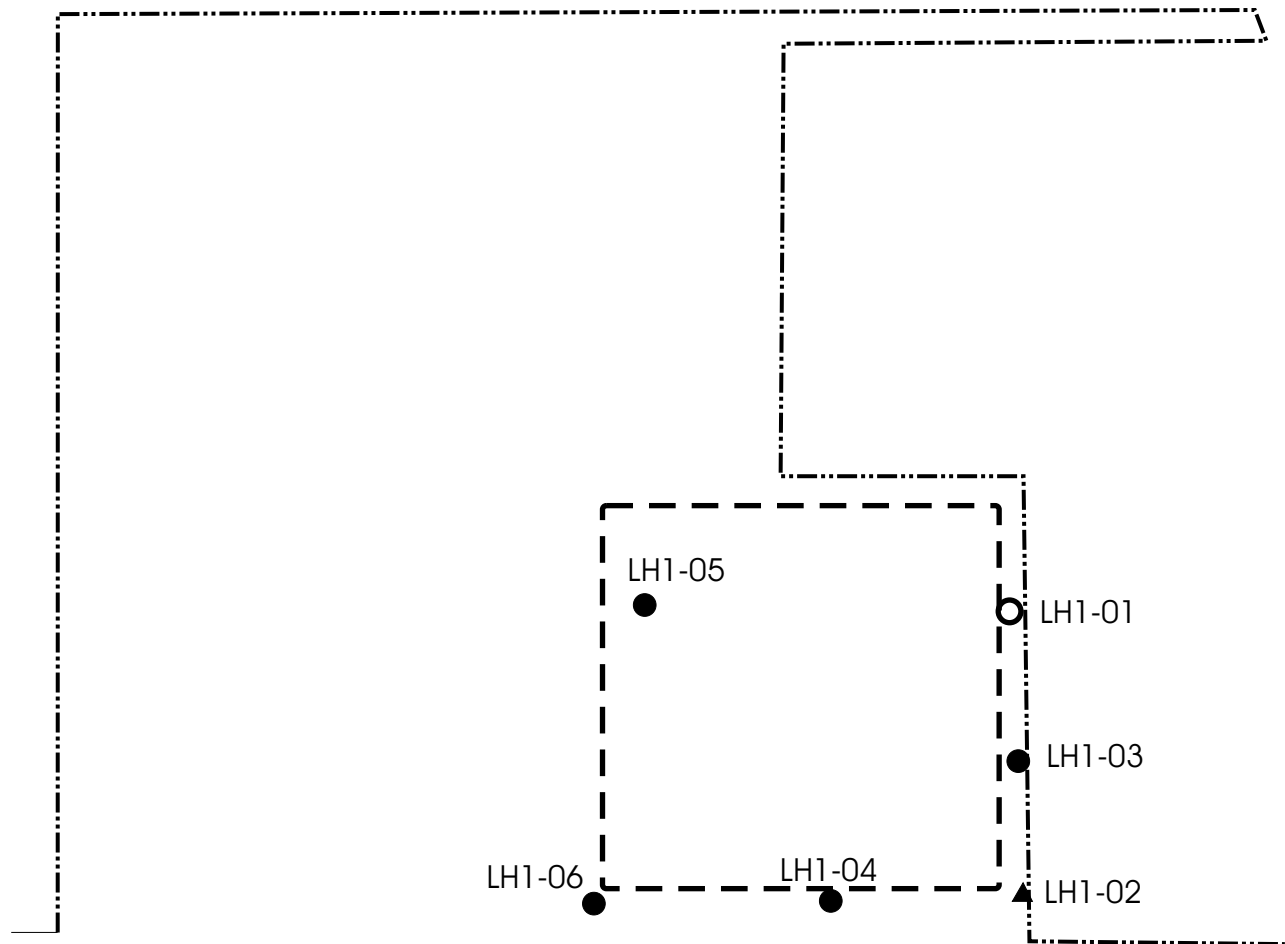

## ATTACHMENT B

### EXPLANATION

- GROUNDWATER MONITORING WELL
- ABANDONED WELL
- ▲ MOISTURE BLOCK
- - - WASTE MANAGEMENT UNIT
- · - · - PROPERTY BOUNDARY



### SITE MAP

ORDER NO. R5-2006-0046

WASTE DISCHARGE REQUIREMENTS  
FOR COUNTY OF KERN

FOR CLOSURE  
AND POST-CLOSURE MAINTENANCE

LOST HILLS SANITARY LANDFILL  
KERN COUNTY

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD  
CENTRAL VALLEY REGION

MONITORING AND REPORTING PROGRAM NO. R5-2006-0046  
FOR  
COUNTY OF KERN  
FOR  
CLOSURE AND POST-CLOSURE MAINTENANCE  
LOST HILLS SANITARY LANDFILL  
KERN COUNTY

Compliance with this Monitoring and Reporting Program, with Title 27, California Code of Regulations, Section 20005, et seq. (hereafter Title 27), and with the *Standard Provisions and Reporting Requirements for Waste Discharge Requirements for Nonhazardous Solid Waste Discharges Regulated by Title 27 and/or Subtitle D (27 CCR §20005 et seq. and 40 CFR 258)*, dated April 2000, is ordered by Waste Discharge Requirements Order No. R5-2006-0046.

**A. REQUIRED MONITORING REPORTS**

<u>Report</u>	<u>Due</u>
1. Groundwater Monitoring (Section D.1)	<b>See Table I</b>
2. Annual Monitoring Summary Report (Section E.5.)	<b>Annually</b>
3. Leachate Monitoring (Section D.2)	<b>See Table II</b>
4. Facility Monitoring (Section D.4)	<b>As necessary</b>
5. Response to a Release (Standard Provisions and Reporting Requirements)	<b>As necessary</b>

**B. REPORTING**

The Discharger shall report monitoring data and information as required in this Monitoring and Reporting Program and as required in Order No. R5-2006-0046 and the Standard Provisions and Reporting Requirements. Reports which do not comply with the required format will be **REJECTED** and the Discharger shall be deemed to be in noncompliance with the waste discharge requirements. In reporting the monitoring data required by this program, the Discharger shall arrange the data in tabular form so that the date, the constituents, the concentrations, and the units are readily discernible. The data shall be summarized in such a manner so as to illustrate clearly the compliance with waste discharge requirements or the lack thereof. Data shall also be submitted in a digital format acceptable to the Executive Officer.

Each monitoring report shall include a compliance evaluation summary as specified in E. Reporting Requirements, of this Monitoring and Reporting Program.

Field and laboratory tests shall be reported in each monitoring report. Monthly, quarterly, semiannual, and annual monitoring reports shall be submitted to the Central Valley Water Board in accordance with the following schedule for the calendar period in which samples were taken or observations made.

<u>Sampling Frequency</u>	<u>Reporting Frequency</u>	<u>Reporting Periods End</u>	<u>Report Date Due</u>
Monthly	Quarterly	Last Day of Month	<b>by Semiannual Schedule</b>
Quarterly	Quarterly	31 March	<b>31 May</b>
		30 June	<b>30 November</b>
		30 September	<b>30 November</b>
		31 December	<b>31 May</b>
Semiannually	Semiannually	31 March	<b>31 May</b>
		30 September	<b>30 November</b>
Annually	Annually	31 December	<b>30 April</b>

The Discharger shall submit an **Annual Monitoring Summary Report** to the Central Valley Water Board covering the previous monitoring year. The annual report shall contain the information specified in E. Reporting Requirements, of this Monitoring and Reporting Program, and a discussion of compliance with the waste discharge requirements and the Water Quality Protection Standard.

The results of **all monitoring** conducted at the site shall reported to the Central Valley Water Board in accordance with the reporting schedule above for the calendar period in which samples were taken or observations made.

**C. WATER QUALITY PROTECTION STANDARD AND COMPLIANCE PERIOD**

**1. Water Quality Protection Standard Report**

For each waste management unit (Unit), the Water Quality Protection Standard shall consist of all constituents of concern, the concentration limit for each constituent of concern, the point of compliance, and all water quality monitoring points. The Executive Officer shall review and approve the Water Quality Protection Standard, or any modification thereto, for each monitored medium.

The report shall:

- a. Identify **all distinct bodies of surface and ground water** that could be affected in the event of a release from a Unit or portion of a Unit. This list shall include at least the uppermost aquifer and any permanent or ephemeral zones of perched groundwater underlying the facility.
- b. Include a map showing the monitoring points and background monitoring points for the surface water monitoring program, groundwater monitoring program, and the unsaturated zone monitoring program. The map shall include the point of compliance in accordance with §20405 of Title 27.
- c. Evaluate the perennial direction(s) of groundwater movement within the uppermost groundwater zone(s).

If subsequent sampling of the background monitoring point(s) indicates significant water quality changes due to either seasonal fluctuations or other reasons unrelated to waste management activities at the site, the Discharger may request modification of the Water Quality Protection Standard.

## 2. **Constituents of Concern**

The constituents of concern include all the waste constituents, their reaction products, and hazardous constituents that are reasonably expected to be in or derived from waste contained in the Unit. The constituents of concern for all Units at the facility are those listed in Tables I through IV for the specified monitored medium. The Discharger shall monitor all constituents of concern every five years, or more frequently as required in accordance with a Corrective Action Program.

### a. **Monitoring Parameters**

Monitoring parameters are constituents of concern that are the waste constituents, reaction products, hazardous constituents, and physical parameters that provide a reliable indication of a release from a Unit. The monitoring parameters for all Units are those listed in Tables I through III for the specified monitored medium.

## 3. **Concentration Limits**

For a naturally occurring constituent of concern, the concentration limit for each constituent of concern shall be determined as follows:

- a. By calculation in accordance with a statistical method pursuant to §20415 of Title 27;  
or
- b. By an alternate statistical method acceptable to the Executive Officer in

accordance with §20415 of Title 27.

- c. Intra-well comparison methods shall be used at all compliance wells for all monitoring parameters that are subject to data analysis under this order.
- d. Initially, for each given monitoring parameter at a given monitoring well, the proposed background data set shall consist of all validated data from that compliance well for the previous sixteen monitoring events. Every two years, following the adoption of this Monitoring and Reporting Program, as part of the annual monitoring summary report [see 27CCR §20415(e)(14)], the Discharger shall add the newer data to the background data set for each well after validating (via a method approved by the Executive Officer) that the new data does not contain data indicating a statistically significant increase over the existing background data. The Discharger shall validate the proposed intra-well background data set as follows for each well (initially) or, subsequently, at a new well. The Discharger shall report the validated or updated background data set, for each well in the next scheduled monitoring report.
- e. The initial background concentrations established for the Unit are contained in Table V.

#### **4. Point of Compliance**

The point of compliance for the water standard at each Unit is a vertical surface located at the hydraulically downgradient limit of the Unit that extends through the uppermost aquifer underlying the Unit.

#### **5. Compliance Period**

The compliance period for each Unit shall be the number of years equal to the active life of the Unit plus the closure period. The compliance period is the minimum period during which the Discharger shall conduct a water quality monitoring program subsequent to a release from the Unit. The compliance period shall begin anew each time the Discharger initiates an evaluation monitoring program.

### **D. MONITORING**

The Discharger shall comply with the detection monitoring program provisions of Title 27 for groundwater, surface water, and the unsaturated zone, in accordance with Detection Monitoring Specification D.1 and D.6 of Waste Discharge Requirements, Order No. R5-2006-0046. All monitoring shall be conducted in accordance with a Sample Collection and Analysis Plan, which includes quality assurance/quality control standards, that is acceptable to the Executive Officer.



All point of compliance monitoring wells established for the detection monitoring program shall constitute the monitoring points for the groundwater Water Quality Protection Standard. All detection monitoring program groundwater monitoring wells, unsaturated zone monitoring devices, leachate, and surface water monitoring points shall be sampled and analyzed for monitoring parameters and constituents of concern as indicated and listed in Tables I through IV.

Method detection limits and practical quantitation limits shall be reported. All peaks shall be reported, including those which cannot be quantified and/or specifically identified. Metals shall be analyzed in accordance with the methods listed in Table IV.

The Discharger may, with the approval of the Executive Officer, use alternative analytical test methods, including new USEPA approved methods, provided the methods have method detection limits equal to or lower than the analytical methods specified in this Monitoring and Reporting Program.

## **1. Groundwater**

The Discharger shall install and operate a groundwater detection monitoring system that complies with the applicable provisions of §20415 and §20420 of Title 27 in accordance with a Detection Monitoring Program approved by the Executive Officer. The Discharger shall collect, preserve, and transport groundwater samples in accordance with the approved Sample Collection and Analysis Plan.

The Discharger shall determine the groundwater flow rate and direction in the uppermost aquifer and in any zones of perched water and in any additional zone of saturation monitored pursuant to this Monitoring and Reporting Program, and report the results semiannually, including the times of highest and lowest elevations of the water levels in the wells.

Hydrographs of each well shall be submitted showing the elevation of groundwater with respect to the elevations of the top and bottom of the screened interval and the elevation of the pump intake. Hydrographs of each well shall be prepared quarterly and submitted annually.

Groundwater samples shall be collected from the point-of-compliance wells, background wells, and any additional wells added as part of the approved groundwater monitoring system. Samples shall be collected and analyzed for the monitoring parameters in accordance with the methods and frequency specified in Table I.

The monitoring parameters shall also be evaluated each reporting period with regards to the cation/anion balance, and the results shall be graphically presented using a Stiff diagram, a Piper graph, or a Schoeller plot. Samples for the constituents of concern

specified in Table I shall be collected and analyzed in accordance with the methods listed

in Table IV every five years.

**2. Leachate Monitoring**

Leachate which seeps to the surface from the Unit shall be sampled and analyzed for the constituents listed in Table II upon detection. The quantity of leachate shall be *estimated* and reported as Leachate Flow Rate (in gallons/day).

**3. Final Cover Monitoring**

The Discharger shall monitor the final cover in accordance with the provisions in the Final Closure Plan and the Post-Closure Maintenance Plan. The pan lysimeter(s) shall be checked for the presence of water on a quarterly basis. The volume of water discovered in the lysimeter(s) shall be reported in the Annual Monitoring Summary Report.

**4. Facility Monitoring**

**a. Facility Inspection**

Annually, prior to the anticipated rainy season, but no later than **30 September**, the Discharger shall conduct an inspection of the facility. The inspection shall assess damage to the drainage control system, groundwater monitoring equipment (including wells, etc.), and shall include the Standard Observations contained in section E.3.f. of this Monitoring and Reporting Program. Any necessary construction, maintenance, or repairs shall be completed by **31 October**. By **15 November** of each year, the Discharger shall submit an annual report describing the results of the inspection and the repair measures implemented, including photographs of the problem and the repairs.

**b. Storm Events**

The Discharger shall inspect all precipitation, diversion, and drainage facilities for damage **within 7 days** following *major storm events*. Necessary repairs shall be completed **within 30 days** of the inspection. The Discharger shall report any damage and subsequent repairs within 45 days of completion of the repairs, including photographs of the problem and the repairs.

**E. REPORTING REQUIREMENTS**

1. The Discharger shall retain records of all monitoring information, including all calibration and maintenance records, all original strip chart recordings of continuous monitoring instrumentation, copies of all reports required by this Order, and records of all data used to complete the application for this Order. Records shall be maintained throughout the life of the facility including the post closure period.

Such legible records shall show the following for each sample:

- a. Sample identification and the Monitoring point or Background Monitoring Point from which it was taken, along with the identity of the individual who obtained the sample;
  - b. Date, time, and manner of sampling;
  - c. Date and time that analyses were started and completed, and the name of the personnel and laboratory performing each analysis;
  - d. Complete procedure used, including method of preserving the sample, and the identity and volumes of reagents used;
  - e. Calculation of results; and
  - f. Results of analyses, and the MDL and PQL for each analysis.
2. A transmittal letter explaining the essential points shall accompany each report. At a minimum, the transmittal letter shall identify any violations found since the last report was submitted, and if the violations were corrected. If no violations have occurred since the last submittal, this shall be stated in the transmittal letter. The transmittal letter shall also state that a discussion of any violations found since the last report was submitted, and a description of the actions taken or planned for correcting those violations, including any references to previously submitted time schedules, is contained in the accompanying report.
3. Each monitoring report shall include a compliance evaluation summary. The summary shall contain at least:
- a. For each Monitoring Point and Background Monitoring Point addressed by the report, a description of:
    - 1) the time of water level measurement;
    - 2) the type of pump - or other device - used for purging and the elevation of the pump intake relative to the elevation of the screened interval;
    - 3) the method of purging (the pumping rate, the equipment and methods used to monitor field pH, temperature, and conductivity during purging, the calibration of the field equipment, results of the pH, temperature, conductivity, and turbidity testing, and the method of disposing of the purge water) to remove all portions of the water that was in the well bore while the sample was being taken;

- 4) the type of pump - or other device - used for sampling, if different than the pump or device used for purging; and
  - 5) a statement that the sampling procedure was conducted in accordance with the Sampling and Analysis Plan approved by the Executive Officer.
- b. A map or aerial photograph showing the locations of observation stations, Monitoring Points, and Background Monitoring Points.
  - c. For each groundwater body, a description and graphical presentation of the gradient and direction of groundwater flow under/around the Unit, based upon water level elevations taken prior to the collection of the water quality data submitted in the report.
  - d. Laboratory statements of results of all analyses evaluating compliance with requirements.
  - e. An evaluation of the effectiveness of the leachate monitoring and control facilities, and of the run-off/run-on control facilities.
  - f. A summary and certification of completion of all **Standard Observations** for the Unit(s), for the perimeter of the Unit, and for the receiving waters. The Standard Observations shall include:
    - 1) For the Unit:
      - a) Evidence of ponded water at any point on the facility (show affected area on map);
      - b) Evidence of odors: presence or absence, characterization, source, and distance of travel from source; and
      - c) Evidence of erosion and/or of day-lighted refuse.
    - 2) Along the perimeter of the Unit:
      - a) Evidence of liquid leaving or entering the Unit, estimated size of affected area, and flow rate (show affected area on map);
      - b) Evidence of odors: presence or absence, characterization, source, and distance of travel from source; and
      - c) Evidence of erosion and/or of day-lighted refuse.
  - g. The quantity and types of wastes discharged and the locations in the Unit where waste has been placed since submittal of the last such report.

4. The Discharger shall report by telephone any seepage from the disposal area **immediately** after it is discovered. A written report shall be filed with the Central Valley Water Board **within seven days**, containing at least the following information:
  - a. A map showing the location(s) of seepage;
  - b. An estimate of the flow rate;
  - c. A description of the nature of the discharge (e.g., all pertinent observations and analyses);
  - d. Verification that samples have been submitted for analyses of the Constituents of Concern and Monitoring Parameters, and an estimated date that the results will be submitted to the Central Valley Water Board; and
  - e. Corrective measures underway or proposed, and corresponding time schedule.
  
5. The Discharger shall submit an **Annual Monitoring Summary Report** to the Central Valley Water Board covering the reporting period of the previous monitoring year. This report shall contain:
  - a. All monitoring parameters and constituents of concern shall be graphed so as to show historical trends at each Monitoring Point and Background Monitoring Point, for all samples taken within at least the previous five calendar years. Each such graph shall plot the concentration of one or more constituents for the period of record for a given Monitoring Point or Background Monitoring Point, at a scale appropriate to show trends or variations in water quality. The graphs shall plot each datum, rather than plotting mean values. For any given constituent or parameter, the scale for background plots shall be the same as that used to plot downgradient data. Graphical analysis of monitoring data may be used to provide significant evidence of a release.
  - b. Unless otherwise exempted by the Executive Officer, all monitoring analytical data obtained during the previous two six-month reporting periods, shall be presented in tabular form as well as in a digital file format acceptable to the Executive Officer. The Central Valley Water Board regards the submittal of data in hard copy and in digital format as "...the form necessary for..." statistical analysis [§20420(h)], in that this facilitates periodic review by the Central Valley Water Board.
  - c. A comprehensive discussion of the compliance record, and the result of any corrective actions taken or planned which may be needed to bring the Discharger into full compliance with these waste discharge requirements.
  - d. A map showing the area and elevations in which filling has been completed during the previous calendar year.

MONITORING AND REPORTING PROGRAM NO. R5-2006-0046  
FOR COUNTY OF KERN  
FOR CLOSURE AND POST-CLOSURE MAINTENANCE  
LOST HILLS SANITARY LANDFILL  
KERN COUNTY

- e. A written summary of the monitoring results, indicating any changes made or observed since the previous annual report.
- f. An evaluation of the effectiveness of the leachate monitoring/control facilities.

The Discharger shall implement the above monitoring program on the effective date of this Program.

Ordered by: \_\_\_\_\_  
PAMELA C. CREEDON, Executive Officer

\_\_\_\_\_ 5 May 2006  
(Date)

REH:fmc: 5/5/06

**TABLE I**  
**GROUNDWATER DETECTION MONITORING PROGRAM**

<u>Parameter</u>	<u>Units</u>	<u>Frequency</u>
<b>Field Parameters</b>		
Groundwater Elevation	Ft. & hundredths, M.S.L.	Semiannual
Temperature	OC	Semiannual
Electrical Conductivity	µmhos/cm	Semiannual
PH	pH units	Semiannual
Turbidity	Turbidity units	Semiannual
<b>Monitoring Parameters</b>		
Total Dissolved Solids (TDS)	Mg/L	Semiannual
Chloride	Mg/L	Semiannual
Carbonate	Mg/L	Semiannual
Bicarbonate	Mg/L	Semiannual
Nitrate - Nitrogen	Mg/L	Semiannual
Sulfate	Mg/L	Semiannual
Calcium	Mg/L	Semiannual
Magnesium	Mg/L	Semiannual
Potassium	Mg/L	Semiannual
Sodium	Mg/L	Semiannual
Volatile Organic Compounds (USEPA Method 8260, see Table III)	µg/L	Semiannual
<b>Constituents of Concern (see Table IV)</b>		
Total Organic Carbon	Mg/L	5 years
Inorganics (dissolved)	Mg/L	5 years
Volatile Organic Compounds (USEPA Method 8260, extended list)	µg/L	5 years
Semi-Volatile Organic Compounds (USEPA Method 8270)	µg/L	5 years
Chlorophenoxy Herbicides (USEPA Method 8150)	µg/L	5 years
Organophosphorus Compounds (USEPA Method 8141)	µg/L	5 years

**TABLE II**  
**LEACHATE DETECTION MONITORING PROGRAM**

<u>Parameter</u>	<u>Units</u>	<u>Frequency</u>
<b>Field Parameters</b>		
Total Flow	Gallons	Monthly
Flow Rate	Gallons/Day	Monthly
Electrical Conductivity	µmhos/cm	Annually
pH	pH units	Annually
<b>Monitoring Parameters</b>		
Total Dissolved Solids (TDS)	mg/L	Annually
Chloride	mg/L	Annually
Carbonate	mg/L	Annually
Bicarbonate	mg/L	Annually
Nitrate - Nitrogen	mg/L	Annually
Sulfate	mg/L	Annually
Calcium	mg/L	Annually
Magnesium	mg/L	Annually
Potassium	mg/L	Annually
Sodium	mg/L	Annually
Volatile Organic Compounds (USEPA Method 8260, see Table III)	µg/L	Annually
<b>Constituents of Concern (see Table IV)</b>		
Total Organic Carbon	mg/L	5 years
Inorganics (dissolved)	mg/L	5 years
Volatile Organic Compounds (USEPA Method 8260, extended list)	µg/L	5 years
Semi-Volatile Organic Compounds (USEPA Method 8270)	µg/L	5 years
Chlorophenoxy Herbicides (USEPA Method 8150)	µg/L	5 years
Organophosphorus Compounds (USEPA Method 8141)	µg/L	5 years



**TABLE III**

**MONITORING PARAMETERS FOR DETECTION MONITORING**

**Surrogates for Metallic Constituents:**

pH  
Total Dissolved Solids  
Electrical Conductivity  
Chloride  
Sulfate  
Nitrate nitrogen

**Constituents included in VOC:**

**USEPA Method 8260**

Acetone  
Acrylonitrile  
Benzene  
Bromochloromethane  
Bromodichloromethane  
Bromoform (Tribromomethane)  
Carbon disulfide  
Carbon tetrachloride  
Chlorobenzene  
Chloroethane (Ethyl chloride)  
Chloroform (Trichloromethane)  
Dibromochloromethane (Chlorodibromomethane)  
1,2-Dibromo-3-chloropropane (DBCP)  
1,2-Dibromoethane (Ethylene dibromide; EDB)  
o-Dichlorobenzene (1,2-Dichlorobenzene)  
p-Dichlorobenzene (1,4-Dichlorobenzene)  
trans-1,4-Dichloro-2-butene  
Dichlorodifluoromethane (CFC-12)  
1,1-Dichloroethane (Ethylidene chloride)  
1,2-Dichloroethane (Ethylene dichloride)  
1,1-Dichloroethylene (1,1-Dichloroethene; Vinylidene chloride)  
cis-1,2-Dichloroethylene (cis-1,2-Dichloroethene)  
trans-1,2-Dichloroethylene (trans-1,2-Dichloroethene)  
1,2-Dichloropropane (Propylene dichloride)  
cis-1,3-Dichloropropene  
trans-1,3-Dichloropropene  
Ethylbenzene  
2-Hexanone (Methyl butyl ketone)  
Methyl bromide (Bromomethane)

**TABLE III**  
**MONITORING PARAMETERS FOR DETECTION MONITORING**

**Continued**

Methyl chloride (Chloromethane)  
Methylene bromide (Dibromomethane)  
Methylene chloride (Dichloromethane)  
Methyl ethyl ketone (MEK: 2-Butanone)  
Methyl iodide (Iodomethane)  
4-Methyl-2-pentanone (Methyl isobutylketone)  
Styrene  
1,1,1,2-Tetrachloroethane  
1,1,2,2-Tetrachloroethane  
Tetrachloroethylene (Tetrachloroethene; Perchloroethylene)  
Toluene  
1,1,1-Trichloroethane (Methylchloroform)  
1,1,2-Trichloroethane  
Trichloroethylene (Trichloroethene)  
Trichlorofluoromethane (CFC- 11)  
1,2,3-Trichloropropane  
Vinyl acetate  
Vinyl chloride  
Xylenes

**TABLE IV**  
**CONSTITUENTS OF CONCERN & APPROVED USEPA ANALYTICAL METHODS**

<b><u>Inorganics (dissolved):</u></b>	<b><u>USEPA Method</u></b>
Aluminum	6010
Antimony	6010
Barium	6010
Beryllium	6010
Cadmium	6010
Chromium	6010
Cobalt	6010
Copper	6010
Silver	6010
Tin	6010
Vanadium	6010
Zinc	6010
Iron	6010
Manganese	6010
Arsenic	7062
Lead	7421
Mercury	7470
Nickel	7520
Selenium	7742
Thallium	7841
Cyanide	9010
Sulfide	9030

**Volatile Organic Compounds:**

**USEPA Method 8260**

Acetone  
Acetonitrile (Methyl cyanide)  
Acrolein  
Acrylonitrile  
Allyl chloride (3-Chloropropene)  
Benzene  
Bromochloromethane (Chlorobromomethane)  
Bromodichloromethane (Dibromochloromethane)  
Bromoform (Tribromomethane)  
Carbon disulfide  
Carbon tetrachloride  
Chlorobenzene  
Chloroethane (Ethyl chloride)  
Chloroform (Trichloromethane)  
Chloroprene  
Dibromochloromethane (Chlorodibromomethane)

**TABLE IV**

**CONSTITUENTS OF CONCERN & APPROVED USEPA ANALYTICAL METHODS**

**Continued**

1,2-Dibromo-3-chloropropane (DBCP)  
1,2-Dibromoethane (Ethylene dibromide; EDB)  
o-Dichlorobenzene (1,2-Dichlorobenzene)  
m-Dichlorobenzene (1,3-Dichlorobenzene)  
p-Dichlorobenzene (1,4-Dichlorobenzene)  
trans- 1,4-Dichloro-2-butene  
Dichlorodifluoromethane (CFC 12)  
1,1 -Dichloroethane (Ethylidene chloride)  
1,2-Dichloroethane (Ethylene dichloride)  
1,1 -Dichloroethylene (1, 1-Dichloroethene; Vinylidene chloride)  
cis- 1,2-Dichloroethylene (cis- 1,2-Dichloroethene)  
trans- 1,2-Dichloroethylene (trans- 1,2-Dichloroethene)  
1,2-Dichloropropane (Propylene dichloride)  
1,3-Dichloropropane (Trimethylene dichloride)  
2,2-Dichloropropane (Isopropylidene chloride)  
1,1 -Dichloropropene  
cis- 1,3-Dichloropropene  
trans- 1,3-Dichloropropene  
Ethylbenzene  
Ethyl methacrylate  
Hexachlorobutadiene  
2-Hexanone (Methyl butyl ketone)  
Isobutyl alcohol  
Methacrylonitrile  
Methyl bromide (Bromomethane)  
Methyl chloride (Chloromethane)  
Methyl ethyl ketone (MEK; 2-Butanone)  
Methyl iodide (Iodomethane)  
Methyl methacrylate  
4-Methyl-2-pentanone (Methyl isobutyl ketone)  
Methylene bromide (Dibromomethane)  
Methylene chloride (Dichloromethane)  
Naphthalene  
Propionitrile (Ethyl cyanide)  
Styrene  
1,1,1,2-Tetrachloroethane  
1,1,2,2-Tetrachloroethane  
Tetrachloroethylene (Tetrachloroethene; Perchloroethylene; PCE)  
Toluene  
1,2,4-Trichlorobenzene  
1,1,1 -Trichloroethane, Methylchloroform  
1,1,2-Trichloroethane  
Trichloroethylene (Trichloroethene; TCE)  
Trichlorofluoromethane (CFC- 11)  
1,2,3-Trichloropropane

**TABLE IV**

**CONSTITUENTS OF CONCERN & APPROVED USEPA ANALYTICAL METHODS**

**Continued**

Vinyl acetate  
Vinyl chloride (Chloroethene)  
Xylene (total)

**Semi-Volatile Organic Compounds:**

**USEPA Method 8270 - base, neutral, & acid extractables**

Acenaphthene  
Acenaphthylene  
Acetophenone  
2-Acetylaminofluorene (2-AAF)  
Aldrin  
4-Aminobiphenyl  
Anthracene  
Benzo[a]anthracene (Benanthracene)  
Benzo[b]fluoranthene  
Benzo[k]fluoranthene  
Benzo[g,h,i]perylene  
Benzo[a]pyrene  
Benzyl alcohol  
Bis(2-ethylhexyl) phthalate  
alpha-BHC  
beta-BHC  
delta-BHC  
gamma-BHC (Lindane)  
Bis(2-chloroethoxy)methane  
Bis(2-chloroethyl) ether (Dichloroethyl ether)  
Bis(2-chloro-1-methylethyl) ether (Bis(2-chloroisopropyl) ether; DCIP)  
4-Bromophenyl phenyl ether  
Butyl benzyl phthalate (Benzyl butyl phthalate)  
Chlordane  
p-Chloroaniline  
Chlorobenzilate  
p-Chloro-m-cresol (4-Chloro-3-methylphenol)  
2-Chloronaphthalene  
2-Chlorophenol  
4-Chlorophenyl phenyl ether  
Chrysene  
o-Cresol (2-methylphenol)  
m-Cresol (3-methylphenol)  
p-Cresol (4-methylphenol)  
4,4'-DDD  
4,4'-DDE  
4,4'-DDT

**TABLE IV**

**CONSTITUENTS OF CONCERN & APPROVED USEPA ANALYTICAL METHODS**

**Continued**

Diallate  
Dibenz[a,h]anthracene  
Dibenzofuran  
Di-n-butyl phthalate  
o-Dichlorobenzene (1,2-Dichlorobenzene)  
m-Dichlorobenzene (1,3-Dichlorobenzene)  
p-Dichlorobenzene (1,4-Dichlorobenzene)  
3,3'-Dichlorobenzidine  
2,4-Dichlorophenol  
2,6-Dichlorophenol  
Dieldrin  
Diethyl phthalate  
p-(Dimethylamino)azobenzene  
7,12-Dimethylbenz[a]anthracene  
3,3'-Dimethylbenzidine  
2,4-Dimethylphenol (m-Xylenol)  
Dimethyl phthalate  
m-Dinitrobenzene  
4,6-Dinitro-o-cresol (4,6-Dinitro-2-methylphenol)  
2,4-Dinitrophenol  
2,4-Dinitrotoluene  
2,6-Dinitrotoluene  
Di-n-octyl phthalate  
Diphenylamine  
Endosulfan I  
Endosulfan II  
Endosulfan sulfate  
Endrin  
Endrin aldehyde  
Ethyl methanesulfonate  
Famphur  
Fluoranthene  
Fluorene  
Heptachlor  
Heptachlor epoxide  
Hexachlorobenzene  
Hexachlorobutadiene  
Hexachlorocyclopentadiene  
Hexachloroethane  
Hexachloropropene  
Indeno(1,2,3-c,d)pyrene  
Isodrin  
Isophorone  
Isosafrole  
Kepone

**TABLE IV**

**CONSTITUENTS OF CONCERN & APPROVED USEPA ANALYTICAL METHODS**

**Continued**

Methapyrilene  
Methoxychlor  
3-Methylcholanthrene  
Methyl methanesulfonate  
2-Methylnaphthalene  
Naphthalene  
1,4-Naphthoquinone  
1-Naphthylamine  
2-Naphthylamine  
o-Nitroaniline (2-Nitroaniline)  
m-Nitroaniline (3-Nitroaniline)  
p-Nitroaniline (4-Nitroaniline)  
Nitrobenzene  
o-Nitrophenol (2-Nitrophenol)  
p-Nitrophenol (4-Nitrophenol)  
N-Nitrosodi-n-butylamine (Di-n-butylnitrosamine)  
N-Nitrosodiethylamine (Diethylnitrosamine)  
N-Nitrosodimethylamine (Dimethylnitrosamine)  
N-Nitrosodiphenylamine (Diphenylnitrosamine)  
N-Nitrosodipropylamine (N-Nitroso-N-dipropylamine; Di-n-propylnitrosamine)  
N-Nitrosomethylethylamine (Methylethylnitrosamine)  
N-Nitrosopiperidine  
N-Nitrosopyrrolidine  
5-Nitro-o-toluidine  
Pentachlorobenzene  
Pentachloronitrobenzene (PCNB)  
Pentachlorophenol  
Phenacetin  
Phenanthrene  
Phenol  
p-Phenylenediamine  
Polychlorinated biphenyls (PCBs; Aroclors)  
Pronamide  
Pyrene  
Safrole  
1,2,4,5-Tetrachlorobenzene  
2,3,4,6-Tetrachlorophenol  
o-Toluidine  
Toxaphene  
1,2,4-Trichlorobenzene  
2,4,5-Trichlorophenol  
0,0,0-Triethyl phosphorothioate  
sym-Trinitrobenzene

**TABLE IV**

**CONSTITUENTS OF CONCERN & APPROVED USEPA ANALYTICAL METHODS**

**Continued**

**Chlorophenoxy Herbicides:**

**USEPA Method 8150**

2,4-D (2,4-Dichlorophenoxyacetic acid)  
Dinoseb (DNBP; 2-sec-Butyl-4,6-dinitrophenol)  
Silvex (2,4,5-Trichlorophenoxypropionic acid; 2,4,5-TP)  
2,4,5-T (2,4,5-Trichlorophenoxyacetic acid)

**Organophosphorus Compounds:**

**USEPA Method 8141**

0,0-Diethyl 0-2-pyrazinyl phosphorothioate (Thionazin)  
Dimethoate  
Disulfoton  
Methyl parathion (Parathion methyl)  
Parathion  
Phorate



**TABLE V**

**WATER QUALITY PROTECTION STANDARD INITIAL CONCENTRATION LIMITS**

<u>Parameter</u>	<u>Units</u>	<u>Concentration</u>	<u>Concentration</u>
		<u>Limits</u> <u>LH1-04</u>	<u>Limits</u> <u>LH1-06</u>
Chloride	mg/L	795	795
Nitrate - Nitrogen	mg/L	0.1	0.1
Sulfate	mg/L	1553	1553
Total Dissolved Solids	mg/L	3730	3730
Aluminum	µg/L	250	250
Antimony	µg/L	100	100
Arsenic	µg/L	8.3	11
Barium	µg/L	27	27
Beryllium	µg/L	20	20
Cadmium	µg/L	10	10
Chromium	µg/L	71	71
Cobalt	µg/L	74	74
Copper	µg/L	20	20
Hexavalent Chromium	µg/L	2	2
Iron	µg/L	50	211
Lead	µg/L	19	19
Manganese	µg/L	183	620
Mercury	µg/L	0.2	0.2
Nickel	µg/L	50	50
Selenium	µg/L	3	3.2
Silver	µg/L	10	10
Thallium	µg/L	1	1
Tin	µg/L	15	15
Vanadium	µg/L	75	75
Zinc	µg/L	50	50
Carbonate	mg/L	2.6	2.6
Cyanide	µg/L	0.02	0.02
Sulfide	µg/L	0.1	0.1
Volatile Organic Constituents	µg/L	MDL	MDL
Semivolatile Organic Constituents	µg/L	MDL	MDL
Organophosphorous Constituents	µg/L	MDL	MDL
Chlorinated Herbicides	µg/L	MDL	MDL

## INFORMATION SHEET

ORDER NO. R5-2006-0046  
COUNTY OF KERN  
FOR CLOSURE AND POST-CLOSURE MAINTENANCE  
LOST HILLS SANITARY LANDFILL  
KERN COUNTY

The County of Kern owns and maintains the Lost Hills Sanitary Landfill, located approximately four miles west of Lost Hills. The 537-acre facility contains one unlined waste management unit (Unit) covering 6.7 acres and is currently regulated by Waste Discharge Requirements Order No. 5-01-161.

The site is near the western edge of the San Joaquin Valley. The climate is semi-arid, with hot, dry summers and cool winters. The average annual precipitation is 5.74 inches of precipitation per year and the annual average reference evapotranspiration from a grass surface is 57.06 inches per year. The site is not within a 100-year floodplain according to FEMA maps.

The San Andreas Fault Zone is located approximately 22 miles west of the landfill. The magnitude of the maximum probable earthquake is 8.25. The peak horizontal ground acceleration at the site would be 0.234g.

Land within 1,000 feet of the site is used for grazing and mining. First encountered groundwater occurs in a perched groundwater-bearing zone at a depth of approximately 263 to 265 feet below the native ground surface. The groundwater elevation in the perched groundwater-bearing zone ranges from approximately 536 feet to 539 feet MSL. Only one well is completed in the perched groundwater-bearing zone, preventing calculation of groundwater gradient and flow direction. The perched groundwater-bearing zone has not been identified beneath the Unit.

Surface drainage is toward an unnamed ephemeral creek in the Lost Hills in the Antelope Plain Hydrologic Area (558.60) of the Tulare Lake Basin. Surface waters in the Antelope Plain Hydrologic Area are designated as Valley Floor Waters in the Basin Plan.

The first encountered groundwater is about 100 to 105 feet below the native ground surface. Groundwater elevations range from 314 feet to 315 feet MSL. The groundwater is unconfined. The depth to groundwater does not fluctuate significantly on a seasonal basis. Monitoring data indicates background groundwater quality has an electrical conductivity ranging between 4,500 and 6,000 micromhos/cm, with total dissolved solids ranging between 3,300 and 4,000 mg/l.

Volatile organic compounds are often detected in a release from a landfill, and are the primary waste constituents detected in groundwater beneath a municipal solid waste landfill. Since volatile organic compounds are not naturally occurring, and thus have no background value, they are not amenable to the statistical analysis procedures contained in Title 27 for the determination of a release of wastes from a Unit. Title 27 does provide for the non-statistical evaluation of monitoring data that will provide the best assurance of the earliest possible detection of a release from a Unit. However, Title 27 does not specify a specific method for non-statistical evaluation of monitoring data.

INFORMATION SHEET-ORDER NO. R5-2006-0046  
COUNTY OF KERN  
FOR CLOSURE AND POST-CLOSURE MAINTENANCE  
LOST HILLS SANITARY LANDFILL  
KERN COUNTY

-2-

A Regional Water Board may specify a non-statistical data analysis method pursuant to Section 20080(a)(1) of Title 27. In order to provide the best assurance of the earliest possible detection of a release of non-naturally occurring waste constituents from a Unit, this Order specifies a non-statistical method for the evaluation of monitoring data.

The specified non-statistical method for evaluation of monitoring data in this Order provides two criteria (or triggers) for making the determination that there has been a release of waste constituents from a Unit. The presence of two waste constituents above their respective method detection limit (MDL), or one waste constituent detected above its practical quantitation limit (PQL), indicates that a release of waste from a Unit has occurred. Following an indication of a release, verification testing will be conducted to determine whether there has been a release from the Unit, or there is a source of the detected constituents other than the landfill, or the detection was a false detection. Although the detection of one waste constituent above its MDL is sufficient to provide for the earliest possible detection of a release in accordance with Title 27, the detection of two waste constituents above the MDL as a trigger is appropriate due to the higher risk of false-positive analytical results and the corresponding increase in sampling and analytical expenses from the use of detecting one waste constituent above its MDL as a trigger.

The Discharger adequately demonstrated that construction of a Title 27 prescriptive standard cover would be unreasonable and unnecessarily burdensome when compared to the proposed engineered alternative design. There is no clay source on-site or nearby and the cost of importing clay from off-site or mixing on-site soils with bentonite would cost substantially more than the alternative design. The Discharger demonstrated that an evapo-transpirative cover utilizing soil from a nearby borrow source would be an appropriate engineered alternative to the prescriptive design. This Order requires the Discharger to install a pan lysimeter(s) beneath the final cover for long-term monitoring of the cover integrity.

On 9 October 1991, the United States Environmental Protection Agency (USEPA) promulgated regulations (Title 40, Code of Federal Regulations, Parts 257 and 258, "federal municipal solid waste [MSW] regulations" or "Subtitle D") that apply, in California, to dischargers who own or operate Class II or Class III landfill units at which municipal solid waste is discharged. The majority of the federal MSW regulations became effective on the "Federal Deadline", which was on 9 October 1993. With the issuance of Resolution No. 93-62, the State Water Resources Control Board established a statewide policy for the regulation of discharges of municipal solid wastes consistent with Subtitle D. Following the issuance of Resolution No. 93-62, the USEPA deemed the State of California to be an approved state, meaning that compliance with the applicable state regulations constitutes compliance with the corresponding portions of the federal Subtitle D regulations. These requirements are consistent with Resolution No. 93-62 and Subtitle D, and implement the appropriate state regulations in lieu of Subtitle D. The Discharger also needs to comply with all applicable provisions of Subtitle D that are not implemented through compliance with this Order or Title 27.

The action to revise waste discharge requirements for this existing facility is exempt from the provisions of the California Environmental Quality Act (CEQA), Public Resource Code §21000, et seq., and the

INFORMATION SHEET-ORDER NO. R5-2006-0046  
COUNTY OF KERN  
FOR CLOSURE AND POST-CLOSURE MAINTENANCE  
LOST HILLS SANITARY LANDFILL  
KERN COUNTY

-3-

CEQA guidelines, in accordance with Title 14, CCR, §15301. Revision of the waste discharge requirements updates the requirements to conform with the California Water Code and Title 27, California Code of Regulations, §20005 et seq.

REH/fmc: 5/5/06