

Introduction

This water quality monitoring fact sheet was prepared by the Irrigated Agriculture Program of the Central Coast Regional Water Quality Control Board (Water Board) and made available on November 30, 2008. The data were delivered by Central Coast Water Quality Preservation, Inc. (CCWQP) to the Water Board as part of the monitoring and reporting requirements for all dischargers enrolled under *Conditional Waiver of Waste Discharge Requirements for Discharge from Irrigated Lands, Order No. R3-2004-0117*. Monitoring stations were selected to represent water quality in predominantly agricultural areas, but in some cases reflect mixed land uses upstream of the sites.

309GAB Gabilan Creek at Boronda Road

The Cooperative Monitoring Program sampled Moro Cojo Slough 15 times (approximately one sample per month) between February 2005 and December 2006.

Summary of Water Quality Data

Notable Measured Analytes for Water Quality Monitoring

Analyte/Parameter	Average	Range	Water Quality Criteria (WQC) or Guideline ¹	Percent Outside WQC or Guideline
Ammonia as N, Unionized	0.045 mg/L	0.002–0.267 mg/L	<0.025 mg/L ⁺	23%
Nitrate/Nitrite as N	27.5 mg/L	1.4–78.4 mg/L	<10.0 mg/L*	78%
Orthophosphate as P	0.79 mg/L	0.00–2.05 mg /L	<0.12 mg/L*	87%
Turbidity (NTU)	1294 NTU	26-3000 NTU	<25 NTU*	100%
Conductivity	0.79 mmho/cm	0.26–1.51 mmho/cm	Ranges: ⁺ <0.75 No Problem 0.75–3.0 Increasing >3.0 Severe	% in Range: 27% 73% 0%
pH	8.0	7.7–8.3	7.0–8.3 ⁺	0%
Annual Median Dissolved Oxygen (% Saturation)	2005: 83% 2006: 68%	54–100%	>85% annual median ⁺	Std not met Std not met
Dissolved Oxygen	7.5 mg/L	5.1–10.5 mg/L	>5.0 mg/L (GEN/WARM) ⁺ >7.0 mg/L (COLD/SPWN) ⁺	0% 40%
Chlorophyll a	2.9 µg/L	0.7–14.2 µg/L	<40 µg/L*	0%
Water Temperature	18.3°C	12.2–26.7°C	Water Basin Specific	--

⁺ Indicates standard defined in the Water Quality Control Plan, Central Coast Basin (Basin Plan)

* Indicates guideline not described in the Basin Plan or not specifically stated as applicable to the beneficial uses of the site. Origin of the guideline is described in the individual discussion of the analyte/parameter.

The present and potential beneficial uses for **Gabilan Creek** as defined in the Basin Plan include Municipal and Domestic Supply (MUN), Agricultural Supply (AGR), Ground Water Recharge (GWR), Water Contact Recreation (REC-1), Non-Contact Water Recreation (REC-2), Wildlife Habitat (WILD), Warm Fresh Water Habitat (WARM), Spawning, Reproduction, and/or Early Development (SPWN), and Commercial and Sport Fishing (COMM).

Unionized Ammonia (as N)

Unionized ammonia (as N) is a calculated value based on water temperature, pH and total ammonium concentration. Ammonia can be toxic in water. With high water temperature and/or high pH, ammonia becomes unionized and is toxic at

¹ Water Quality Criteria (WQC) are defined in the Water Quality Control Plan, Central Coast Basin (also referred to as the “Basin Plan”) to protect beneficial uses such as drinking water, fish habitat, irrigation water, etc. WQC include general water quality standards for some analytes as well as specific criteria based on the defined beneficial uses. Other water quality guidelines were compiled to provide a standard in order to compare sites. Bold indicates beneficial uses that apply to this watershed.

much lower levels. The Basin Plan general water quality objectives state that unionized ammonia shall not exceed 0.025 mg/L. Over time, ammonia should reduce to nitrate; so long-lasting levels of ammonia may indicate continuous discharges of waste. **Three of 13 samples (23%) exceeded the standard, reaching over ten times the standard (May 2006 – 0.267 mg/L). All exceedances occurred between May and August. The average unionized ammonia concentration was 0.045 mg/L. However, the standard deviation was 0.082 mg/L, indicating extreme (high and low) values.**


Nitrate/Nitrite as N

The Municipal and Domestic Supply (MUN) objective states in Table 3-2 of the Basin Plan that nitrate as NO₃ shall not exceed 45 mg/L. This value is equivalent to 10 mg/L of nitrate as N. Nitrite accounts for a small percent of total nitrate/nitrite, and therefore, nitrate as N criterion was used as a guideline for nitrate/nitrite. **Seven of nine nitrate/nitrite samples (78%) exceeded the guideline, ranging from 1.4 to 78.4 mg/L (nearly 8 times the guideline). The three highest exceedances occurred in 2006.**

Orthophosphate as P

The Basin Plan does not contain orthophosphate standards. The Central Coast Ambient Monitoring program (CCAMP) non-regulatory guideline for general water quality objectives states that orthophosphate concentrations shall not exceed 0.12 mg/L. **Orthophosphate concentrations exceeded the guideline in 13 of 15 samples (87%). The average orthophosphate concentration over 2006 (1.18 mg/L) was more than double the average orthophosphate concentration over 2005 (0.53 mg/L). The four highest exceedances occurred in 2006. The average concentration over both years was 0.79 mg/L.**

The chart below shows the nitrate/nitrite and orthophosphate concentration levels throughout the sampling period. The guidelines for nitrate/nitrite as N and orthophosphate as P state that their concentrations shall not exceed 10 mg/L and 0.12 mg/L, respectively, shown by the black horizontal line on the graph.

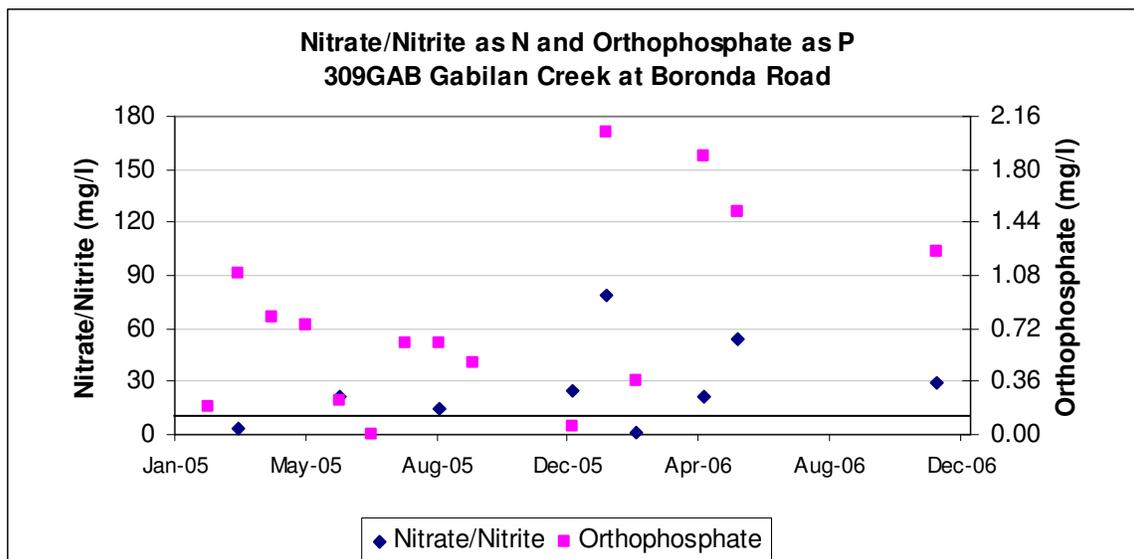

Turbidity

The Basin Plan states: “Water shall be free of changes in turbidity that cause nuisance or adversely affect beneficial uses.” Sigler et al.² shows that turbidity levels of 25 NTU or greater caused reduction in juvenile salmonid growth due to interference with their ability to find food. Turbidity is often affected by suspended material in runoff. **All 15 turbidity readings exceeded the guideline. Turbidity levels in Gabilan Creek averaged 1294 NTU (over 50 times the guideline). Turbidity levels exceeded 3000 NTU in four samples.**

² Sigler, J.W., T.C. Bjornn, & F.H. Everst. (1984). *Effects of chronic turbidity on density and growth of steelhead and coho salmon*. Transactions of the American Fisheries Society. 113:142-150.

Conductivity

Conductivity is measured from a water sample. Based on Table 3-3 of the Basin Plan showing Guidelines for Interpretation of Quality of Water for Irrigation, conductivity below 0.75 mmho/cm causes no problems to irrigation, between 0.75 and 3 mmho/cm causes increasing problems, and conductivity above 3 mmho/cm causes severe problems. The conductivity level can be greatly affected by geologic and biological influences and is not necessarily related to agricultural activities. **Four of 15 conductivity samples (27%) indicated no problems to irrigation water; 11 samples (73%) indicated increasing problems; no samples indicated severe problems.**

pH

Multiple beneficial uses have objectives for pH. The Basin Plan general water quality objective for pH is between 7.0 and 8.5; MUN, AGR, REC-1, and REC-2 pH objectives are between 6.5 and 8.3. The standard, therefore, is 7.0-8.3 if one or more of MUN, AGR, REC-1, and REC-2 is defined as a beneficial use. pH above 9 can cause skin irritation to humans and makes water inhospitable to many species. **All 15 samples remained within the standard for pH, ranging from 7.7 to 8.3. There were no apparent trends or cycles.**

Dissolved Oxygen Concentration and Dissolved Oxygen Saturation

The Basin Plan general water quality objectives state annual median dissolved oxygen shall remain above 85% saturation. General and WARM objectives state that the dissolved oxygen concentration must remain above 5.0 mg/L at all times, and SPWN and COLD objectives state that the dissolved oxygen concentration must remain above 7.0 mg/L at all times. **All 15 samples met the general and WARM concentration standard, but six samples (40%) did not meet the SPWN concentration standard. Dissolved oxygen did not meet the saturation standard during 2005 or 2006, with median annual values of 83 and 68% saturation, respectively.**

Chlorophyll a

Healthy and appropriate Chlorophyll a levels are not defined in the Basin Plan. Chlorophyll a indicates phytoplankton growth, a necessary component of healthy water bodies. Because turbidity causes interference for the Chlorophyll a probe, measurements of Chlorophyll a may not be accurate when turbidity is above 1000 NTU. Chlorophyll a levels over 40µg/L are considered problematic by North Carolina Administrative Code (NCAC). **No readings exceeded the guideline. The Chlorophyll a readings averaged 2.9 µg/L.**

Temperature

Sullivan et al.³ state that the maximum weekly average temperatures for protection of steelhead or rainbow trout, and coho salmon are 19.6 and 19.7°C, respectively. **The temperature averaged 18.3°C and ranged from 12.2 to 26.7°C. Though weekly averages were not taken, the temperatures taken at this site indicate averages that may regularly exceed the maximum temperatures for fish protection.**

³ Sullivan, K., D.J. Martin, R.D. Cardwell, T.E. Toll, & S. Duke. (2000). *An analysis of the effects of temperature on salmonids of the Pacific Northwest with implications for selecting temperature criteria*. Portland, OR: Sustainable Ecosystems Institute.

Summary of Toxicity Data

Species with Significant Mortality


	Mar-05	Apr-05	Jul-05	Sep-05	Feb-06	May-06
Invertebrate (Water Column)	Yes		Yes ⁺	Yes ⁺	Yes [§]	
Invertebrate (Sediment)		Yes				Yes
Fish (Water Column)	No				No	
Algae (Water Column)	No				No	

⁺Indicates complete mortality within 24 hours of test initiation

[§]Indicates complete mortality within 48 hours of test initiation

Significant effect is determined by statistically significant rates of mortality, growth, or reproduction compared to a control sample and provides an indication that something is affecting plant or animal life in the stream. Invertebrates show significant sensitivity to organophosphates and pesticides. Significant effect to algae often indicates the presence of herbicides and metals such as copper. Fish are less sensitive to organophosphates but can be impacted by other pollutants such as ammonia and pyrethroid pesticides.

Photos of Site

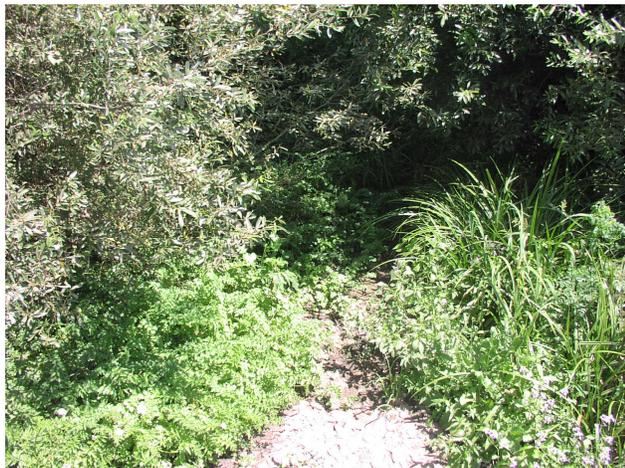

July 2006



February 2006

QAQC

The data in this water quality monitoring fact sheets meet the quality assurance and quality control requirements of the Water Board's Surface Water Ambient Monitoring Program (SWAMP). Additional surface water monitoring data are available at the Water Board's Central Coast Ambient Monitoring Program website <http://www.ccamp.org>. Any questions regarding the data or analysis should be directed to either **Peter Meertens** at pmeertens@waterboards.ca.gov (805) 549-3869 or **Amanda Bern** at abern@waterboards.ca.gov (805) 594-6197.

Attachment: Monitoring Data

