

Chapter 4 Water Quality Monitoring 2010
TJ Ditto¹
Ivan Korogod¹
Central Valley Regional Water Quality Control Board

Introduction

The monitoring program for the Grassland Bypass Project (GBP), including water quality monitoring, is described in detail in Compliance Monitoring Program for the Use and Operation of the Grassland Bypass Project, Phase II (USBR et al., 2002). This chapter provides a summary of the water quality monitoring program, modifications to the plan for the ninth year of operation of Phase II of the GBP (January 1, 2010 to December 31, 2010), and water quality trends observed during this period. Detailed water quality data of individual monitoring stations will not be provided in this summary, as the San Francisco Estuary Institute (SFEI) has presented this information in annual narrative and graphical summary reports (SFEI, 2010).

Monitoring Program

The Central Valley Regional Water Quality Control Board (CVRWQCB) has an ongoing water quality monitoring program related to regulatory activities for agricultural subsurface drainage from the Grassland watershed. The water quality monitoring program for the GBP is an adaptation of the CVRWQCB monitoring program. The CVRWQCB conducts most of the water quality sampling. The Panoche Water District (under contract with the San Luis & Delta-Mendota Water Authority; SL&D-MWA) assists the CVRWQCB by collecting samples at Stations A, J, K, L2, and M2. Samples are transferred to and processed by the CVRWQCB and analyzed by its contract laboratories. The CVRWQCB conducts quality assurance (QA) reviews of the data before submitting them to the SFEI for reporting.

Monitoring Objectives

The water quality monitoring program was designed to provide data for evaluating compliance with commitments in the Project Waste Discharge Requirements, the Use Agreement, and associated documents. The commitments include:

- Monthly and annual selenium load limits on discharges
- No degradation of the San Joaquin River water quality relative to the pre-Project-condition
- Cessation of discharge of agricultural subsurface drainage to the wetland channels

- Management of flows in the San Luis Drain (SLD) so as to not mobilize channel sediments

The Monitoring Program was also designed to verify the validity of assumptions expressed in documents associated with the GBP. The assumptions include:

- The GBP is expected to result in selenium concentrations less than 2 µg/L in approximately 93 miles of wetland water supply channels.
- The increased frequency of exceeding selenium water quality objectives in Mud Slough (north) will be offset by a reduction of exceedances in Salt Slough.

In addition, the Monitoring Program was intended to provide data to be used to assess spatial and temporal trends in water quality parameters of concern and to characterize habitats in which biological samples were collected.

Sampling Locations

Monitoring was conducted in four areas; the SLD, Mud Slough (north), the San Joaquin River, and the Grassland wetland water supply channels, including Salt Slough. Table 1 summarizes the Monitoring Program, and sampling locations are depicted in Figure 2 in Chapter 1.

Frequency of Sampling

The frequency of sampling is outlined in Table 1. Weekly composite samples were collected at Station A (inflow to the SLD). Daily composite samples were collected at Station B (discharge from the SLD), and at Station N (San Joaquin River at Crows Landing). At Station A, daily samples were composited into a weekly sample to be used along with continuous flow data to calculate weekly selenium load inflow to the SLD. At Station B, daily composite samples along with continuous flow data were used to calculate daily selenium load discharge to Mud Slough (north). At Station N, daily composite samples were collected to allow the CVRWQCB to calculate loads and evaluate progress toward compliance with Basin Plan water quality objectives. The compliance date at Station N for the selenium water quality objective (5 µg/L 4-day average) during normal and wet years was October 1, 2005, and during critical, dry, and below normal years was October 1, 2010 (CVRWQCB, 1998a). Since the objective is based on a 4-day average concentration, consecutive daily samples are required at this station. The remaining stations were sampled on a weekly basis. Table 2 shows the summary of the selenium water quality objectives and compliance time table for Mud Slough as well as the San Joaquin River from the Mud Slough Confluence to the Merced River.

Sampling Methodology

Three types of sampling techniques were utilized, depending on the frequency of sampling and data needs: auto-sampler, mid-channel depth-integrated, and grab sample

from channel bank. Auto-samplers were used to collect daily and weekly composite samples because of the remoteness of the station and frequency of sampling at stations A, B, and N. At Stations A, B, and D, structures such as a bridge or platform over the channel permitted the collection of mid-channel, depth-integrated samples. At other stations, a grab sample was collected from the stream bank. With respect to stream hydrology, lateral and vertical homogeneity was assumed for dissolved constituents at all sampling stations.

Modifications to the Water Quality Monitoring Program

During the Phase I of the GBP a number of issues were resolved with respect to the water quality monitoring program. These modifications and clarifications to the monitoring program are discussed in the previous Annual Reports (USBR, 1998 and SFEI, 1999, 2000, 2001, 2003, 2004b and 2005).

Water Quality Trends

Detailed water quality data for each monitoring station are presented in the Grassland Bypass Project Annual Narrative and Graphical Summary Reports, January 2010 to December 2010 (SFEI, 2011). Thus, this presentation will be limited to major water quality trends and findings for the ninth year of operation of Phase II of the GBP. Of primary interest are selenium concentrations in the San Joaquin River and water quality trends in Mud Slough (north). Also of interest are sporadic exceedances in the wetland channels of selenium water quality objectives established in the Water Quality Control Plan for the Sacramento/San Joaquin River Basins.

San Joaquin River

The Water Quality Control Plan for the Sacramento River and San Joaquin River Basins (Basin Plan) contains a schedule for compliance with the 5 µg/L (4-day average) selenium water quality objective and performance goals. The compliance date was October 1, 2005 for above normal and wet water year types and was October 1, 2010 for critical, dry, and below normal water year types. A 5 µg/L performance goal became effective October 1, 2005 for critical, dry, and below normal water year types. Compliance with selenium water quality objectives and performance goals specified in the Basin Plan is measured at Station N.

Figure 1 depicts selenium concentrations in the San Joaquin River at monitoring Stations G (weekly grab), and N (4-day average) for 2010. Station G is located at Fremont Ford, upstream of the Mud Slough (north) inflow to the San Joaquin River. Because this station is located upstream of drainage discharges from the GBP service area (except during flood events when drainage is occasionally routed to Salt Slough), selenium concentrations are generally low. Station N is located downstream of the GBP discharges conveyed by Mud Slough (north) and the Merced River inflow to the San Joaquin River. Merced River inflows dilute the upstream selenium contributions (CVRWQCB, 2002).

For the months of January through December 2010, the applicable water quality objective is 5 µg/L 4-day average. Selenium concentrations remained below this performance goal for the 2010 calendar year at both Site N and Site G. Figure 2 shows the monthly means at Site N as well as the 5 µg performance goal. Due to autosampler malfunction no samples were collected at Site N April 7, 2010 through April 20, 2010, May 19, 2010 through June 1, 2010, and October 27, 2010 through November 2, 2010.

The Basin Plan and the GBP Waste Discharge Requirements (WDRs) prohibit discharge of selenium from agricultural subsurface drainage systems in the Grassland Watershed to the San Joaquin River in amounts exceeding 8,000-pounds per water year. Compliance is measured at Station B. Calculations using daily selenium data, preliminary USGS flow data, and the load calculation methods found in CVRWQCB (1998b) indicate that the annual selenium loads measured at Station B during Water Years 2010 was 4,162 pounds; well below the 8,000-pound annual load limit for the Grassland Watershed.

Wetland Channels

Monthly mean selenium concentrations in the wetland channels during 2010 are depicted in Figure 3. The monthly mean 2 µg/L selenium objective was met during all months of 2010 in Salt Slough (Site F), Camp 13 (site J) and Santa Fe Canal (Site M2). Selenium concentrations slightly in excess of the monthly mean 2 µg/L objective were observed at San Luis Canal (Site L2) in March 2010. At Site K, selenium concentrations were in excess of the monthly mean 2 µg/L objective in February 2010.

Regional Board staff conducted preliminary investigations on the potential sources of selenium, which are detailed in two separate reports (CVRWQCB, 2000 and CVRWQCB, 2002). In summary, primary sources of selenium to the channels were determined to be diversions from the 94,000-acre Drainage Project Area (DPA) (both stormwater flows and seepage from control gates), supply water, subsurface agricultural drainage from areas outside of the DPA, tailwater and local groundwater. To address the first source, diversions from the DPA, the Grassland Area Farmers (GAF) developed a stormwater management plan, and internal control gates were sealed. These actions appear to have controlled peaks of selenium previously observed during storm events.

Despite the stormwater management plan and control gate modifications made by the GAF, selenium concentrations have continued to sporadically exceed the 2 µg/l monthly mean selenium objective in the wetland channels.

Mud Slough (North)

Selenium concentrations observed at Station D (Mud Slough (north) downstream of the SLD), during 2010 are depicted in Figure 4. Water quality at Station D is dominated by the GBP drainage discharge. Selenium concentrations tend to be lowest from the fall through early winter (non-irrigation period) and highest during the irrigation period, which commences in mid winter (pre-plant irrigation) and lasts through the summer.

During 2010, selenium concentrations at Station D ranged from 0.969 µg/L in October to 45.3 µg/L in May. For comparison purposes, the 5 µg/L (4-day average) selenium water quality objective, which applies December 31, 2019 for Mud Slough (north) and the 15 µg/L performance goal, which applies December 31, 2015, are noted on Figure 4. Selenium concentrations regularly exceeded 5 µg/L at Station D. During 2010, the observed concentration of selenium at Station C (Mud Slough (north) upstream of the drainage discharge) remained below 5 µg/L, as depicted in Figure 5. The maximum observed selenium concentration of 1.66 µg/L was noted for 2010 in July in Mud Slough upstream of SLD.

Boron Water Quality Objectives

Boron water quality objectives and monthly mean boron concentrations for Mud Slough, Salt Slough, and the San Joaquin River for 2009 are presented in Table 3.

During 2010, exceedances of the 2.0 mg/L objective occurred at Station D from March 16 through September 15. Exceedances also occurred at Station C in March, April, and May. The 1.3 mg/L objectives were met continuously at Station N throughout 2010.

Sources of boron occur throughout the San Joaquin Basin and are not confined to the GBP service area (CVRWQCB, 2002). The CVRWQCB is currently conducting a separate effort to control salt and boron loading to the lower San Joaquin Basin.

Molybdenum Water Quality Objectives

Molybdenum water quality objectives and monthly mean molybdenum concentrations for Mud Slough, Salt Slough, and the San Joaquin River for 2010 are presented in Table 4. The data indicate that molybdenum concentrations were below the 19 µg/L water quality objectives in Mud Slough, Salt Slough, and the San Joaquin River throughout 2010 at Stations C, D, F, G, and N. Due to lab error no molybdenum samples were analyzed during the month of August.

Nutrient Data

CVRWQCB staff collected nutrient samples at Stations B, C, D, G, and N. Available nutrient data for the San Luis Drain, Mud Slough (north), and the San Joaquin River are presented in Tables 5 through 9.

For comparison purposes, the Primary Maximum Contaminant Level (MCL) for nitrate in drinking water is 10 mg/L nitrate expressed as nitrogen (CVRWQCB, 2003).

During 2010, nitrate levels in samples collected at Station B were above the MCL during January, March, May, and one of the sampling events in June, with a maximum recorded value of 17 mg/L. Nitrate levels in samples collected at site D during one sampling event in May were above the MCL with a value of 13.0 mg/L. Nitrate levels in samples

collected at Stations C, G, and N were below the MCL in all samples collected during 2010.

Freshwater aquatic life criteria for ammonia are found in CVRWQCB (2003). The threshold value for ammonia toxicity is a function of both the temperature and pH of the ambient water from which the nutrient sample is collected. Temperature and pH field measurements were used to determine the ammonia toxicity threshold for each sample. Ammonia levels did not exceed the Ammonia Toxicity Thresholds throughout 2010 at Stations B, C, D, G, and N.

Additional constituents (total Kjeldhal nitrogen, total phosphorus, and orthophosphate) continue to be collected to aid in the development of a TMDL for oxygen demanding substances in the San Joaquin River and future nutrient criteria.

Conclusions

Monitoring has shown that selenium concentrations in the San Joaquin River are a function of location in the River with respect to discharge points and tributary inflows, and of the assimilative capacity of the River. The lowest selenium concentrations in the San Joaquin River are upstream of Mud Slough (north) inflows. Mud Slough (north) inflow contains relatively high concentrations of selenium. The Merced River dilutes the San Joaquin River with respect to selenium. Selenium concentrations in the San Joaquin River at Station N, however, remain elevated relative to the background condition in the San Joaquin River at Station G.

The 2 µg/L monthly mean selenium water quality objective was exceeded in two of the wetland supply channels during 2010. Selenium concentrations were substantially lower than pre-project conditions for all sites.

A number of sources may contribute to the exceedances of selenium water quality objectives in the wetland channels, including agricultural subsurface drainage from areas outside the GBP being discharged to the channels upstream of the wetlands.

For most of the year, the water quality of Mud Slough (north) downstream of the SLD inflow is governed by the GBP drainage discharge and fluctuates widely. Selenium concentrations tend to be lowest from the fall through early winter (non-irrigation period) and highest during the irrigation season, which commences in mid winter (pre-plant irrigation) and lasts through the summer. Selenium concentrations regularly exceeded 5 µg/L in Mud Slough (north) downstream of the SLD inflow. Upstream of the drainage discharge, the concentration of selenium was below 2 µg/L in all samples.

Boron water quality data from Mud Slough (north), Salt Slough, and the San Joaquin River were compared to applicable water quality objectives and there were no exceedances in the San Joaquin River or in Salt Slough. Boron water quality objectives were exceeded during the irrigation season in Mud Slough (north). Sources of boron occur throughout the San Joaquin Basin and are not confined to the GBP. The

CVRWQCB is concurrently conducting a separate effort to control salt and boron loading to the lower San Joaquin Basin.

Molybdenum water quality objectives were met in Salt Slough, and the San Joaquin River throughout 2010.

Nitrate concentrations were frequently observed above the MCL in samples collected at Station B, and were the lowest during the summer months. Nitrate concentrations did exceed the MCL in the sample collected in May at site C. Nitrate concentrations were below the MCL at Stations D, G, and N in all samples collected during 2010. Ammonia levels were observed below the toxicity threshold at all stations during 2010.

References

CVRWQCB. 1998a. The Water Quality Control Plan (Basin Plan) for the California Regional Water Quality Control Board, Central Valley Region, Fourth Edition: The Sacramento River Basin and the San Joaquin River Basin. California Regional Water Quality Control Board, Central Valley Region. Sacramento, CA.

CVRWQCB. 1998b. Loads of Salt, Boron, and Selenium in the Grassland Watershed and Lower San Joaquin River October 1985 to September 1995 – Volume I: Load Calculations. California Regional Water Quality Control Board, Central Valley Region. Sacramento, CA.

CVRWQCB. 1998c. Compilation of Electrical Conductivity, Boron, and Selenium Water Quality Data for the Grassland Watershed and San Joaquin River (May 1985 – September 1995), February 1998. California Regional Water Quality Control Board, Central Valley Region. Sacramento, CA.

CVRWQCB. 2000. Review of Selenium Concentrations in Wetland Water Supply Channels in the Grassland Watershed, May 2000. California Regional Water Quality Control Board, Central Valley Region. Sacramento, CA.

CVRWQCB. 2001. Waste Discharge Requirements No. 5-01-234 for the San Luis and Delta-Mendota Water Authority and the United States Department of the Interior, Bureau of Reclamation, Grassland Bypass Channel Project (Phase II), Fresno and Merced Counties. Sacramento, CA.

CVRWQCB. 2002. Water Quality of the Lower San Joaquin River: Lander Avenue to Vernalis

October 1998 - September 2000 (Water Years 1999 and 2000). California Regional Water Quality Control Board, Central Valley Region. Sacramento, CA.

CVRWQCB. 2002. Review of Selenium Concentrations in Wetland Water Supply Channels in the Grassland Watershed, April 2002. California Regional Water Quality

Control Board, Central Valley Region. Sacramento, CA.

CVRWQCB. 2003. A Compilation of Water Quality Goals, August 2003. California Regional Water Quality Control Board, Central Valley Region. Sacramento, CA.
San Francisco Estuary Institute (SFEI). 1999. Grassland Bypass Project Annual Report, October 1, 1997 to September 30, 1998. Richmond, CA.

DWR. 2008. California Cooperative Snow Surveys. Chronological Reconstructed Sacramento and San Joaquin Valley Water Year Hydrologic Classification Indices. WSIHIST (11/20/08 1524). <http://cdec.water.ca.gov/cgi-progs/iodir/WSIHIST>

San Francisco Estuary Institute (SFEI). 2011. Grassland Bypass Project Annual Narrative and Graphical Summary, January 2010 to December 2010. Richmond, CA

U.S. Bureau of Reclamation et al. 1996. Compliance Monitoring Program for the Use and Operation of the Grassland Bypass Project, September 1996. U.S. Bureau of Reclamation, Mid-Pacific Region, Sacramento, CA.

U.S. Bureau of Reclamation. 1998. Grassland Bypass Project Annual Report. October 1, 1996 through September 30, 1997. U.S. Bureau of Reclamation, Mid-Pacific Region, Sacramento, CA.

U.S. Bureau of Reclamation et al. June 2002. Monitoring Program for the Operation of the Grassland Bypass Project, Phase II. Sacramento, CA.

U.S. Bureau of Reclamation, et. al. August 22, 2002. Quality Assurance Project Plan for the Compliance Monitoring Program for Use and Operation of the Grassland Bypass Project. Sacramento, CA.

Table 1. Summary of Water Quality Monitoring Plan

Location	Site	Description	Purpose	Analytical Parameter	Frequency	Sampling Methodology
San Luis Drain	A	inflow to SLD	water quality of inflow	Se, B, SC SC, TSS	weekly composite weekly	auto-sampler mid-channel, depth integrated
	B	discharge from SLD	water quality of discharge (for Se load calculation)	Se, B, SC pH, SC, Temp, Se, B, TSS ¹ , Mo ² , Nutrients ³	daily composite weekly	auto-sampler mid-channel, depth integrated
Mud Slough (north)	C	upstream of SLD discharge	Mud Slough (north) base water quality prior to receiving drainage discharges	pH, SC, Temp, Se, B, Mo ² , Nutrients ³	weekly	grab
	D	downstream of discharge	Mud Slough (north) water quality as impacted by drainage discharge	pH, SC, Temp, Se, B, Mo ² , Nutrients ³	weekly	mid-channel, depth integrated
	I/I2	back water	water quality impact of Mud Slough (north) flooding in Kesterson Refuge	Se, B, SC	annually	N/A
Wetland Channels	F	Salt Slough	water quality of habitat and to track improvements in former drainage conveyance channel	pH, SC, Temp, Se, B, Mo ² , Nutrients ³	weekly	grab
	J	Camp 13	verify no discharge of drainage provision, water quality of wetland water supply channel	Se, B, SC	weekly	grab
	K	Agatha Canal	verify no discharge of drainage provision, water quality of wetland water supply channel	Se, B, SC	weekly	grab
	L2	San Luis Canal	water quality of wetland water supply channel	Se, B, SC	weekly	grab
	M2	Santa Fe Canal	water quality of wetland water supply channel	Se, B, SC	weekly	grab
San Joaquin River	G	at Fremont Ford (upstream of drainage inflow)	track improvements in former drainage conveyance channel and characterize water quality of habitat	pH, SC, Temp, Se, B, Mo ² , Nutrients ³	weekly	grab
	N	at Crows Landing (downstream of Merced River confluence)	characterize water quality of habitat	Se, B, SC pH, SC, Temp, Se, B, Mo ² , Nutrients ³	daily composite weekly	auto-sampler grab

Notes:

- 1 TSS required daily during storm events
- 2 Molybdenum required monthly
- 3 Nutrients required monthly September through February and every other week March through August

Table 2. Summary of Selenium Water Quality Objectives and Compliance Time Schedule

[Selenium Water Quality Objectives (in bold) and Performance Goals (in italics)]

Water Body/Water Year Type ¹	31 December 2015	31 December 2019
Mud Slough (north) and the San Joaquin River from the Mud Slough confluence to the Merced River	<i>15 µg/L</i> <i>monthly mean</i>	5 µg/L 4-day average

¹ The water year classification will be established using the best available estimate of the 60-20-20 San Joaquin Valley water year hydrologic classification (as defined in Footnote 17 for Table 3 in the State Water Resources Control Board's *Water Quality Control Plan for the San Francisco Bay/Sacramento-San Joaquin Delta Estuary*, May 1995) at the 75% exceedance level using data from the Department of Water Resources Bulletin 120 series. The previous water year's classification will apply until an estimate is made of the current water year.

Table 3. Boron Concentrations in the Grassland Watershed and San Joaquin River: January 2010 - December 2010

Station		Mean Monthly Concentration (mg/L)												Monthly		
ID	Description	Jan-10	Feb-10	Mar-10	Apr-10	May-10	Jun-10	Jul-10	Aug-10	Sep-10	Oct-10	Nov-10	Dec-10	WQO		
C	Mud Slu (N) upstrm of SLD Discharge	a	a	a	2.1	2.4	3.0	1.8	2.0	0.9	0.5	a	a	a	2.0	
D	Mud Slu (N) dwnstrm of SLD Discharge	a	a	a	3.2	4.1	6.5	4.5	6.4	4.7	3.6	a	a	a	2.0	
F	Salt Slough at Lander Avenue	a	a	a	1.1	0.7	0.6	0.5	0.5	0.4	0.5	a	a	a	2.0	
G	SJR at Fremont Ford	a	a	a	0.6	0.3	0.3	0.3	0.3	0.4	0.2	a	a	a	2.0	
N	SJR at Crows Landing Weekly Grab Samples	0.9	1.0	1.0	0.7	0.5	0.4	0.5	0.8	0.7	0.3	0.4	0.4	0.7	0.6	1.3
N	SJR at Crows Landing Daily Autosamples	0.9	0.9	0.6	0.9	0.5	0.4	0.5	0.7	0.7	0.3	0.3	0.4	0.7	0.6	1.3

Notes:

- = water quality objective exceedance
- a = objective only applies 15 March through 15 September
- WQO = water quality objective in mg/L
- na = no data available

Table 4. Molybdenum Concentrations in the Grassland Watershed and San Joaquin River: January 2010 - December 2010

Station		Mean Monthly Concentration (ug/L)												Monthly
ID	Description	Jan-10	Feb-10	Mar-10	Apr-10	May-10	Jun-10	Jul-10	Aug-10	Sep-10	Oct-10	Nov-10	Dec-10	WQO
C	Mud Slu (N) upstrm of SLD Discharge	6.3	8.4	4.5	7.5	18.1	2.0	12.4	NA	2.3	6.0	6.6	7.4	19.0
D	Mud Slu (N) dwnstrm of SLD Discharge	12.2	11.6	9.3	11.4	17.7	1.5	17.9	NA	10.8	7.3	8.4	11.9	19.0
F	Salt Slough at Lander Avenue	9.1	8.9	8.7	5.0	7.3	5.7	6.0	NA	5.2	4.3	6.2	6.3	19.0
G	SJR at Fremont Ford	9.5	6.4	2.3	4.1	2.3	2.1	6.3	NA	2.7	4.6	4.5	6.3	19.0
N	SJR at Crows Landing Grab Samples	5.6	4.5	1.8	3.9	2.6	2.4	5.2	NA	2.6	3.3	3.3	5.6	10.0

Notes:

- = water quality objective exceedance
- = water quality objective in ug/L
- na = no data available

Table 5. Nutrient Series Data, Site B, SLD at terminus (MER535)

January 2010 - December 2010

Parameter	Nitrate	Total Kjeldhal Nitrogen	Total Phosphorus	Ortho Phosphate	Dissolved Ammonia	Ammonia Toxicity Threshold
Units	mg/L as N	mg/L	mg/L	mg/L as P	mg/L as N	mg/L as N
5-Jan-10	14.0	<.5	0.05	0.01	<.2	5.08
2-Feb-10	7.0	1.0	0.10	0.02	<.2	1.91
2-Mar-10	15.0	<.5	0.12	0.03	<.2	1.75
16-Mar-10	15.0	<.5	0.09	<.01	<.2	1.33
6-Apr-10	3.4	2.5	0.09	0.02	0.78	3.14
20-Apr-10	2.6	1.6	0.11	0.01	<.2	1.91
4-May-10	17.0	1.1	0.07	0.01	NA	2.86
18-May-10	14.0	1.3	NA	0.02	<.2	0.85
1-Jun-10	12.0	1.7	0.10	<.01	0.22	0.52
15-Jun-10	6.8	1.9	0.12	0.05	NA	0.26
6-Jul-10	4.4	2.7	0.16	0.04	NA	0.24
20-Jul-10	3.9	3.0	0.16	<.01	NA	1.53
3-Aug-10	5.2	<.5	0.19	0.03	<.2	0.24
17-Aug-10	4.8	3.1	0.15	<.01	<.2	2.23
7-Sep-10	1.1	2.5	0.11	<.01	NA	0.58
5-Oct-10	0.1	1.6	0.09	<.01	<.2	2.06
2-Nov-10	<0.05	0.8	0.12	0.02	<.2	3.01
7-Dec-10	9.0	0.9	0.05	<.01	0.22	4.13

Data

Source: California Regional Water Quality Control Board, Central Valley Region

Notes:

= water quality objective exceedance

Table 6. Nutrient Series Data, Site C, Mud Slough (North) Upstream of SLD (MER536)

January 2010 - December 2010

Parameter	Nitrate	Total Kjeldhal Nitrogen	Total Phosphorus	Ortho Phosphate	Dissolved Ammonia	Ammonia Toxicity Threshold
Units	mg/L as N	mg/L	mg/L	mg/L as P	mg/L as N	mg/L as N
5-Jan-10	0.07	1.00	0.32	0.34	<.2	4.09
2-Feb-10	0.13	1.20	0.29	0.24	<.2	2.99
2-Mar-10	0.96	<0.5	0.48	0.30	<.2	2.22
16-Mar-10	0.32	<0.5	0.40	NA	<.2	2.07
6-Apr-10	0.22	2.40	0.46	0.29	<.2	2.26
20-Apr-10	<0.05	1.90	0.69	0.50	<.2	2.46
4-May-10	<0.05	1.10	0.36	0.26	NA	3.39
18-May-10	<0.05	0.56	NA	0.26	<.2	2.41
1-Jun-10	<0.05	1.30	0.37	0.20	<.2	2.52
15-Jun-10	<0.05	1.40	0.31	0.21	NA	2.33
6-Jul-10	0.14	1.20	0.18	0.08	NA	1.37
20-Jul-10	0.20	1.30	0.18	0.07	NA	1.67
3-Aug-10	0.20	<0.5	0.18	0.07	<.2	1.54
17-Aug-10	<0.05	0.90	0.17	0.03	<.2	0.73
7-Sep-10	0.25	0.90	0.17	0.12	NA	1.16
5-Oct-10	0.18	1.10	0.41	0.31	<.2	3.17
2-Nov-10	0.16	1.23	0.40	0.32	0.22	3.65
7-Dec-10	0.13	1.30	0.20	0.15	<.2	3.26

Data Source: California Regional Water Quality Control Board, Central Valley Region

Table 7. Nutrient Series Data, Site D, Mud Slough (North) Downstream of SLD (MER542)

January 2010 - December 2010

Parameter	Nitrate	Total Kjeldhal Nitrogen	Total Phosphorus	Ortho Phosphate	Dissolved Ammonia	Ammonia Toxicity Threshold
Units	mg/L as N	mg/L	mg/L	mg/L as P	mg/L as N	mg/L as N
5-Jan-10	3.40	0.90	0.16	0.15	<.2	4.40
2-Feb-10	1.40	1.20	0.27	0.16	<.2	2.80
2-Mar-10	3.20	1.60	0.36	0.18	<.2	2.37
16-Mar-10	3.50	NA	0.35	NA	<.2	1.97
6-Apr-10	0.90	2.40	0.41	0.06	<.2	2.33
20-Apr-10	1.20	1.60	0.36	0.05	<.2	2.97
4-May-10	10.00	1.20	0.18	0.03	NA	3.18
18-May-10	13.00	1.30	NA	0.02	<.2	1.04
1-Jun-10	4.40	1.60	0.27	0.02	<.2	1.16
15-Jun-10	2.50	1.70	0.24	0.08	NA	1.13
6-Jul-10	1.80	1.80	0.21	0.01	NA	0.51
20-Jul-10	2.20	2.00	0.17	0.01	NA	2.48
3-Aug-10	2.00	NA	0.23	0.05	<.2	0.41
17-Aug-10	1.40	2.00	0.20	0.04	<.2	1.37
7-Sep-10	0.85	1.30	0.14	0.04	NA	1.10
5-Oct-10	0.22	1.20	0.39	0.26	<.2	1.82
2-Nov-10	0.14	1.23	0.39	0.17	<.2	3.58
7-Dec-10	1.50	NA	NA	0.13	NA	3.54

Data Source: California Regional Water Quality Control Board, Central Valley Region

Notes:

= water quality objective exceedance

Table 8. Nutrient Series Data, Site G, San Joaquin River at Fremont Ford (MER538)

January 2010 - December 2010

Parameter	Nitrate mg/L as N	Total Kjeldhal Nitrogen mg/L	Total Phosphorus mg/L	Ortho Phosphate mg/L as P	Dissolved Ammonia mg/L as N	Ammonia Toxicity Threshold mg/L as N
Units						
5-Jan-10	0.19	0.56	0.17	0.12	<.2	4.02
2-Feb-10	0.28	0.78	0.23	0.17	<.2	4.40
2-Mar-10	1.10	1.30	0.28	0.20	<.2	4.66
16-Mar-10	1.30	NA	0.18	NA	<.2	5.56
6-Apr-10	0.65	0.90	0.21	0.15	<.2	5.21
20-Apr-10	0.30	0.56	0.19	0.14	<.2	2.15
4-May-10	0.18	0.56	0.16	0.11	NA	3.47
18-May-10	0.23	0.67	NA	0.23	<.2	2.04
1-Jun-10	0.22	0.78	0.17	0.09	<.2	1.92
15-Jun-10	0.89	1.10	0.26	0.23	NA	2.34
6-Jul-10	1.30	1.00	0.29	0.20	NA	1.99
20-Jul-10	1.40	1.10	0.34	0.26	NA	2.88
3-Aug-10	0.96	NA	0.32	0.22	<.2	1.60
17-Aug-10	0.69	0.90	0.30	0.19	<.2	1.91
7-Sep-10	0.33	0.67	0.22	0.18	NA	2.34
5-Oct-10	0.18	0.67	0.23	0.19	<.2	2.97
2-Nov-10	0.41	<0.50	0.23	0.16	<.2	4.93
7-Dec-10	0.37	0.78	0.17	0.11	<.2	4.70

Data

Source: California Regional Water Quality Control Board, Central Valley Region


Table 9. Nutrient Series Data, Site N, San Joaquin River at Crows Landing (STC504)

January 2009 - December 2009


Parameter Units	Nitrate mg/L as N	Total Kjeldhal Nitrogen mg/L	Total Phosphorus mg/L	Ortho Phosphate mg/L as P	Dissolved Ammonia mg/L as N	Ammonia Toxicity Threshold mg/L as N
5-Jan-10	1.90	0.67	0.16	0.11	<.2	5.39
2-Feb-10	1.30	1.10	0.24	0.19	<.2	3.14
2-Mar-10	1.20	1.10	0.27	0.15	<.2	4.21
16-Mar-10	1.60	NA	0.23	NA	<.2	3.94
6-Apr-10	2.00	1.00	0.26	0.18	<.2	4.63
20-Apr-10	1.10	<0.50	0.20	0.13	<.2	2.26
4-May-10	0.63	<0.50	0.15	0.10	NA	3.79
18-May-10	1.30	0.56	NA	0.11	<.2	2.53
1-Jun-10	1.10	0.78	0.18	0.09	<.2	3.34
15-Jun-10	1.30	0.78	0.21	0.18	NA	1.98
6-Jul-10	2.40	1.00	0.23	0.13	NA	1.70
20-Jul-10	1.80	1.30	0.26	0.12	NA	2.05
3-Aug-10	2.60	NA	0.28	0.16	<.2	1.53
17-Aug-10	2.50	0.78	0.23	0.15	<.2	1.57
7-Sep-10	2.00	0.56	0.18	0.14	NA	2.01
5-Oct-10	2.60	0.56	0.21	0.17	<.2	2.72
2-Nov-10	1.50	<0.50	0.18	0.12	<.2	4.38
7-Dec-10	2.00	NA	NA	0.11	<.2	3.14

Data Source: California Regional Water Quality Control Board, Central Valley Region


**Figure 1. Selenium Concentration in the San Joaquin River
January 2010 - December 2010**

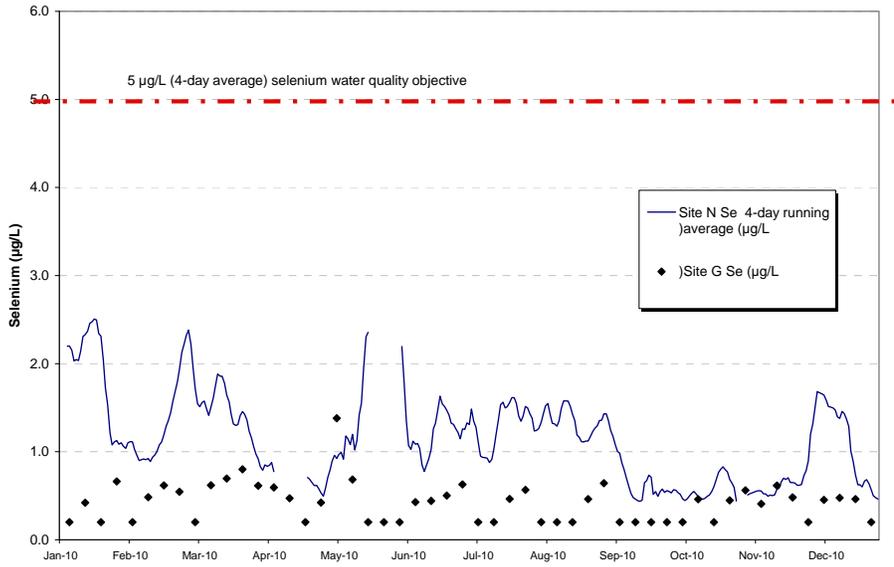

**Figure 2. Monthly Mean Selenium Concentration at Site N
January 2010 - December 2010**

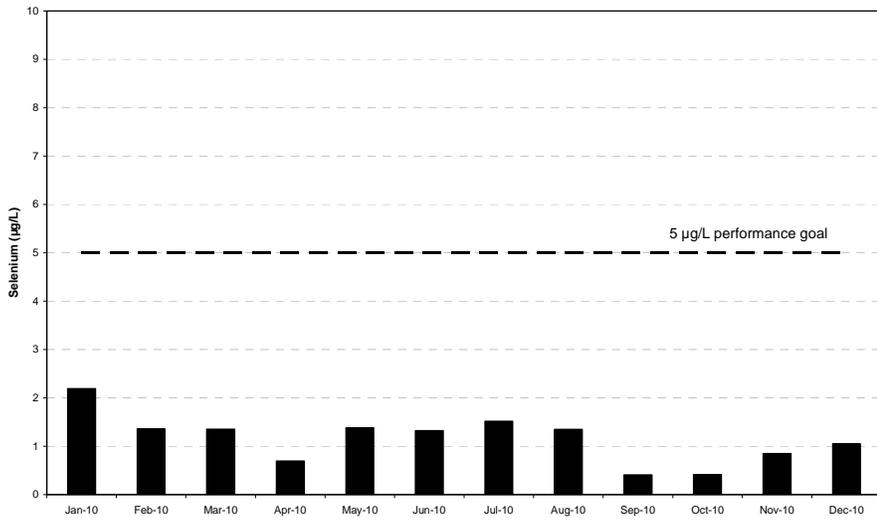

**Figure 3. Mean Monthly Selenium Concentration in the Grassland Wetland Supply Channels
January 2010 - December 2010**

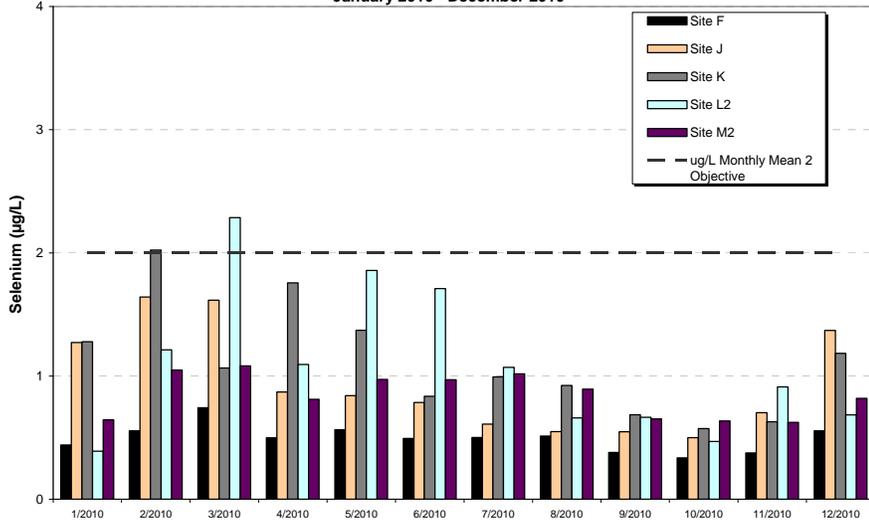

**Figure 4. Weekly Grab Selenium Concentration at Site D
January 2010 - December 2010**

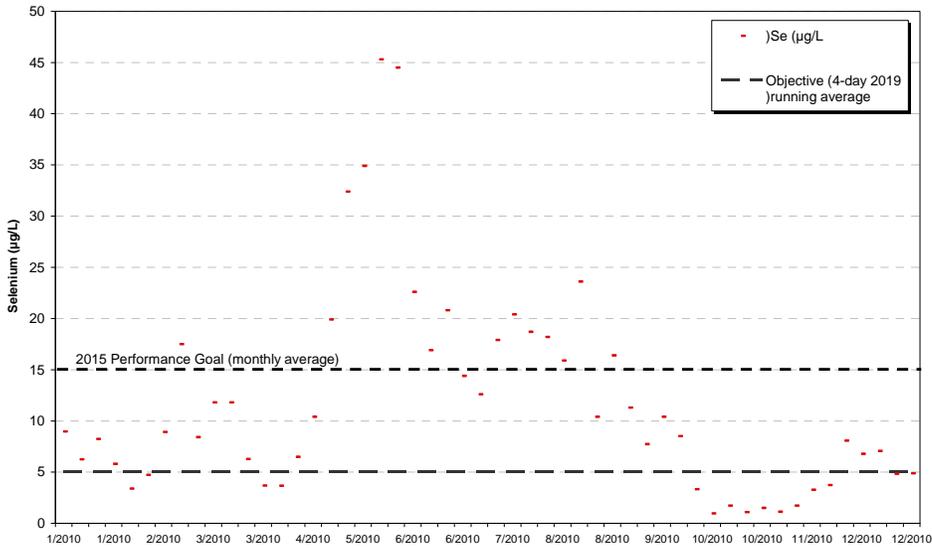


Figure 5. Weekly Grab Selenium Concentration at Site C
January 2010 - December 2010

