

APPENDIX A

Hydraulic capture shall be demonstrated through analysis of potentiometric surfaces in the A1 and A2 layers of the upper aquifer measured at least monthly. Hydraulic capture shall be demonstrated using those monitoring wells or piezometers identified in Table A-1 or other wells as accepted by Water Board staff. For well pairs, the inner well must have a potentiometric surface lower than the outer well. For well triplets, the vector described by the potentiometric surfaces at the three wells must show a gradient directed inward of the capture boundary line shown on Figures A-1 or A-2, for the A1 and A2 depth layers, respectively.


Table A-1 Hydraulic Capture Monitoring Plan

Depth Interval	Well Pairs		Well Triplets
A1 Layer	Outer Well	Inner Well	
	MW-86S	MW-55S	
	MW-80S	MW-72S	
	DW-03	MW-68S	
	MW-79S	MW-71S	
	New wells ^{1,2}	MW-71S	
			MW-88S, -87S, -32S
			MW-70S, -69S, -71S ²
			DW-02, MW-29, -21A or new piezometer ³ near MW-31
			MW-58, -45A and -47A
	MW-82S	new piezometer ³ near EX-29/-30	
			MW-54, -76S and -45A
			MW-50S, -88S and -41S
A2 Layer	Outer Well	Inner Well	
	MW-41B	MW-30B2	
	MW-83D	MW-62A	
	MW-69D	MW-62A ²	
	MW-50B	MW-21B	
	MW-47	MW-42B2 or new piezometer ³ near EX-29/-30 or EX-26	
			MW-69D, MW55B, MW-68D ²

¹“New Wells” indicates one or more piezometers in a row north of 71S. There is technical uncertainty as to the exact location of the down gradient capture line. Therefore only one of the piezometers will need to indicate an inward gradient. This piezometer must be outboard of the containment line.”

² It is understood that seasonal groundwater extraction to the north of this well pair/triplet may temporarily expand capture to the north. As a result, it is acceptable that an inward gradient or vector at these points may not be demonstrated during extraction from the A1 interval north of G2R, and/or from the A2 interval north of Alcudia Road. Expanding capture to the north will continue to meet the minimal plume capture requirement.

³ If the new piezometer cannot be installed due to access limitations pursuant to Endangered Species Act, then PG&E will develop an alternative location.

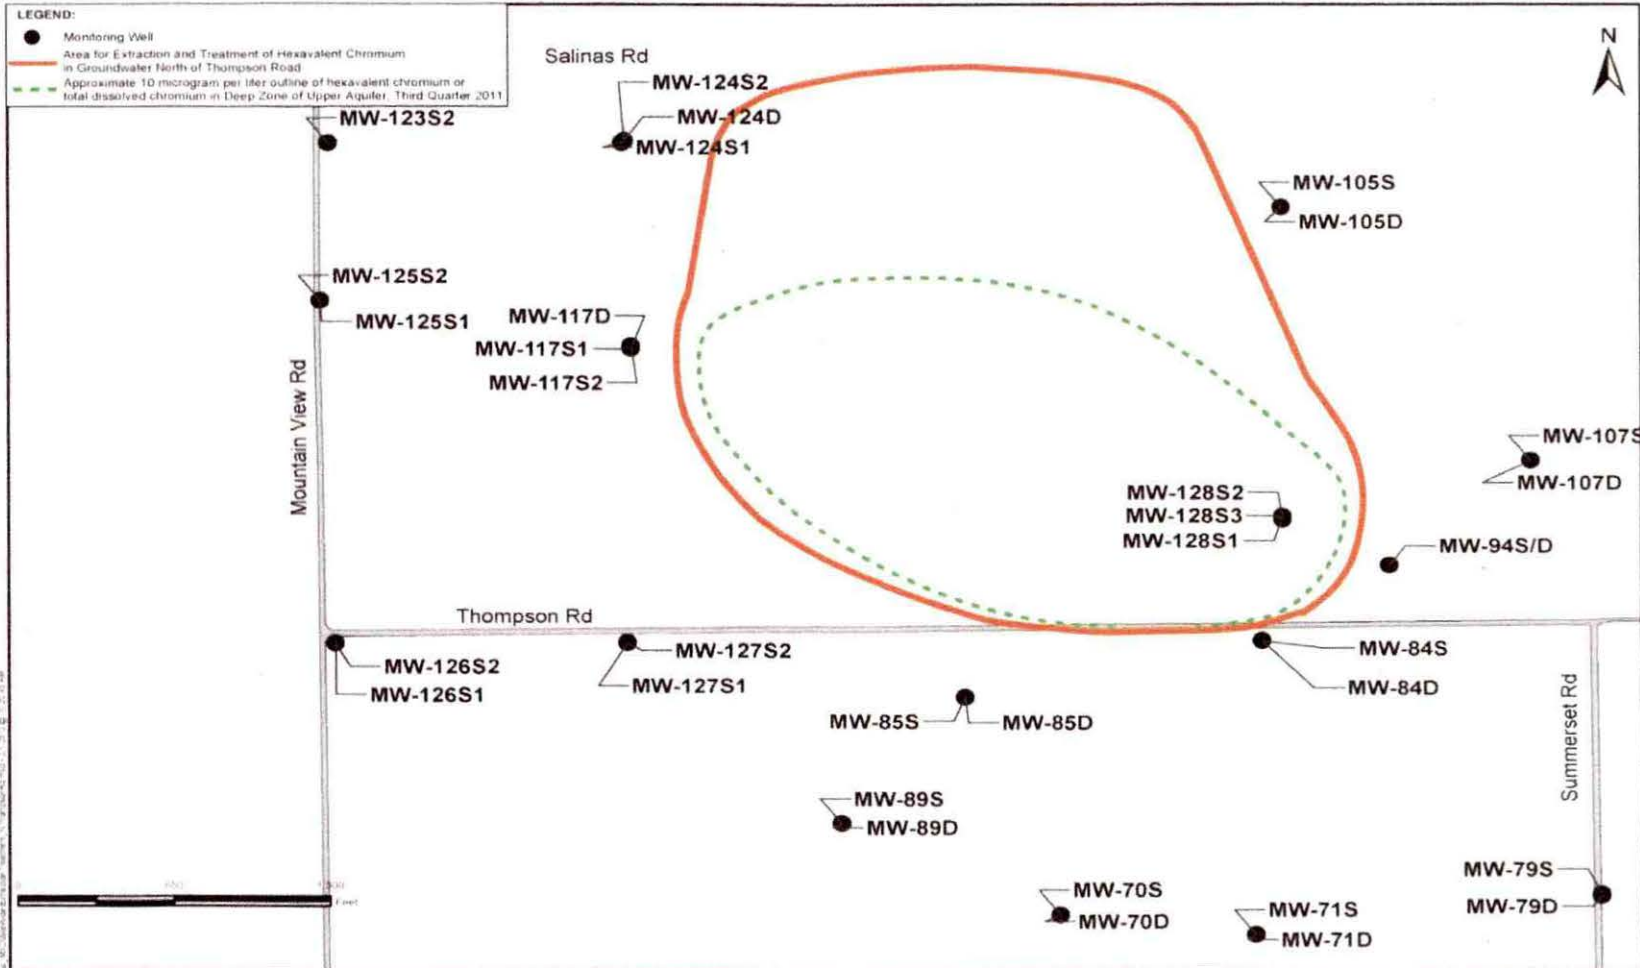

Program Manager
 Lisa Cope
 Field Manager
 Jander Beatty
 Title Manager
 Margaret Gordie
 Technical Support
 Scott Seyfried

100 Montgomery Street, Suite 300
 San Francisco, California 94104
 Tel: 415-774-2744
 Fax: 415-774-2148
 www.arcadis-usa.com

**Area for Extraction and Treatment of
 Hexavalent Chromium in Groundwater North of Thompson Road**
 Pacific Gas and Electric Company
 Hinkley, California

FIGURE