


Eligibility Criteria

Plan No.:	1-06-080 SCR
Plan Name:	RMC 2006-2007

Regulatory and Monitoring Requirement Decision Tool

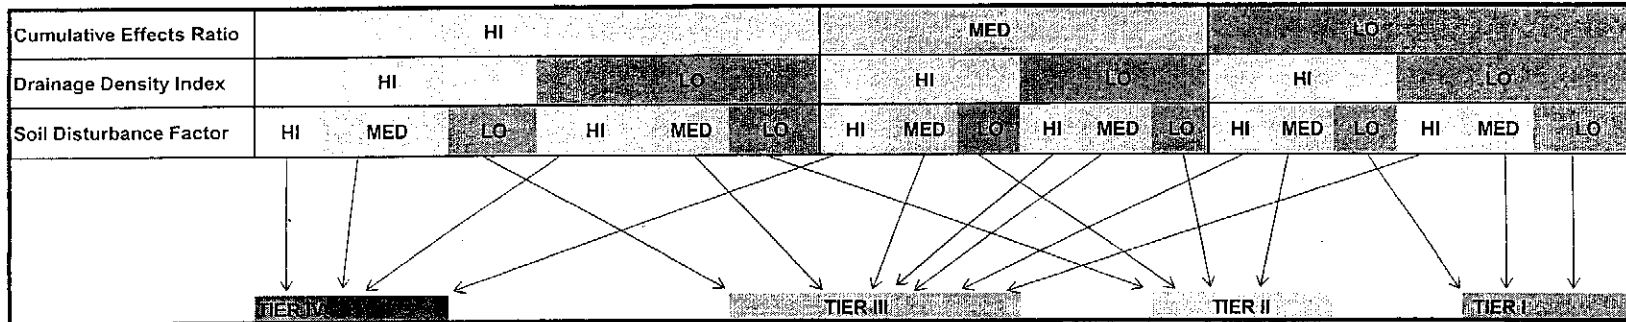

Regulatory Option	Individual WDR or Waiver	General Conditional Waiver for Timber Operations
Monitoring Requirements	Individual Monitoring	<p>Tier III Monitoring Requirements include water column monitoring for temperature and turbidity, visual and photo monitoring of timber harvest area infrastructure, CDF Forest Practice Rules compliance monitoring, road inventory program, and forensic monitoring as necessary. Tier III monitoring is automatically required if ground based equipment is used off of an all-weather road during the period October 15 - May 1.</p> <p>Tier II Monitoring Requirements include visual and photo monitoring of timber harvest area infrastructure, CDF Forest Practice Rules compliance monitoring, road inventory program, and forensic monitoring as necessary.</p> <p>Tier I Monitoring Requirements include CDF Forest Practice Rules compliance monitoring, road inventory program, and forensic monitoring as necessary.</p>

	High	Med	Low		Final
Cumulative Effects Ratio	>15%	15% to 10%	<10%	39%	High
Drainage Density Index	>100		<100	105	High
Soil Disturbance Factor	>2500	2500 to 1000	<1000	1772	Medium

Winter Operations Not Proposed

Plan No.:	1-06-080 SCR
Plan Name:	RMC 2006-2007

Soil Disturbance Factor

Enter values in cells shaded yellow.

		Group(ac)	Selection(ac)			Corrected Sum
Silviculture	Harvest Area (ac)		535			535
	Area in THP (ac)	535				
Roads		<u>Seasonal/Temporary Existing</u> x 4	<u>Proposed</u> x 6	<u>All weather/Permanent Existing</u> x 2	<u>Proposed</u> x 4	
	Linear feet - Existing and proposed	20064	860	0	0	160
		<u>Class I</u> x 30	<u>Class II</u> x 20	<u>Class III</u> x 10		
	Crossings - Number and Class of watercourse crossed	1	7	22		390
		x 10				
	Number of feet In-lieu/Alt rule in WLPZ	725				73
		<u>High</u> x2	<u>Extreme</u> x5			
EHR - Number of feet in high or extreme	20924	0			418	
						Roads Subtotal 1047
Skid Trails		<u>Existing</u> x 1.5	<u>Proposed</u> x 2.5			
	Linear feet - Existing and proposed	9800	300	For unmapped acreage, add 100 feet per acre		29
		<u>Class I</u> x 10	<u>Class II</u> x7	<u>Class III</u> x 3		
	Crossings - Number and Class of watercourse crossed	0	1	1		10
		x 5				
Number of In-lieu/Alt rule in WLPZ					0	
	<u>High</u> x1.0	<u>Extreme</u> x2				
EHR - Number of feet in high or extreme	10100				101	
						Skid Trails Subtotal 140
Landings		<u>Existing</u> x 1.5	<u>Proposed</u> x 2.5			
	Ground-based	29	5			56
	Helicopter	x 1	x 2			
	No. of In-lieu/Alt rule in	0	x 5			0
	0	0			0	
						Landings Subtotal 56
FINAL SUM						
						Sub Total 1772
Winter Operations Proposed? Yes or No If yes, automatic Tier III monitoring.	no					Total 1772

Plan No.:	1-06-080 SCR
Plan Name:	RMC 2006-2007

Cumulative Effects Ratio						
Is the proposed harvest in a 303(d) listed watershed?**	Acres Proposed for Harvest or Harvested in Planning Watershed (CalWater) in last fifteen years*		Acres to be harvested as part of proposed THP/NTMP		Total Acres in Planning Watershed	
	Sum	CER	Sum	CER		
Yes	3465		535	4000	10239	39%

* Include all acreage in proposed and approved THPs/NTMPs

**Watershed 303d listed as impaired from sediment or temperature?
If yes type "yes" or leave blank.

Plan No.:	1-06-080 SCR
Plan Name:	RMC 2006-2007

Drainage Density Index

ft. of Class I	ft. of Class II	ft. of Class III	Corrected Sum	Plan Area (ac)	DDI
6600	8700	19100	56300	535	105