
Central Valley Regional Water Quality Control Board

12 September 2016

Brian Reed
City of Folsom
50 Natoma Street
Folsom, CA 95630

CERTIFIED MAIL
91 7199 9991 7035 8419 8308

CLEAN WATER ACT SECTION 401 TECHNICALLY CONDITIONED WATER QUALITY CERTIFICATION; CITY OF FOLSOM, GREEN VALLEY ROAD WIDENING PROJECT (WDID#5A09CR00154), EL DORADO AND SACRAMENTO COUNTIES

This Order responds to the 8 October 2015 application submitted by the City of Folsom (Applicant) for the Water Quality Certification of the Green Valley Road Widening Project (Project), permanently impacting 0.45 acre/89 linear feet and temporarily impacting 0.31 acre of waters of the United States and permanently impacting 0.01 acre/28 linear feet and temporarily impacting 0.02 acre/40 linear feet of waters of the state.

This Order serves as certification of the United States Army Corps of Engineers' Nationwide Permit #14 (SPK-2015-00884) under Section 401 of the Clean Water Act, and a Waste Discharge Requirement under the Porter-Cologne Water Quality Control Act and State Water Board Order 2003-0017-DWQ.

WATER QUALITY CERTIFICATION STANDARD CONDITIONS:

- 1. This Water Quality Certification (Certification) is not valid until coverage under Section 404 of the Clean Water Act is obtained. If the Project, including the area of impact (as described) is modified through this process, this Certification will not be valid until amended by the Central Valley Water Board.**
2. This Order serves as a Water Quality Certification (Certification) action that is subject to modification or revocation upon administrative or judicial review, including review and amendment pursuant to Section 13330 of the California Water Code and Section 3867 of the California Code of Regulations.
3. This Certification action is not intended and shall not be construed to apply to any discharge from any activity involving a hydroelectric facility requiring a Federal Energy Regulatory Commission (FERC) license or an amendment to a FERC license unless the pertinent Certification application was filed pursuant to Section 3855(b) of the California Code of

Regulations, and the application specifically identified that a FERC license or amendment to a FERC license for a hydroelectric facility was being sought.

4. The validity of any non-denial Certification action shall be conditioned upon total payment of the full fee required under Section 3860(c) of the California Code of Regulations.
5. This Certification is no longer valid if the Project (as described) is modified, or coverage under Section 404 of the Clean Water Act has expired.
6. All reports, notices, or other documents required by this Certification or requested by the Central Valley Regional Water Quality Control Board (Central Valley Water Board) shall be signed by a person described below or by a duly authorized representative of that person.
 - (a) For a corporation: by a responsible corporate officer such as: 1) a president, secretary, treasurer, or vice president of the corporation in charge of a principal business function; 2) any other person who performs similar policy or decision-making functions for the corporation; or 3) the manager of one or more manufacturing, production, or operating facilities if authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures.
 - (b) For a partnership or sole proprietorship: by a general partner or the proprietor.
 - (c) For a municipality, state, federal, or other public agency: by either a principal executive officer or ranking elected official.

7. Any person signing a document under Standard Condition number 5 shall make the following certification:

“I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.”

TECHNICAL CERTIFICATION CONDITIONS:

In addition to the above standard conditions, the Applicant shall satisfy the following:

1. The Applicant shall notify the Central Valley Water Board in writing seven (7) days in advance of the start of any work within waters of the United States and waters of the State.
2. Except for activities permitted by the United States Army Corps of Engineers under Section 404 of the Clean Water Act, soil, silt, or other organic materials shall not be placed where such materials could pass into surface water or surface water drainage courses.

3. The Applicant shall maintain a copy of this Certification and supporting documentation (Project Information Sheet) at the Project site during construction for review by site personnel and agencies. All personnel (employees, contractors, and subcontractors) performing work on the proposed Project shall be adequately informed and trained regarding the conditions of this Certification.
4. The Applicant shall perform surface water sampling¹:
 - a) when performing any in-water work;
 - b) in the event that Project activities result in any materials reaching surface waters; or
 - c) when any activities result in the creation of a visible plume in surface waters.

For work conducted in a water body where there is an upstream or downstream location from the project area, the sampling requirements in Table 1 shall be conducted upstream out of the influence of the Project, and 300 feet downstream of the work area. The sampling frequency may be modified for certain projects with written approval from Central Valley Water Board staff.

For work conducted in a water body with no upstream or downstream location from the project area (i.e. lake, wetland, etc.), the sampling requirements in Table 1 shall be conducted by taking a sample of the ambient conditions before work begins in the work area, and sampling during work in the work area. The sampling frequency may be modified for certain projects with written approval from Central Valley Water Board staff.

Table 1: Monitoring Requirements

Parameter	Unit	Type of Sample	Minimum Sampling Frequency	Required Analytical Test Method
Turbidity	NTU	Grab ⁽¹⁾	Every 4 hours during in-water work	(2, 4)
Settleable Material	mL/L	Grab ⁽¹⁾	Every 4 hours during in-water work	(2)
Visible construction related pollutants ⁽³⁾	Observations	Visual Inspections	Continuous throughout the construction period	—

⁽¹⁾ Grab samples shall not be collected at the same time each day to get a complete representation of variations in the receiving water.

⁽²⁾ Pollutants shall be analyzed using the analytical methods described in 40 Code of Federal Regulations Part 136; where no methods are specified for a given pollutant, the method shall be approved by Central Valley Water Board staff.

⁽³⁾ Visible construction-related pollutants include oil, grease, foam, fuel, petroleum products, and construction-related, excavated, organic or earthen materials.

⁽⁴⁾ A hand-held field meter may be used, provided the meter utilizes a USEPA-approved algorithm/method and is calibrated and maintained in accordance with the manufacturer's instructions. A calibration and maintenance log for each meter used for monitoring shall be maintained onsite.

¹ Sampling is not required in wetlands, where the entire wetland is being permanently filled; provided there is no outflow connecting the wetland to surface waters.

Surface water sampling shall occur at mid-depth. A surface water monitoring report shall be submitted within two weeks of initiation of in-water construction, and every two weeks thereafter. In reporting the sampling data, the Applicant shall arrange the data in tabular form so that the sampling locations, date, constituents, and concentrations are readily discernible. The data shall be summarized in such a manner to illustrate clearly whether the Project complies with Certification requirements. The report shall include surface water sampling results, visual observations, and identification of the turbidity increase in the receiving water applicable to the natural turbidity conditions specified in the turbidity criteria below.

If no sampling is required, the Applicant shall submit a written statement stating, "No sampling was required" within two weeks of initiation of in-water construction, and every two weeks thereafter.

5. The Central Valley Water Board adopted a *Water Quality Control Plan for the Sacramento River and San Joaquin River Basins*, Fourth Edition, revised April 2016 (Basin Plan) that designates beneficial uses, establishes water quality objectives, and contains implementation programs and policies to achieve those objectives for all waters addressed through the plan. Turbidity and settleable matter limits are based on water quality objectives contained in the Basin Plan and are part of this Certification as follows:

- a) Activities shall not cause turbidity increases in surface water to exceed:
 - i. where natural turbidity is less than 1 Nephelometric Turbidity Units (NTUs), controllable factors shall not cause downstream turbidity to exceed 2 NTUs;
 - ii. where natural turbidity is between 1 and 5 NTUs, increases shall not exceed 1 NTU;
 - iii. where natural turbidity is between 5 and 50 NTUs, increases shall not exceed 20 percent;
 - iv. where natural turbidity is between 50 and 100 NTUs, increases shall not exceed 10 NTUs; and
 - v. where natural turbidity is greater than 100 NTUs, increases shall not exceed 10 percent.

Appropriate averaging periods may be applied, provided that beneficial uses will be fully protected.

- b) Activities shall not cause settleable matter to exceed 0.1 mL/L in surface waters as measured in surface waters within surface waters or 300 feet downstream of the Project.
6. The Applicant shall notify the Central Valley Water Board immediately if the above criteria for turbidity, settleable matter, or other water quality objectives are exceeded.
 7. In-water work shall occur during periods of low flow (i.e. water level is below the construction area) and no precipitation. The Applicant shall perform surface water sampling in accordance with Technical Certification Condition No. 4, if any of the following conditions occur: 1) in-water work is conducted during an unanticipated flow event; 2) Project activities

result in any materials reaching surface waters; or 3) Project activities result in the creation of a visible plume in surface waters.

8. If water is present in the construction area, the area must be dewatered prior to the start of work.
9. If temporary surface water diversions and/or dewatering are anticipated, the Applicant shall develop and maintain on-site a Dewatering Plan. The Plan must be developed prior to initiation of any water diversions. The Plan shall include the proposed method and duration of diversion activities. The Plan must be consistent with this Certification and must be made available to the Central Valley Water Board staff upon request.
10. When work in a flowing stream is unavoidable and any dam or other artificial obstruction is being constructed, maintained, or placed in operation, sufficient water shall at all times be allowed to pass downstream, to maintain beneficial uses of waters of the State below the dam. Construction, dewatering, and removal of temporary cofferdams shall not violate Technical Certification Condition 5 of this Certification.
11. Any temporary dam or other artificial obstruction constructed shall only be built from clean materials such as sandbags, gravel bags, water dams, or clean/washed gravel which will cause little or no siltation. Stream flow shall be temporarily diverted using gravity flow through temporary culverts/pipes or pumped around the work site with the use of hoses.
12. Activities shall not cause visible oil, grease, or foam in the receiving water.
13. Refueling of equipment within the floodplain or within 300 feet of the waterway is prohibited. If critical equipment must be refueled within 300 feet of the waterway, spill prevention and countermeasures must be implemented to avoid spills. Refueling areas shall be provided with secondary containment including drip pans and/or placement of absorbent material. No hazardous materials, pesticides, fuels, lubricants, oils, hydraulic fluids, or other construction-related potentially hazardous substances should be stored within a floodplain or within 300 feet of a waterway. The Applicant must perform frequent inspections of construction equipment prior to utilizing it near surface waters to ensure leaks from the equipment are not occurring and are not a threat to water quality.
14. The Applicant shall develop and maintain onsite a project-specific Spill Prevention, Containment and Cleanup Plan outlining the practices to prevent, minimize, and/or clean up potential spills during construction of the Project. The Plan must detail the Project elements, construction equipment types and location, access and staging and construction sequence.
15. Raw cement, concrete (or washing thereof), asphalt, drilling fluids, lubricants, paints, coating material, oil, petroleum products, or any other substances which could be hazardous to fish and wildlife resulting from or disturbed by project-related activities, shall be prevented from contaminating the soil and/or entering waters of the United States and waters of the State.
16. Silt fencing, straw wattles, or other effective management practices must be used along the construction zone to minimize soil or sediment along the embankments from migrating into

the waters of the United States and waters of the State through the entire duration of the Project.

17. The use of netting material (e.g., monofilament-based erosion blankets) that could trap aquatic dependent wildlife is prohibited within the Project area.
18. All areas disturbed by Project activities shall be protected from washout and erosion.
19. All temporarily affected areas shall be restored to pre-construction contours and conditions upon completion of construction activities.
20. Hydroseeding shall be performed with California native seed mix.
21. All materials resulting from the Project shall be removed from the site and disposed of properly.
22. This Certification does not allow permanent water diversion of flow from the receiving water. This Certification is invalid if any water is permanently diverted as a part of the project.
23. The discharge of petroleum products, any construction materials, hazardous materials, pesticides, fuels, lubricants, oils, hydraulic fluids, raw cement, concrete, asphalt, paint, coating material, drilling fluids, or other construction-related potentially hazardous substances to surface water and/or soil is prohibited. In the event of a prohibited discharge, the Applicant shall notify the Central Valley Water Board Contact within 24-hours of the discharge.
24. The Applicant shall apply for a name change or amendment to this Certification should any of the following occur: a) a change in the ownership of all or any portion of the Project; b) any change in the Project description; c) any change involving discharge amounts, temporary impacts, or permanent impacts; or d) amendments, modifications, revisions, extensions, or changes to the United States Army Corps of Engineers' Nationwide Permit #14 or the California Department of Fish and Wildlife Streambed Alteration Agreement.
25. The Applicant shall comply with all California Department of Fish and Wildlife requirements, including those requirements described Streambed Alteration Agreement No. 1600-2015-0281-R2.
26. If Valley elderberry longhorn beetle habitat is identified within the Project area, the Applicant shall implement the United States Fish and Wildlife Conservation Guidelines for the Valley Elderberry Longhorn Beetle dated 9 July 1999.
27. The Applicant shall obtain coverage under the National Pollutant Discharge Elimination System (NPDES) General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities Order No. 2009-0009-DWQ for discharges to surface waters comprised of storm water associated with construction activity.

28. If dewatering activities result in discharges into surface water, the Applicant shall work with the Central Valley Water Board to obtain coverage under an NPDES permit.
29. The Conditions in this Certification are based on the information in the attached "Project Information Sheet." If the actual project, as described in the attached Project Information Sheet, is modified or changed, this Certification is no longer valid until amended by the Central Valley Water Board.
30. The Applicant shall implement each of the mitigation measures specified in the approved Mitigated Negative Declaration for the Project, as they pertain to biology, hydrology and water quality impacts as required by Section 21081.6 of the Public Resource Code and Section 15097 of the California Code of Regulations.
31. In the event of any violation or threatened violation of the conditions of this Certification, the violation or threatened violation shall be subject to any remedies, penalties, process, or sanctions as provided for under state and federal law. The applicability of any state law authorizing remedies, penalties, process, or sanctions for the violation or threatened violation constitutes a limitation necessary to ensure compliance with this Certification.
 - (a) If the Applicant or a duly authorized representative of the Project fails or refuses to furnish technical or monitoring reports, as required under this Certification, or falsifies any information provided in the monitoring reports, the applicant is subject to civil liability, for each day of violation, and/or criminal liability.
 - (b) In response to a suspected violation of any condition of this Certification, the Central Valley Water Board may require the Applicant to furnish, under penalty of perjury, any technical or monitoring reports the Central Valley Water Board deems appropriate, provided that the burden, including cost of the reports, shall be in reasonable relationship to the need for the reports and the benefits to be obtained from the reports.
 - (c) The Applicant shall allow the staff of the Central Valley Water Board, or an authorized representative(s), upon the presentation of credentials and other documents, as may be required by law, to enter the Project premises for inspection, including taking photographs and securing copies of project-related records, for the purpose of assuring compliance with this Certification and determining the ecological success of the Project.
32. To mitigate for the loss of 0.45 acre of waters of the United States, the Applicant shall purchase a minimum of 0.45 floodplain mosaic restoration credits from the River Ranch Wetland Mitigation Bank, or as otherwise required by the United States Army Corps of Engineers for the impacted watershed prior to commencing construction. To mitigate for the loss of 0.01 acre of waters of the state, the Applicant shall purchase a minimum of 0.01 floodplain mosaic restoration credits from the River Ranch Wetland Mitigation Bank for impacted watershed prior to commencing construction. At a minimum, compensatory mitigation must achieve a ratio of 1:1 for permanent impacts. The Applicant shall provide evidence of all off-site compensatory mitigation to the Central Valley Water Board.

Compensatory mitigation must comply with the effective policy, which ensures no overall net loss of wetlands for impacts to waters of the State, at the time of Certification.

NOTIFICATIONS AND REPORTS:

33. The Applicant shall provide a Notice of Completion (NOC) no later than 30 days after the Project completion. The NOC shall demonstrate that the Project has been carried out in accordance with the Project description in the Certification and in any approved amendments. The NOC shall include a map of the Project location(s), including final boundaries of any on-site restoration area(s), if appropriate, and representative pre and post construction photographs. Each photograph shall include a descriptive title, date taken, photographic site, and photographic orientation.
34. The Applicant shall submit all notifications, submissions, materials, data, correspondence, and reports in a searchable Portable Document Format (PDF). Documents less than 50 MB must be emailed to: centralvalleysacramento@waterboards.ca.gov. In the subject line of the email, include the Central Valley Water Board Contact, Project name, and WDID number as shown in the subject line above. Documents that are 50 MB or larger must be transferred to a disk and mailed to the Central Valley Water Board Contact.

CENTRAL VALLEY WATER BOARD CONTACT:

Stephanie Tadlock, Environmental Scientist
Central Valley Regional Water Quality Control Board
11020 Sun Center Drive, Suite 200
Rancho Cordova, CA 95670-8114
Stephanie.Tadlock@waterboards.ca.gov
(916) 464-4644

CALIFORNIA ENVIRONMENTAL QUALITY ACT:

The City of Folsom is the Lead Agency responsible for compliance with the California Environmental Quality Act for the Green Valley Road Widening Project pursuant to Section 21000 et seq. of the Public Resources Code. The City of Folsom approved the Mitigated Negative Declaration on 27 October 2015. The City of Folsom filed a Notice of Determination with the State Clearinghouse on 30 October 2015 (SCH No. 2015062091).

The Central Valley Water Board is a responsible agency for the project. The Central Valley Water Board has determined that the Mitigated Negative Declaration is in accordance with the requirements of the California Environmental Quality Act.

The Central Valley Water Board has reviewed and evaluated the impacts to water quality identified in the Mitigated Negative Declaration. The mitigation measures discussed in the Mitigated Negative Declaration to minimize project impacts to waters of the United States and state are required by this Certification.

With regard to the remaining impacts identified in the Mitigated Negative Declaration, the corresponding mitigation measures proposed are within the responsibility and jurisdiction of other public agencies.

WATER QUALITY CERTIFICATION:

I hereby issue an Order certifying that any discharge from the City of Folsom, Green Valley Road Widening Project (WDID#5A09CR00154) will comply with the applicable provisions of Section 301 ("Effluent Limitations"), Section 302 ("Water Quality Related Effluent Limitations"), Section 303 ("Water Quality Standards and Implementation Plans"), Section 306 ("National Standards of Performance"), and Section 307 ("Toxic and Pretreatment Effluent Standards") of the Clean Water Act. Through this Order, this discharge is also regulated under State Water Resources Control Board Water Quality Order No. 2003-0017 DWQ "Statewide General Waste Discharge Requirements For Dredged Or Fill Discharges That Have Received State Water Quality Certification (General WDRs)".

Except insofar as may be modified by any preceding conditions, all Certification actions are contingent on: a) the discharge being limited and all proposed mitigation being completed in compliance with the conditions of this Certification, the City of Folsom's application package, and the attached Project Information Sheet; and b) compliance with all applicable requirements of the *Water Quality Control Plan for the Sacramento River and San Joaquin River Basins*, Fourth Edition, revised April 2016.

Any person aggrieved by this action may petition the State Water Resources Control Board to review the action in accordance with California Water Code Section 13320 and California Code of Regulations, Title 23, Section 2050 and following. The State Water Resources Control Board must receive the petition by 5:00 p.m., 30 days after the date of this action, except that if the thirtieth day following the date of this action falls on a Saturday, Sunday, or state holiday, the petition must be received by the State Water Resources Control Board by 5:00 p.m. on the next business day. Copies of the law and regulations applicable to filing petitions may be found on the Internet at: http://www.waterboards.ca.gov/public_notices/petitions/water_quality or will be provided upon request."

Original Signed By Adam Laputz for:

Pamela C. Creedon
Executive Officer

Enclosure: Project Information Sheet

Attachments: Figure 1 – Project Location Map
Figure 2 – Site Impacts Map

cc: Distribution List, page 15

PROJECT INFORMATION SHEET

Application Date: 8 October 2015

Applicant: Brian Reed
City of Folsom
50 Natoma Street
Folsom, CA 95630

Applicant Representative: Namat Hosseinion
Dokken Engineering
110 Blue Ravine Road, Suite 200
Folsom, CA 95630

Project Name: Green Valley Road Widening

Application Number: WDID#5A09CR00154

Date on Public Notice: 16 October 2015

Date Application Deemed Complete: 29 January 2016

Type of Project: Transportation, Roads and Highways

Approved Months of Project Implementation: 6 September 2016 through 15 October 2017, or as otherwise directed by the California Department of Fish and Wildlife

Project Location: Section 21, 28, & 29, Township 10 North, Range 8 East, MDB&M.
Latitude: 38°41'52" N and Longitude: 121°06'57" W

County: El Dorado and Sacramento Counties

Receiving Water(s) (hydrologic unit): Humbug Creek, Sacramento Hydrologic Basin, Valley-American Hydrologic Unit #519.21, Lower American HSA

Water Body Type: Wetland, Streambed

Designated Beneficial Uses: The *Water Quality Control Plan for the Sacramento River and San Joaquin River Basins*, Fourth Edition, revised April 2016 (Basin Plan) has designated beneficial uses for surface and ground waters within the region. Beneficial uses that could be impacted by the project include, but are not limited to: Municipal and Domestic Water Supply (MUN); Agricultural Supply (AGR); Industrial Supply (IND); Hydropower Generation (POW); Groundwater Recharge (GWR); Water Contact Recreation (REC-1); Non-Contact Water Recreation (REC-2); Warm Freshwater Habitat (WARM); Cold Freshwater Habitat (COLD); Preservation of Biological Habitats of Special Significance (BIOL); Rare, Threatened, or Endangered Species (RARE); Migration of Aquatic Organisms (MIGR); Spawning,

Reproduction, and/or Early Development (SPWN); and Wildlife Habitat (WILD). A comprehensive and specific list of the beneficial uses applicable for the project area can be found at http://www.waterboards.ca.gov/centralvalley/water_issues/basin_plans/index.shtml.

303(d) List of Water Quality Limited Segments: Humbug Creek is the receiving water for the Green Valley Road Widening Project. Humbug Creek is on the 303(d) list for copper, mercury, sedimentation/siltation, and zinc. The most recent list of approved water quality limited segments is found at:
http://www.waterboards.ca.gov/water_issues/programs/tmdl/integrated2010.shtml.

Project Description: The Green Valley Road Widening Project (Project) is located between East Natoma Street and Sophia Parkway in Folsom. This Project will connect East Natoma Street in Folsom to Sophia Parkway in El Dorado Hills. The Project consists of: 1) widening Green Valley Road between East Natoma Street and Sophia Parkway; and 2) replacing four existing culverts.

Green Valley Road Widening

Each new lane will be 12-feet wide and 1.2-miles long. The Project adds 4.3 acres of net impervious surface. The Stormwater Quality Design Manual for the Sacramento Region (2014) outlines the stormwater requirements specific to this project. In addition, source controls are required for the Project to comply with the existing Municipal Separate Storm Sewer System (MS4) permit(s) for Sacramento and El Dorado counties. To comply with the MS4 permits for Sacramento and Sacramento and El Dorado counties, permanent erosion control features, including hydroseeding of exposed cut/fill slopes throughout the project area and RSP at the culverts to handle the additional storm water flows from the roadway, are included in the Project. Waters of the state are located on the southern portion of Green Valley Road and will be impacted by road widening activities. Road widening activities will permanently impact 0.45 acre/89 linear feet and temporarily impact 0.28 acre of waters of the United States and permanently impact 0.01 acre/28 linear feet and temporarily impact 0.02 acre/40 linear feet of waters of the state.

Culvert Replacement

Dewatering will occur within the Project area using concrete K-rail covered in plastic sheeting and sand bags to establish temporary berms in the area that will be dewatered. Once the area is completely dewatered, three existing culverts (Culvert 1, Culvert 2, and Culvert 3) will be replaced. The location of the three culverts is shown on Figure 2. A summary of the culvert work is shown in Table 2. Replacing the three culverts will temporarily impact 0.03 acre of waters of the United States. A fourth culvert (Culvert 4) will be replaced, but impacts from Culvert 4 replacement will not impact waters of the United States or state.

Table 2: Summary of Culvert Work

Culvert	Quantity	Existing Culvert Type	New Length (feet)	New Culvert Type	Flared End		Headwall	RSP Dimensions	
					Upstream	Downstream		Upstream	Downstream
Culvert 1	1	24-inch diameter pipe	120 feet	24-inch diameter pipe	Y	Y	N	6-feet by 8-feet	6-feet by 8-feet
Culvert 2	1	24-inch diameter pipe	200 feet	4-foot by 3-foot Open bottom box culvert	N	N	Y	n/a	n/a
Culvert 3	2	Four 18-inch diameter pipes	99 feet	Two 23-inch wide and 14-inch tall pipes	N	N	Y	5-feet by 5-feet	5-feet by 5-feet
Culvert 4	1	24-inch diameter pipe	35 feet	24-inch diameter pipe	N	Y	N	n/a	20-feet by 10-feet

Valley Elderberry Longhorn Beetle (VELB) has been known to occur in or near the Project area and may be impacted as a result of construction activities. If VELB are discovered within the Project area, the Applicant will follow the United States Fish and Wildlife Conservation Guidelines for the Valley Elderberry Longhorn Beetle dated 9 July 1999.

No wet concrete will be placed into the wetlands or stream bed. Project activities will be performed during dry conditions after completely dewatering the work area. The temporary berms will be removed once culvert work is complete. The Project will permanently impact 0.45 acre/89 linear feet and temporarily impact 0.31 acre of waters of the United States and permanently impact 0.01 acre/28 linear feet and temporarily impact 0.02 acre/40 linear feet of waters of the state.

Preliminary Water Quality Concerns: Construction activities may impact surface waters with increased turbidity and settleable matter.

Proposed Mitigation to Address Concerns: The Applicant will implement Best Management Practices to control sedimentation and erosion. This Certification requires all work to be conducted during periods of low flow and no precipitation. In the event that project activities result in any materials reaching surface waters or unanticipated in-water work occurs, the Applicant will conduct turbidity and settleable matter testing. During this testing, the Applicant will stop work if Basin Plan criteria are exceeded or observations indicate an exceedance of a water quality objective.

All temporary affected areas will be restored to pre-construction contours and conditions upon completion of construction activities to provide 1:1 mitigation for temporary impacts.

Excavation/Fill Area: Approximately 2,107 cubic yards of native soil and cobbles will be excavated from 0.45 acre of wetlands (waters of the United States) and approximately 6 cubic yards of native soil and cobbles will be excavated from 0.01 acre of riparian habitat (waters of the state).

Approximately 2,107 cubic yards of native soil and cobbles will be placed into 0.28 acre of wetlands (waters of the United States) and 0.02 acre of riparian habitat (waters of the state) and approximately 6 cubic yards of native soil and cobbles will be placed into 0.03 acre of stream channel (waters of the United States).

Dredge Volume: None

California Integrated Water Quality System Impact Data: The Project will permanently impact 0.45 acre/89 linear feet of wetland habitat (waters of the United States) and 0.01 acre/28 linear feet of riparian habitat (waters of the state). The Project will temporarily impact 0.28 acre of wetland habitat and 0.03 acre of stream bed habitat (waters of the United States), and 0.02 acre/40 linear feet of waters of the state from fill and excavation activities.

The Project will permanently impact 0.45 acre/89 linear feet and temporarily impact 0.31 acre of waters of the United States and permanently impact 0.01 acre/28 linear feet and temporarily impact 0.02 acre/40 linear feet of waters of the state.

Table 3: Impacts from Fill and Excavation Activities

Aquatic Resource Type	Temporary			Permanent					
				Physical Loss of Area			Degradation of Ecological Condition Only		
	Acres	Cubic-yards	Linear-feet	Acres	Cubic-yards	Linear-feet	Acres	Cubic-yards	Linear-feet
Stream Channel	0.03	--	--	--	--	--	--	--	--
Wetland	0.28	--	--	0.45	--	89	--	--	--
Riparian (waters of the State)	0.02	--	40	0.01	--	28	--	--	--
TOTAL	0.33	--	40	0.46	--	117	--	--	--

United States Army Corps of Engineers File Number: SPK-2015-00884

United States Army Corps of Engineers Permit Type: Nationwide Permit #14

California Department of Fish and Wildlife Streambed Alteration Agreement:
1600-2015-0281-R2

Possible Listed Species: Valley elderberry longhorn beetle

Status of CEQA Compliance: The City of Folsom approved a Mitigated Negative Declaration on 27 October 2015. The City of Folsom filed a Notice of Determination with the State Clearinghouse on 30 October 2015 (SCH No. 2015062091).

The Central Valley Water Board will file a Notice of Determination with the State Clearinghouse as a responsible agency within five (5) days of the date of this Certification.

Compensatory Mitigation: To mitigate for the loss of 0.45 acre of waters of the United States, the Applicant shall purchase a minimum of 0.45 floodplain mosaic restoration credits from the River Ranch Wetland Mitigation Bank, or as otherwise required by the United States Army Corps of Engineers for the impacted watershed prior to commencing construction. To mitigate for the loss of 0.01 acre of waters of the state, the Applicant shall purchase a minimum of 0.01 floodplain mosaic restoration credits from the River Ranch Wetland Mitigation Bank for impacted watershed prior to commencing construction. At a minimum, compensatory mitigation must achieve a ratio of 1:1 for permanent impacts. The Applicant shall provide evidence of all off-site compensatory mitigation to the Central Valley Water Board.

Table 4: Compensatory Mitigation for Permanent Physical Loss of Area

Aquatic Resource Type	Comp Mitigation Type			Units		Established	Re-established	Rehabilitated	Enhanced	Preserved	Unknown
	In-Lieu	Mit. Bank	Permittee Responsible	AC (Acres)	LF (Linear Feet)						
Floodplain Mosaic	--	X	--	0.46	--	X	--	--	--	X	--

Application Fee Provided: Total fees of \$5,136.00 have been submitted to the Central Valley Water Board as required by Section 3833(b)(3)(A) and Section 2200(a)(3) of the California Code of Regulations.

DISTRIBUTION LIST

Peck Ha (SPK-2015-00884)
United States Army Corps of Engineers
Sacramento District Headquarters
1325 J Street, Room 1350
Sacramento, CA 95814-2922

Kylie Stoner (Electronic Copy Only)
Department of Fish and Wildlife
Kyle.Stoner@wildlife.ca.gov


Bill Jennings
CA Sportfishing Protection Alliance
3536 Rainier Avenue
Stockton, CA 95204

Bill Orme (Electronic Copy Only)
State Water Resources Control Board
Stateboard401@waterboards.ca.gov

Joe Morgan (Electronic Copy Only)
United States Environmental Protection Agency
Morgan.Joseph@epa.gov

Namat Hosseinion (Electronic Copy Only)
Dokken Engineering
nhosseinion@dokkenengineering.com

Amy Dunay (Electronic Copy Only)
Dokken Engineering
adunay@dokkenengineering.com

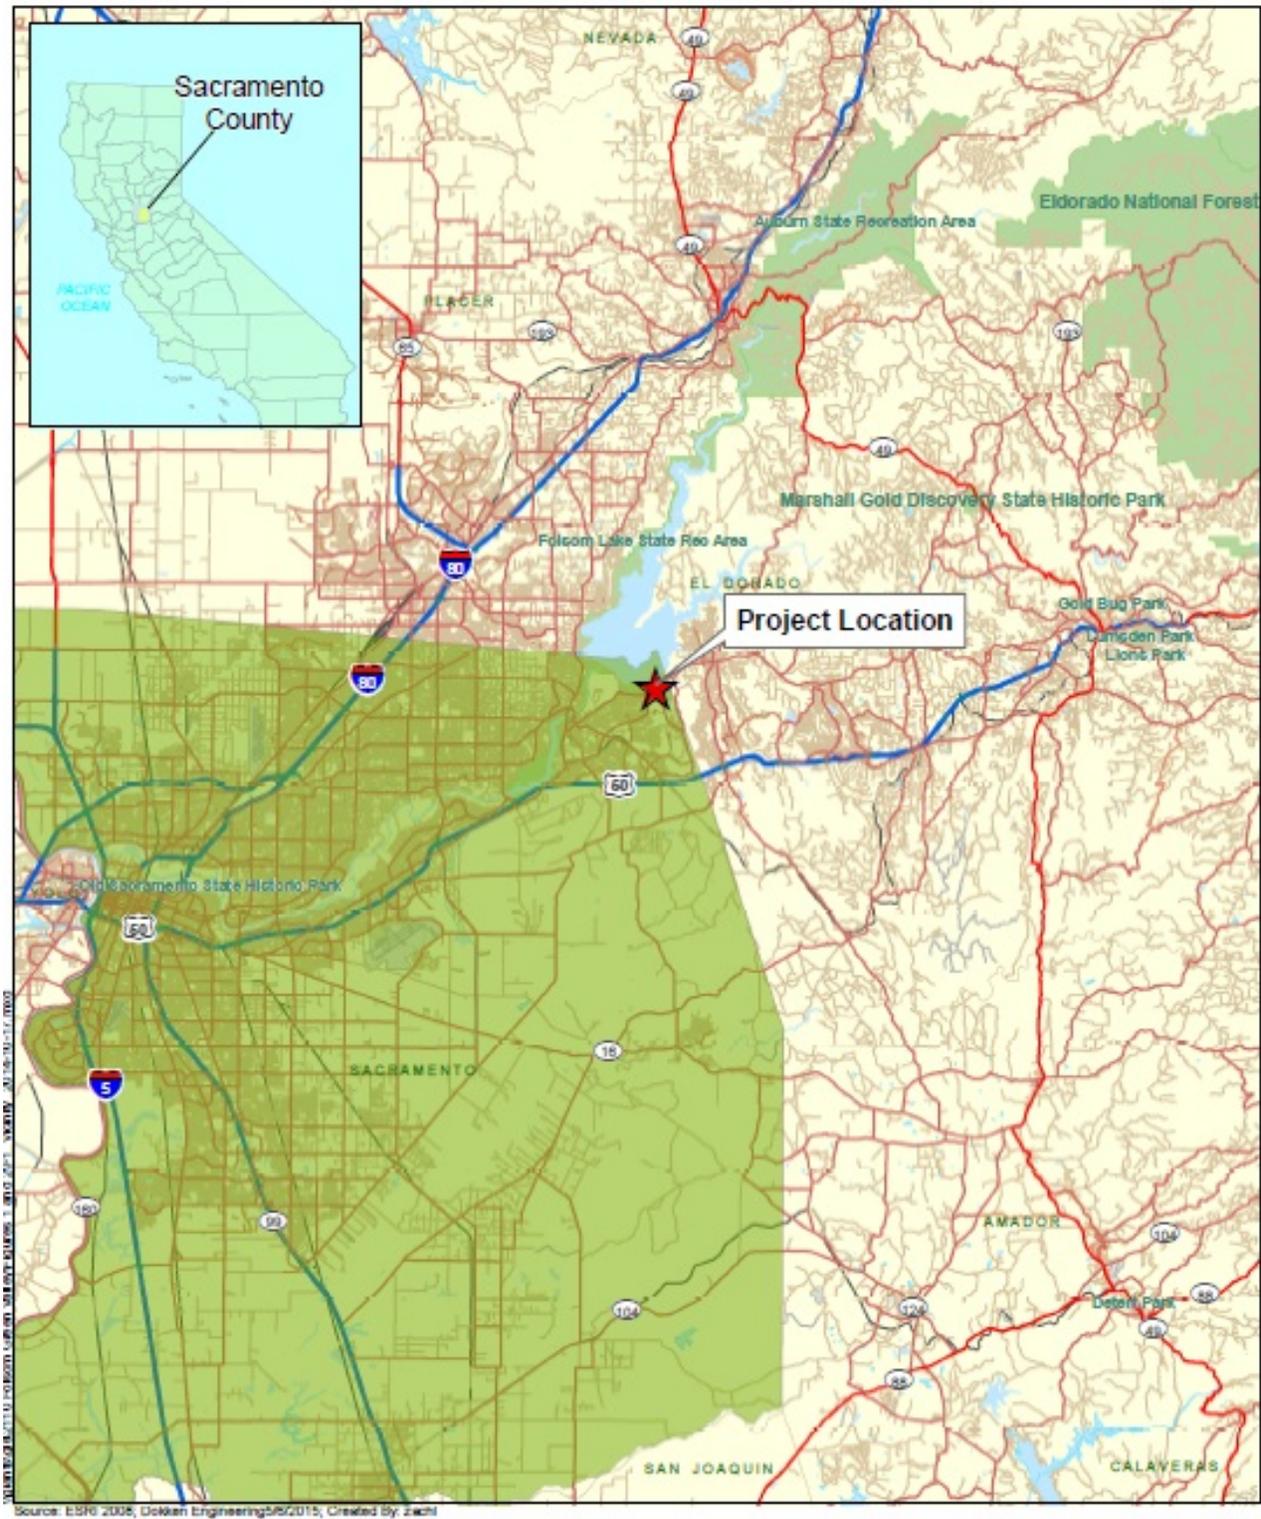

0 5 10
Miles

FIGURE 1
Project Vicinity
STPL-6288(040)
Green Valley Road Widening Project
Folsom, Sacramento County and El Dorado County, California

Figure 1 – Project Location Map

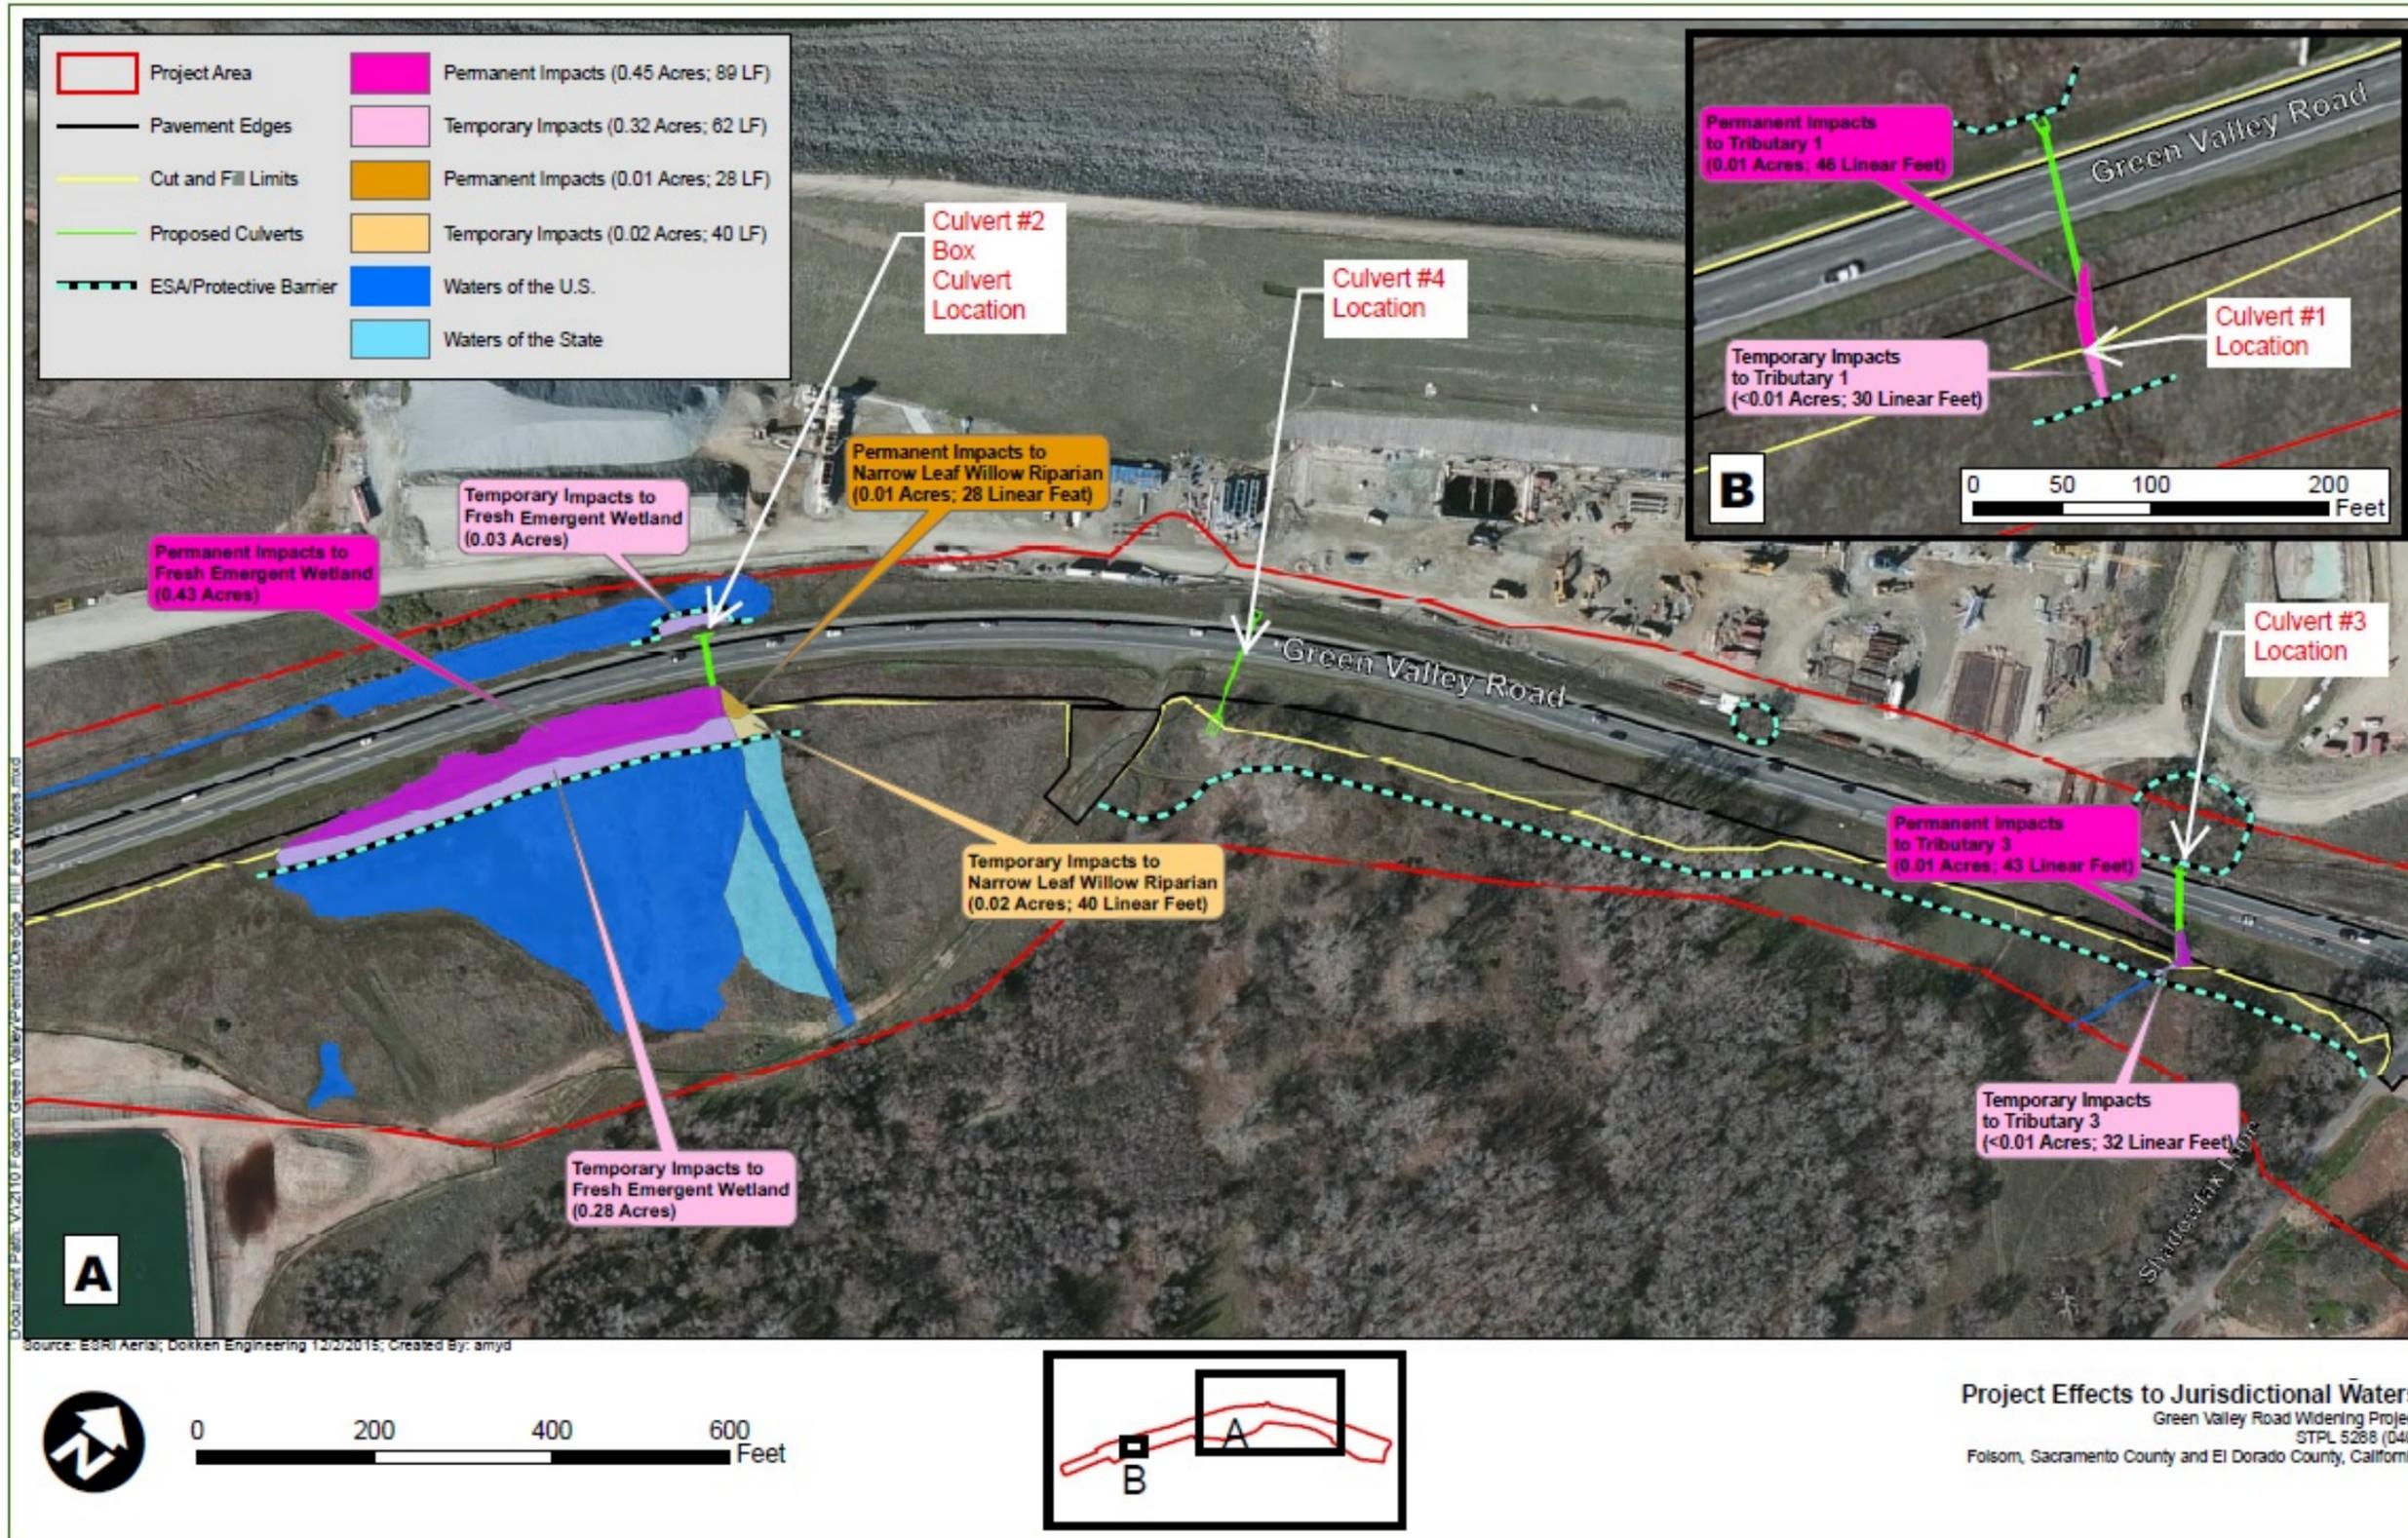


Figure 2 – Site Impacts Map