
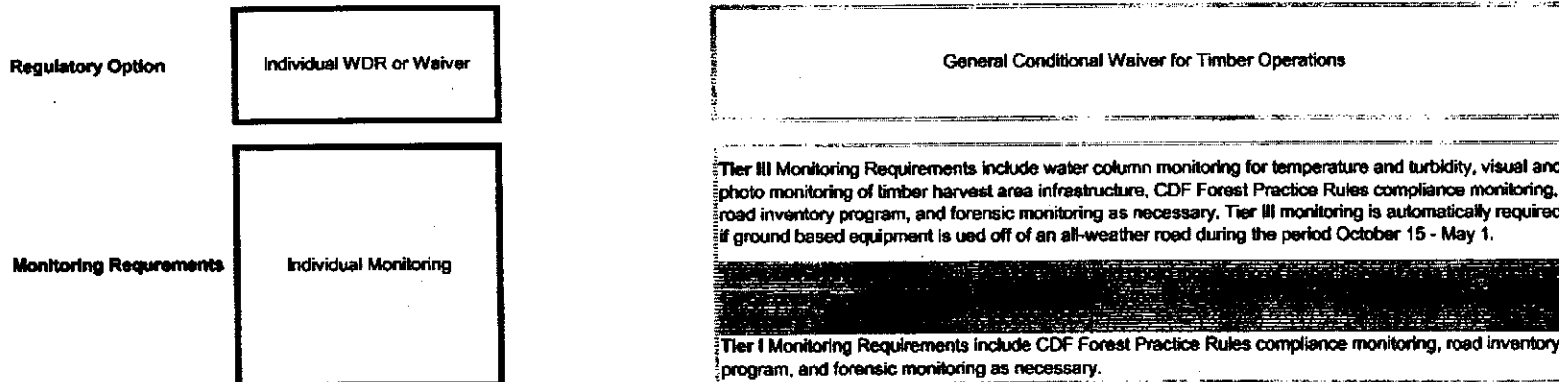


Eligibility Criteria

Plan No.:	1-07-119 SCR
Plan Name:	Camp Lindblad

Regulatory and Monitoring Requirement Decision Tool

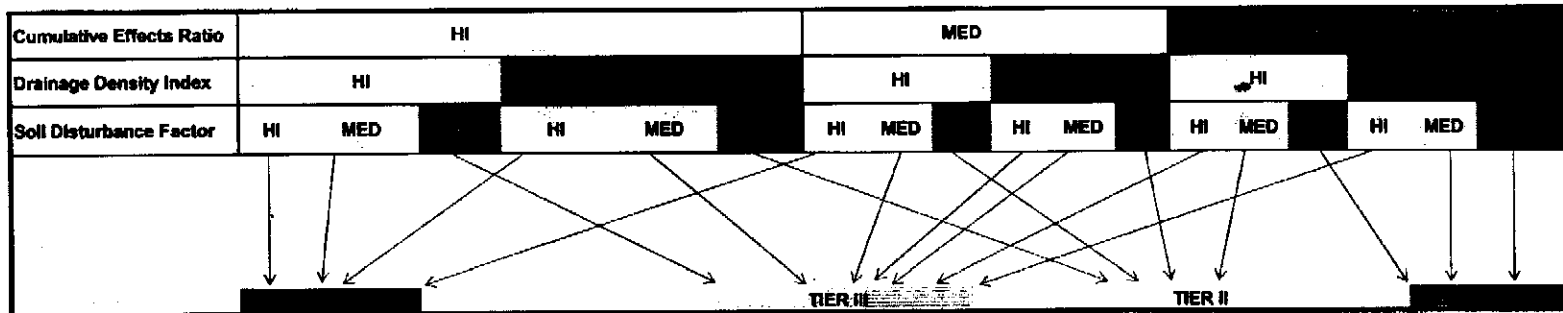

	High	Med	Low		Final
Cumulative Effects Ratio	>15%	15% to 10%		27%	High
Drainage Density Index	>100			142	High
Soil Disturbance Factor	>2500	2500 to 1000		1258	Medium

Winter Ops Proposed - Automatic Tier III

Attachment 4

Plan No.:	1-07-119 SOR
Plan Name:	Camp Inhabid

Soil Disturbance Factor

Enter values in cells shaded yellow.

		Group(ac)	Selection(ac)			Corrected Sum	
Silviculture	Harvest Area (ac)		150				
	Area in THP (ac)	150					
Roads			<u>Seasonal/Temporary</u>	<u>Proposed</u>	<u>All weather/Permanent</u>	<u>Proposed</u>	
			<u>Existing</u>	<u>x 6</u>	<u>Existing</u>	<u>x 4</u>	
	Linear feet - Existing and proposed		8,900	0	1,750	0	261
			<u>Class I</u>	<u>Class II</u>	<u>Class III</u>		
			<u>x 30</u>	<u>x 20</u>	<u>x 10</u>		
	Crossings - Number and Class of watercourse crossed		1	3	6		150
	Number of feet in-lieu/Alt rule in WLPZ		x 10 1,000				100
	EHR - Number of feet in high or extreme		High x2 10,650	Extreme x5 0			213
							Roads Subtotal
	Skid Trails			<u>Existing</u>	<u>Proposed</u>		
		<u>x 1.5</u>	<u>x 2.5</u>				
Linear feet - Existing and proposed		7,085	200	For unmapped acreage, add 100 feet per acre		74	
		<u>Class I</u>	<u>Class II</u>	<u>Class III</u>			
		<u>x 10</u>	<u>x 7</u>	<u>x 3</u>			
Crossings - Number and Class of watercourse crossed		0	1	3		16	
Number of in-lieu/Alt rule in WLPZ		x 5 1				5	
EHR - Number of feet in high or extreme		High x1.0 7,085	Extreme x2 0			71	
						Skid Trails Subtotal	
Landings			<u>Existing</u>	<u>Proposed</u>			
	Ground-based		<u>x 1.5</u>	<u>x 2.5</u>			
			6	0			9
	Helicopter		x 1	x 2			0
No. of in-lieu/Alt rule in		0	0			0	
		x 3	x 5			0	
		0	0				
						Landings Subtotal	
FINAL SUM							
Winter Operations Proposed? Yes or No If yes, automatic Tier III monitoring.		yes					
						Sub Total	
						Total	

Plan No. 1-07-119 SCR

Plan Name: Camp Lindholm

Cumulative Effects Ratio

Is the proposed harvest in a 303(d) listed watershed? **	Acres Proposed for Harvest or Harvested in Planning Watershed (CalWater) in last fifteen years*			Acres to be harvested as part of proposed THP/NTMP	Sum	Total Acres in Planning Watershed	CER
yes	1,985		150		2135	7,769	27%

* Include all acreage in proposed and approved THPs/NTMPs

** Watershed 303d listed as impaired from sediment or temperature?
If yes type "yes" or leave blank.

Plan No.:	1-07-1198CR
Plan Name:	Camp Lindahl

Drainage Density Index					
ft. of Class I	ft. of Class II	ft. of Class III	Corrected Sum	Plan Area (ac)	DDI
1,425	5,225	6,570	21295	150	