



Los Angeles Regional Water Quality Control Board

May 6, 2019

Mr. Billy Ho City of Los Angeles 1149 S. Broadway, Suite 600 Los Angeles, CA 90015

VIA CERTIFIED MAIL RETURN RECEIPT REQUESTED No. 7008 1140 0002 8672 0628

Dear Mr. Ho:

RE: CLEAN WATER ACT SECTION 401 WATER QUALITY CERTIFICATION AND ORDER FOR THE OSBORNE STREET BRIDGE REPLACEMENT (WDID FILE #4WQC40118073)

Enclosed please find a Clean Water Act Section 401 Water Quality Certification and Order, authorized by Los Angeles Regional Water Quality Control Board Executive Officer, Renee Purdy. This Order is issued to Mr. Billy Ho, City of Los Angeles (Applicant) for Osborne Street Bridge Replacement (Project). Attachments A through C of the Enclosure are also part of the Order.

This Order is issued in response to an application submitted by the Mr. Billy Ho, City of Los Angeles for proposed Project discharges to waters of the state, to ensure that the water quality standards for all waters of the state impacted by the Project are met. You may proceed with your Project according to the terms and conditions of the enclosed Order.

If you require further assistance, please contact Valerie Carrillo Zara by phone at (213) 576-6759 or by email at <u>Valerie.CarrilloZara@waterboards.ca.gov</u>

You may also contact LB Nye, Senior Environmental Scientist, by phone at (213) 576-6785 or by email at LB.Nye@waterboards.ca.gov

Sincerely,

LB Nye, Senior Environmental Scientist Section 401 Certification and Wetlands Unit Los Angeles Water Quality Control Board

Enclosures (1): Order for Osborne Street Bridge Replacement, File No. 18-073

Reg. Meas. ID: 422326 Place ID: 848588

File No.: 18-073

cc: [Via email only] (w/ enclosure):

Elizabeth Payne
CWA Section 401 WQC Program
Division of Water Quality
State Water Resources Control Board

Justin Pearce U.S. Army Corps of Engineers Regulatory Branch, Los Angeles District

Jeffrey Humble California Department of Fish and Wildlife Streambed Alteration Team Los Alamitos Field Office

Melissa Scianni US EPA, Region 9

G. Mendel Stewart Jonathan Snyder U.S. Fish and Wildlife Service





Los Angeles Regional Water Quality Control Board

CLEAN WATER ACT SECTION 401 WATER QUALITY CERTIFICATION AND ORDER

Effective Date: May 6, 2019

Reg. Meas. ID:

422326

Program Type: Fill/Excavation

Place ID:

848588

WDID:

4WQC40118073

NWP:

14

USACOE#:

SPL-2009-00974-CO

R4 File No

18-073

Project Type: Bridges, Overpasses and Crossings

Project: Osborne Street Bridge Replacement (Project)

Applicant: City of Los Angeles

Applicant Contact:

Mr. Billy Ho

1149 S. Broadway, Suite 600

Los Angeles, CA 90015 Phone: (213) 485-5745 Email: billy.ho@lacity.org

Water Board Staff: Valerie Carrillo Zara

Engineering Geologist

320 W. 4th Street, Suite 200 Los Angeles, CA 90013 Phone: (213) 576-6759 Email: billy.ho@lacity.org

Water Board Contact Person:

If you have any questions, please call Los Angeles Regional Water Quality Control Board (Los Angeles Water Board) Staff listed above or (213) 576-6600 and ask to speak with the Water Quality Certification and Wetlands Unit Program Manager.

Osborne Street Bridge Replacement

Reg. Meas. ID: 422326 Place ID: 848588 File No. 18-073

Table of Contents

i.	Order		3		
И.	Public Notic	Public Notice			
III.	Project Pur	pose			
IV.	Project Des	scription	3		
V.	Project Loc	eation	4		
VI.	Project Imp	pact and Receiving Waters Information	5		
VII.	Description	Description of Direct Impacts to Waters of the State			
VIII.	California Environmental Quality Act (CEQA)5				
IX.	Petitions fo	Petitions for Reconsideration6			
X.	Fees Received				
XI.	Conditions				
XII.	Water Qual	lity Certification	14		
	chment A chment B	Maps Signatory Requirements			

Attachment C Report and Notification Requirements

I. Order

This Clean Water Act (CWA) section 401 Water Quality Certification action and Order (Order) is issued at the request of Mr. Billy Ho, City of Los Angeles (herein after Permittee) for the Project. This Order is for the purpose described in the application and supplemental information submitted by the Permittee. The application was received on June 20, 2018. The application was deemed complete on January 29, 2019.

II. Public Notice

The Los Angeles Water Board provided public notice of the application pursuant to California Code of Regulations, title 23, section 3858 from June 22, 2018 to the effective date of the Order. The Los Angeles Water Board did not receive any comments during the comment period.

III. Project Purpose

The purpose of the project is to permanently restore the Osborne Street Bridge to ensure that the bridge is safe for use by the public.

IV. Project Description

The Project will replace the existing, two-span, two-lane bridge with a single span reinforced concrete slab bridge which will maintain the approximate dimensions of the original bridge (approximately 86 feet x 45 feet). General construction activities include demolition, removal and haul away of pavement/structural concrete from the original bridge deck, excavation, pile emplacement, construction/replacement of abutment walls, repair of wing walls, and installation of a new structural concrete paved deck.

The Osborne Street Bridge is currently a two-span, two-lane, reinforced concrete slab bridge, constructed in 1977 with a width of 86 feet and length of 42.5 feet. Located over Kagel Canyon Creek, approximately 0.5 miles north of Foothill Boulevard in the Lake View Terrace community, the bridge deck also includes equestrian walkways in addition to two traffic lanes. The bridge configuration includes upstream and downstream wing walls, supporting abutment walls and a central pier system, which are constructed on spread foundations.

Foundations at the north abutment wall, northerly channel bottom and the central pier were severely undermined and damaged as a result of storm events that occurred from December 2004 to January 2005. The north approach slab had also sustained extensive undermining. In March 2005 as part of emergency repair work, City of Los Angeles crews temporarily repaired the bridge by underpinning foundations and the north approach slab. The channel bottom was protected by constructing a structural concrete slab, for the flow channel, with cut-off walls at each end.

In order to avoid major reconstruction activities within Kagel Canyon Creek, the existing wing walls and structural concrete channel slab will be left in place. The replacement bridge will be single-span reinforced concrete slab bridge, which will maintain the approximate dimensions of the original bridge (approximately 86 feet x 45 feet). In order to construct the new bridge and keep traffic flow uninterrupted, the demolition and reconstruction of the bridge will be done in two phases.

The first phase of the project will commence with converting the existing 24 feet of the eastern equestrian walkway into a temporary roadway before demolishing the western section of the

bridge. Traffic lanes will be re-striped to allow for the 2-way use of the eastern portion of the bridge. Temporary shoring for excavations over 5 feet will be required during demolition and construction activities.

The second phase of the project will commence upon the completion of the western section of the new bridge. Two-way traffic will then be diverted, by re-striping the roadway, to the newly completed western section of the bridge. The eastern half of the original bridge will be demolished and the remaining half of the new bridge will be constructed. The two completed sections will be joined by a final closure pour. New abutment walls will be constructed on casted reinforced concrete pile foundations to prevent any possible future undermining. The original center pier wall will be cut to a height of 4 feet above the flow line and will have a smooth finish. The wing walls and invert slab which were rebuilt during the temporary repair in 2005 will be kept in place and tied to the rebuilt bridge abutments. Final re-striping of the bridge will facilitate both two-way traffic flow and restoration of the equestrian walkways. It also may become necessary to reconstruct the wing walls and associated foundations if they are inadvertently damaged during the demolition process.

Rubber-tired construction equipment, steel crawler-type equipment, "CAT" construction equipment, and jack hammers will be used to complete project activities.

There will be no increase in traffic lanes or widening beyond pre-2005 storm conditions. Construction methods utilized will minimize debris from entering or falling into the creek. In the event minor amounts of debris fall into the creek, it will be removed.

Construction is estimated to occur to August 2023, for a total duration of approximately 5 years. Construction of the project will occur during the rainy season; however, water within Kagel Canyon Creek is not anticipated. In the event that flowing water is encountered during construction, the project will implement water diversion methods.

Construction access to areas underneath the bridge deck will occur at an existing path located at the southwest area of the bridge along Osborne Street. All work will occur within City right-of-way, including staging and equipment and materials storage. During construction, no lanes of traffic will be closed.

Permanent Impacts

There are no additional permanent impacts resulting from the construction of the project. The project would not create additional impervious surface area within the creek beyond existing conditions. No vegetation is anticipated to be removed.

Temporary Impacts

Total temporary impacts resulting from project activities totals 0.011 acres of non-wetland waters and 86 linear feet in the immediate project construction area. Temporary impacts resulting from the project consist of areas within the concrete-lined portion of the channel and ingress/egress area for construction equipment and personnel to access areas underneath the bridge.

V. Project Location

<u>Latitude</u>

<u>Longitude</u>

34.281346

-118.372425

Reg. Meas. ID: 422326 Place ID: 848588

File No. 18-073

34.281479	-118.372346
34.281369	-118.372070
34.281201	-118.372024
34.280967	-118.371746
34.280809	-118.371906
34.281029	-118.372177
34.281115	-118.372380

Maps showing the Project location is found in Attachment A of this Order.

VI. Project Impact and Receiving Waters Information

The Project is located within the jurisdiction of Los Angeles Regional Water Quality Control Board. Receiving waters and groundwater potentially impacted by this Project are protected in accordance with the applicable water quality control plan (Basin Plan) for the region and other plans and policies which may be accessed online at:

http://www.waterboards.ca.gov/plans policies/. The Basin Plan includes water quality standards, which consist of existing and potential beneficial uses of waters of the state, water quality objectives to protect those uses, and the state and federal antidegradation policies.

It is the policy of the State of California that every human being has the right to safe, clean, affordable, and accessible water adequate for human consumption, cooking, and sanitary purposes. This Order promotes that policy by requiring discharges to meet contaminant levels designed to protect human health and ensure that water is safe for domestic use.

Receiving Water:

Kagel Canyon Creek

(Hydrologic Unit Code: 180701050104)

Designated Beneficial Uses:

MUN*, GWR, REC-1, REC-2, WARM, WILD

*Conditional beneficial use

VII. Description of Direct Impacts to Waters of the State

Total Project fill/excavation quantities for all impacts are summarized in Table 1. Permanent impacts are categorized as those resulting in a physical loss in area and also those degrading ecological condition only.

Table 1: Total Project Fill/Exca	vation Quantity	
Aquatic	Temporary Impact ¹	
Resource Type	Acres	
Stream Channel	0.011	

VIII. California Environmental Quality Act (CEQA)

¹ Includes only temporary direct impacts to waters of the state and does not include upland areas of temporary disturbance which could result in a discharge to waters of the state.

The Los Angeles Water Board has determined that the Project is exempt from review under CEQA pursuant to California Water Code of Regulations, title 14, section 15061. Specifically, the issuance of this Order and the activities described herein meet the exemption criteria under California Code of Regulations title 14, section(s) 15302 Replacement or Reconstruction. Additionally, the Los Angeles Water Board concludes that no exceptions to the CEQA exemption apply to the activities approved by this Order.

IX. Petitions for Reconsideration

Any person aggrieved by this action may petition the State Water Board to reconsider this Order in accordance with California Code of Regulations, title 23, section 3867. A petition for reconsideration must be submitted in writing and received within 30 calendar days of the issuance of this Order.

X. Fees Received

The fee amount for the proposed project has been determined as required by California Code of Regulations, title 23, sections 3833(b)(3) and 2200(a)(3), and was calculated as Fill and Excavation Discharges, with the dredge and fill fee calculator.

Date Received	Check No.	Amount
June 20, 2018	0222835	\$1,500
March 29, 2019	1782	\$138
		Total: \$1,638

XI. Conditions

The Los Angeles Water Board has independently reviewed the record of the Project to analyze impacts to water quality and designated beneficial uses within the watershed of the Project. In accordance with this Order, the Permittee may proceed with the Project under the following terms and conditions:

A. Authorization

Impacts to waters of the state shall not exceed quantities shown in Table 1.

B. Reporting and Notification Requirements

Requirements for the content of these reporting and notification types are detailed in Attachment C, including specifications for photo and map documentation during the Project. Written reports and notifications must be submitted using the Reporting and Notification Cover Sheet located in Attachment C, which must be signed by the Permittee or an authorized representative.

1. Project Reporting

a. Annual Reporting: The Permittee shall submit an Annual Report each year on the anniversary of Project effective date. Annual Reporting requirements are detailed in

Attachment C. Annual reporting shall continue until a Notice of Project Complete Letter is issued to the Permittee.

2. Project Status Notifications

- a. Request for Notice of Completion of Discharges Letter: The Permittee shall submit a Request for Notice of Completion of Discharges Letter following completion of active Project construction activities, including any required restoration and permittee-responsible mitigation. This request shall be submitted to the Los Angeles Water Board staff within thirty (30) days following completion of all Project construction activities. Upon acceptance of the request, Los Angeles Water Board staff shall issue a Notice of Completion of Discharges Letter to the Permittee which will end the active discharge period and associated annual fees.
- b. Request for Notice of Project Complete Letter: The Permittee shall submit a Request for Notice of Project Complete Letter when construction and/or any post-construction monitoring is complete,² and no further Project activities will occur. This request shall be submitted to Los Angeles Water Board staff within thirty (30) days following completion of all Project activities. Upon approval of the request, the Los Angeles Water Board staff shall issue a Notice of Project Complete Letter to the Permittee which will end the post discharge monitoring period and associated annual fees.
- **3. Conditional Notifications and Reports:** The following notifications and reports are required as appropriate.
 - a. Accidental Discharges of Hazardous Materials³

Following an accidental discharge of a reportable quantity of a hazardous material, sewage, or an unknown material, the following applies (Wat. Code, § 13271):

- As soon as (A) Permittee has knowledge of the discharge or noncompliance,
 (B) notification is possible, and (C) notification can be provided without substantially impeding cleanup or other emergency measures then:
 - first call 911 (to notify local response agency)
 - then call Office of Emergency Services (OES) State Warning Center at: (800) 852-7550 or (916) 845-8911
 - Lastly follow the required OES procedures as set forth in: http://www.caloes.ca.gov/FireRescueSite/Documents/CalOES-Spill Booklet Feb2014 FINAL BW Acc.pdf

² Completion of post-construction monitoring shall be determined by Los Angeles Water Board staff and shall be contingent on successful attainment of restoration and mitigation performance criteria.

³ "Hazardous material" means any material that, because of its quantity, concentration, or physical or chemical characteristics, poses a significant present or potential hazard to human health and safety or to the environment if released into the workplace or the environment. "Hazardous materials" include, but are not limited to, hazardous substances, hazardous waste, and any material that a handler or the administering agency has a reasonable basis for believing that it would be injurious to the health and safety of persons or harmful to the environment if released into the workplace or the environment. (Health & Saf. Code, § 25501.)

- ii. Following notification to OES, the Permittee shall notify Los Angeles Water Board, as soon as practicable (ideally within 24 hours). Notification may be via telephone, e-mail, delivered written notice, or other verifiable means.
- iii. Within five (5) working days of notification to the Los Angeles Water Board, the Permittee must submit an Accidental Discharge of Hazardous Material Report.
- b. Violation of Compliance with Water Quality Standards: The Permittee shall notify the Los Angeles Water Board of any event causing a violation of compliance with water quality standards. Notification may be via telephone, e-mail, delivered written notice, or other verifiable means.
 - i. Examples of noncompliance events include: lack of storm water treatment following a rain event, discharges causing a visible plume in a water of the state, and water contact with uncured concrete.
 - ii. This notification must be followed within three (3) working days by submission of a Violation of Compliance with Water Quality Standards Report.

c. In-Water Work or Diversion

- i. If stream diversion will be necessary, the Permittee shall submit to the Los Angeles Water Board staff a Stream Diversion Plan, with a diagram and a narrative description of the method to divert the stream and associated BMPs for acceptance at least 30 days in advance of any stream diversion.
- ii. During stream diversion, water quality monitoring shall be conducted. Requirements for water quality monitoring are below.
- iii. The Permittee shall notify the Los Angeles Water Board at least forty-eight (48) hours prior to initiating work in water or stream diversions. Notification may be via telephone, e-mail, delivered written notice, or other verifiable means.
- iv. Within three (3) working days following completion of work in water or stream diversions, an In-Water Work/Diversions Water Quality Monitoring Report must be submitted to Los Angeles Water Board staff.

d. Modifications to Project

Project modifications may require an amendment of this Order. The Permittee shall give advance notice to Los Angeles Water Board staff if Project implementation as described in the application materials is altered in any way or by the imposition of subsequent permit conditions by any local, state or federal regulatory authority by submitting a Modifications to Project Report. The Permittee shall inform Los Angeles Water Board staff of any Project modifications that will interfere with the Permittee's compliance with this Order.

e. Transfer of Property Ownership: This Order is not transferable in its entirety or in part to any person or organization except after notice to the Los Angeles Water Board in accordance with the following terms:

i. The Permittee must notify the Los Angeles Water Board of any change in ownership or interest in ownership of the Project area by submitting a Transfer of Property Ownership Report. The Permittee and purchaser must sign and date the notification and provide such notification to the Los Angeles Water Board at least 10 days prior to the transfer of ownership.

ii. Until such time as this Order has been modified to name the purchaser as the permittee, the Permittee shall continue to be responsible for all requirements set forth in this Order.

C. Water Quality Monitoring

- 1. General: If surface water is present, continuous visual surface water monitoring shall be conducted to detect accidental discharge of construction related pollutants (e.g. oil and grease, turbidity plume, or uncured concrete).
- 2. Accidental Discharges/Noncompliance: Upon occurrence of an accidental discharge of hazardous materials or a violation of compliance with a water quality standard, Los Angeles Water Board staff may require water quality monitoring based on the discharge constituents and/or related water quality objectives and beneficial uses.

3. In-Water Work or Diversions:

During planned work in water or stream diversions any discharge(s) to waters of the state shall conform to the following water quality standards:

- a. Oil and Grease. Waters shall not contain oils, greases, waxes or other materials in concentrations that result in a visible film or coating on the surface of the water or on objects in the water, that cause nuisance, or that otherwise adversely affect beneficial uses.
- b. Dissolved Oxygen. At a minimum, the mean annual dissolved oxygen concentration of all waters shall be greater than 7 mg/L, and no single determination shall be less than 5.0 mg/L, except when natural conditions cause lesser concentrations. The dissolved oxygen content of all surface waters designated as WARM shall not be depressed below 5 mg/L as a result of waste discharges.
- c. pH. The pH of inland surface waters shall not be depressed below 6.5 or raised above 8.5 as a result of waste discharges. Ambient pH levels shall not be changed more than 0.5 units from natural conditions as a result of waste discharge.
- **d.** Turbidity. Downstream TSS shall be maintained at ambient levels. Where natural turbidity is between 0 and 50 Nephelometric Turbidity Units (NTU), increases shall not exceed 20%. Where natural turbidity is greater than 50 NTU, increases shall not exceed 10%.

Sampling shall be conducted in accordance with Table 3 sampling parameters.4

Table 3: Sample Type and Frequency Requirements					
Parameter	Unit of Type of Measurement Sample		Minimum Frequency		
Oil and Grease	N/A	Visual	Continuous		
Dissolved Oxygen	mg/L & % saturation	Grab	Daily for the first week, weekly, thereafter		
рН	Standard Units	Grab	Daily for the first week, weekly, thereafter		
Turbidity	NTU	Grab	Daily for the first week, weekly, thereafter		
Temperature	°F (or as °C)	Grab	Daily for the first week, weekly, thereafter		

Baseline sampling shall be conducted at least one location within the project boundary for each phase. All other sampling shall take place at a minimum of two locations. In streams or flowing water the sample locations shall be upstream and downstream. Results of the analyses shall be submitted to this Regional Board by the 15th day of each subsequent sampling month. A map or drawing indicating the locations of sampling points shall be included with each submittal.

4. Post-Construction: Visually inspect the Project site during the rainy season for five (5) years to ensure excessive erosion, stream instability, or other water quality pollution is not occurring in or downstream of the Project site. If water quality pollution is occurring, contact the Los Angeles Water Board staff member overseeing the Project within three (3) working days. The Los Angeles Water Board may require the submission of a Violation of Compliance with Water Quality Standards Report. Additional permits may be required to carry out any necessary site remediation.

D. Standard

1. This Order is subject to modification or revocation upon administrative or judicial review, including review and amendment pursuant to Water Code section 13330, and California Code of Regulations, title 23, chapter 28, Article 6 commencing with sections 3867-3869, inclusive. Additionally, the Los Angeles Water Board reserves the right to suspend, cancel, or modify and reissue this Order, after providing notice to the Permittee, if the Los Angeles Water Board determines that: the Project fails to comply with any of the conditions of this Order; or, when necessary to implement any new or revised water quality standards and implementation plans adopted or approved pursuant to the Porter-Cologne Water Quality Control Act (Wat. Code, § 13000 et seq.) or federal Clean Water Act section 303 (33 U.S.C. § 1313). For purposes of Clean Water Act

⁴ Pollutants shall be analyzed using the analytical methods described in 40 Code of Federal Regulations Part 136; where no methods are specified for a given pollutant, the method shall be approved by Los Angeles Water Board staff. Grab samples shall be taken between the surface and mid-depth and not be collected at the same time each day to get a complete representation of variations in the receiving water. A hand-held field meter may be used, provided the meter utilizes a U.S. EPA-approved algorithm/method and is calibrated and maintained in accordance with the manufacturer's instructions. A calibration and maintenance log for each meter used for monitoring shall be maintained onsite.

section 401(d), the condition constitutes a limitation necessary to assure compliance with water quality standards and appropriate requirements of state law.

- 2. This Order is not intended and shall not be construed to apply to any activity involving a hydroelectric facility requiring a Federal Energy Regulatory Commission (FERC) license or an amendment to a FERC license, unless the pertinent certification application was filed pursuant to subsection 3855(b) of chapter 28, title 23 of the California Code of Regulations, and that application specifically identified that a FERC license or amendment to a FERC license for a hydroelectric facility was being sought.
- 3. This Order is conditioned upon total payment of any fee required under title 23 of the California Code of Regulations and owed by the Permittee.
- 4. In the event of any violation or threatened violation of the conditions of this Order, the violation or threatened violation shall be subject to any remedies, penalties, process, or sanctions as provided for under state and federal law. For purposes of Clean Water Act, section 401(d), the applicability of any state law authorizing remedies, penalties, processes, or sanctions for the violation or threatened violation constitutes a limitation necessary to assure compliance with the water quality standards and other pertinent requirements incorporated into this Order.

E. General Compliance

- 1. Failure to comply with any condition of this Order shall constitute a violation of the Porter-Cologne Water Quality Control Act and the Clean Water Act. The Permittee and/or discharger may then be subject to administrative and/or civil liability pursuant to Water Code section 13385.
- 2. Permitted actions must not cause a violation of any applicable water quality standards, including impairment of designated beneficial uses for receiving waters as adopted in the Basin Plans by any applicable Los Angeles Water Board or any applicable State Water Board (collectively Water Boards) water quality control plan or policy. The source of any such discharge must be eliminated as soon as practicable.
- 3. In response to a suspected violation of any condition of this Order, the Los Angeles Water Board may require the holder of this Order to furnish, under penalty of perjury, any technical or monitoring reports the Water Boards deem appropriate, provide that the burden, including costs, of the reports shall bear a reasonable relationship to the need for the reports and the benefits to be obtained from the reports. The additional monitoring requirements ensure that permitted discharges and activities comport with any applicable effluent limitations, water quality standards, and/or other appropriate requirement of state law.
- 4. The Permittee must, at all times, fully comply with engineering plans, specifications, and technical reports submitted to support this Order; and all subsequent submittals required as part of this Order. The conditions within this Order and Attachments supersede conflicting provisions within Permittee submittals.
- 5. This Order and all of its conditions contained herein continue to have full force and effect regardless of the expiration or revocation of any federal license or permit issued for the Project. For purposes of Clean Water Act, section 401(d), this condition constitutes a

limitation necessary to assure compliance with the water quality standards and other pertinent requirements of state law.

6. Construction General Permit Requirement: If enrolled, the Permittee shall maintain compliance with conditions described in, and required by, NPDES General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities (Order No. 2009-009-DWQ and NPDES No. CAS 000002 as amended by Order No. 2010-0014-DWQ, Order No. 2012-0006-DWQ, and any amendments thereto) (General Construction Permit).

F. Administrative

- 1. Signatory requirements for all document submittals required by this Order are presented in Attachment B of this Order.
- 2. This Order does not authorize any act which results in the taking of a threatened, endangered or candidate species or any act, which is now prohibited, or becomes prohibited in the future, under either the California Endangered Species Act (Fish & G. Code, §§ 2050-2097) or the federal Endangered Species Act (16 U.S.C. §§ 1531-1544). If a "take" will result from any act authorized under this Order held by the Permittee, the Permittee must obtain authorization for the take prior to any construction or operation of the portion of the Project that may result in a take. The Permittee is responsible for meeting all requirements of the applicable endangered species act for the Project authorized under this Order.
- 3. The Permittee shall grant Los Angeles Water Board staff, or an authorized representative (including an authorized contractor acting as a Water Board representative), upon presentation of credentials and other documents as may be required by law, permission to:
 - **a.** Enter upon the Project or compensatory mitigation site(s) premises where a regulated facility or activity is located or conducted, or where records are kept.
 - **b.** Have access to and copy any records that are kept and are relevant to the Project or the requirements of this Order.
 - **c.** Inspect any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this Order.
 - d. Sample or monitor for the purposes of assuring Order compliance.
- **4.** A copy of this Order shall be provided to any consultants, contractors, and subcontractors working on the Project. Copies of this Order shall remain at the Project site for the duration of this Order. The Permittee shall be responsible for work conducted by its consultants, contractors, and any subcontractors.
- 5. A copy of this Order must be available at the Project site(s) during construction for review by site personnel and agencies. All personnel performing work on the Project shall be familiar with the content of this Order and its posted location at the Project site.
- 6. Lake and Streambed Alteration Agreement The Permittee shall submit a signed copy of the Department of Fish and Wildlife's lake and streambed alteration agreement to the

Los Angeles Water Board immediately upon execution and prior to any discharge to waters of the state.

7. This Order shall expire **five (5) years** from date of this Order. The Applicant shall submit a complete application at least 90 days prior to termination of this Order if renewal is requested.

G. Best Management Practices

1. Good Site Management "Housekeeping"

- **a.** No non-rubber-tired construction equipment will be placed in the channel during construction. If steel crawler type equipment is used, wooden matting shall be provided over the invert in operation area.
- **b.** No stockpiles of material will be placed within the channel during construction.
- **c.** All provisions of the Los Angeles County Flood Control District Permit will be complied with, including work provisions during the rainy season.
- d. Sandbags, silt fencing, or appropriate silt-control devices will be placed immediately down slope of the project area at the ESA boundaries to prevent sediment or project-related deposition from inadvertently being discharged downstream. A qualified biologist will supervise the placement of ESA fencing.
- e. No debris, soil, silt, sand, rubbish, cement, or concrete washings thereof, and/or oil petroleum products or washings thereof, will be allowed to enter into areas or placed where it may be washed by rainfall or runoff into the waterway.
- f. Upon completion of project, any and all excess construction materials and project related-debris will be removed off- site and outside waters of the U.S.
- **g.** Staging, storage, fueling, and maintenance of equipment and materials will be located outside waters of the U.S.

2. Storm Water

- a. The project shall comply with the local regulations associated with the Los Angeles Water Board's Municipal Stormwater Permit issued to Los Angeles County and co-permittees under NPDES No. CAS004001 and Waste Discharge Requirements Order No. R4-2012-0175 or subsequent Order.
- b. If not enrolled in the General Construction Permit, the Permittee shall develop and implement a site-specific Storm Water Pollution Prevention Plan (SWPPP) and a Rain Event Action Plan (REAP) as described in the General Construction Permit.

H. On-site Mitigation for Temporary Impacts

1. The Permittee shall restore all areas of temporary impacts to waters of the state.

- Restoration shall include grading of disturbed areas to pre-project contours and revegetation with native species. Restored areas shall be monitored and maintained with native species as necessary for five years.
- 3. The Los Angeles Water Board may extend the monitoring period upon a determination by Los Angeles Water Board Executive Officer that the performance standards have not been met or are not likely to be met within the monitoring period.

Table 4: Required Project Mitigation Quantity for Temporary Impacts								
Aquatic					Me	thod ⁶		
Aquatic Resource Type	Mit. Type⁵	Units	Est.	Re-est.	Reh.	Enh.	Pres.	Unknown
Stream Channel	PR	Acres			0.011			

XII. Water Quality Certification

I hereby issue the Order for the Osborne Street Bridge Replacement, 4WQC40118073 certifying that as long as all of the conditions listed in this Order are met, any discharge from the referenced Project will comply with the applicable provisions of Clean Water Act sections 301 (Effluent Limitations), 302 (Water Quality Related Effluent Limitations), 303 (Water Quality Standards and Implementation Plans), 306 (National Standards of Performance), and 307 (Toxic and Pretreatment Effluent Standards).

This discharge is also regulated pursuant to State Water Board Water Quality Order No. 2003-0017-DWQ which authorizes this Order to serve as Waste Discharge Requirements pursuant to the Porter-Cologne Water Quality Control Act (Wat. Code, § 13000 et seq.).

Except insofar as may be modified by any preceding conditions, all Order actions are contingent on: (a) the discharge being limited and all proposed mitigation being completed in strict compliance with the conditions of this Order and the attachments to this Order; and, (b) compliance with all applicable requirements of Statewide Water Quality Control Plans and Policies, the Regional Water Boards' Water Quality Control Plans and Policies.

Refiee Purdy

Executive Officer

Los Angeles Water Quality Control Board


5/6/19 Date

⁵ Mitigation type for onsite restoration of temporary impacts is Permittee Responsible (PR).

⁶ Methods: establishment (Est.), reestablishment (Re-est.), rehabilitation (Reh.), enhancement (Enh.), preservation (Pres.). Unknown applies to advance credits with an unknown method and or location.


Regulatory Measure ID: 422326 Place ID: 848588

File No: 18-073

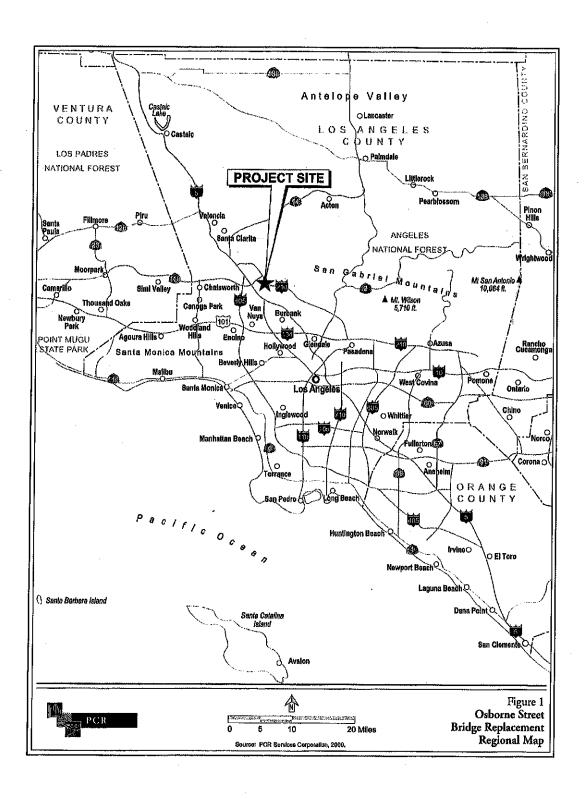


Regulatory Measure ID: 422326

Place ID: 848588 File No: 18-073

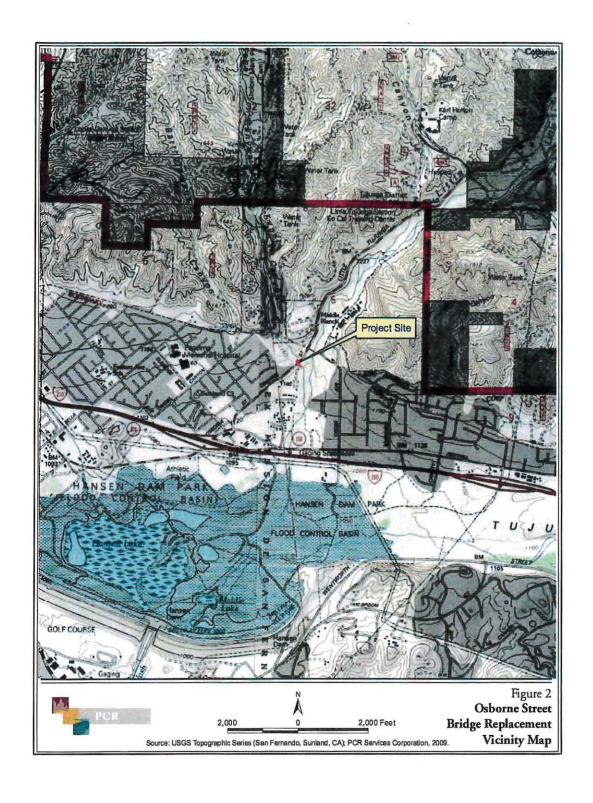

Regulatory Measure ID: 422326 Place ID: 848588

File No: 18-073

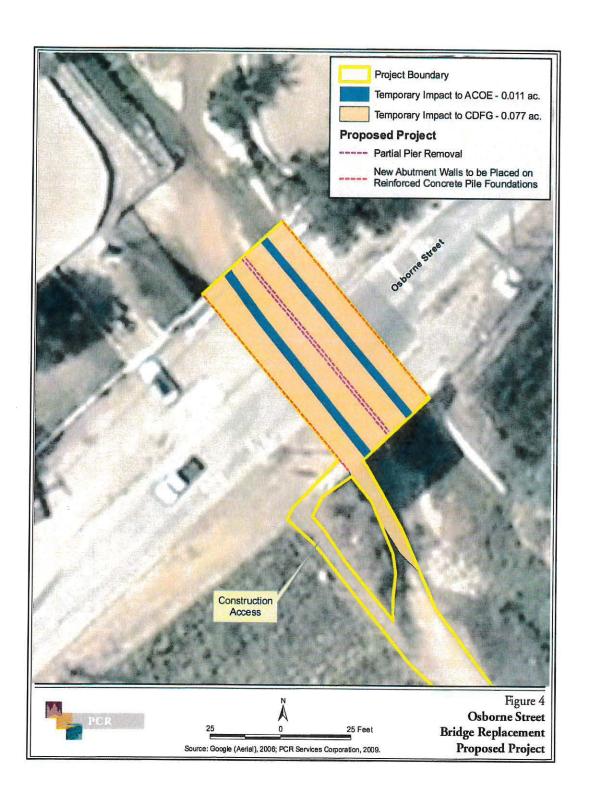

Regulatory Measure ID: 422326

Place ID: 848588 File No: 18-073

SIGNATORY REQUIREMENTS

All Documents Submitted In Compliance With This Order Shall Meet The Following Signatory Requirements:

- 1. All applications, reports, or information submitted to the Los Angeles Water Quality Control Board (Los Angeles Water Board) must be signed and certified as follows:
 - a) For a corporation, by a responsible corporate officer of at least the level of vice-president.
 - b) For a partnership or sole proprietorship, by a general partner or proprietor, respectively.
 - c) For a municipality, or a state, federal, or other public agency, by either a principal executive officer or ranking elected official.
- 2. A duly authorized representative of a person designated in items 1.a through 1.c above may sign documents if:
 - a) The authorization is made in writing by a person described in items 1.a through 1.c above.
 - b) The authorization specifies either an individual or position having responsibility for the overall operation of the regulated activity.
 - c) The written authorization is submitted to the Los Angeles Water Board Staff Contact prior to submitting any documents listed in item 1 above.
- 3. Any person signing a document under this section shall make the following certification:

"I certify under penalty of law that I have personally examined and am familiar with the information submitted in this document and all attachments and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment."

Copies of this Form

Include a copy of the Project specific Cover Sheet below with your report: please retain a copy for your records.

Report Submittal Instructions

- Check the box on the Report and Notification Cover Sheet next to the report or notification you are submitting.
 - Part A (Annual Report): This report will be submitted annually from the anniversary of Project effective date until a Notice of Project Complete Letter is issued.
 - Part B (Project Status Notifications): Used to notify the Los Angeles Water Board of the status
 of the Project schedule that may affect Project billing.
 - Part C (Conditional Notifications and Reports): Required on a case by case basis for accidental
 discharges of hazardous materials, violation of compliance with water quality standards,
 notification of in-water work, or other reports.
- 2. Sign the Report and Notification Cover Sheet and attach all information requested for the Report Type.
- 3. Electronic Report Submittal Instructions:
 - Submit signed Report and Notification Cover Sheet and required information via email to:
 Valerie CarrilloZara@waterboards.ca.gov
 - Include in the subject line of the email:

Subject: ATTN: Valerie CarrilloZara; File No: 18-073, Reg. Measure ID: 422326 Report

Definition of Reporting Terms

- 1. <u>Active Discharge Period</u>: The active discharge period begins with the effective date of this Order and ends on the date that the Permittee receives a Notice of Completion of Discharges Letter or, if no post-construction monitoring is required, a Notice of Project Complete Letter. The Active Discharge Period includes all elements of the Project including site construction and restoration, and any Permittee responsible compensatory mitigation construction.
- 2. Request for Notice of Completion of Discharges Letter: This request by the Permittee to the Los Angeles Water Board staff pertains to projects that have post construction monitoring requirements, e.g. if site restoration was required to be monitored for 5 years following construction. Los Angeles Water Board staff will review the request and send a Completion of Discharges Letter to the Permittee upon approval. This letter will initiate the post-discharge monitoring period and a change in fees from the annual active discharge fee to the annual post-discharge monitoring fee.

- Request for Notice of Project Complete Letter: This request by the Permittee to the Los Angeles Water Board staff pertains to projects that either have completed post-construction monitoring and achieved performance standards or have no post-construction monitoring requirements, and no further Project activities are planned. Los Angeles Water Board staff will review the request and send a Project Complete Letter to the Permittee upon approval. Termination of annual invoicing of fees will correspond with the date of this letter.
- 4. <u>Post-Discharge Monitoring Period</u>: The post-discharge monitoring period begins on the date of the Notice of Completion of Discharges Letter and ends on the date of the Notice of Project Complete Letter issued by the Los Angeles Water Board staff. The Post-Discharge Monitoring Period includes continued water quality monitoring or compensatory mitigation monitoring.
- 5. Effective Date: Date of Order issuance.

Map/Photo Documentation Information

When submitting maps or photos, please use the following formats.

1. Map Format Information:

Preferred map formats of at least 1:24000 (1" = 2000') detail (listed in order of preference):

- GIS shapefiles: The shapefiles must depict the boundaries of all project areas and extent of
 aquatic resources impacted. Each shape should be attributed with the extent/type of aquatic
 resources impacted. Features and boundaries should be accurate to within 33 feet (10 meters).
 Identify datum/projection used and if possible, provide map with a North American Datum of 1983
 (NAD38) in the California Teale Albers projection in feet.
- Google KML files saved from Google Maps: My Maps or Google Earth Pro. Maps must show the boundaries of all project areas and extent/type of aquatic resources impacted. Include URL(s) of maps. If this format is used include a spreadsheet with the object ID and attributed with the extent/type of aquatic resources impacted.
- Other electronic format (CAD or illustration format) that provides a context for location (inclusion
 of landmarks, known structures, geographic coordinates, or USGS DRG or DOQQ). Maps must
 show the boundaries of all project areas and extent/type of aquatic resources impacted. If this
 format is used include a spreadsheet with the object ID and attributed with the extent/type of
 aquatic resources impacted.
- Aquatic resource maps marked on paper USGS 7.5 minute topographic maps or Digital
 Orthophoto Quarter Quads (DOQQ) printouts. Maps must show the boundaries of all project
 areas and extent/type of aquatic resources impacted. If this format is used include a spreadsheet
 with the object ID and attributed with the extent/type of aquatic resources impacted.
- 2. <u>Photo-Documentation</u>: Include a unique identifier, date stamp, written description of photo details, and latitude/longitude (in decimal degrees) or map indicating location of photo. Successive photos should be taken from the same vantage point to compare pre/post construction conditions.

	REPORT AND NOTIF	ICATION C	OVER SHEET		
Project:	Osborne Street Bridge I	Replacemer	t		
Permittee:	City of Los Angeles				
Reg. Meas. ID:	422326	Place ID:	848588	File No:	18-073

	Report Type Submitted				
Part A – Project Reporting					
Report Type Annual Report					
	Part B - Project Status Notifications				
Report Type	□ Commencement of Construction				
Report Type	☐ Request for Notice of Completion of Discharges Letter				
Report Type Request for Notice of Project Complete Letter					
	Part C - Conditional Notifications and Reports				
Report Type	☐ Accidental Discharge of Hazardous Material Report				
Report Type	☐ Violation of Compliance with Water Quality Standards Report				
Report Type	☐ In-Water Work/Diversions Water Quality Monitoring Report				
Report Type	☐ Modifications to Project Report				
Report Type	☐ Transfer of Property Ownership Report				

[] 하는 사람들이 하는 사람들이 되었다. 그는 사람들이 되었다면 하는 사람들이 되었다면 보고 있다면 보다면 보고 있다면 보다 되었다면 보고 있다면 보	
Print Name ¹	Affiliation and Job Title
Signature	Date
	de if authorization has changed since to act in my behalf as my representative in the equest, supplemental information in support of this
	Date st be signed by the Permittee or a duly authorized
representative and included with all written su	age 4 of 9

Part A – Project Reporting

Report Type	Annual Report			
Report Purpose	Notify the Los Angeles Water Board staff of Project status during both the active discharge and post-discharge monitoring periods.			
When to Submit	Annual reports shall be submitted each year on the anniversary of Project effective date. Annual reports shall continue until a Notice of Project Complete Letter is issued to the Permittee.			
Report Contents	The contents of the annual report shall include the topics indicated below for each project period. Report contents are outlined in Annual Report Topics below.			
	During the Active Discharge Period			
	Topic 1: Construction Summary			
	 Topic 2: Mitigation for Temporary Impacts Status Topic 3: Compensatory Mitigation for Permanent Impacts Status 			
	During the Post-Discharge Monitoring Period			
	Topic 2: Mitigation for Temporary Impacts Status			
	Topic 3: Compensatory Mitigation for Permanent Impacts Status			
	Annual Report Topics (1-3)			
Annual Report Topic 1	Construction Summary			
When to Submit	With the annual report during the Active Discharge Period.			
Report Contents	 Project progress and schedule including initial ground disturbance, site clearing and grubbing, road construction, site construction, and the implementation status of construction storm water best management practices (BMPs). If construction has not started, provide estimated start date and reasons for delay. Color photos, pre-project and current. Map showing general Project progress. If applicable: Summary of any conditional reports sent during the year such as "Accidental Discharge of Hazardous Material Report" or "Accidental Discharge of Hazardous Material Report" Copies of revised permits from other agencies Compilation of all water quality monitoring results for the year in a spreadsheet format. 			
Annual Report Topic 2	Minimation for Townson Investo Status			
	Mitigation for Temporary Impacts Status			
When to Submit	With the annual report during both the Active Discharge Period and Post- Discharge Monitoring Period.			

Report Contents	*If not applicable report N/A.				
	Planned date of initiation and map showing locations of mitigation for temporary impacts to waters of the state and all upland areas of temporary disturbance which could result in a discharge to waters of the state.				
	2. If mitigation for temporary impacts has already commenced, provide a map and information concerning attainment of mitigation success.				
Annual Report Topic 3	Compensatory Mitigation for Permanent Impacts Status				
When to Submit	With the annual report during both the Active Discharge Period and Post- Discharge Monitoring Period.				
Report Contents	*If not applicable report N/A.				
	 Part A. Permittee Responsible 1. Planned date of initiation of compensatory mitigation site installation. 2. If installation is in progress, a map of what has been completed to date. 3. If the compensatory mitigation site has been installed, provide a final map and information concerning attainment of performance standards contained in the compensatory mitigation plan. 				
	Part B. Mitigation Bank or In-Lieu Fee 1. Status or proof of purchase of credit types and quantities. 2. Include the name of bank/ILF Program and contact information. 3. If ILF, location of project and type if known.				

Part B – Project Status Notifications

Report Type	Commencement of Construction
Report Purpose	Notify Los Angeles Water Board staff prior to the start of construction.
When to Submit	Must be received at least seven (7) days prior to start of initial ground disturbance activities.
Report Contents	 Date of commencement of construction. Anticipated date when discharges to waters of the state will occur. Project schedule milestones including a schedule for onsite compensatory mitigation, if applicable.

Report Type	Request for Notice of Completion of Discharges Letter
Report Purpose	Notify Los Angeles Water Board staff that post-construction monitoring is
↑ 기위 환경의 구성 등 기계	required and that active Project construction, including any mitigation and
	permittee responsible compensatory mitigation, is complete.

When to Submit	Must be received by Los Angeles Water Board staff within thirty (30) days following completion of all Project construction activities.
Report Contents	 Pre- and post-photo documentation of all Project activity sites where the discharge of dredge and/or fill/excavation was authorized. An updated monitoring schedule for mitigation for temporary impacts to waters of the state and permittee responsible compensatory mitigation during the post-discharge monitoring period, if applicable.

Report Type	Request for Notice of Project Complete Letter
Report Purpose	Notify Los Angeles Water Board staff that construction and/or any post- construction monitoring is complete, or is not required, and no further Project activity is planned.
When to Submit	Must be received by Los Angeles Water Board staff within thirty (30) days following completion of all Project activities.
Report Contents	Part A: Mitigation for Temporary Impacts 1. A report establishing that areas of temporary impacts to waters of the state, and upland areas of temporary disturbance which could result in a discharge to waters of the state, have been successfully restored and all identified success criteria have been met. Pre- and post-photo documentation of all restoration sites.
	Part B: Permittee Responsible Compensatory Mitigation
	A report establishing that the performance standards outlined in the compensatory mitigation plan have been met.
	3. Status on the implementation of the long-term maintenance and management plan and funding of endowment.
	4. Pre- and post-photo documentation of all compensatory mitigation sites.
음마. 그런 경험을 보고 말했다. 연안되고 있다. 그렇게 되었다.	5. Final maps of all compensatory mitigation areas (including buffers).
	Part C: Post-Construction Storm Water BMPs
	6. Date of storm water permit Notice of Termination(s), if applicable.
	7. Report status and functionality of all post-construction BMPs.

Part C – Conditional Notifications and Reports

Report Type	Accidental Discharge of Hazardous Material Report
Report Purpose	Notifies Los Angeles Water Board staff that an accidental discharge of hazardous material has occurred.
When to Submit	Within five (5) working days following the date of an accidental discharge. Continue reporting as required by Los Angeles Water Board staff.

Report Contents	1.	The report shall include the OES Incident/Assessment Form, a full
		description and map of the accidental discharge incident (i.e. location,
		time and date, source, discharge constituent and quantity, aerial extent,
		and photo documentation). If applicable, the OES Written Follow-Up
		Report may be substituted.
	2.	If applicable, any required sampling data, a full description of the sampling
		methods including frequency/dates and times of sampling, equipment,
		locations of sampling sites.
	3.	Locations and construction specifications of any barriers, including silt
The first law is a first law in the firs		curtains or diverting structures, and any associated trenching or
		anchoring.

Report Type	Violation of Compliance with Water Quality Standards Report
Report Purpose	Notifies Los Angeles Water Board staff that a violation of compliance with water quality standards has occurred.
When to Submit	The Permittee shall report any event that causes a violation of water quality standards within three (3) working days of the noncompliance event notification to Los Angeles Water Board staff.
Report Contents	The report shall include: the cause; the location shown on a map; and the period of the noncompliance including exact dates and times. If the noncompliance has not been corrected, include: the anticipated time it is expected to continue; the steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance; and any monitoring results if
	required by Los Angeles Water Board staff.

Report Type	In-Water Work and Diversions Water Quality Monitoring Report
Report Purpose	Notifies Los Angeles Water Board staff of the completion of in-water work.
When to Submit	Within three (3) working days following the completion of in-water work.
	Continue reporting in accordance with the approved water quality monitoring
	plan.
Report Contents	As required by the approved water quality monitoring plan.

Report Type	Modifications to Project Report
Report Purpose	Notifies Los Angeles Water Board staff if the Project, as described in the
	application materials, is altered in any way or by the imposition of subsequent
	permit conditions by any local, state or federal regulatory authority.
When to Submit	Prior to any alteration or modification of Project activities.
Report Contents	A description and location of any alterations of Project activities. Identify any
	Project modifications that will interfere with the Permittee's compliance with
	the Order. Any alteration may require an Amendment, to be determined by
	Los Angeles Water Board staff.

Report Type	Transfer of Property Ownership Report	
Report Purpose	Notifies Los Angeles Water Board staff of change in ownership of the Proof or Permittee-responsible mitigation area.	
When to Submit	At least 10 working days prior to the transfer of ownership.	
Report Contents	 A statement that the Permittee has provided the purchaser with a copy of this Order and that the purchaser understands and accepts: a. the Order's requirements and the obligation to implement them or be subject to administrative and/or civil liability for failure to do so; and b. responsibility for compliance with any long-term BMP¹ maintenance plan requirements in this Order. A statement that the Permittee has informed the purchaser to submit a written request to the Los Angeles Water Board to be named as the permittee in a revised order. 	
Report Type	Transfer of Long-Term BMP Maintenance Report	
Report Purpose	Notifies Los Angeles Water Board staff of transfer of long-term BMP maintenance responsibility.	
When to Submit	At least 10 working days prior to the transfer of BMP maintenance responsibility.	
Report Contents	A copy of the legal document transferring maintenance responsibility of post- construction BMPs.	

¹ Best Management Practices (BMPs) is a term used to describe a type of water pollution or environmental control.