

6.0 Mitigation Summary

In accordance with the California Environmental Quality Act (CEQA), the State Water Resources Control Board (State Water Board) is the Lead Agency for preparation of the environmental impact report (EIR) and the incorporated Mitigation Monitoring and Reporting Program (MMRP) contained within this chapter (Public Resources Code §21081.6). As such, the State Water Board is responsible for certifying its contents, and taking action to approve or deny approval of the Eagle Mountain Pumped Storage Project (Project). As the Lead Agency, the State Water Board is responsible for ensuring the mitigation program is implemented. Several agencies will be responsible for verification and timing of specific aspects of the mitigation program.

The mitigation program has been designed to avoid, minimize, rectify, reduce, eliminate or compensate for potentially significant impacts caused by construction, operation or maintenance of the Project (CEQA Guidelines §10597, 15126.4 & 15370). Implementation of the recommended mitigation program would reduce potentially significant impacts to a less than significant level, except for the resource areas with unavoidable significant impacts: Groundwater, Aesthetics, and Air Quality. A statement of overriding considerations will be required for the resource areas with unavoidable significant impacts (CEQA Guideline §15093) [*refer to* Section 3.0 Environmental Analysis and Section 5.0 CEQA Mandated Topics for complete discussion].

The mitigation program includes both project design features (PDFs) and mitigation measures (MMs). The PDFs are design elements inherent to the Project that reduce or eliminate potential impacts. Because PDFs are incorporated into the Project, either in the Project design or by law as part of Project implementation, and do not constitute MMs. However, the PDFs are described within the mitigation program and are described within the analysis of each CEQA resource topic. Where applicable, MMs are provided to reduce impacts from the proposed Project to a less than significant level.

CEQA Guidelines, Section 15123.4(a)(1) state that, “An EIR shall describe feasible measures which could minimize significant adverse impacts.” Figures 6-1 and 6-2 were prepared to aid in understanding of the MMs, and how they work together, so that as a package they result in minimization of significant adverse impacts. For example, MM GW-1, Groundwater level monitoring, is a multi-purpose mitigation measure. The information from the monitoring will be used in the engineering design of the seepage recovery wells (MM GW-4 and 5) which are used to prevent impacts to the Colorado River Aqueduct and the proposed Eagle Mountain Landfill. In addition, the groundwater level monitoring will be used to verify that the seepage recovery wells are working as intended, and that seepage is being controlled to meet the performance standards set for the Project. Therefore, MM GW-1 is a necessary component of the mitigation program as a whole.

The following text is a summary of the mitigation program for the proposed Project. This summary is a compilation of all of the PDFs and MMs which are discussed in the resource specific sections , found in Section 3. This summary has been added to the Draft Final EIR to aid the reader in locating information about the mitigation program.

Table 6-1 Summary of Project Impacts, Mitigation Program, and Residual Effects, presents a listing by threshold of significance by resource area, identified environmental impacts, mitigation program component, and level of significance after mitigation is incorporated into the Project. Table 6-1 also identifies cumulative impacts resulting from build out of the proposed Project in conjunction with the approved and pending projects.

Table 6-2 Mitigation Monitoring and Reporting Program, provides a checklist table listing each MM and PDF, implementation timing, the party responsible for monitoring or reporting, and agency responsible for verification and enforcement. The MMRP is designed to ensure compliance during Project implementation and will be incorporated into the State Water Board's water quality certification for the proposed Project.

Biological Mitigation Measures Eagle Mountain Pumped Storage Project

ENGINEERING DESIGN

CONSTRUCTION

OPERATION


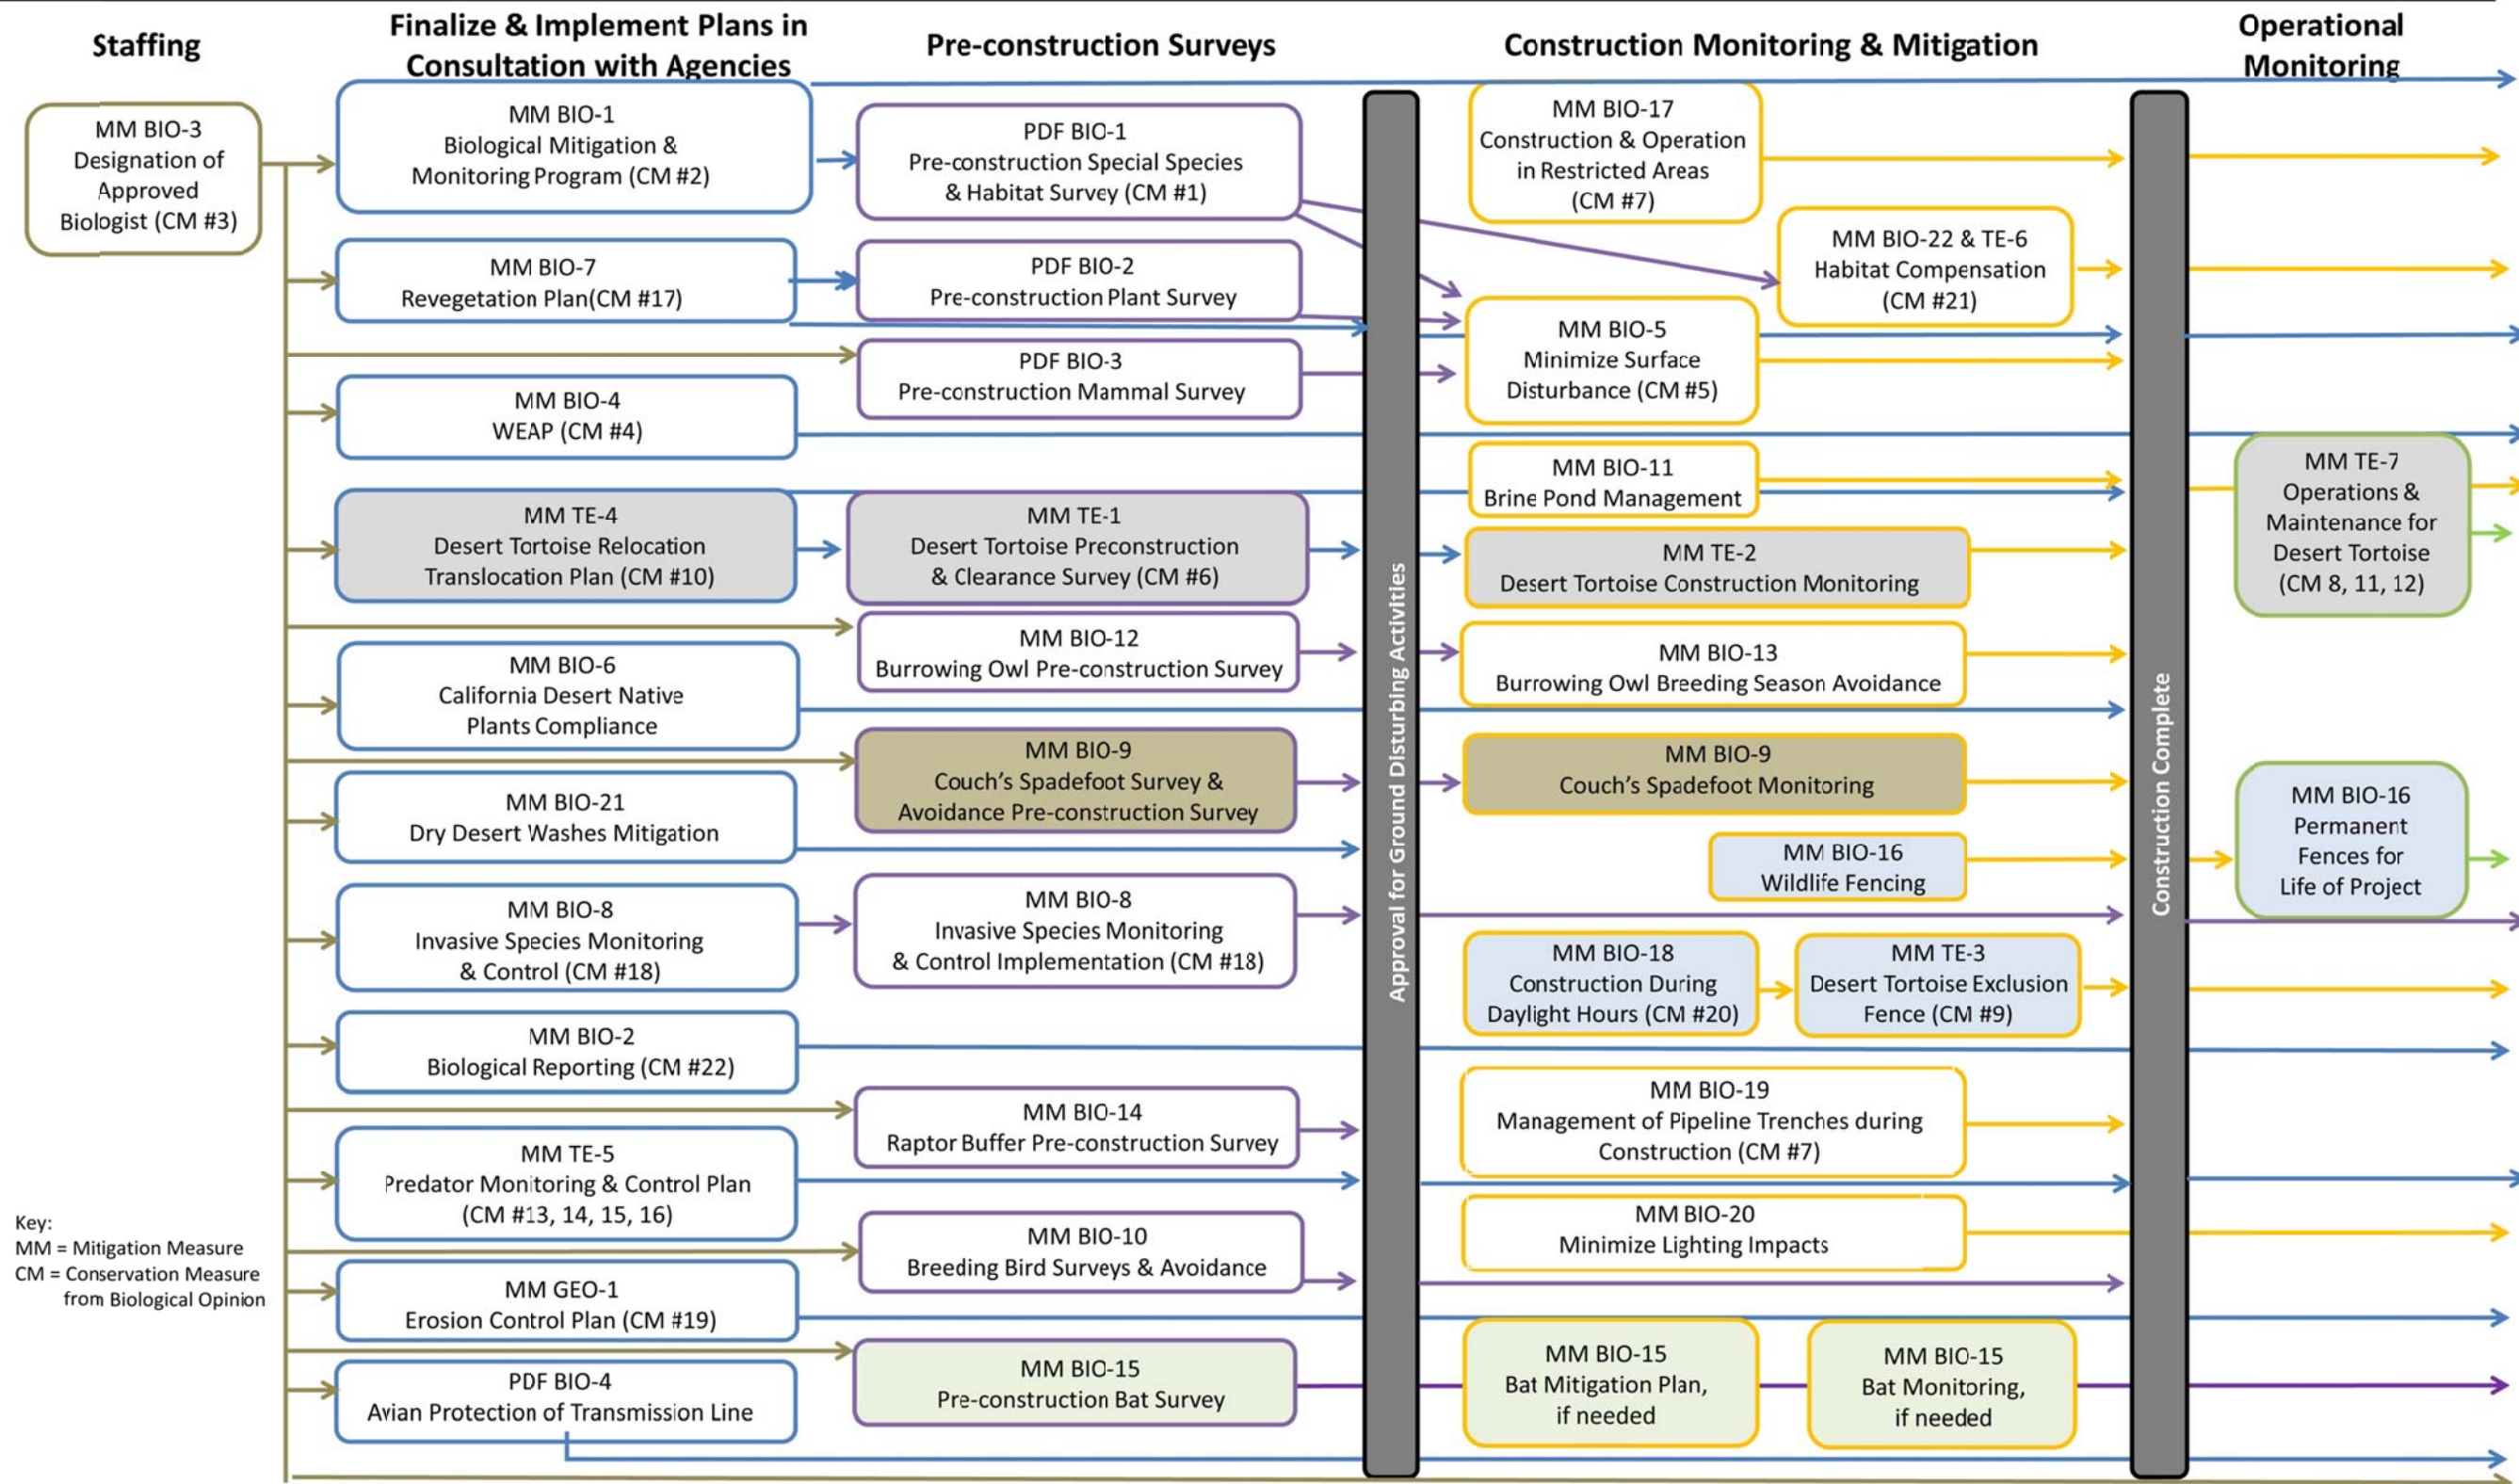


Figure 6-1 Biological Mitigation Measures (above) and Figure 6-2 Geological & Water-Related Mitigation Measures (below).

Geological & Water-Related Mitigation Measures Eagle Mountain Pumped Storage Project

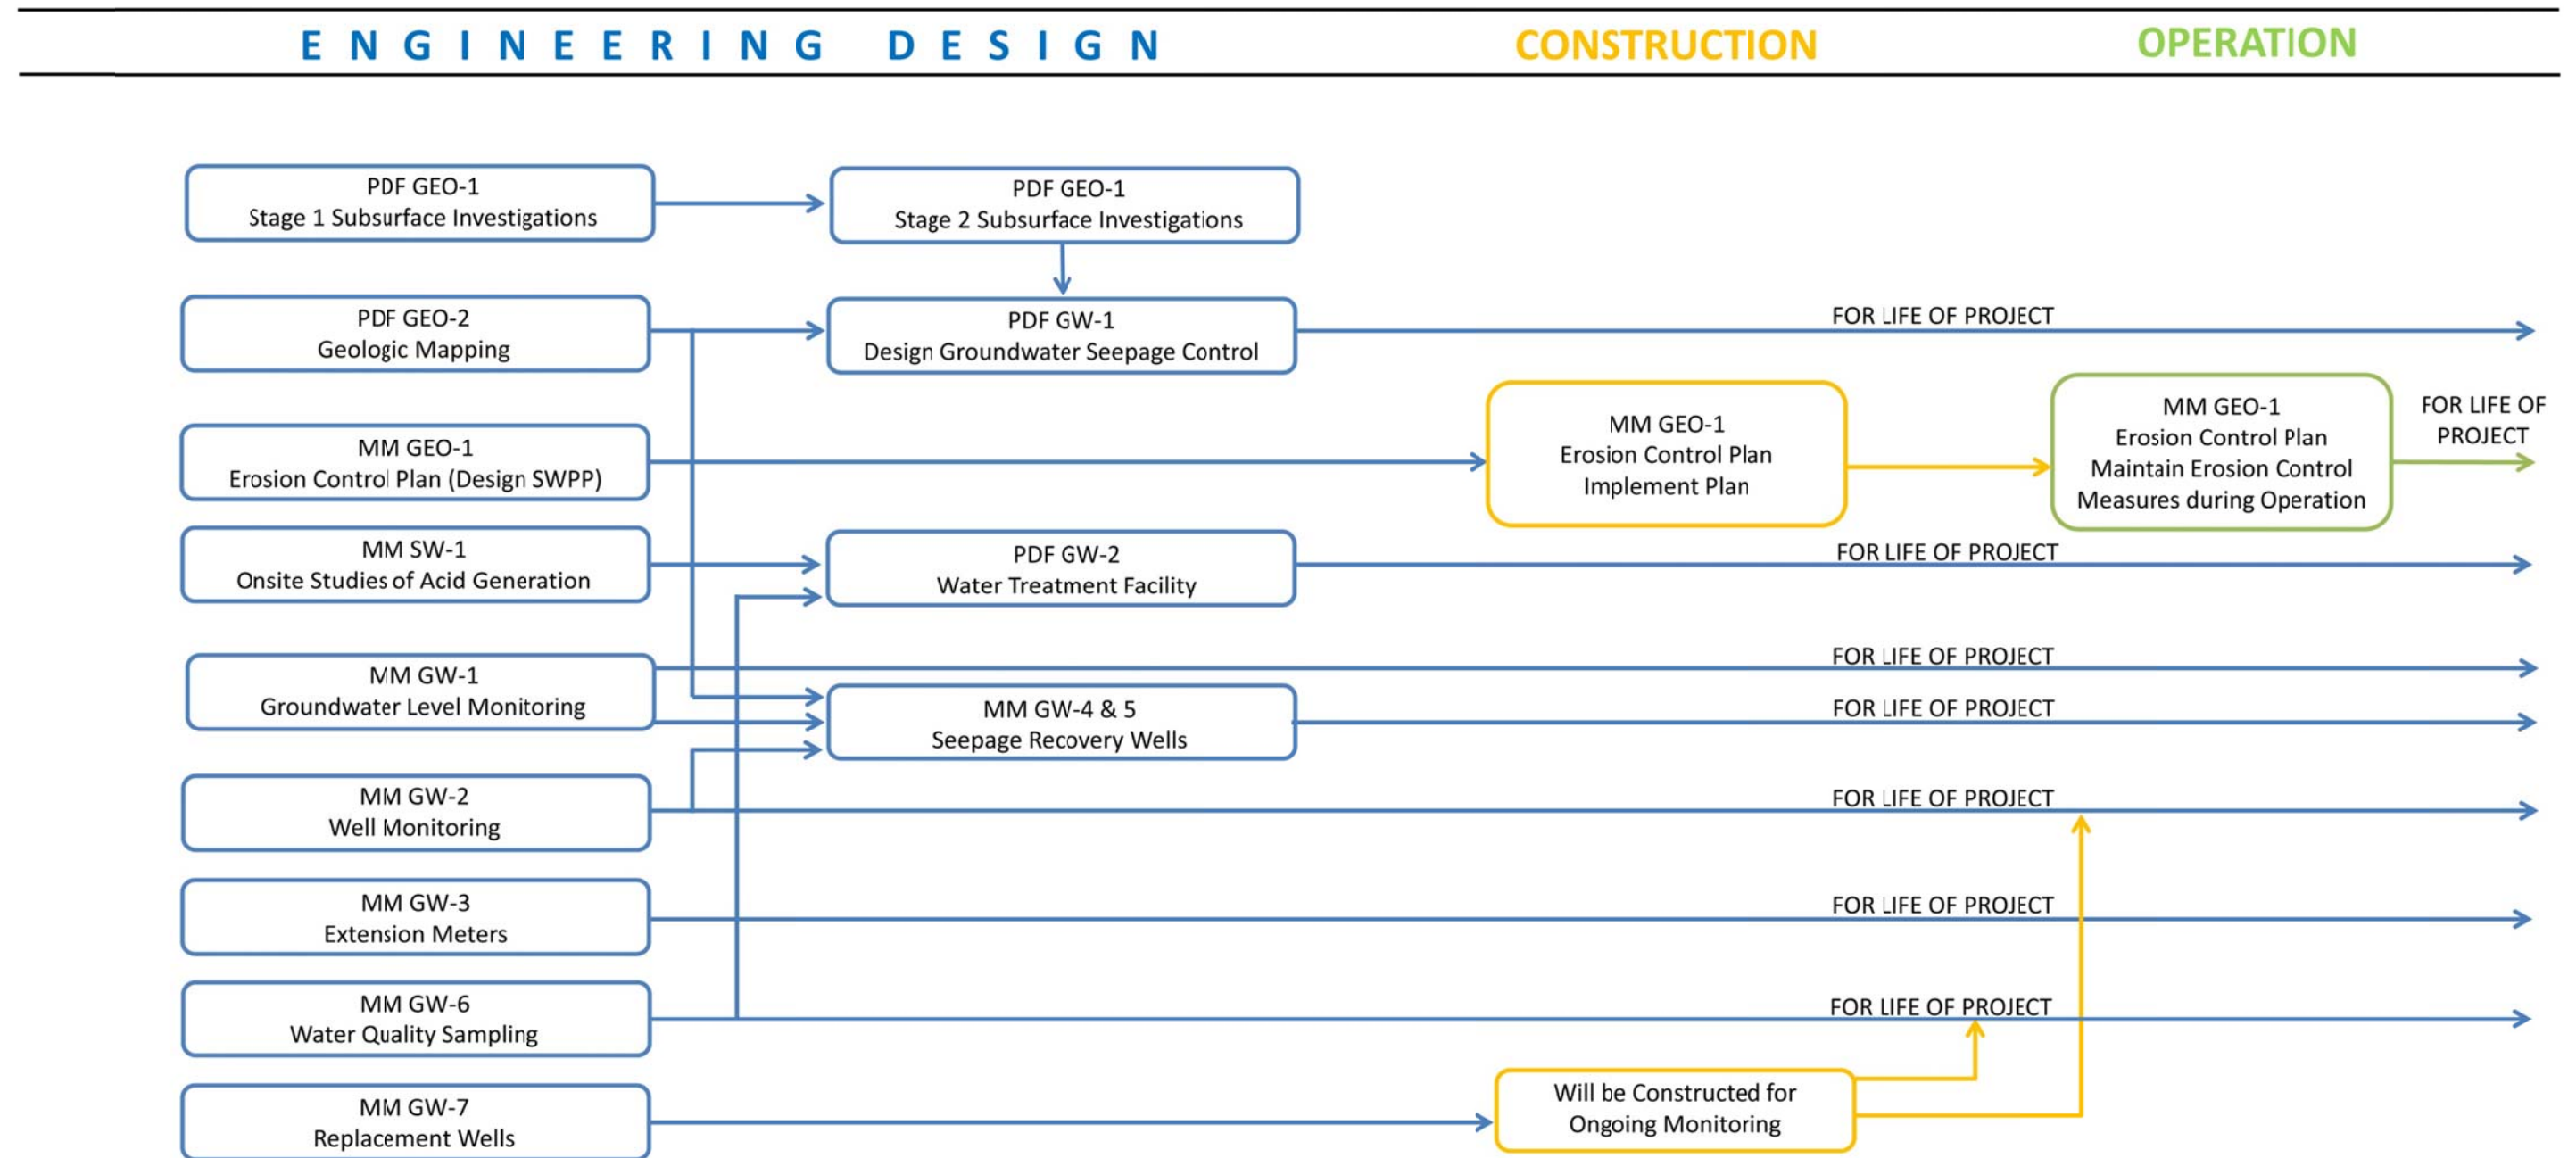

6.1 Draft Final EIR Project Design Features

6.1.1 Geology

PDF GEO-1. Subsurface Investigations.

Detailed investigations to support final engineering will be conducted in two stages, as detailed in Section 12.1. These generally include:

Phase I Site Investigations: Based on available information and the current Project configuration, conduct a limited field program designed to confirm that basic Project feature locations are appropriate and to provide basic design parameters for the final layout of the Project features. Phase I Site Investigations will be initiated after licensing and receipt of site access, at the initiation of the Project engineering design phase. Field work will be completed within six months of the start of field investigations, and results filed with the State Water Board and FERC 12 months after the start of field investigations. Phase I field work is focused on the pumped physical facilities associated with the pumped storage project to provide the owner with additional information needed to confirm feasibility and Project cost.

Phase II Site Investigations: Using the results of the Phase I work, and based on any design refinements developed during pre-design engineering, conduct additional explorations that will support final design of the Project features and bids for construction of the Project. The Phase II program will also include field investigations and modeling to support detailed evaluation of potential seepage from the Project features (reservoirs and water conveyance tunnels). Seepage evaluations will include groundwater modeling to refine plans for seepage control, seepage recovery, and monitoring as required to avoid potential adverse impacts on the local groundwater regime and water quality, the Colorado River Aqueduct and the proposed landfill if and when it is implemented. It should be noted that the Phase II program may be implemented in a number of progressive steps. Geotechnical field programs during the design stage of implementation are usually implemented in a phased or step-wise manner with subsequent field work planned based on what is learned from the preceding field work.

The scopes of the Phase I and II programs are discussed in a technical memorandum found in Section 12.1.

PDF GEO-2. Geologic Mapping.

During site investigations, geologic mapping will be performed by Project Engineers to identify conditions of the overburden and bedrock exposed in the mine pits (reservoir areas) that may affect the stability of existing slopes during reservoir level fluctuations. Mapping will identify the degree and orientation of jointing and fracturing, faulting, weathering, and the dimensions of the benches excavated during mining. The apparent stability of the cut slopes and benches will be assessed at this time.

Geologic mapping will begin during the Phase I Site Investigations (*See* Section 12.1 for details) and will continue during Phase II Site Investigations (*See* Section 12.1 for details).

During construction, areas within the pits that exhibit unstable slopes because of adverse fracture sets exposed in the pit walls will be scaled of loose rock and unstable blocks. Material scaled from the side slopes will be removed and disposed of outside the pit, or pushed downslope and buried in the bottom of the pit. Rock slopes within the East and Central pits that lie below an elevation of five feet above the maximum water level will be scaled of loose and unstable rock during construction. Existing cut slopes that lie above these elevations will not be modified unless there is evidence of potential failure areas that could impact Project facilities. Final Project design will be reviewed by the State Water Board and approved by the FERC.

6.1.2 Groundwater

PDF GW-1. Groundwater Seepage.

The Licensee will limit seepage from the Project reservoirs to the extent feasible using specified grouting, seepage blankets, and roller-compacted concrete (RCC) or soil cement treatments. This includes the Upper Reservoir, Lower Reservoir, and the brine disposal ponds that will be part of the water quality management system for the Project. Final design for seepage control will be approved by the State Water Board and FERC prior to construction. Seepage control from the Project reservoirs will be accomplished using systematic procedures that will include the following:

- During final engineering design, a detailed reconnaissance of the reservoir basins and pond areas will be conducted to identify zones where leakage and seepage would be expected to occur. These areas will include faults, fissures and cracks in the bedrock, and zones that may have direct connection to the alluvial deposits of the Chuckwalla Valley. During the reconnaissance, the effectiveness of various methods for seepage and leakage control to mitigate the effects of these particular features will be evaluated, including grouting, seepage blankets, and RCC or soil cement treatments, and other methods if needed.
- Methods for seepage and leakage control will include curtain grouting of the foundation beneath the dam footprint and around the reservoir rim, as needed; backfill concrete placement and/or slush grouting of faults, fissures, and cracks detected in the field reconnaissance; placement of low permeability materials over zones too large to be grouted and over areas of alluvium within the Lower Reservoir; seepage and leakage collection systems positioned based upon the results of the hydrogeologic analyses; and clay or membrane lining of the brine ponds associated with the Project's water quality management system. The collection systems would recycle water into the Project reservoirs or the reverse osmosis (RO) system.
- Design and construction of a Comprehensive Monitoring Program, consisting of observation wells and piezometers that will be used to assess the effectiveness of the seepage and leakage control measures.

- Based on monitoring results, additional actions may be taken to further control leakage and seepage from the reservoirs and ponds. Such measures may include curtain grouting and the expansion of seepage and leakage collection systems.
- Other measures, such as use of stepped RCC or soil cement overlay on the eastern portion of the Lower Reservoir, may also be used depending on results of final engineering design analyses.
- In addition, portions of the tunnels and shaft of the Project will experience very high water pressures; whereas, current plans are based on lining of the tunnels with concrete, and in some locations steel liners will be installed. These liners will also effectively block seepage from occurring.

PDF GW-2. Water Treatment Facility.

In order to maintain TDS at a level consistent with existing groundwater quality, a water treatment plant using a RO desalination system and brine disposal lagoon will be constructed as a part of the Project to remove salts and metals from reservoir water and maintain TDS concentrations equivalent to the source groundwater.

Treated water will be returned to the Lower Reservoir while the concentrated brine from the RO process will be directed to brine ponds. In addition to removing salts from the water supply, other contaminants, nutrients, and minerals, if present, would be removed, preventing eutrophication from occurring.

Salts from the brine disposal lagoon will be removed and disposed of at an approved facility when the lagoons become full, approximately every 10 years. The lagoons will be maintained in a wetted condition, to maintain air quality in the Project area.

6.1.3 Biology

PDF BIO-1. Pre-construction Special Species and Habitat Survey.

Following licensing and access to the Central Project Area, surveys for special species and habitats that could support special species will be conducted. A thorough examination of the Central Project Area and local springs and seeps will provide information to determine if any avoidance or adaptive management is required. Simultaneously, the site will be assessed for use by other wildlife. Based on the results of these surveys, the biological mitigation and monitoring program will be modified in ongoing consultation with the United States Fish and Wildlife Service (USFWS) and the California Department of Fish and Wildlife (CDFW). Reporting requirements for the pre-construction surveys are specified in MM BIO-2.

PDF BIO-2. Pre-construction Plant Survey.

Preconstruction surveys will identify special-status plant populations and also species protected by the California Desert Native Plants Act (CDNPA). For annuals or herbaceous perennials that are dormant during certain seasons, data from 2008, 2009, and 2010 surveys will be used to assist in locating populations during dormant seasons. Based on these combined surveys, avoidance areas in construction zones will be established for special plant resources. The perimeters will be marked with wooden stakes, at least 3 feet high, and no more than 10 feet apart. Each stake will be flagged with red and white candy-striped flagging or other obvious barrier tape.

Where avoidance is not feasible, and the species can be reasonably transplanted (e.g., foxtail cactus, Wiggins' cholla, other cacti and species protected by the CDNPA), plants will be salvaged and transplanted in areas approved in the Re-Vegetation Plan. Transplantation will be part of the Re-Vegetation Plan developed for the Project. Salvaging seed and replanting may be an option considered for certain species (e.g., smoke tree, ironwood).

PDF BIO-3. Pre-construction Mammals Surveys.

Prior to construction, surveys will be conducted for all burrows that might host a badger or kit fox. (These surveys can be simultaneous with those for desert tortoise burrows.) Active burrows and all fox natal dens will be avoided, where possible. The perimeters of all avoidance areas will be marked with wooden stakes, at least 3 feet high, and no more than 10 feet apart. Each stake will be flagged with red and white candy-striped flagging or other obvious barrier tape.

Where avoidance is infeasible, occupancy of burrows will be determined through fiberoptics and/or night vision equipment. All occupants will be encouraged to leave their burrows using one-way doors, burrow excavation in the late afternoon/early evening (to encourage escape at night), or other approved methods. All burrows from which badgers or foxes have been removed will be fully excavated and collapsed to ensure that animals cannot return prior to or during construction.

PDF BIO-4. Avian Protection of Transmission Line.

The Licensee will develop an avian protection plan in consultation with the USFWS. The plan will: meet Avian Power Line Interaction Committee/Fish and Wildlife Service (APLIC/FWS) guidelines for an avian protection plan: present designs to reduce potential for avian electrocution and collisions; provide methods for surveying and reporting Project-related raptor mortality and managing nesting on the proposed transmission lines; and include a workers education program.

The raptor-friendly transmission lines will be developed in strict accordance with the industry standard guidelines set forth in *Suggested Practices for Raptor Protection on Power Lines: The State of the Art in 2006*, by Avian Power Line Interaction Committee, Edison Electric Institute, and Raptor Research Foundation and the USFWS-approved Avian and Bat Protection

Guidelines. The design plan (filed for FERC approval) will include adequate insulation, and any other measures necessary to protect bats and raptors from electrocution hazards.

6.1.4 Aesthetics

PDF AES-1. Staging Areas.

Staging areas and areas needed for equipment operation, material storage and assembly shall be combined with construction lands to the extent feasible, and organized to minimize the total footprint needed. Staging, storage, and temporary construction areas shall be reclaimed as soon as the use of each such area is completed.

6.1.5 Land Use

PDF LU-1. Construction Access.

Construction access to/from the substation site will be from the Eagle Mountain Road exit and follow the Frontage Road east to the site. The Contractor will be responsible for monitoring construction access points.

PDF LU-2. Construction Monitoring.

Two weeks prior to beginning construction, notices shall be posted locally stating hours of operation for construction near the Desert Center community and along State Route 177.

PDF LU-3. Pipeline Construction.

Impacts from water pipeline construction will be minimized or avoided by: (1) grading out the sidecast to meet existing grades; (2) minimizing disturbance, and construction timing to avoid seasonal rain, and maintaining surface contours and natural function of washes crossed; and (3) use of existing access roads, when feasible, thereby avoiding new ground disturbance.

PDF LU-4. Coordination with Adjacent Projects.

The Project layout has been modified to eliminate conflicts with existing and proposed land uses. For example, construction staging and lay-down areas have been relocated to a parcel southwest of the Lower Reservoir and outside of the proposed landfill to eliminate conflict with the proposed landfill truck marshalling and railyard facilities. Low voltage cables from the underground powerhouse have been routed through the underground powerhouse access tunnel to avoid conflicts with landfill Phase 3. Water treatment facilities have been relocated further from the Colorado River Aqueduct (CRA) to address concerns of the Metropolitan Water District of Southern California (MWD) regarding the proximity of the brine ponds to the CRA.

These efforts will continue during the final design and construction of the proposed Project. Because several large and complex projects are proposed in the same general area (including the landfill project and several proposed solar energy projects), detailed coordination will occur as the Project progresses in order to eliminate conflicts of facility locations, supporting infrastructure, designs, permits, and operations. The Licensee will be required to have regular

Project coordination meetings with the owners of the landfill project, the adjacent solar projects, MWD, and any other interested landowners and Project developers during construction of the Project. As the Project progresses into the design phase, the Project layout will be designed to preserve landfill capacity in Phases 1 through 4.

PDF LU-5. Public Outreach Program.

The Licensee will hold public meetings in the Project area to brief the public on Project activities and to hear and respond to comments. These meetings will be held quarterly in the Project area during engineering and construction and annually during Project operation for the life of the Project.

6.1.6 Greenhouse Gases

PDF GHG-1: SF₆ Monitoring.

All SF₆-containing circuit breakers that are installed under the Project shall be cataloged and monitored pursuant to California state law and the recommendations of the SF₆ Reduction Partnership for Electric Power Systems.

6.2 Draft Final EIR Mitigation Measures

6.2.1 Geology

MM GEO-1. Erosion Control Plan.

Erosion and sediment control measures for each area type, including proposed best management practices (BMPs), are listed in the Erosion Control Plan in Section 12.2. The Applicant shall limit impacts to soil erosion through implementation of an Erosion Control Plan limiting surface disturbance to only those areas necessary for construction as required by California Code of Regulations, title 23, section 122.26. Where natural topsoil occurs, it would be salvaged and stockpiled prior to construction, and the soil piles stabilized.

Following construction, all areas where natural topsoils were removed that are not occupied by permanent Project facilities would be re-graded, have the topsoils replaced, and be seeded with native vegetation to reduce erosion potential.

Erosion control measures will be maintained throughout the life of the Project.

At minimum, the Applicant shall use and implement the following BMPs for effective temporary and final soil stabilization during construction.

- Preserving existing vegetation where required and when feasible to prevent or minimize erosion.
- Once existing vegetation is cleared, construction will follow immediately behind to reduce unnecessary exposure of scarified soil to wind and water.

- Sloping roadways and excavations away from washes will prevent or minimize erosion into washes. Where haul roads cross surface washes, the ground will be cleared of loose soil and pre-existing sediments, as necessary.
- Installation of riprap at the washes to prevent or minimize erosion.
- Small earthen embankments will be built within washes in order to slow or divert surface water to reduce erosion.
- Silt fences will be installed when working around a wash to prevent sediment from entering washes during a rain storm and will be constructed as described in Attachment B of Section 12.2 (e.g., buried to a depth of at least 12 inches).
- The Applicant will be required to preserve and protect existing vegetation not required, or otherwise authorized, to be removed. Vegetation will be protected from damage or injury caused by construction operations, personnel, or equipment by the use of temporary fencing, protective barriers, or other similar methods.
- Water will be applied to disturbed soil areas of the Project site to control wind erosion and dust. Water applications will be monitored to prevent excessive runoff.
- Sediment controls, structural measures that are intended to complement and enhance the soil stabilization (erosion control) measures, will be implemented. Sediment controls are designed to intercept and filter out soil particles detached and transported by the force of water.

Prior to construction, a Stormwater Pollution Prevention Plan (SWPPP) will be prepared detailing BMPs that will be implemented at the site. The Applicant will comply with the General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities (Construction General Permit; Order No. 2009-0009-DWQ and amendments thereto; National Pollutant Discharge Elimination System No. CAS000002).

6.2.2 Surface Water

MM SW-1. On-site Studies of Acid Production Potential.

When access is granted to the Licensee for the purpose of collecting samples, the field and analytical program will be undertaken as described in the Phase 1 Geotechnical Program detailed in Section 12.1. This program will:

1. Obtain samples from each pit (upper and lower) across the stratigraphic section (porphyritic quartz monzonite, upper quartzite, middle quartzite, schistose meta arkose, vitreous quartzite, and the ore zones).
2. Perform analysis for total, pyrite and sulfate sulfur (ASTM Method 1915-97 [2000]) for total sulfur, and ASTM 1915-99 method E (2000) for sulfide sulfur.
3. Calculate acid production potential (APP) by the method of Sobek et al. (1978) and calculate acid production.

4. Determine the neutralization potential (NP) by the method of Sobek et al. (1978). Calculate the net neutralizing potential (NNP): $NNP = NP - APP$ expressed as kilogram calcium carbonate/ton.

In the event that APP is found, water treatment will be added to the treatment program, consisting of one or more of the following strategies:

- Use of limestone, hydrated lime, soda ash, or other similar neutralizing substances to increase pH of the water
- Increased seepage control to reduce seepage through the reservoir
- Construction of limestone drains or limestone ponds to treat water
- Modifications to the RO system to increase pH

Phase I Site investigations will be initiated after licensing and receipt of site access, at the initiation of the Project engineering design phase. Field work will be completed within 6 months of the start of field investigations, and results filed with the State Water Board and FERC 12 months after the start of field investigations.

Performance Standard: As a performance standard, the proposed Project must not cause or contribute to the degradation of background water quality of the aquifer, as required by the Region 7 Colorado River Water Quality Control Plan. Water quality in the reservoirs will be maintained at the existing quality of the source groundwater.

6.2.3 Groundwater

MM GW-1. Groundwater Level Monitoring.

A groundwater level monitoring network will be installed to confirm that Project pumping is maintained at levels that are in the range of historic pumping. The monitoring network will consist of both existing and new monitoring wells to assess changes in groundwater levels beneath the CRA, and the Pinto Basin, as well as in areas east of the Project water supply wells. Table 3.3-10 lists the proposed monitoring network and Figure 3.3-17 shows its proposed locations. In addition to the proposed monitoring wells, groundwater levels, water quality, and production will be recorded at the Project pumping wells. The Project will report the static water levels beneath each of the Project's production wells annually along with a reference either to the accounting surface as proposed by USGS in 2008 or to a valid accounting surface methodology set forth in future legislation, rule-making or applicable judicial determination. A "static water level" shall be when the well has been idle for an equal time that it has been pumping or the measurement taken after the longest period of Project non-pumping.

If monitoring indicates that groundwater is being draw down at greater levels and faster rates than expected (exceeding the "Maximum Allowable Changes" identified in Table 3.3-9), pumping rates for the initial fill will be reduced to a level that meets the levels specified in Table 3.3-9. The initial fill period would therefore be extended to a maximum of 4.5 to 6 years.

MM GW-2. Well Monitoring.

Wells on neighboring properties whose water production may be impaired by Project groundwater pumping will be monitored quarterly at a minimum during the initial fill pumping period and for 4 years following the initial fill. Monitoring will be semi-annual, at a minimum, for the remainder of the Project. If it is determined that Project pumping is lowering static water levels in those wells by 5 feet or more, the Project will replace or lower the pumps, deepen the existing well, construct a new well, and/or compensate the well owner for increased pumping costs to maintain water supply to those neighboring properties.

MM GW-3. Extensionmeters.

Two extensimeters shall be constructed to measure potential inelastic subsidence that could affect operation of the CRA; one in the upper Chuckwalla Valley near OW-3 and the other in the Orocochia Valley near OW-15. Figures 3.3-17 and 18 show the locations of the extensometers.

In the unlikely event that the data show inelastic subsidence is occurring due to Project groundwater pumping the Project will eliminate inelastic subsidence by:

- Redistributing pumping by constructing additional wells and modifying the pumping rates to reduce drawdown.
- Reducing pumping or by artificially increasing recharge in order to better match the net annual groundwater withdrawal to the net annual recharge.

If structures are impacted, they will be mitigated to pre-subsidence condition through engineered solutions that may consist of re-leveling, placement of compacted fill, soil-cement, pressure grouting, installation of piles and grade-beams, or steel-reinforcement. As necessary, portions or all of the impacted structure will be repaired or replaced in consultation with the Metropolitan Water District of Southern California (MWD).

MM GW-4. Lower Reservoir Seepage Recovery Wells.

Seepage from the Lower Reservoir will be extracted through seepage recovery wells. The proposed recovery well locations are shown on Figure 3.3-18. Seepage from the Lower Reservoir will be maintained to prevent a significant rise in water levels beneath the CRA or a rise in groundwater that could potentially impact the liner of the proposed landfill. Target water levels have been assigned to the monitoring wells as shown in Table 3.3-10. Aquifer tests will be performed during final engineering design to confirm the seepage recovery well pumping rates and aquifer characteristics. The tests will be performed by constructing one of the seepage recovery wells and pumping the well while observing the drawdown in at least two seepage recovery or monitoring wells. Upon completion of this testing, the model will be re-run and the optimal locations of the remainder of the seepage recovery wells will be determined to effectively capture water from the Lower Reservoir and maintain groundwater level changes at less than significant levels beneath the CRA and the liner of the proposed landfill. Groundwater monitoring will be performed on a quarterly basis for the first 4 years of Project pumping. This program may be modified to bi-annually or annually depending on the findings as approved by

the State Water Board and FERC. Annual reports will be prepared and distributed to interested parties.

If needed based upon monitoring results, and acceptable based upon water quality monitoring results, as an adaptive management measure Project pumping drawdown can be mitigated by allowing seepage from the reservoirs to occur without pump-back recovery. If seepage from the reservoirs is unimpeded, groundwater levels could rise beneath the CRA by up to 3 feet.

Performance Standard: Seepage from the Lower Reservoir will be maintained to prevent a significant rise in water levels beneath the CRA or a rise in groundwater that could potentially impact the liner of the proposed landfill. Target levels for protection of the landfill and the CRA have been assigned to the monitoring wells as shown in Table 3.3-10.

MM GW-5. Upper Reservoir Seepage Recovery Wells.

Seepage from the Upper Reservoir will be controlled through a separate set of seepage recovery wells, locations of which are shown on Figure 3.3-18. Seepage from the Upper Reservoir will be maintained at least five feet below the bottom elevation of the proposed landfill project liner. Target levels have been assigned to the monitoring wells as shown in Table 3.3-10. A testing program will also be employed for seepage recovery wells for the Upper Reservoir to assess the interconnectedness of the joints and fractures and the pumping extraction rate. Drawdown observations will be made in nearby observation wells to support final engineering design. Groundwater monitoring will be performed on a quarterly basis for the first four years of Project pumping. This program may be extended to bi-annually or annually depending on the findings. Annual reports will be prepared and distributed to interested parties.

Based upon testing for final design, or if indicated by groundwater level monitoring, additional seepage extraction wells may be constructed to meet target groundwater levels listed in Table 3.3-10. PDF GW-1 would also apply should water levels approach target levels listed in Table 3.3-10. Based upon testing for final design, or if indicated by groundwater level monitoring, additional seepage extraction wells may be constructed.

Performance Standard: Seepage from the Upper Reservoir will be maintained at least five feet below the bottom elevation of the liner of the proposed landfill so that the landfill will comply with title 27 CCR Section 20240, subdivision (c). Target levels have been assigned to the monitoring wells as shown in Table 3.3-10.

MM GW-6. Water Quality Sampling.

Water quality sampling will be done at the source wells, and within the reservoirs, and in monitoring wells up-gradient and down-gradient of the reservoirs and brine disposal lagoon consistent with applicable portions of California Code of Regulations Title 27. Figure 3.3-18 shows the proposed locations of these wells. The Licensee shall prepare and implement a site-specific monitoring and reporting plan for groundwater and surface waters which will specify the location and timing of water quality monitoring, and constituents to be monitored. Monitoring will be done on a quarterly basis for the first four years and may be reduced to biannually

thereafter based on initial results. Results of the sampling will be used to adjust water treatment volume, and to add or adjust treatment modules for TDS and other potential contaminants as needed to maintain groundwater quality under the direction of the State Water Board and FERC. Groundwater quality monitoring results will be made available to the MWD upon request.

Performance Standard: As a performance standard, the proposed Project: 1) must not cause or contribute to the degradation of background water quality; and 2) water quality in the reservoirs will be maintained at the existing quality of the source groundwater.

MM GW-7. Replacement Wells.

Existing wells within the central and eastern mining pits which are to be developed as Project reservoirs, will be replaced at locations outside of the reservoirs as shown on Figure 3.3-18. Table 3.3-10 lists those wells scheduled for replacement.

6.2.4 Biology

MM BIO-1. Mitigation and Monitoring Program.

Concurrent with final engineering design a comprehensive site-specific mitigation and monitoring program shall be verified and implemented in consultation with the Biological Technical Advisory Team. The Biological Technical Advisory Team shall be composed of the Licensee's Environmental Coordinator and consultants, and staff from the resource managing agencies (BLM, USFWS, and CDFW).

MM BIO-2. Biological Reporting to Resource Agencies.

As part of implementing protection measures, regular reports shall be submitted to the relevant resource agencies to document the Project activities, mitigation implemented and mitigation effectiveness, and provide recommendations as needed. Reporting shall include monthly reports during construction, annual comprehensive reports, and special-incident reports. The Project Biologist shall be responsible for reviewing and signing reports prior to submittal to the agencies.

MM BIO-3. Designation of an Approved Project Biologist.

An authorized Project Biologist, approved of by USFWS, the State Water Board, and CDFW, shall be responsible for implementing and overseeing the biological compliance program. This person shall be sufficiently qualified to ensure approval by the USFWS and CDFW for all biological protection measures that may be implemented by the Project. The USFWS describes a single designation for biologists who can be approved to handle tortoises as an "Authorized Biologist." Such biologists have demonstrated to the USFWS that they possess sufficient desert tortoise knowledge and experience to handle and move tortoises appropriately. Authorized Biologists are permitted to then approve specific monitors to handle tortoises, at their discretion.

CDFW must also approve such biologists, potentially including individual approvals for monitors approved by the Authorized Biologist.

MM BIO-4. Worker Environmental Awareness Program.

A Worker Environmental Awareness Program (WEAP) (*see* Section 12.14) shall be implemented to ensure that Project construction and operation occur within a framework of safeguarding environmentally sensitive resources. Although facility construction has the greatest potential to harm environmental resources, the WEAP shall be designed to address those environmental issues that pertain to Project operations, such as general conduct, repairs and maintenance. All project workers will be required to attend the program.

The WEAP shall include information on biological resources that may occur on the site, with emphasis on listed and special-status species. Education shall include, but not be limited to, ecology, natural history, endangerment factors, legal protection, site mitigation measures, and hierarchy of command. Site rules of conduct shall be identified, including but not limited to: speed limits, work areas that must be accompanied by a biological monitor, parking areas, looking under parked vehicles prior to moving them, trash deposition, off-site conduct in the area of the Project, and other employee response protocols. Teamwork will be emphasized, but it will be clear that willful non-compliance may result in sufficiently severe penalties to the contractor that the contractor may dismiss the offending employee.

The educational format will be a video, shown initially by the Project Biologist and ultimately by a limited staff of trained and approved personnel. The Project Biologist also may be videotaped giving the first program, for assistance to further instructors.

All workers completing the education program shall be given a wallet card with site “rules” and contact cell phone numbers, and a sticker to affix to their hard hat. Each shall sign a sheet attesting to completing the training program.

6.2.5 Plants

MM BIO-5. Minimize Surface Disturbance.

During construction in native habitats, all surface disturbance shall be restricted to the smallest area necessary to complete the construction. New spur roads and improvements to existing access roads shall be designed to preserve existing desert wash topography and flow patterns.

MM BIO-6. California Desert Native Plants Act.

In compliance with the California Desert Native Plants Act (CDNPA), the County Agricultural Commissioner shall be consulted for direction regarding disposal of plants protected by the CDNPA. This may include salvage for subsequent revegetation of temporarily disturbed areas on-site, salvage by an approved nursery, landscaper or other group, or landfill disposal.

MM BIO-7. Revegetation Plan.

A revegetation plan (*see* Section 12.14) shall be implemented for areas that are temporarily disturbed during construction. In order to accommodate the specific features of the desert that make revegetation difficult – namely lack of predictable rainfall, lack of an “A” soil horizon, and the difficulty of re-establishing a soil community of micro-organisms – a detailed and realistic vegetation program shall address the following:

- Quantitative identification of the baseline community, both annual, herbaceous perennial and woody perennial species
- Soil salvage and replacement on areas to be revegetated
- Final site preparation and grading to include features that enhance germination and growth of native species. This includes surface pitting for the accumulation of sediments, water and seed and the construction of small swales for such species as California ditaxis and desert unicorn plant, which are commonly found in road swales and shoulders. All disturbed washes shall be recontoured to eliminate erosion and encourage the reestablishment of the drainage to its pre-construction condition.
- Vertical mulching and other techniques to promote a hospitable environment for germination and growth
- Seeding and/or planting of seedlings of colonizing species
- Development of a soil micro-community by inoculation of mycorrhizal fungi and planting species that develop a mycorrhizal net
- Weed control
- Initial irrigation, if necessary
- A realistic schedule of regrowth of native species, and remedial measures, if needed
- Monitoring and reporting

MM BIO-8. Invasive Species Monitoring and Control.

To minimize the spread of invasive non-native vegetation a weed control program shall be implemented during construction. This program (*see* Section 12.14) includes:

- Baseline surveys for weed species that are present and/or are most likely to invade the Project site and surrounding area
- Methods quantifying weed invasion
- Methods for minimizing weed introduction and/or spread
- Triggers which prompt weed control
- Methods and a schedule for weed control and eradication
- Success standards

Pesticides will be used in accordance with label directions.

6.2.6 Wildlife

MM BIO-9. Couch's Spadefoot.

The NECO Plan requirements shall be implemented to avoid disturbance of impoundments and restriction of surface flow to impoundments. Surveys on the Central Project Area shall elucidate the presence of any artificial impoundments that could subsidize Couch's spadefoot reproduction. Should those exist then surveys shall be conducted at the appropriate time to determine if larvae are present. If present, the impoundment will be avoided, if possible. If avoidance is not possible, then a new impoundment will be constructed as close as is feasible, to replicate and replace each lost impoundment. All larvae shall be removed to the new impoundment.

During construction on all Project facilities, should ephemeral pools develop in response to intense rainfall showers from early spring through fall these shall be examined for larvae of Couch's spadefoot. If larvae are present, the pools shall be flagged and avoided by construction activities. Where pools cannot be avoided, new pools shall be constructed and larvae transplanted.

MM BIO-10. Breeding Bird Surveys and Avoidance.

For all construction activities in vegetated habitat that are scheduled to occur between approximately February 15 and July 30, surveys shall be completed in all potential nesting sites for active bird nests. Unless otherwise directed by the CDFW, if an active bird nest is located, the nest site shall be flagged or staked a minimum of 5 yards in all directions. This flagged zone shall not be disturbed until the nest becomes inactive. Alternatively, grading and site preparation may occur prior to February 15 to preclude interference with nesting birds.

MM BIO-11. Brine Ponds Management.

Brine ponds shall be managed to minimize their attractiveness and access to migratory birds. This consists of making resources provided by the ponds less available to birds through their design (steep slopes to discourage wading birds, etc.) and netting the ponds to prevent access by birds (Figure 3.5-19).

MM BIO-12. Burrowing Owls Phase III Survey.

Based on the results of the 2009 surveys, a Phase III survey shall be completed to further assess bird use of the Project area and potential impacts (CBOC, 1993). This includes a nesting season survey, followed by a winter survey if no burrows or owls are observed during the nesting season. Each of these surveys shall span several visits and days.

A pre-construction survey shall be conducted within 30 days of the start of Project construction to assess species presence and the need for avoidance. In consultation with the CDFW, the pre-construction survey may obviate the need for the Phase III survey (see MM BIO-13).

MM BIO-13. Burrowing Owl Breeding Season.

The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan limits the construction period to September 1 through February 1 if burrowing owls are present, to avoid disruption of breeding activities. Following CDFW (1995) guidance, mitigation measures for resident owls will be implemented:

- Disruption of burrowing owl nesting activities shall be avoided during construction
- Active nests shall be avoided by a minimum of a 250-foot buffer until fledging has occurred (February 1 through August 31)
- Following fledging, owls may be passively relocated

MM BIO-14. Raptor Buffer.

The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan identifies ¼-mile as an important buffer distance for prairie falcon or golden eagle aerie. No aeries or nests have been observed within a ¼-mile, but pre-construction surveys on the Central Project Area will confirm if any raptor aeries are within ¼-mile of construction. If so, a ¼-mile construction buffer will be required during the nesting seasons.

MM BIO-15. Bat Survey.

The following applicable measures are required by the Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan:

- Survey for bat roosts within 1 mile of a project, or within 5 miles of any permanent stream or riparian habitat on a project site.
- Projects authorized within 1 mile of a significant bat roost site would have applicable mitigation measures, including, but not restricted to seasonal restrictions, light abatement, bat exclusion, and gating of alternative sites. Any exclusion must be performed at a non-critical time, by an authorized bat biologist.

Pre-construction bat surveys shall be completed by a qualified bat biologist to determine the existence, location and condition of bat roosts on the site. Because foraging areas used by resident bats may be critical to the functioning of those colonies, foraging habitat within the Project lands will be identified. If needed based on the results of these surveys, actions will be taken to avoid roosting and foraging impacts to resident bats, minimize that disturbance or, as an inescapable measure, evict bats. These actions shall include (as relevant):

- Designation of avoidance areas and associated measures
- Eviction of bats outside of the maternity season

- A monitoring program to determine impacts from the Project
- Extending the monitoring program for the brine ponds to include bats, as deemed necessary

MM BIO-16. Wildlife Fencing.

The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan recommends fencing potential hazards to bighorn sheep. A security fence shall be constructed around portions of the Central Project Area to *exclude larger terrestrial wildlife* – bighorn sheep, deer, coyotes, foxes, badgers – from entering Project areas that could pose a hazard to these species (Figure 3.6-4). Such areas shall include the transmission switchyard and other structures that may be dangerous to wildlife. Where exclusion fencing is required, security gates will remain closed except during specific vehicle entry and may be electronically activated to open and close immediately after vehicle(s) have entered or exited.

Permanent security fences will be installed around the Upper and Lower reservoirs, switchyard and brine ponds, for security, safety and general liability purposes, and will prevent wildlife access. These fences will also be equipped with tortoise exclusion fencing. In addition, temporary tortoise exclusion fences will be installed around work zones during construction, and will be sufficiently low (3 feet) to permit passage by sheep.

These temporary fences will be removed at the end of construction. Figure 3.6-4 shows the concept for the temporary construction fencing. If additional fencing is needed during construction to protect tortoises, this fencing will be installed and maintained during the construction period.

All required exclusion fencing shall be maintained for the life of the Project. All fences will be inspected monthly and during/following all major rainfall events. Any damage to the fencing shall be temporarily repaired immediately, followed by permanent repair within 1 week.

MM BIO-17. Construction and Operation Restricted Areas.

Construction and maintenance activities shall be restricted to minimize biological Project impacts. These restrictions shall include vehicle speed limits on both paved and dirt roads; avoidance areas, work areas in which workers must be accompanied by a biological monitor, specified parking areas, trash deposition, repair, and refueling areas; looking under parked vehicles prior to movement; and the appropriate response upon finding a special-status species. For construction, this will include the entire construction period. For operations, this will apply to scheduled and unscheduled maintenance activities.

MM BIO-18. Construction during Daylight Hours.

The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan requires that, in areas without wildlife exclusion fencing or those areas that have not been cleared of tortoises, construction activities will only take place during daylight hours. This permits avoidance of

construction-related mortalities of fossorial, diurnal species such as the desert tortoise, or nocturnally active species, such as the desert rosy boa.

MM BIO-19. Construction of Pipeline Trenches.

The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan identifies that pipeline trenches must be closed, covered, and/or inspected. Pipeline trenches shall be closed, temporarily fenced, or covered each day. Each day, any open trenches shall be inspected by an approved biological monitor at first light, midday, and at the end of each day to ensure animal safety. Ramps shall be provided to encourage animals to escape on their own. The biological monitor shall be confirmed by the Approved Project Biologist.

MM BIO-20. Minimize Nighttime Lighting Impacts.

Facility lighting will be designed, installed, and maintained to prevent casting of nighttime light into adjacent native habitat. *See also* MM AES-1.

MM BIO-21. Dry Desert Washes.

There are many small washes crossed by the pipeline and transmission line that are regulated by the CDFW. A Streambed Alteration Agreement (Section 1602 of the Fish and Game Code) shall be obtained, which will identify the condition and location of all state jurisdictional waters, impacts, and mitigation measures. Mitigation includes the acreage assessment of washes that may be affected, construction requirements associated with working on or near the washes, and compensation for lost or damaged acreage. It is anticipated that this compensation will be included in the habitat compensation for special-status species (MM BIO-22 and MM TE-6).

MM BIO-22. Habitat Compensation.

CDFW standard off-site compensation for loss of occupied burrowing owl habitat consists of a minimum of 6.5 acres of lands, approved by CDFW and protected in perpetuity, for each pair of owls or unpaired resident bird. In addition, existing unsuitable burrows on the protected lands should be enhanced (i.e., cleared of debris or enlarged) or new burrows installed at a ratio of 2:1. Habitat compensation for burrowing owls, if needed, will be subsumed by compensation for lost desert tortoise habitat, which also constitutes burrowing owl habitat.

The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan requires compensation for disturbance of Desert Dry Wash Woodland in WHMAs [Wildlife Habitat Management Area] at the rate of 3:1. The Project does not disturb any Desert Dry Woodland inside a WHMA. However, the compensation for desert tortoise habitat that is lost to the Project will compensate for the loss of Desert Dry Wash Woodland expected to be lost or disturbed during construction activities.

6.2.7 Terrestrial

MM TE-1. Desert Tortoise Pre-construction Surveys and Clearance Surveys.

Desert tortoises shall be removed from construction areas by the Project Biologist. Such tortoises shall be processed (cataloged, photographed, and numbered) prior to placement outside the construction zones but on public or private land, or the Project ROW [right of way] (*see* Appendix 12.14 Desert Tortoise Removal and Translocation Plan). On the linear facilities, this is achieved by first surveying for all desert tortoises that might be within construction zones or are likely to enter construction zones, immediately prior to the start of construction. (These surveys can be simultaneous with those for badger and kit fox.). Active burrows will be identified, measured, and the entrance “gated” (a 3-inch twig inserted into the floor of the runway) for monitoring tortoise use. The locations of all desert tortoises will be mapped so that those locations can be monitored for tortoise use during construction.

On the Central Project Area, there is little likelihood of desert tortoises except along the southern and eastern edges because of the altered landscape and massive and abundant tailings piles. Surveys first will be conducted in the Central Project Area to determine the presence of desert tortoise. If there is any suggestion of tortoise presence, either due to the presence of tortoise habitat and/or tortoise sign, a clearance survey (*see* Appendix 12.14 Desert Tortoise Removal and Translocation Plan) will be completed in those areas after tortoise-proof fencing is installed (*see* MM TE-3: Desert Tortoise Exclusion Fencing). A minimum of two clearance passes will be completed. Surveys will coincide with heightened tortoise activity, from mid-March to mid-April and during October. This will maximize the probability of finding all tortoises. Any tortoises found will be removed per mitigation MM TE-4: Revised Desert Tortoise Clearance and Relocation/Translocation Plan.

Surveys and clearance on the substation will proceed identically to that on the Central Project Area, with the exception that a pre-construction survey prior to clearance surveys is not necessary.

MM TE-2. Desert Tortoise Construction Monitoring.

No construction in unfenced areas (*see* MM TE-3: Desert Tortoise Exclusion Fencing) on the linear facilities will occur without biological monitors. This includes both construction monitoring and maintenance activities that require surface disturbance. An adequate number of trained and experienced monitors must be present during all construction activities, depending on the various construction tasks, locations, and season. The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan suggests that construction activities occur when tortoises are inactive—November 1 to March 15—where possible. However, adequate monitoring will mitigate concerns about take due to heightened activity levels the remainder of the year.

All desert tortoises will be removed from harm’s way by a biologist approved by the Project Biologist (MM BIO-2). The Project Biologist must be sufficiently qualified to ensure approval by USFWS and CDFW for all tortoise protection measures that may be implemented by the Project. USFWS describes a single designation for biologists who can be approved to handle tortoises, “Authorized Biologist.” Such biologists have demonstrated to USFWS that they possess sufficient desert tortoise knowledge and experience to handle and move tortoises

appropriately. Authorized Biologists are permitted to then approve specific monitors to handle tortoises, at their discretion. The CDFW must also approve such biologists, potentially including individual approvals for monitors approved by the Authorized Biologist.

Active burrows and special-resource burrows will be avoided, where possible. Where avoidance of any burrow is infeasible, occupancy will first be determined through the use of fiberoptics, probes or mirrors. All burrows that could potentially host a tortoise will be excavated with hand tools in the method prescribed by the Desert Tortoise Council (1994, rev. 1999), *Guidelines for handling desert tortoises during construction projects*. Any tortoises found will be removed from the construction area per MM TE-4: Revised Desert Tortoise Clearance and Relocation/Translocation Plan.

Pipeline trenches will be closed, temporarily fenced, or covered each day. Each day, any open trenches will be inspected by an approved biological monitor at first light, midday, and at the end of each day to ensure tortoise safety.

If necessary, temporary fencing will be installed in the active work area to separate a tortoise from active construction, in order to maximize protection.

If a tortoise is injured or killed, surface disturbing activities must cease in the area of the killed or injured tortoise and the Project Biologist contacted. Injured tortoises will be taken to a qualified veterinarian if their survival is expected. USFWS will determine if the tortoise can be returned to the wild, should it recover.

As a mitigation performance standard, following site clearance, a report will be prepared by the Project Biologist to document the clearance surveys, construction monitoring, the capture and release locations of all tortoises found, individual tortoise data, and other relevant data. This report will be submitted to the CDFW and USFWS.

MM TE-3. Desert Tortoise Exclusion Fencing.

The substation will be enclosed with a permanent tortoise exclusion fence to keep adjacent tortoises from entering the site. The fencing type will be 1- by 2-inch vertical mesh galvanized fence material, extending at least 2 feet above the ground and buried at least 1 foot. Where burial is impossible, the mesh will be bent at a right angle toward the outside of the fence and covered with dirt, rocks, or gravel to prevent the tortoise from digging under the fence. Tortoise-proof gates will be established at all site entry points. All fence construction will be monitored by qualified biologists to ensure that no tortoises are harmed. Following installation, the fencing will be inspected monthly and during all major rainfall events. Any damage to the fencing will be repaired immediately. Parking and storage will occur within the substation and disturbed, previously fenced areas.

Any areas on the Central Project Area that are determined through surveys to require fencing will be fenced as outlined above (Figure 3.6-4). Where a fence is discontinuous (between tailings

piles for example), the fence ends will extend well up the slope of the piles, to ensure that tortoises cannot go around the end. Alternative methods may be explored to ensure that the fences are functional at excluding tortoises.

MM TE-4. Revised Desert Tortoise Clearance and Relocation/Translocation Plan.

The plan is found in its entirety within Section 12.14. For both the Central Project Area and the linear facilities, it is anticipated that any tortoises removed would not be “translocated” or “relocated” in the biological sense of putting an animal in a location outside its home range. Instead, any tortoise would simply be removed to another part of its home range. Because construction on the Central Project Area will occur on highly disturbed previously mined areas, any tortoise found there during clearance would likely be a transient or in a peripheral part of its home range, certainly outside its core use areas or parts of its home range that could support its survival. By moving such a tortoise to a location immediately adjacent to its capture site outside the fenced construction area, the Project would be maintaining the tortoise within its home range, not translocating it. The tortoise merely would be excluded from undesirable areas. For utility corridors and fence construction, tortoises would be removed a short distance from the construction zone. Hence, this plan will describe tortoise removal, not translocation. Tasks will include the following:

- Tortoise handling and temperature requirements
- Data gathered on removed tortoises
- Translocation site preparation (if any) and choice
- Monitoring – all tortoises removed will be monitored sufficiently to ensure its safety

MM TE-5. Predator Monitoring and Control Program.

The Predator Monitoring and Control Program is found in its entirety within Section 12.14. Proposed projects on federal lands that may result in increased desert tortoise predator populations must incorporate mitigation to reduce or eliminate the opportunity for raven proliferation. One of the most significant desert tortoise predators are ravens. The USFWS has developed a program to monitor and manage raven populations in the California desert in an effort to enhance desert tortoise recovery. In order to integrate monitoring and management, the USFWS has agreed to an “in-lieu” fee to replace quantitative raven monitoring on new projects in the range of the desert tortoise. The Licensee will pay in-lieu fees to USFWS that will be directed toward a future quantitative regional monitoring program aimed at understanding the relationship between ongoing development in the desert region, raven population growth and expansion and raven impacts on desert tortoise populations. The vehicle for this program is a Memorandum of Understanding between the Licensee, CDFW, and USFWS.

The Predator Monitoring and Control Program may include this in-lieu fee if it is determined that the raven population may increase over current levels due to the Project.

In addition to this in-lieu fee, the program will include, at a minimum:

- A suite of construction and operations measures to reduce food scavenging and drinking by ravens (e.g., trash containment, minimization of pooling water on roadways and construction right-of-ways)
- Roadkill removal
- Qualitative monitoring of raven use of the Project site during operations, conducted on a pre-determined schedule by the on-site Project environmental compliance officer
- Breeding season nest surveys
- Baseline and post-construction surveys for other desert tortoise predators, including coyotes, wild dogs, and gulls
- Mitigation measures to be implemented if the number of predators increases
- A schedule for post-construction surveys during the second year of Project operation, followed by surveys once every 5 years
- The Licensee will continue to work collaboratively with the resource management agencies to conduct adaptive management as needed to control ravens and other predators in the Project area

MM TE-6. Habitat Compensation.

The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan states that all lands within a DWMA will be designated as Category I Desert Tortoise Habitat,¹ with required compensation of 5 acres for every acre disturbed. All lands outside a DWMA are considered Category III habitat, with a 1:1 compensation ratio.

The Project overlaps 19 acres of Category I Habitat and 65 acres of Category III Habitat. A minimum total compensation, then, would be 160 acres (Figure 3.6-3).

This land would need to be purchased in the same population of desert tortoises as occupy the site. In addition, the following features should apply to compensation lands:

- Be part of a larger block of lands that are currently protected or able to be protected
- Are not subject to intensive habitat degradation (e.g., recreational use, grazing use, agriculture)
- Have inherently moderate to good habitat that will naturally and ultimately regenerate when current disturbances are removed
- Preferably are bordered by native habitat suitable for tortoises, and/or

¹ BLM habitat categories (BLM, 1988), ranging in decreasing importance from Category I to Category III, were designed as management tools to ensure future protection and management of desert tortoise habitat and its populations. These designations were based on tortoise density, estimated local tortoise population trends, habitat quality, and other land-use conflicts. Category I habitat areas are considered essential to the maintenance of large, viable populations.

- In part, may represent a buffer for a block of good habitat

MM TE-7. Operations and Maintenance.

Tortoises observed during routine maintenance activities will be allowed to voluntarily move out of harm's way. Transmission line repair activities that will result in surface disturbance will require biological monitoring, per MM TE-2.

6.2.8 Aesthetics

MM AES-1. Lighting.

To minimize lighting effects and potential light pollution outside of the proposed Project boundaries, the final engineering design shall incorporate directional lighting, light hoods, low pressure sodium bulbs or light emitting diode (LED) lighting, and operational devices to allow surface night-lighting in the central site to be turned on as-needed for safety to minimize lights that would be directly visible from the National Park. Lighting systems will be designed to use the warmest light practicable for the application. The Licensee shall fund night sky monitoring to be conducted in collaboration with the National Park Service (NPS) during the post-licensing design period (to represent baseline conditions) and during construction and the initial operational period. In addition, the NPS will be consulted during the Project design phase to ensure that feasible measures to minimize light trespass are incorporated into final design.

MM AES-2. Water Pipeline.

For construction of the water pipeline, reduce side cast disposal of soils from open cut construction (by replacing disturbed soil within the trench and limiting the width of the construction disturbance) to reduce color contrast and disturbance with surrounding landscape. The area disturbed during pipeline construction shall be backfilled and revegetated with native vegetation immediately following completion of pipeline construction.

MM AES-3. Road Crossings.

For design of the transmission line, road crossings shall be aligned perpendicular to the road to minimize views up and down ROW corridors, and towers should be placed at the maximum distance from the road ROW. Steel lattice structures with a dull, galvanized steel finish shall be utilized to reduce visual contrast. Conductors shall be selected to reduce glare and visual contrast. The corridor should be collocated with the existing MWD transmission corridor, and tower spacing at Victory Pass designed so that as few towers as possible are skylighted on the ridgeline. These considerations will be balanced with engineering constraints and concerns for minimizing impacts to other resources such a desert tortoise and cultural resources. Final design will be approved by the FERC.

MM AES-4. Transmission Line.

For construction of the transmission line, existing access roads and construction laydown areas shall be used to the extent feasible. The transmission line disturbed zones that will not be

required for long-term maintenance access will be revegetated with native vegetation immediately following completion of transmission line construction, consistent with the recommendations in the Biological Resources Revegetation Plan (*see* Section 12.14).

6.2.9 Cultural Resources

MM CR-1. Protect Known Historic Properties.

Of the cultural resources recorded within the Project boundaries (*see* Table 3.8-4), only the CRA (P-33-6726) is evaluated as potentially eligible for listing under Criterion “A” – broad patterns of history; and Criterion “C” – embodies distinctive characteristics of a type, period, region, or method of construction. No formal determination of eligibility has been made, but the CRA will be treated as potentially eligible.

Management Activity: Design transmission line and water pipes to avoid direct or indirect impacts to the buried portion of the CRA. Inspect once every 2 years to observe if conditions are stable or if any disturbance or deterioration has occurred.

The Licensee will design transmission tower locations, plan conductor installation procedures, and design water line placements to avoid impacts to this crucial element of southern California’s water delivery infrastructure. Consultation with the MWD will occur for that purpose. The CRA is buried in the areas of the Project Area of Potential Effect (APE) and no impacts to its integrity are anticipated.

- The inspections will be made at ground surface level as appropriate
- Digital photographs will be taken and compared with photographs from the previous inspections
- The Licensee (Project Environmental Coordinator or designee) will summarize observations made during inspections every 2 years during construction. This summary will be included in the HPMP Implementation Summary Report (HPMP Implementation Report). The Licensee will provide a HPMP Implementation Report on a 6-year review cycle after construction, in coordination with the State Historic Preservation Office (SHPO).
- Although none are presently identified, in the event that interested Indian Tribes identify TCPs in the future during the planning, construction, and/or operation of the Project within the APE, the Project Environmental Coordinator shall direct qualified individuals to conduct additional consultation with the Indian Tribes, BLM, and SHPO to evaluate and document the properties in accordance with National Register Bulletin 38 (Parker and King, 1998). If the properties are determined to be eligible for listing in the NRHP, appropriate measures will be taken to mitigate adverse effects through consultation with the Indian Tribes, BLM, and SHPO. Priority will be given to preservation in place when possible.

Implementation Steps for Performance :

- Inspect the CRA in the area of the APE every 2 years
- Provide a summary of observations on a 2-year cycle during the construction phase and a 6-year reporting cycle thereafter
- If notable changes are observed in site conditions consult with SHPO to determine if further remedial actions are appropriate
- Conduct appropriate consultation and treatment if TCP are identified in the future

MM CR-2. Inventory and Evaluate Cultural Resources Within the Kaiser Mine Property.

An inventory of this portion of the APE will be undertaken in compliance with Section 106 of the National Historic Preservation Act and according to regulatory procedures provide in 36 CFR 800. The inventory will also include other accessible portions of the APE within the Kaiser property. The entire townsite and associated portions of the railroad will be re-recorded, and the various elements will be considered as contributors to a National Register district.

Management Activity: A Work Plan will be developed and executed following issuance of the FERC license and upon gaining legal access to the subject lands. A phased approach will be taken in order to make prudent and well-informed decisions on Section 106 compliance within the Kaiser property. The first phase will be a scoping reconnaissance of the APE within the Kaiser property and the entirety of the Eagle Mountain townsite. Portions of the site have been re-used from 1988 until 2003 for a prison. A high school and residential community has occupied portions of the site until recent years. Today it exists as a mix of abandoned and re-occupied post-war minimal traditional style dwellings, Kaiser operations buildings, modern buildings, ruins, and foundations. Questions concerning what remains of the original townsite plan and integrity of the Eagle Mountain townsite will be assessed to determine whether a district is feasible or warranted and what the scope of a survey should include. This information will be applied to the development of a Work Plan for the recording and evaluation of the site.

- The Work Plan will include a draft historic context and historical information about the footprint and content of the original townsite and its development over time. The context will include a consideration of the Eagle Mountain as a late example of a company town in the American West. This information will be used to develop an approach to the documentation of the site and consideration of whether a potential district may exist. The draft Work Plan will be submitted to SHPO, BLM, and FERC for review, comment, and approval of the survey approach.
- Updates to DPR 523 forms will be developed for the townsite, mine, and railroad and will be used as the basis for formal evaluations of the townsite, mine, and railroad for listing in the NRHP will be made according to 36 CFR 800 and 36 CFR 60.4. Individual buildings or structures will be documented on DPR 523b forms. A District Record (DPR 523d) will be completed, if appropriate. Any other resources discovered during survey also will be documented and evaluated. The results will be provided in California Archaeological Resource Management Report format and to the Secretary of the Interior's standards for archaeological reporting.

Implementation Steps for Performance:

- SHPO, BLM, and FERC concurrence will be obtained for the determination of NRHP-eligibility of the Eagle Mountain townsite, mine, railroad, and any other documented cultural resources within the Project APE, including consideration for the potential of

any resources as contributing elements to a historic district, if evidence exists for one to be present.

- If any resources are determined to be historic properties, recommendations will be developed to avoid or mitigate impacts through appropriate treatments in accordance with the Secretary of the Interior's standards. These include in order of preference: project design to avoid direct impacts; moving of standing buildings or structures in the APE to other areas of the townsite or mine so that integrity of setting, feeling, and materials can be retained; or data recovery and documentation.

MM CR-3. Implement the Historic Properties Management Plan and a Worker Environmental Awareness Program.

Pursuant to CEQA Guidelines §15126.4(b)(3)(A-D) preservation in place is the preferred manner in which to mitigate impacts to archeological sites. Preservation in place maintains the relationship between the artifacts and context, and seeks to avoid conflict values of groups associated with the site. The Historic Properties Management Plan and a Worker Environmental Awareness Program have been prepared to address procedures and treatment for data recovery and will be adopted prior to site excavation.

Management Activity: Implement project-specific education program.

- A qualified archaeologist will implement a cultural resources element for the Worker Environmental Awareness Program that is tailored to the Eagle Mountain Pumped Storage Project and workforce. This Program will focus on possible discovery and mitigation procedures during the construction phase of the Project as well as preservation obligations of Project staff.
- The program will include a printed handout for all Project personnel and a PowerPoint presentation or video that all Project personnel will be required to view.
- The program will present concepts of cultural resources management in a simple, understandable format, including a review of preservation laws and sanctions, examples of possible discoveries, and notification procedures in the event of discoveries. These are key elements of the HPMP including the Unanticipated Discoveries Plan and the steps to follow in evaluating potential cultural resources needs that are triggered by proposed construction activities.
- The program will include a Monitoring Protocol and Provisions for Enforcement that may be presented to refresh personnel and introduce new staff to cultural resource concepts and Project-specific issues.
- Project equipment and vehicle operators will be educated on the importance of staying within Project boundaries and also the prohibitions of going off designated routes of travel such as Eagle Mountain Road or Kaiser Road.

MM CR-4. Offer Opportunities for Public Interpretation.

Unlike other hydroelectric projects where public access and recreational opportunities may be afforded, safety concerns and proximity to a proposed landfill project preclude offering public access within the core of the Project boundaries. Opportunities for public interpretation are therefore extremely limited. Some appropriate signage that interprets the history of the area already exists, including the 2009 E Clampus Vitus monument on Eagle Mountain Road for the 36th Evacuation Hospital associated with the World War II DTC and a Riverside County historical marker that acknowledges the Iron Chief, Eagle Mountain, and other mines of the area. The Desert Training Center, California/Arizona Maneuver Area (DTC/CAMA) is also thoroughly and professionally interpreted at the General Patton Memorial Museum in Chiriaco Summit, located off of I-10 between Indio and Desert Center. The prehistory and Native American cultural traditions of the region are interpreted at the Agua Caliente Cultural Museum in Palm Springs, the Malki Museum on the Morongo Indian Reservation, the Palm Spring Desert Museum, the Coachella Valley Museum and Cultural Center, and at Joshua Tree National Park.

Management Activity: Develop informative signage that will be available to the public.

The Licensee will develop and install one weather-tolerant sign that will be placed outside the main gate of the facility. The sign will provide information about the prehistory and history of the general area, Native American groups who inhabited the area, and background on the functioning of the Project. Local museums and historical monuments will also be identified.

A public interpretive sign will be developed in coordination with the development of the HPMP and will be installed within one year of completion of the boundary fence.

MM CR-5. Review Effectiveness of the HPMP.

Management Activity: Every 6 years, the Licensee will determine if modifications will improve the effectiveness of the HPMP.

Develop recommendations for changes to the HPMP that may be discussed with SHPO, the BLM, Riverside County, interested Indian Tribes, FERC, and other consulting parties.

MM CR-6. Consult with SHPO, the BLM, Riverside County, interested Indian Tribes, and FERC.

Management Activity: Develop a HPMP Implementation Report. The HPMP Implementation Report will be distributed for review according to a 2-year cycle during the construction phase of the Project because cultural resource discoveries and treatments are most likely during that period. Thereafter, in the operation and maintenance phase, the HPMP Implementation Reports will be coordinated with the 6-year cycle of the Licensed Hydropower Recreation Development Report (FERC Form 80). The report will summarize, in table format, all Licensee cultural resources consultations and/or surveys performed for Project modifications, activities related to the Erosion Control Plan, or any other activities that have been reviewed due to their potential to

result in soil disturbance in areas not previously disturbed. The HPMP Implementation Report will:

- Describe the proposed modifications, the type of cultural survey or other activity performed, the results of the survey or other activity, and actions taken (e.g., SHPO consultation and/or other consultation, mitigation, no action determined appropriate, etc.)
- Summarize observations made of historic properties
- Include summaries of cultural resource treatments as an update to a HPMP implementation summary table
- Report the status of Licensee's public interpretation projects
- Recommend modifications to the Project HPMP that will improve its implementation if appropriate

Implementation Steps for Performance: Develop a format for the HPMP Implementation Report and its associated Summary Table that will present the cultural resources activities and considerations in which the Licensee participated over a 2-year reporting cycle during construction and the 6-year reporting cycle thereafter. The HPMP Implementation Report will be provided to the SHPO, BLM, Riverside County, and interested Indian Tribes for a 30-day review and comment period every 6 years in coordination with FERC Form 80. Following a consideration of review comments, the Licensee will file the HPMP Implementation Report with the FERC.

MM CR-7. Class I Investigation.

In the event that Project activities would extend beyond the areas previously surveyed, then background literature will be reviewed to identify the location, character, and significance of known cultural resources in the area of a proposed action and the potential of the proposed action to affect historic properties. The Class I Investigation will rely on information contained within the Licensee's Project archives. Should these data not prove sufficient, the Project Environmental Coordinator may determine that additional documentation is necessary to address a particular action under consideration that extends beyond the 1-mile buffer of the already completed Class I Investigation. The most important source of Class I literature review is the Eastern Information Center California (EIC) at the University of California, Riverside.

Management Activity: compare proposed Project location with Cultural Resources Management Maps.

- Determine if the Project area is located within 100 feet of a potentially significant previously recorded archeological site
- Determine if Project area has been characterized as actively eroding or previously disturbed by other ground-disturbing activity (e.g., by machine excavation or underground utility line)
- Determine if the area has been previously surveyed for cultural resources

Implementation Steps for Performance: Based on the results of the above-noted Management Activity.

- Project area is located within 100 feet of a previously recorded potentially significant archeological site. Delay Project pending SHPO consultation and possible follow-up studies by a Secretary of the Interior-qualified professional archaeologist.
- Previous ground-disturbing activity may be documented or observed therefore no Project effect on cultural resources expected. Project may proceed. The Licensee shall include the Project description and permit considerations in the Historic Properties Management Plan (HPMP) Implementation Report that will be distributed to the SHPO, the BLM, Riverside County, interested Indian Tribes and FERC on a 2-year cycle during the construction phase and on a 6-year review cycle thereafter in coordination with Form 80.

MM CR-8. Class III Cultural Resources Field Investigation.

Any modifications or additions to the APE in previously unsurveyed and undisturbed areas will require a Class III survey in compliance with Section 106 of the National Historic Preservation Act and according to 36 CFR 800. The Licensee will conduct an on-the-ground inventory of the APE for a proposed action that confirms the presence of known cultural resources and that may result in identification of previously unrecorded cultural resources. A Class III investigation may involve the excavation of shovel tests placed at 50-foot intervals within the APE or implementation of an alternative investigative strategy approved by the Licensee's Project Environmental Coordinator and the SHPO. Any investigations on easements through BLM land require a Fieldwork Authorization to a BLM permit-holding archaeologist in compliance with the Federal Land Policy and Management Act of 1976, as amended (PL 94-579).

Management Activity: Consult with BLM or other land holding agencies as to what Section 106 or Section 110 compliance needs may still be required and implement as specified. Engage services of a qualified archaeologist to brief the Project Environmental Coordinator on correct scoping and protocols and conduct Class III survey such as a walkover survey and/or systematic subsurface shovel testing (e.g., perform an identification level archeological field survey.) The actual scope of work will depend upon the proposed Project location and size of the proposed activity as well as BLM requirements on BLM land. The archaeologist will perform the Class III survey and prepare a report that describes the investigation and results. The Licensee will forward this report to the SHPO, interested Indian Tribes, and FERC. All new reports and site forms will be submitted to the EIC, University of California, Riverside.

Implementation Steps for Performance: Review results of the Class III Survey and the associated recommendations.

- If the Class III Survey did not locate cultural resources, then the proposed action may proceed following consultation with the BLM and SHPO.
- If the Class III Survey locates cultural resources that the archaeologist recommends as not potentially significant, then the Licensee's Project Environmental Coordinator

consults with the SHPO. If consensus is reached on the recommendation, then the action may proceed.

- If the Class III Survey locates cultural resources that the archaeologist recommends as potentially significant (i.e., demonstrates good integrity, identifiable limits, structure, function, research potential, and cultural/historical context – *see* definition in Section 4.2.3), then the Licensee’s Project Environmental Coordinator consults with SHPO. If SHPO concurs with evaluation, then a Testing Phase investigation is recommended unless action may be designed to avoid the resource. Alternative Project locations will be reviewed.

MM CR-9. Testing Phase Cultural Resources Field Investigation.

Limited archeological excavations and analyses, possibly including documentation of structures, will be conducted to assess the National Register eligibility of individual resources and Project effects on historic properties.

The criteria for sites eligible to the NRHP may be found at 36 CFR 60.4. A site is eligible to the NRHP if it contains qualities that are significant in American history, architecture, archaeology, engineering, and culture and possesses integrity of location, design, setting, materials, workmanship, feeling, and association and:

- is associated with events that have made a significant contribution to the broad patterns of history
- is associated with the lives of persons significant in the past
- embodies the distinctive characteristics of a type, period or method of construction; or represents a significant and distinguishable entity whose components may lack individual distinction or
- has yielded, or may be likely to yield, information important in prehistory or history

Management Activity: Engage services of a qualified archaeologist to collect data sufficient to determine if a cultural resource qualifies as significant. If the site is located on BLM land, an excavation permit is required for testing programs that remove more than one cubic meter of soil from an individual site, in compliance with the Archaeological Resources Protection Act of 1979, as Amended (PL 96-95). Archaeological Resources Protection Act permits require submittal of a Treatment Plan/Research Design for which the BLM is required to consult with the SHPO and interested Indian Tribes prior to approving field investigation. The archaeologist will perform a Testing Phase investigation and prepare a report that describes the Testing Phase investigation and results. The Licensee will forward this report to the BLM for consultation with the SHPO, interested Indian Tribes and FERC.

Implementation Steps for Performance:: Review results of the Testing Phase Report and the associated recommendations, and consult with the BLM and SHPO.

- If the Testing Phase investigation indicates that the cultural resource does not qualify as significant, the Project may proceed following consultation with SHPO.
- If the Testing Phase investigation indicates that the cultural resource qualifies as significant, the Licensee consults with the BLM and SHPO. If SHPO concurs with the recommendation that the cultural resource is potentially eligible for listing in the NRHP and if the Project is not amended to avoid the resource, consultation with the SHPO will continue. A qualified archaeologist will develop the scope of work that will serve as mitigation of Project effects. The Licensee will consult with the SHPO and gain consensus on the appropriate mitigation (may involve further Data Recovery field investigation, monitoring, or another alternative treatment measure).

MM CR-10. Data Recovery or Alternative Mitigation.

The Licensee will investigate activities designed to mitigate effects upon a historic property that an action will affect. This may include data recovery, documentation, restoration or other measures. Such investigations will be preceded by development of an action-specific Memorandum of Agreement that has been approved by the Licensee, SHPO, BLM, Advisory Council on Historic Preservation, FERC, and, as appropriate, interested Indian Tribes

Management Activity: The Licensee's Project Environmental Coordinator works with the Licensee and qualified archaeologist and consults with the SHPO to avoid Project adverse impacts, minimize Project adverse effects through possible design modifications and or through data recovery or an alternative mutually agreed-upon method. If NRHP-eligible resource may not be avoided, the Licensee's archaeologist develops a Memorandum of Agreement (MOA) and the Licensee consults with SHPO, BLM, Advisory Council on Historic Preservation, and interested Indian Tribes, as appropriate and files the MOA with the FERC for approval. When an appropriate MOA is agreed upon, the archaeologist will perform the Data Recovery mitigation and prepare a report that describes the mitigation and the results. The Licensee will forward this report to the consulting parties.

Implementation Steps for Performance: Review results of the data recovery or other mitigation and consult with the SHPO, BLM, Advisory Council on Historic Preservation, interested Indian Tribes, and FERC. When consulting parties concur that mitigation has been successfully achieved, the action may proceed.

MM CR-11. Treatment of Unanticipated Discoveries of Cultural Resources and Human Remains.

As with all development projects in the state, should unforeseen artifacts become uncovered during site grading, the Licensee is required to adhere to all state of California procedures, including Section 21083.2(i) of the CEQA Statutes and Section 15064.5 of the CEQA Guidelines regarding stoppage of work, handling of discovered materials, and notification of proper authorities to ensure that the construction/operation of the Project would not have an adverse effect on cultural resources. The Licensee is responsible for addressing action impacts to cultural

sites and human remains should they be exposed as a result of ground disturbing activities by the Licensee or one of its contractors; erosion control measures; erosion of any inventoried historic properties; or resources that are exposed in the event of a Project operation emergency.

Management Activities: The Licensee shall follow the Project specific Plan and Procedures Addressing Unanticipated Discoveries of Cultural Resources and Human Remains, found in Appendix A of the HPMP in the event that unanticipated cultural materials or human remains are found within the Project area.

Implementation Steps for Performance: The Licensee shall consult with SHPO, BLM, interested Indian Tribes, Riverside County Coroner, as appropriate and depending on the land jurisdiction on which any discovery is made, and FERC., If the Licensee or its contractors discovers contemporary contexts with human remains, local law enforcement agencies and the Riverside County Coroner shall be notified and consulted.

6.2.10 Land Use

MM LU-1. Development Impact Fee.

Prior to the start of commercial operation the Licensee shall pay to Riverside County the required Development Impact Fee for the Project area in accordance with Riverside County Ordinance 659, as amended through 659.7 and Chapter 4.60 of the Riverside County Code (Development Impact Fees).

MM LU-2. Coordinate with MWD.

The Licensee will submit design plans for proposed Project facilities which may affect MWD facilities to the MWD for its review and approval for any Project component that may affect MWD facilities or rights-of-way. MWD's approval will be contingent on review and approval of design plans. MWD will also be notified of the construction of Project features that may affect MWD facilities or rights-of-way and will have an opportunity to observe construction of such features.

6.2.11 Air Quality

MM AQ-1. Fugitive Dust.

Periodic watering or application of suitable surfactant will be conducted for short-term stabilization of disturbed surface areas and storage piles as needed to minimize visible fugitive dust emissions. For dirt roads, watering, with complete coverage, shall occur at least twice daily, preferably in the late morning and after work is done for the day.

MM AQ-2. Trackout.

To prevent Project-related trackout onto paved surfaces, the following measures will be undertaken through the construction period:

- Prevention and clean-up of Project-related track out or spills on publicly maintained paved surfaces within 24 hours
- Covering loaded haul vehicles operating on public paved roads
- Material transported off-site shall be either sufficiently watered or securely covered to prevent excessive amounts of dust
- Paving, gravel covering, or chemically stabilizing on-site roads as soon as feasible
- Limiting on-site vehicle speeds on unpaved surfaces to 25 miles per hour (mph)
- Operating a wash rack for drivers to wet down material before leaving the facility
- Operate a wheel washer (or equivalent) to remove soil from vehicle tires as needed

MM AQ-3. Grading.

Graded site surfaces will be stabilized upon completion of grading when subsequent development is delayed or expected to be delayed more than 30 days, except when such a delay is due to precipitation that dampens the disturbed surface sufficiently to eliminate visible fugitive dust emissions.

MM AQ-4. Surface Disturbance.

Areas of active surface disturbance (such as grading) will be limited to no more than 15 acres per day.

MM AQ-5. Earth-moving Activities.

Non-essential earth-moving activities will be reduced during windy conditions; i.e., when visible dusting occurs from moist and dry surfaces due to wind erosion. Clearing, grading, earth-moving, or excavation activities will cease if winds exceed 25 mph averaged over 1-hour duration.

In addition, compliance with MM AQ-6 through AQ-12 would further reduce impacts from engine exhaust and NO_x and other criteria pollutant emissions.

MM AQ-6. Transportation Management Plan.

The Licensee shall be responsible to develop and implement a Transportation Management Plan (TMP) for employees, including provisions for ridesharing, use of shuttle transit for Project employees, and provision of on-site food service to reduce vehicle trips, where feasible. The TMP shall also consider availability of local housing that can be secured for use by a voluntary portion of the employees throughout the construction period. The TMP will target a minimum 25% reduction in employee vehicle trips.

MM AQ-7. Diesel Trucks.

All diesel truck operators shall strictly abide by the applicable state law requirements for idling, as described in the airborne toxic control measure (CCR, Title 13, section 2485), which limits vehicles with gross vehicular weight ratings of more than 10,000 pounds to no more than

5 minutes in a 60-minute period of idling of the primary engine or the diesel-fueled auxiliary power system at any location.

MM AQ-8. Equipment.

Use electrical drops in place of temporary electrical generators, and substitute low- and zero emitting construction equipment and/or alternative fueled or catalyst equipped diesel construction equipment wherever economically feasible.

MM AQ-9. Generators.

Electrical generators must be properly permitted with the SCAQMD.

MM AQ-10. Heavy-duty Diesel Trucks.

Heavy-duty diesel trucks shall be properly tuned and maintained to manufacturers' specifications to ensure minimum emissions under normal operations.

MM AQ-11. Construction Equipment.

At least 50 percent diesel fleet hours will utilize 2002 or later year diesel construction equipment, where feasible.

MM AQ-12. Off-road Construction Equipment.

Older off-road construction equipment shall be retrofitted with appropriate emission control devices prior to on-site use.

MM AQ-13. Air Quality Study Design.

The Licensee shall work collaboratively with the National Park Service (NPS) to establish an air quality study design for 2 years of ozone monitoring to be conducted upon completion of construction and Project operations beginning. The Licensee will fund the annual expenses as a cost-share with the NPS and other transmission operators. The funding contribution for this study will be based on a percentage of total miles of transmission line.

6.2.12 Noise

MM N-1. Construction Equipment.

The Licensee shall use construction equipment with properly operating and maintained noise mufflers and intake silencers, consistent with manufacturers' standards in order to reduce or avoid construction noise levels.

6.2.13 Hazards & Hazardous Materials

MM HM-1. UXO [Unexploded Ordnance] Plan.

The Licensee, in consultation with the Licensee's Environmental Coordinator, shall implement a UXO Identification, Training and Reporting Plan (UXO Plan) to properly train all site workers in the recognition, avoidance and reporting of military waste debris and ordnance. Implementation

shall include: (1) a description of the training program outline and materials, and the qualifications of the trainers; (2) identification of available trained experts that will respond to notification of discovery of any ordnance (unexploded or not); (3) a work plan to recover and remove discovered ordnance; and (4) work stoppage until site is determined clear by the Environmental Coordinator.

Verification: The UXO Plan shall be implemented no less than 60 days prior to the initiation of construction activities at the site.

Table 6-1 Summary of Project Impacts, Mitigation Program, and Residual Effect²

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
Section 3.1			
Geology and Soils			
Impact 3.1-1 Earthquakes and Faults. On-site faults have been evaluated and found to be not active. Therefore, the risk of surface rupture at the site caused by faulting is very low.	<i>Less than significant</i>	No mitigation is required.	N/A
Impact 3.1-2 Ground Subsidence. Ground subsidence is not considered to be a potential hazard associated with this Project.	<i>Less than significant</i>	No mitigation is required.	N/A
Impact 3.1-3 Active and Inactive Mines. There are no current permitted plans to resume iron mining at the Project site. The owners of the mine site property intend to develop the mine site as a regional landfill and have not filed an application to re-open the mines as an iron mine, although some small scale rock quarrying is ongoing. Ore reserves within the Project boundary, constituting	<i>Less than significant</i>	No mitigation is required.	N/A

² Project design features (PDFs) are design elements inherent to the Project that reduce or eliminate potential impacts. Because PDFs are incorporated into the Project, either in the Project design or by law as part of Project implementation, they do not constitute mitigation measures (MM), which are required to reduce or avoid a potentially significant impact. For clarity, PDFs are described within the mitigation program and are described within the analysis of each CEQA resource topic. MMs are intended to reduce all impacts from the proposed Project to below a level of significance, where applicable.

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>a small percentage of the available iron ore on the site, will not be accessible for the life of the Project, including a portion of CSLC mineral reserves. Iron ore and other rock resources in the mine site outside the Project boundary will remain accessible for mining. This impact would be <i>less than significant</i> and no mitigation is required.</p>			
<p>Impact 3.1-4 Soil Erosion. There will be potential increases in soil erosion resulting from construction of this Project.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM GEO-1. Erosion Control Plan.</p> <p>Erosion and sediment control measures for each area type, including proposed best management practices (BMPs), are listed in the Erosion Control Plan in Section 12.2. The Applicant shall limit impacts to soil erosion through implementation of an Erosion Control Plan limiting surface disturbance to only those areas necessary for construction as required by California Code of Regulations, title 23, section 122.26. Where natural topsoil occurs, it would be salvaged and stockpiled prior to construction, and the soil piles stabilized.</p> <p>Following construction, all areas where natural topsoils were removed that are not occupied by permanent Eagle Mountain Pumped Storage Project (Project) facilities would be re-graded, have the topsoils replaced, and be seeded with native vegetation to reduce erosion potential.</p> <p>Erosion control measures will be maintained throughout the life of the Project. At minimum, the Applicant shall use and implement the following BMPs for effective temporary and final soil stabilization during construction.</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<ul style="list-style-type: none"> • Preserving existing vegetation where required and when feasible to prevent or minimize erosion. • Once existing vegetation is cleared, construction will follow immediately behind to reduce unnecessary exposure of scarified soil to wind and water. • Sloping roadways and excavations away from washes will prevent or minimize erosion into washes. Where haul roads cross surface washes, the ground will be cleared of loose soil and pre-existing sediments, as necessary. • Installation of riprap at the washes prevent or minimize erosion. • Small earthen embankments will be built within washes in order to slow or divert surface water to reduce erosion. • Silt fences will be installed when working around a wash to prevent sediment from entering washes during a rain storm and will be constructed as described in Attachment B of Section 12.2 (e.g., buried to a depth of at least 12 inches. • The Applicant will be required to preserve and protect existing vegetation not required, or otherwise authorized, to be removed. Vegetation will be protected from damage or injury caused by construction operations, personnel, or equipment by the use of temporary fencing, protective barriers, or other similar methods. • Water will be applied to disturbed soil areas of the Project site to control wind erosion and dust. Water applications will be monitored to prevent excessive runoff. • Sediment controls, structural measures that are intended to complement and enhance the soil stabilization (erosion control) measures, will be implemented. Sediment controls 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>are designed to intercept and filter out soil particles detached and transported by the force of water. Prior to construction, a Stormwater Pollution Prevention Plan (SWPPP) will be prepared detailing BMPs that will be implemented at the site. The Applicant will comply with the General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities (Construction General Permit; Order No. 2009-0009-DWQ and amendments thereto; National Pollutant Discharge Elimination System No. CAS000002).</p>	
<p>Impact 3.1-5 Landslides and Mass Movements. Slope raveling and localized, surficial slope failures and/or rock falls are expected in areas where mining has exposed adversely oriented fracture sets on the pit walls.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>PDF GEO-1. Subsurface Investigations. Detailed investigations to support final engineering will be conducted in two stages, as detailed in Section 12.1. These generally include:</p> <p>Phase I Site Investigations: Based on available information and the current Project configuration, conduct a limited field program designed to confirm that basic Project feature locations are appropriate and to provide basic design parameters for the final layout of the Project features. Phase I Site Investigations will be initiated after licensing and receipt of site access, at the initiation of the Project engineering design phase. Field work will be completed within six months of the start of field investigations, and results filed with the State Water Board and FERC 12 months after the start of field investigations. Phase 1 Field Work is focused on the pumped physical facilities associated with the pumped storage project to provide the owner with additional information needed to confirm feasibility and Project cost.</p> <p>Phase II Site Investigations: Using the results of the Phase I Work, and based on any design refinements developed during pre-design engineering, conduct additional</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>explorations that will support final design of the Project features and bids for construction of the Project. The Phase II Program will also include field investigations and modeling to support detailed evaluation of potential seepage from the Project features (reservoirs and water conveyance tunnels). Seepage evaluations will include groundwater modeling to refine plans for seepage control, seepage recovery, and monitoring as required to avoid potential adverse impacts on the local ground water regime and water quality, the Colorado River Aqueduct and the proposed landfill if and when it is implemented. It should be noted that the Phase II Program may be implemented in a number of progressive steps. Geotechnical field programs during the design stage of implementation are usually implemented in a phased or step-wise manner with subsequent field work planned based on what is learned from the preceding field work.</p> <p>The scopes of the Phase I and II programs are discussed in a technical memorandum found in Section 12.1.</p> <p>PDF GEO-2. Geologic Mapping. During site investigations, geologic mapping will be performed by Project Engineers to identify conditions of the overburden and bedrock exposed in the mine pits (reservoir areas) that may affect the stability of existing slopes during reservoir level fluctuations. Mapping will identify the degree and orientation of jointing and fracturing, faulting, weathering, and the dimensions of the benches excavated during mining. The stability of the cut slopes and benches will be assessed at this time.</p> <p>Geologic mapping will begin during the Phase I Site Investigations (see Section 12.1 for details) and will continue during Phase II Site Investigations.</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		During construction, areas within the pits that exhibit unstable slopes because of adverse fracture sets exposed in the pit walls will be scaled of loose rock and unstable blocks. Material scaled from the side slopes will be removed and disposed of outside the pit, or pushed downslope and buried in the bottom of the pit. Rock slopes within the East and Central pits that lie below an elevation of five feet above the maximum water level will be scaled of loose and unstable rock during construction. Existing cut slopes that lie above these elevations will not be modified unless there is evidence of potential failure areas that could impact Project facilities. Final Project design will be reviewed by the State Water Board and approved by the FERC.	
Impact 3.1-6 Liquefaction. The potential for liquefaction-induced settlements is very low to non-existent	<i>Less than significant</i>	No mitigation is required	N/A
Impact 3.1-7 Reservoir Triggered Seismicity. The potential of reservoir triggered seismicity at the site is remote	<i>Less than significant</i>	No mitigation is required.	N/A
Section 3.2 Surface Water			
Impact 3.2-1 Existing Surface Water. There are no perennial streams in the Project area. Springs are located outside of the Project area, and are not hydrologically connected to groundwater in the Chuckwalla Aquifer. Eagle Creek and other unnamed washes are ephemeral streams which could be affected	<i>Potentially significant impact and subject to mitigation</i>	MM GEO-1. Erosion Control Plan. Erosion and sediment control measures for each area type, including proposed BMPs, are listed in the Erosion Control Plan in Section 12.2. The Applicant shall limit impacts to soil erosion through implementation of an Erosion Control Plan limiting surface disturbance to only those areas necessary for construction as required by California Code of Regulations, title 23, section 122.26. Where natural topsoil occurs, it would be salvaged and stockpiled prior to	Less than significant

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>by erosion from project construction.</p>		<p>construction, and the soil piles stabilized.</p> <p>Following construction, all areas where natural topsoils were removed that are not occupied by permanent Project facilities would be re-graded, have the topsoils replaced, and be seeded with native vegetation to reduce erosion potential.</p> <p>Erosion control measures will be maintained throughout the life of the Project.</p> <p>At minimum, the Applicant shall use and implement the following BMPs for effective temporary and final soil stabilization during construction.</p> <ul style="list-style-type: none"> • Preserving existing vegetation where required and when feasible to prevent or minimize erosion. • Once existing vegetation is cleared, construction will follow immediately behind to reduce unnecessary exposure of scarified soil to wind and water. • Sloping roadways and excavations away from washes will prevent or minimize erosion into washes. Where haul roads cross surface washes, the ground will be cleared of loose soil and pre-existing sediments, as necessary. • Installation of riprap at the washes prevent or minimize erosion. • Small earthen embankments will be built within washes in order to slow or divert surface water to reduce erosion. • Silt fences will be installed when working around a wash to prevent sediment from entering washes during a rain storm and will be constructed as described in Attachment B of Section 12.2 (e.g., buried to a depth of at least 12 inches). 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<ul style="list-style-type: none"> • The Applicant will be required to preserve and protect existing vegetation not required, or otherwise authorized, to be removed. Vegetation will be protected from damage or injury caused by construction operations, personnel, or equipment by the use of temporary fencing, protective barriers, or other similar methods. • Water will be applied to disturbed soil areas of the Project site to control wind erosion and dust. Water applications will be monitored to prevent excessive runoff. • Sediment controls, structural measures that are intended to complement and enhance the soil stabilization (erosion control) measures, will be implemented. Sediment controls are designed to intercept and filter out soil particles detached and transported by the force of water. Prior to construction, a Stormwater Pollution Prevention Plan (SWPPP) will be prepared detailing BMPs that will be implemented at the site. The Applicant will comply with the General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities (Construction General Permit; Order No. 2009-0009-DWQ and amendments thereto; National Pollutant Discharge Elimination System No. CAS000002). 	
<p>Impact 3.2-2 Eutrophication. The Project will not add nutrients to the environment.</p>	<p><i>Less than significant</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>
<p>Impact 3.2-3 Water quality impacts to the project created surface waters. Potential impacts include sedimentation from erosion as a result of land disturbing activities during construction and increased metals</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM SW-1. On-site studies of acid production potential. When access is granted to the Licensee for the purpose of collecting samples, the field and analytical program will be undertaken as described in the Phase 1 Geotechnical Program detailed in Section 12.1. This program will:</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>as a result former mining activities on the Project site. An Erosion Control Plan (MM GEO-1) has been developed to reduce erosion and sedimentation to a level that is less than significant. A field and laboratory evaluation of acid production potential will be conducted pre-construction (MM SW-1).</p> <p>Without water quality treatment, the water in the reservoirs would change over time due to evaporation, resulting in increasing levels of TDS. In order to maintain TDS at a level consistent with existing groundwater quality, a water treatment plant using reverse osmosis (RO) is proposed as a part of the Project to maintain reservoir water quality at the existing quality of the source groundwater. This consists primarily of an RO desalination facility and brine disposal ponds to remove salts and metals from reservoir water and maintain TDS concentrations equivalent to the source water quality (PDF GW-2). Water quality monitoring (MM GW-6) has been incorporated into the project design and mitigation measures.</p>		<ol style="list-style-type: none"> 1. Obtain samples from each pit (upper and lower) across the stratigraphic section (porphyritic quartz monzonite, upper quartzite, middle quartzite, schistose meta arkose, vitreous quartzite and the ore zones). 2. Perform analysis for total, pyrite and sulfate sulfur (ASTM Method 1915-97 (2000) for total sulfur, and ASTM 1915-99 method E (2000) for sulfide sulfur). 3. Calculate acid production potential (APP) by the method of Sobek et al. (1978) and calculate acid production. 4. Determine the neutralization potential (NP) by the method of Sobek et al. (1978). Calculate the net neutralizing potential (NNP): $NNP = NP - APP$ expressed as kilogram calcium carbonate/ton. <p>In the event that APP is found, water treatment to neutralize acid will be added to the treatment program to the water treatment facility (PDF GW-2), consisting of one or more of the following strategies:</p> <ul style="list-style-type: none"> • Use of limestone, hydrated lime, soda ash, or other similar neutralizing substances to increase pH of the water • Increased seepage control to reduce seepage through the reservoir • Construction of limestone drains or limestone ponds to treat water • Modifications to the RO system to increase pH <p>Phase I Site Investigations will be initiated after licensing and receipt of site access, at the initiation of the Project engineering design phase. Field work will be completed within 6 months of the start of field investigations, and results filed with the State Water Board and FERC 12 months after the start of field investigations.</p> <p><i>Performance Standard:</i> As a performance standard, the</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>proposed Project must not cause or contribute to the degradation of background water quality of the aquifer, as required by the Region 7 Colorado River Water Quality Control Plan. Water quality in the reservoirs will be maintained at the existing quality of the source groundwater.</p> <p>PDF GW-2. Water Treatment Facility. In order to maintain TDS at a level consistent with existing groundwater quality, a water treatment plant using a RO desalination system and brine disposal lagoon will be constructed as a part of the Project to remove salts and metals from reservoir water and maintain TDS concentrations equivalent to the source groundwater.</p> <p>Treated water will be returned to the Lower Reservoir while the concentrated brine from the RO process will be directed to brine ponds. In addition to removing salts from the water supply, other contaminants, nutrients, and minerals, if present, would be removed, preventing eutrophication from occurring.</p> <p>Salts from the brine disposal lagoon will be removed and disposed of at an approved facility when the lagoons become full, approximately every 10 years. The lagoons will be maintained in a wetted condition, to maintain air quality in the Project area.</p> <p>MM GW-6. Water Quality Sampling. Water quality sampling will be done at the source wells, and within the reservoirs, and in monitoring wells upgradient and downgradient of the reservoirs and brine disposal lagoon consistent with applicable portions of California Code of Regulations Title 27. Figure 3.3-18 shows the proposed locations of these wells. The Licensee shall prepare and implement a site-specific monitoring and reporting plan for groundwater and surface waters which will specify the</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>location and timing of water quality monitoring, and constituents to be monitored. Monitoring will be done on a quarterly basis for the first four years and may be reduced to biannually thereafter based on initial results. Results of the sampling will be used to adjust water treatment volume, and to add or adjust treatment modules for TDS and other potential contaminants as needed to maintain groundwater quality under the direction of the State Water Board and FERC. Groundwater quality monitoring results will be made available to the Metropolitan Water District of Southern California (MWD) upon request.</p> <p><i>Performance Standard:</i> As a performance standard, the proposed Project: 1) must not cause or contribute to the degradation of background water quality; and 2) water quality in the reservoirs will be maintained at the existing quality of the source groundwater.</p> <p>MM GEO-1. Erosion Control Plan. Erosion and sediment control measures for each area type, including proposed BMPs, are listed in the Erosion Control Plan in Section 12.2. The Applicant shall limit impacts to soil erosion through implementation of an Erosion Control Plan limiting surface disturbance to only those areas necessary for construction as required by California Code of Regulations, Title 23, Section 122.26. Where natural topsoil occurs, it would be salvaged and stockpiled prior to construction, and the soil piles stabilized.</p> <p>Following construction, all areas where natural topsoils were removed that are not occupied by permanent Project facilities would be re-graded, have the topsoils replaced, and be seeded with native vegetation to reduce erosion potential.</p> <p>Erosion control measures will be maintained throughout the</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>life of the Project.</p> <p>At minimum, the Applicant shall use and implement the following BMPs for effective temporary and final soil stabilization during construction.</p> <ul style="list-style-type: none"> • Preserving existing vegetation where required and when feasible to prevent or minimize erosion. • Once existing vegetation is cleared, construction will follow immediately behind to reduce unnecessary exposure of scarified soil to wind and water. • Sloping roadways and excavations away from washes will prevent or minimize erosion into washes. Where haul roads cross surface washes, the ground will be cleared of loose soil and pre-existing sediments, as necessary. • Installation of riprap at the washes prevent or minimize erosion. • Small earthen embankments will be built within washes in order to slow or divert surface water to reduce erosion. • Silt fences will be installed when working around a wash to prevent sediment from entering washes during a rain storm and will be constructed as described in Attachment B of Section 12.2 (e.g., buried to a depth of at least 12 inches). • The Applicant will be required to preserve and protect existing vegetation not required, or otherwise authorized, to be removed. Vegetation will be protected from damage or injury caused by construction operations, personnel, or equipment by the use of temporary fencing, protective barriers, or other similar methods. • Water will be applied to disturbed soil areas of the Project site to control wind erosion and dust. Water applications 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>will be monitored to prevent excessive runoff.</p> <p>Sediment controls, structural measures that are intended to complement and enhance the soil stabilization (erosion control) measures, will be implemented. Sediment controls are designed to intercept and filter out soil particles detached and transported by the force of water.</p> <p>Prior to construction, a Stormwater Pollution Prevention Plan (SWPPP) will be prepared detailing BMPs that will be implemented at the site. The Applicant will comply with the General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities (Construction General Permit; Order No. 2009-0009-DWQ and amendments thereto; National Pollutant Discharge Elimination System No. CAS000002).</p>	
Section 3.3 Groundwater			
<p>Impact 3.3-1 Perennial Yield and Regional Groundwater Level Effects. Pumping will exceed recharge for approximately 4 years of the 50-year Project life. During the remaining years, recharge will exceed pumping. By 2065, at the end of the 50-year FERC Project license period, the aquifer storage (cumulative change) will have been increased by about 74,000 acre-feet. This will not result in depletion of groundwater supplies.</p>	<p><i>Less than significant</i></p>	<p>--</p>	<p>Less than significant for project-specific impact analysis. However, in combination with pumping for all reasonably foreseeable projects (cumulative impact), basin overdraft of about 9 feet is likely to occur over the life of the Project, in which case, this Project would contribute to a</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
			<i>significant adverse cumulative effect.</i>
<p>Impact 3.3-2 Local Groundwater Level Effects. Although not significant Basin-wide, the modeling predicts initial Project water supply pumping will cause drawdown of the groundwater levels in the vicinity of the Project's wells. Although not significant basin-wide, the modeling predicts initial Project water supply pumping will cause drawdown of the groundwater levels in the vicinity of the Project's wells. During the initial fill about 50 feet of drawdown will be created at the cone of depression of the pumping wells for about 4 years, but thereafter the drawdown will be reduced to about 14 feet. At distances of 1 mile from the pumping wells the drawdown will be about 6 feet. The greatest drawdown will occur after the first 4 years of pumping. The drawdown created by just Project pumping will be approximately 3.6 to 4.3 feet near the CRA in the upper Chuckwalla and Orocopia valleys. Project pumping by itself would not</p>	<p><i>Potentially significant and subject to mitigation</i></p>	<p>MM GW-1. Groundwater Level Monitoring. A groundwater level monitoring network will be installed to confirm that Project pumping is maintained at levels that are in the range of historic pumping. The monitoring network will consist of both existing and new monitoring wells to assess changes in groundwater levels beneath the CRA, and the Pinto Basin, as well as in areas east of the Project water supply wells. Table 3.3-10 lists the proposed monitoring network and Figure 3.3-17 shows its proposed locations. In addition to the proposed monitoring wells, groundwater levels, water quality, and production will be recorded at the Project pumping wells. The Project will report the static water levels beneath each of the Project's production wells annually along with a reference either to the accounting surface as proposed by USGS in 2008 or to a valid accounting surface methodology set forth in future legislation, rule-making or applicable judicial determination. A "static water level" shall be when the well has been idle for an equal time that it has been pumping or the measurement taken after the longest period of Project non-pumping.</p> <p>If monitoring indicates that groundwater is being draw down at greater levels and faster rates than expected (exceeding the "Maximum Allowable Changes" identified in Table 3.3-9), pumping rates for the initial fill will be reduced to a level that meets the levels specified in Table 3.3-9. The initial fill period would therefore be extended to a maximum of 4.5 to 6 years</p> <p>MM GW-2. Well Monitoring. Wells on neighboring properties whose water production may be impaired by</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>exceed the maximum historic drawdown, and this impact is not considered a substantial depletion of the local groundwater level. Local drawdown effects do have the potential to interfere with pumping costs and yields from nearby neighboring wells.</p>		<p>Project groundwater pumping will be monitored quarterly at a minimum during the initial fill pumping period and for 4 years following the initial fill. Monitoring will be semi-annual, at a minimum, for the remainder of the Project. If it is determined that Project pumping is lowering static water levels in those wells by 5 feet or more, the Project will replace or lower the pumps, deepen the existing well, construct a new well, and/or compensate the well owner for increased pumping costs or water purchase costs to maintain water supply to those neighboring properties.</p>	
<p>Impact 3.3-3 Groundwater Flow Direction Effects. The short- and long-term pumping effects will not significantly change groundwater flow directions.</p>	<p><i>Less than significant</i></p>	<p>No mitigation required.</p>	<p>N/A</p>
<p>Impact 3.3-4 Subsidence and Hydrocompaction Potential. Lowering of groundwater levels below their historic lows could cause subsidence and potential impacts to the CRA. Increases of groundwater levels could result in hydrocompaction, resulting in impacts to the CRA. It is unlikely that lowering of water levels below their historic lows by up to additional 5 feet at the CRA will cause subsidence. Direct contact of seepage water with the CRA is unlikely because groundwater levels are about 135 feet below ground surface at the CRA.</p>	<p><i>Potentially significant and subject to mitigation</i></p>	<p>MM GW-3. Extensionmeters. Two extensimeters shall be constructed to measure potential inelastic subsidence that could affect operation of the CRA; one in the upper Chuckwalla Valley near OW-3 and the other in the Orocopia Valley near OW-15. Figures 3.3-17 and 18 show the locations of the extensimeters.</p> <p>In the unlikely event that the data show inelastic subsidence is occurring due to Project groundwater pumping the Project will eliminate inelastic subsidence by:</p> <ul style="list-style-type: none"> • Redistributing pumping by constructing additional wells and modifying the pumping rates to reduce drawdown • Reducing pumping or by artificially increasing recharge in order to better match the net annual groundwater withdrawal to the net annual recharge <p>If structures are impacted, they will be mitigated to pre-subsidence condition through engineered solutions that may</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>consist of re-leveling, placement of compacted fill, soil-cement, pressure grouting, installation of piles and grade-beams, or steel-reinforcement. As necessary, portions or all of the impacted structure will be repaired or replaced in consultation with the MWD.</p> <p>MM GW-4. Lower Reservoir Seepage Recovery Wells. Seepage from the <u>Lower Reservoir</u> will be extracted through seepage recovery wells. The proposed recovery well locations are shown on Figure 3.3-18. Seepage from the Lower Reservoir will be maintained to prevent a significant rise in water levels beneath the CRA or a rise in groundwater that could potentially impact the liner of the proposed landfill. Target water levels have been assigned to the monitoring wells as shown in Table 3.3-10. Aquifer tests will be performed during final engineering design to confirm the seepage recovery well pumping rates and aquifer characteristics. The tests will be performed by constructing one of the seepage recovery wells and pumping the well while observing the drawdown in at least two seepage recovery or monitoring wells. Upon completion of this testing, the model will be re-run and the optimal locations of the remainder of the seepage recovery wells will be determined to effectively capture water from the Lower Reservoir and maintain groundwater level changes at less than significant levels beneath the CRA and the liner of the proposed landfill. Groundwater monitoring will be performed on a quarterly basis for the first 4 years of Project pumping. This program may be modified to bi-annually or annually depending on the findings as approved by the State Water Board and FERC. Annual reports will be prepared and distributed to interested parties.</p> <p>If needed based upon monitoring results, and acceptable based upon water quality monitoring results, as an adaptive</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>management measure Project pumping drawdown can be mitigated by allowing seepage from the reservoirs to occur without pump-back recovery. If seepage from the reservoirs is unimpeded, groundwater levels could rise beneath the CRA by up to 3 feet.</p> <p><i>Performance Standard:</i> Seepage from the Lower Reservoir will be maintained to prevent a significant rise in water levels beneath the CRA or a rise in groundwater that could potentially impact the liner of the proposed landfill. Target levels for protection of the landfill and the CRA have been assigned to the monitoring wells as shown in Table 3.3-10.</p> <p>MM GW-5. Upper Reservoir Seepage Recovery Wells. Seepage from the Upper Reservoir will be controlled through a separate set of seepage recovery wells, locations of which are shown on Figure 3.3-18. Seepage from the Upper Reservoir will be maintained at least five feet below the bottom elevation of the proposed landfill project liner. Target levels have been assigned to the monitoring wells as shown in Table 3.3-10. A testing program will also be employed for seepage recovery wells for the Upper Reservoir to assess the interconnectedness of the joints and fractures and the pumping extraction rate. Drawdown observations will be made in nearby observation wells to support final engineering design. Groundwater monitoring will be performed on a quarterly basis for the first four years of Project pumping. This program may be extended to bi-annually or annually depending on the findings. Annual reports will be prepared and distributed to interested parties.</p> <p>Based upon testing for final design, or if indicated by groundwater level monitoring, additional seepage extraction wells may be constructed to meet target groundwater levels listed in Table 3.3-10. PDF GW-1 would also apply should</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>water levels approach target levels listed in Table 3.3-10. Based upon testing for final design, or if indicated by groundwater level monitoring, additional seepage extraction wells may be constructed.</p> <p><i>Performance Standard:</i> Seepage from the Upper Reservoir will be maintained at least five feet below the bottom elevation of the liner of the proposed landfill so that the landfill will comply with title 27 CCR Section 20240, subdivision (c). Target levels have been assigned to the monitoring wells as shown in Table 3.3-10.</p>	
<p>Impact 3.3-5 Groundwater Quality. Seepage water could migrate into the Chuckwalla Valley Groundwater Basin and could affect water quality in the aquifer.</p>	<p><i>Potentially significant and subject to mitigation</i></p>	<p>MM GW-6. Water Quality Sampling. Water quality sampling will be done at the source wells, and within the reservoirs, and in monitoring wells upgradient and downgradient of the reservoirs and brine disposal lagoon consistent with applicable portions of California Code of Regulations Title 27. Figure 3.3-18 shows the proposed locations of these wells. The Licensee shall prepare and implement a site-specific monitoring and reporting plan for groundwater and surface waters which will specify the location and timing of water quality monitoring, and constituents to be monitored. Monitoring will be done on a quarterly basis for the first four years and may be reduced to biannually thereafter based on initial results. Results of the sampling will be used to adjust water treatment volume, and to add or adjust treatment modules for TDS and other potential contaminants as needed to maintain groundwater quality under the direction of the State Water Board and FERC. Groundwater quality monitoring results will be made available to the MWD upon request.</p> <p><i>Performance Standard:</i> As a performance standard, the proposed Project: 1) must not cause or contribute to the degradation of background water quality; and 2) water</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>quality in the reservoirs will be maintained at the existing quality of the source groundwater.</p> <p>PDF GW-2. Water Treatment Facility. In order to maintain TDS at a level consistent with existing groundwater quality, a water treatment plant using a RO desalination system and brine disposal lagoon will be constructed as a part of the Project to remove salts and metals from reservoir water and maintain TDS concentrations equivalent to the source groundwater.</p> <p>Treated water will be returned to the Lower Reservoir while the concentrated brine from the RO process will be directed to brine ponds. In addition to removing salts from the water supply, other contaminants, nutrients, and minerals, if present, would be removed, preventing eutrophication from occurring.</p> <p>Salts from the brine disposal lagoon will be removed and disposed of at an approved facility when the lagoons become full, approximately every 10 years. The lagoons will be maintained in a wetted condition, to maintain air quality in the Project area.</p>	
<p>Impact 3.3-6 Colorado River Effects. The groundwater levels in the area are around 500 feet msl, and will not deplete groundwater levels in a manner that could encounter the accounting surface elevations.</p>	<p><i>No impact</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>
<p>Impact 3.3-7 Loss of Existing Wells. Existing wells located within the central and eastern mining pits would be destroyed by</p>	<p><i>Potentially significant and subject to mitigation</i></p>	<p>MM GW-7. Replacement Wells. Existing wells located within the central and eastern mining pits which are to be developed as Project reservoirs, will be replaced at locations outside of the reservoirs as shown on Figure 3.3-</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
development of the Project reservoirs.		18. Table 3.3-10 lists those wells scheduled for replacement.	
Section 3.4 Agricultural & Forestry Resources			
Impact 3.4-1 Impacts to Agricultural Lands or Forestry Lands. None of the facilities or structures of the Project are anticipated to have a significant adverse effect on existing agricultural lands or forest. No currently active farmland or forest is proposed to be crossed by the water pipeline or transmission line corridor. The Central Project area is within mining pit and therefore does not have the ability to impact active farmland or forestry resources.	<i>Less than significant</i>	No mitigation is required.	N/A
Section 3.5 Biological Resources			
Impact 3.5-1 Construction Impacts on Plants. Pre-construction surveys and construction controls such as an employee awareness program, on-site Project Biologist, restricted areas, revegetation plan, and minimal surface disturbance plans will be employed avoid or reduce these impacts.	<i>Potentially significant and subject to the mitigation program</i>	MM BIO-1. Biological Mitigation and Monitoring Program. Concurrent with final engineering design a comprehensive site-specific biological mitigation and monitoring program shall be verified and implemented in consultation with the Biological Technical Advisory Team. The Biological Technical Advisory Team shall be composed of the Licensee's Environmental Coordinator and consultants, and staff from the resource managing agencies (BLM, USFWS, and CDFW). MM BIO-2. Biological Reporting to Resource Agencies. As part of implementing protection measures, regular reports shall be submitted to the relevant resource	Less than significant

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>agencies to document the Project activities, mitigation implemented and mitigation effectiveness. As a performance standard, adaptive management recommendations shall be updated as needed and in consultation with the coordinating agencies. Reporting shall include monthly reports during construction, annual comprehensive reports, and special-incident reports. The Project Biologist shall be responsible for reviewing and signing reports prior to submittal to the agencies.</p> <p>MM BIO-3. Designation of an Authorized Project Biologist. An Authorized Project Biologist, approved of by USFWS, the State Water Board, and CDFW, shall be responsible for implementing and overseeing the biological compliance program. This person shall be sufficiently qualified to ensure approval by the USFWS and CDFW for all biological protection measures that may be implemented by the Project. The USFWS describes a single designation for biologists who can be approved to handle tortoises - "Authorized Biologist." Such biologists have demonstrated to the USFWS that they possess sufficient desert tortoise knowledge and experience to handle and move tortoises appropriately. Authorized Biologists are permitted to then approve specific monitors to handle tortoises, at their discretion. The CDFW must also approve such biologists, potentially including individual approvals for monitors approved by the Authorized Biologist.</p> <p>MM BIO-4. Worker Environmental Awareness Program. A Worker Environmental Awareness Program (WEAP) (see Section 12.14) shall be implemented to ensure that Project construction and operation occur within a framework of safeguarding environmentally sensitive resources. Although facility construction has the greatest potential to harm environmental resources, the WEAP shall</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>be designed to address those environmental issues that pertain to Project operations, such as general conduct, repairs and maintenance. All project workers will be required to attend the program. All project workers will be required to attend the program.</p> <p>The WEAP shall include information on biological resources that may occur on the site, with emphasis on listed and special-status species. Education shall include, but not be limited to, ecology, natural history, endangerment factors, legal protection, site mitigation measures, and hierarchy of command. Site rules of conduct shall be identified, including but not limited to: speed limits, work areas that must be accompanied by a biological monitor, parking areas, looking under parked vehicles prior to moving them, trash deposition, off-site conduct in the area of the Project, and other employee response protocols. Willful non-compliance shall result in sufficiently severe penalties to the contractor that the contractor may dismiss the offending employee.</p> <p>The educational format will be a video, shown initially by the Project Biologist and ultimately by a limited staff of trained and approved personnel. The Project Biologist also may be videotaped giving the first program, for assistance to further instructors.</p> <p>All workers completing the education program shall be given a wallet card with site "rules" and contact cell phone numbers, and an environmental training completion sticker to affix to their hard hat. Each shall sign a sheet attesting to completing the training program.</p> <p><u>Plants</u></p> <p>MM BIO-5. Minimize Surface Disturbance. During construction in native habitats, all surface disturbance shall</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>be restricted to the smallest area necessary to complete the construction. New spur roads and improvements to existing access roads shall be designed to preserve existing desert wash topography and flow patterns.</p> <p>MM BIO-6. California Desert Native Plants Act. In compliance with the California Desert Native Plants Act (CDNPA), the County Agricultural Commissioner shall be consulted for direction regarding disposal of plants protected by the CDNPA. This may include salvage for subsequent revegetation of temporarily disturbed areas on-site, salvage by an approved nursery, landscaper or other group, or landfill disposal.</p> <p>MM BIO-7. Revegetation Plan. A revegetation plan (see Section 12.14) shall be implemented for areas that are temporarily disturbed during construction. In order to accommodate the specific features of the desert that make revegetation difficult – namely lack of predictable rainfall, lack of an “A” soil horizon, and the difficulty of re-establishing a soil community of micro-organisms – a detailed Revegetation Plan shall address the following measures and include:</p> <ul style="list-style-type: none"> • Quantitative identification of the baseline community, both annual, herbaceous perennial and woody perennial species • Soil salvage and replacement on areas to be revegetated • Final site preparation and grading to include features that enhance germination and growth of native species. This includes surface pitting for the accumulation of sediments, water and seed and the construction of small swales for such species as California ditaxis and desert unicorn plant, which are commonly found in road swales and shoulders. 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>All disturbed washes shall be recontoured to eliminate erosion and encourage the reestablishment of the drainage to its pre-construction condition.</p> <ul style="list-style-type: none"> • Vertical mulching and other techniques to promote a hospitable environment for germination and growth • Seeding and/or planting of seedlings of colonizing species • Development of a soil micro-community by inoculation of mycorrhizal fungi and planting species that develop a mycorrhizal net • Weed control • Initial irrigation, if necessary • A realistic schedule of regrowth of native species, and remedial measures, if needed • Monitoring and reporting <p>MM BIO-8. Invasive Species Monitoring and Control. To minimize the spread of invasive non-native vegetation a weed control program shall be implemented during construction. This program (see Section 12.14) includes:</p> <ul style="list-style-type: none"> • Baseline surveys for weed species that are present and/or are most likely to invade the Project site and surrounding area • Methods quantifying weed invasion • Methods for minimizing weed introduction and/or spread • Triggers which prompt weed control • Methods and a schedule for weed control and eradication 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<ul style="list-style-type: none"> • Success standards <p><u>Pesticides will be used in accordance with label directions</u></p> <p>MM BIO-9. Couch's Spadefoot. The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan requirements shall be implemented to avoid disturbance of impoundments and restriction of surface flow to impoundments. Surveys on the Central Project Area shall elucidate the presence of any artificial impoundments that could subsidize Couch's spadefoot reproduction. Should those exist then surveys shall be conducted at the appropriate time to determine if larvae are present. If present, the impoundment will be avoided, if possible. If avoidance is not possible, then a new impoundment will be constructed as close as is feasible, to replicate and replace each lost impoundment with similar characteristics. All larvae shall be removed to the new impoundment.</p> <p>During construction on all Project facilities, should ephemeral pools develop in response to intense rainfall showers from early spring through fall these shall be examined for larvae of Couch's spadefoot. If larvae are present, the pools shall be flagged and avoided by construction activities. Where pools cannot be avoided, new pools shall be constructed and larvae transplanted under the supervision of the Project Biologist.</p> <p>PDF BIO-1. Pre-construction Special Species and Habitat Survey. Following licensing and access to the Central Project Area, surveys for special species and habitats that could support special species will be conducted. A thorough examination of the Central Project Area and local springs and seeps will provide information to determine if any avoidance or adaptive management is</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>required. Simultaneously, the site will be assessed for use by other wildlife. Based on the results of these surveys, the biological mitigation and monitoring program will be modified in ongoing consultation with the USFWS and the CDFW. Reporting requirements for the pre-construction surveys are specified in MM BIO-2.</p> <p>PDF BIO-2. Pre-construction Plant Survey.</p> <p>Preconstruction surveys will identify special-status plant populations and also species protected by the CDNPA. For annuals or herbaceous perennials that are dormant during certain seasons, data from 2008, 2009, and 2010 surveys will be used to assist in locating populations during dormant seasons. Based on these combined surveys, avoidance areas in construction zones will be established for special plant resources. The perimeters will be marked with wooden stakes, at least 3 feet high, and no more than 10 feet apart. Each stake will be flagged with red and white candy-striped flagging or other obvious barrier tape.</p> <p>Where avoidance is not feasible, and the species can be reasonably transplanted (e.g., foxtail cactus, Wiggins' cholla, other cacti and species protected by the CDNPA), plants will be salvaged and transplanted in areas approved in the Re-Vegetation Plan. Transplantation will be part of the Re-Vegetation plan developed for the Project. Salvaging seed and replanting may be an option considered for certain species (e.g., smoke tree, ironwood).</p>	
<p>Impact 3.5-2 Construction Impacts on Wildlife Species. Within in the Central Project Area, the baseline condition of the habitat is highly disturbed, with limited wildlife use. The</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM BIO-1. Biological Mitigation and Monitoring Program. Concurrent with final engineering design a comprehensive site-specific biological mitigation and monitoring program shall be verified and implemented in consultation with the Biological Technical Advisory Team. The Technical Advisory Team shall be composed of the</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>transmission line and water pipeline will cross higher quality habitat areas and may impact species occupying those areas.</p>		<p>Licensee's Environmental Coordinator and consultants, and staff from the resource managing agencies (BLM, USFWS, and CDFW).</p> <p>MM BIO-2. Biological Reporting to Resource Agencies. As part of implementing protection measures, regular reports shall be submitted to the relevant resource agencies to document the Project activities, mitigation implemented and mitigation effectiveness. As a performance standard, adaptive management recommendations shall be updated as needed and in consultation with the coordinating agencies. Reporting shall include monthly reports during construction, annual comprehensive reports, and special-incident reports. The Project Biologist shall be responsible for reviewing and signing reports prior to submittal to the agencies.</p> <p>MM BIO-3. Designation of an Authorized Project Biologist. An Authorized Project Biologist, approved of by USFWS, the State Water Board, and CDFW, shall be responsible for implementing and overseeing the biological compliance program. This person shall be sufficiently qualified to ensure approval by the USFWS and CDFW for all biological protection measures that may be implemented by the Project. The USFWS describes a single designation for biologists who can be approved to handle tortoises - "Authorized Biologist." Such biologists have demonstrated to the USFWS that they possess sufficient desert tortoise knowledge and experience to handle and move tortoises appropriately. Authorized Biologists are permitted to then approve specific monitors to handle tortoises, at their discretion. The CDFW must also approve such biologists, potentially including individual approvals for monitors approved by the Authorized Biologist.</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>MM BIO-4. Worker Environmental Awareness Program. A Worker Environmental Awareness Program (WEAP) (see Section 12.14) shall be implemented to ensure that Project construction and operation occur within a framework of safeguarding environmentally sensitive resources. Although facility construction has the greatest potential to harm environmental resources, the WEAP shall be designed to address those environmental issues that pertain to Project operations, such as general conduct, repairs and maintenance. All project workers will be required to attend the program. All project workers will be required to attend the program.</p> <p>The WEAP shall include information on biological resources that may occur on the site, with emphasis on listed and special-status species. Education shall include, but not be limited to, ecology, natural history, endangerment factors, legal protection, site mitigation measures, and hierarchy of command. Site rules of conduct shall be identified, including but not limited to: speed limits, work areas that must be accompanied by a biological monitor, parking areas, looking under parked vehicles prior to moving them, trash deposition, off-site conduct in the area of the Project, and other employee response protocols. Willful non-compliance may result in sufficiently severe penalties to the contractor that the contractor may dismiss the offending employee.</p> <p>The educational format will be a video, shown initially by the Project Biologist and ultimately by a limited staff of trained and approved personnel. The Project Biologist also may be videotaped giving the first program, for assistance to further instructors.</p> <p>All workers completing the education program shall be given a wallet card with site "rules" and contact cell phone</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>numbers, and an environmental training completion sticker to affix to their hard hat. Each shall sign a sheet attesting to completing the training program.</p> <p>MM BIO-9. Couch's Spadefoot. The NECO Plan requirements shall be implemented to avoid disturbance of impoundments and restriction of surface flow to impoundments. Surveys on the Central Project Area shall elucidate the presence of any artificial impoundments that could subsidize Couch's spadefoot reproduction. Should those exist then surveys shall be conducted at the appropriate time to determine if larvae are present. If present, the impoundment will be avoided, if possible. If avoidance is not possible, then a new impoundment will be constructed as close as is feasible, to replicate and replace each lost impoundment with similar characteristics. All larvae shall be removed to the new impoundment.</p> <p>During construction on all Project facilities, should ephemeral pools develop in response to intense rainfall showers from early spring through fall these shall be examined for larvae of Couch's spadefoot. If larvae are present, the pools shall be flagged and avoided by construction activities. Where pools cannot be avoided, new pools shall be constructed and larvae transplanted by the Project Biologist.</p> <p>MM BIO-10. Breeding Bird Surveys and Avoidance. For all construction activities in vegetated habitat that are scheduled to occur between approximately February 15 and July 30, surveys shall be completed in all potential nesting sites for active bird nests. Unless otherwise directed by the CDFW, if an active bird nest is located, the nest site shall be flagged or staked a minimum of 5 yards in all directions. This flagged zone shall not be disturbed until the nest</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>becomes inactive. Alternatively, grading and site preparation may occur prior to February 15 to preclude interference with nesting birds.</p> <p>MM BIO-11. Brine Ponds Management. Brine ponds shall be managed to minimize their attractiveness and access to migratory birds. This consists of making resources provided by the ponds less available to birds through their design (steep slopes to discourage wading birds, etc.) and netting the ponds to prevent access by birds (Figure 3.5-19).</p> <p>MM BIO-12. Burrowing Owls Phase III Survey. Based on the results of the 2009 surveys, a Phase III survey shall be completed to further assess bird use of the Project area and potential impacts if required by the CDFG (CBOC, 1993). This includes a nesting season survey, followed by a winter survey if no burrows or owls are observed during the nesting season. Each of these surveys shall span several visits and days.</p> <p>A pre-construction survey shall be conducted within 30 days of the start of Project construction to assess species presence and the need for avoidance. In consultation with the CDFW, the pre-construction survey may obviate the need for the Phase III Survey (see MM BIO-13).</p> <p>MM BIO-13. Burrowing Owl Breeding Season. The NECO Plan limits the construction period to September 1 through February 1 if burrowing owls are present, to avoid disruption of breeding activities. Following CDFW (1995) guidance, mitigation measures for resident owls will be implemented:</p> <ul style="list-style-type: none"> • Disruption of burrowing owl nesting activities shall be avoided during construction. • Active nests shall be avoided by a minimum of a 250-foot 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>buffer until fledging has occurred (February 1 through August 31).</p> <ul style="list-style-type: none"> • Following fledging, owls may be passively relocated. <p>MM BIO-14. Raptor Buffer. The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan identifies ¼-mile as an important buffer distance for prairie falcon or golden eagle aerie. No aeries or nests have been observed within a ¼-mile, but pre-construction surveys on the Central Project Area will confirm if any raptor aeries are within ¼-mile of construction. If so, a ¼-mile construction buffer will be required during the nesting seasons.</p> <p>MM BIO-15. Bat Survey. The following applicable measures are required by the NECO Plan:</p> <ul style="list-style-type: none"> • Survey for bat roosts within 1 mile of a project, or within 5 miles of any permanent stream or riparian habitat on a project site • Projects authorized within 1 mile of a significant bat roost site would have applicable mitigation measures, including, but not restricted to seasonal restrictions, light abatement, bat exclusion, and gating of alternative sites. Any exclusion must be performed at a non-critical time, by an authorized bat biologist. <p>Pre-construction bat surveys shall be completed by a qualified bat biologist to determine the existence, location and condition of bat roosts on the site. Because foraging areas used by resident bats may be critical to the functioning of those colonies, foraging habitat within the Project lands will be identified. If needed, based on the results of these surveys, actions will be taken to avoid roosting and foraging impacts to resident bats, minimize that disturbance or, as an inescapable measure, evict bats.</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>These actions shall include (as relevant):</p> <ul style="list-style-type: none"> • Designation of avoidance areas and associated measures • Eviction of bats outside of the maternity season • A monitoring program to determine impacts from the Project • Extending the monitoring program for the brine ponds to include bats, as deemed necessary <p>MM BIO-16. Wildlife Fencing. The NECO Plan recommends fencing potential hazards to bighorn sheep. A security fence shall be constructed around portions of the Central Project Area to <i>exclude larger terrestrial wildlife</i> – bighorn sheep, deer, coyotes, foxes, badgers – from entering Project areas that could pose a hazard to these species (Figure 3.6-4). Such areas shall include the transmission switchyard and other structures that may be dangerous to wildlife. Where exclusion fencing is required, security gates will remain closed except during specific vehicle entry and may be electronically activated to open and close immediately after vehicle(s) have entered or exited.</p> <p>Permanent security fences will be installed around the Upper and Lower reservoirs, switchyard and brine ponds, for security, safety and general liability purposes, and will prevent wildlife access. These fences will also be equipped with tortoise exclusion fencing. In addition, temporary tortoise exclusion fences will be installed around work zones during construction, and will be sufficiently low (3 feet) to permit passage by sheep.</p> <p>These temporary fences will be removed at the end of construction. Figure 3.6-4 shows the concept for the</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>temporary construction fencing. If additional fencing is needed during construction to protect tortoises, this fencing will be installed and maintained during the construction period.</p> <p>All required exclusion fencing shall be maintained for the life of the Project. All fences will be inspected monthly and during/following all major rainfall events. Any damage to the fencing shall be temporarily repaired immediately, followed by permanent repair within 1 week.</p> <p>MM BIO-17. Construction and Operation Restricted Areas. Construction and maintenance activities shall be restricted to minimize biological Project impacts. These restrictions shall include vehicle speed limits on both paved and dirt roads (the speed limit shall be based on County regulations); avoidance areas, work areas in which workers must be accompanied by a biological monitor, specified parking areas, trash deposition, repair, and refueling areas; looking under parked vehicles prior to movement; and the appropriate response upon finding a special-status species. For construction, this will include the entire construction period. For operations, this will apply to scheduled and unscheduled maintenance activities. <i>for verification and enforcement:</i> BLM</p> <p>MM BIO-18. Construction during Daylight Hours. The NECO Plan requires that, in areas without wildlife exclusion fencing or those areas that have not been cleared of tortoises, construction activities will only take place during daylight hours. This permits avoidance of construction-related mortalities of fossorial, diurnal species such as the desert tortoise, or nocturnally active species, such as the desert rosy boa.</p> <p>MM BIO-19. Construction of Pipeline Trenches. The</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>NECO Plan identifies that pipeline trenches must be closed, covered, and/or inspected. Pipeline trenches shall be closed, temporarily fenced, or covered each day. Each day, any open trenches shall be inspected by an approved biological monitor, under the supervision of the Authorized Biologist, at first light, midday, and at the end of each day to ensure animal safety. Ramps shall be provided to encourage animals to escape on their own. The biological monitor shall be confirmed by the Approved Project Biologist.</p> <p>MM BIO-20. Minimize Nighttime Lighting Impacts. Facility lighting will be designed, installed, and maintained to prevent casting of nighttime light into adjacent native habitat. See also MM AES-1.</p> <p>MM BIO-22. Habitat Compensation. CDFW standard off-site compensation for loss of occupied burrowing owl habitat consists of a minimum of 6.5 acres of lands, approved by CDFW and protected in perpetuity, for each pair of owls or unpaired resident bird. In addition, existing unsuitable burrows on the protected lands should be enhanced (i.e., cleared of debris or enlarged) or new burrows installed at a ratio of 2:1. Habitat compensation for burrowing owls, if needed, will be subsumed by compensation for lost desert tortoise habitat, which also constitutes burrowing owl habitat.</p> <p>The NECO Plan requires compensation for disturbance of Desert Dry Wash Woodland in WHMAs at the rate of 3:1. The Project does not disturb any Desert Dry Woodland inside a WHMA. However, the compensation for desert tortoise habitat that is lost to the Project will compensate for the loss of Desert Dry Wash Woodland expected to be lost or disturbed during construction activities.</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>PDF BIO-1. Pre-construction Special Species and Habitat Survey. Following licensing and access to the Central Project Area, surveys for special species and habitats that could support special species will be conducted. A thorough examination of the Central Project Area and local springs and seeps will provide information to determine if any avoidance or adaptive management is required. Simultaneously, the site will be assessed for use by other wildlife. Based on the results of these surveys, the biological mitigation and monitoring program will be modified in ongoing consultation with the USFWS and the CDFW. Reporting requirements for the pre-construction surveys are specified in MM BIO-2.</p> <p>PDF BIO-3. Pre-construction Mammals Surveys. Prior to construction, surveys will be conducted for all burrows that might host a badger or kit fox. (These surveys can be simultaneous with those for desert tortoise burrows.) Active burrows and all fox natal dens will be avoided, where possible. The perimeters of all avoidance areas will be marked with wooden stakes, at least 3 feet high, and no more than 10 feet apart. Each stake will be flagged with red and white candy-striped flagging or other obvious barrier tape.</p> <p>Where avoidance is infeasible, occupancy of burrows will be determined through fiberoptics and/or night vision equipment. All occupants will be encouraged to leave their burrows using one-way doors, burrow excavation in the late afternoon/early evening (to encourage escape at night), or other approved methods. All burrows from which badgers or foxes have been removed will be fully excavated and collapsed to ensure that animals cannot return prior to or during construction.</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>Impact 3.5-3 Operational Effects on Plant Species. Plant community structure and resulting fauna may be altered if non-native invasive species that are currently in the area spread during construction and/or maintenance activities increase both abundance and distribution of those species.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM BIO-1. Biological Mitigation and Monitoring Program. Concurrent with final engineering design a comprehensive site-specific biological mitigation and monitoring program shall be verified and implemented in consultation with the Biological Technical Advisory Team. The Technical Advisory Team shall be composed of the Licensee’s Environmental Coordinator and consultants, and staff from the resource managing agencies (BLM, USFWS, and CDFW).</p> <p>MM BIO-2. Biological Reporting to Resource Agencies. As part of implementing protection measures, regular reports shall be submitted to the relevant resource agencies to document the Project activities, mitigation implemented and mitigation effectiveness. As a performance standard, adaptive management recommendations shall be updated as needed and in consultation with the coordinating agencies. Reporting shall include monthly reports during construction, annual comprehensive reports, and special-incident reports. The Project Biologist shall be responsible for reviewing and signing reports prior to submittal to the agencies.</p> <p>MM BIO-3. Designation of an Authorized Project Biologist. An Authorized Project Biologist, approved of byUSFWS, the State Water Board, and CDFW, shall be responsible for implementing and overseeing the biological compliance program. This person shall be sufficiently qualified to ensure approval by the USFWS and CDFW for all biological protection measures that may be implemented by the Project. The USFWS describes a single designation for biologists who can be approved to handle tortoises - “Authorized Biologist.” Such biologists have demonstrated to the USFWS that they possess sufficient desert tortoise knowledge and experience to handle and move tortoises</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>appropriately. Authorized Biologists are permitted to then approve specific monitors to handle tortoises, at their discretion. The CDFW must also approve such biologists, potentially including individual approvals for monitors approved by the Authorized Biologist.</p> <p>MM BIO-4. Worker Environmental Awareness Program. A WEAP (see Section 12.14) shall be implemented to ensure that Project construction and operation occur within a framework of safeguarding environmentally sensitive resources. Although facility construction has the greatest potential to harm environmental resources, the WEAP shall be designed to address those environmental issues that pertain to Project operations, such as general conduct, repairs and maintenance. All project workers will be required to attend the program.</p> <p>The WEAP shall include information on biological resources that may occur on the site, with emphasis on listed and special-status species. Education shall include, but not be limited to, ecology, natural history, endangerment factors, legal protection, site mitigation measures, and hierarchy of command. Site rules of conduct shall be identified, including but not limited to: speed limits, work areas that must be accompanied by a biological monitor, parking areas, looking under parked vehicles prior to moving them, trash deposition, off-site conduct in the area of the Project, and other employee response protocols. Willful non-compliance shall result in sufficiently severe penalties to the contractor that the contractor may dismiss the offending employee.</p> <p>The educational format will be a video, shown initially by the Project Biologist and ultimately by a limited staff of trained and approved personnel. The Project Biologist also may be</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>videotaped giving the first program, for assistance to further instructors.</p> <p>All workers completing the education program shall be given a wallet card with site “rules” and contact cell phone numbers, and an environmental training completion sticker to affix to their hard hat. Each shall sign a sheet attesting to completing the training program.</p> <p>MM BIO-5. Minimize Surface Disturbance. During construction in native habitats, all surface disturbance shall be restricted to the smallest area necessary to complete the construction. New spur roads and improvements to existing access roads shall be designed to preserve existing desert wash topography and flow patterns.</p> <p>MM BIO-6. California Desert Native Plants Act. In compliance with the California Desert Native Plants Act (CDNPA), the County Agricultural Commissioner shall be consulted for direction regarding disposal of plants protected by the CDNPA. This may include salvage for subsequent revegetation of temporarily disturbed areas on-site, salvage by an approved nursery, landscaper or other group, or landfill disposal.</p> <p>MM BIO-7. Revegetation Plan. A revegetation plan (see Section 12.14) shall be implemented for areas that are temporarily disturbed during construction. In order to accommodate the specific features of the desert that make revegetation difficult – namely lack of predictable rainfall, lack of an “A” soil horizon, and the difficulty of re-establishing a soil community of micro-organisms – a detailed Revegetation Plan shall address the following measures and include:</p> <ul style="list-style-type: none"> • Quantitative identification of the baseline community, both 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>annual, herbaceous perennial and woody perennial species</p> <ul style="list-style-type: none"> • Soil salvage and replacement on areas to be revegetated • Final site preparation and grading to include features that enhance germination and growth of native species. This includes surface pitting for the accumulation of sediments, water and seed and the construction of small swales for such species as California ditaxis and desert unicorn plant, which are commonly found in road swales and shoulders. All disturbed washes shall be recontoured to eliminate erosion and encourage the reestablishment of the drainage to its pre-construction condition. • Vertical mulching and other techniques to promote a hospitable environment for germination and growth • Seeding and/or planting of seedlings of colonizing species • Development of a soil micro-community by inoculation of mycorrhizal fungi and planting species that develop a mycorrhizal net • Weed control • Initial irrigation, if necessary • A realistic schedule of regrowth of native species, and remedial measures, if needed • Monitoring and reporting <p>MM BIO-8. Invasive Species Monitoring and Control. To minimize the spread of invasive non-native vegetation a weed control program shall be implemented during construction. This program (see Section 12.14) includes:</p> <ul style="list-style-type: none"> • Baseline surveys for weed species that are present and/or 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>are most likely to invade the Project site and surrounding area</p> <ul style="list-style-type: none"> • Methods quantifying weed invasion • Methods for minimizing weed introduction and/or spread • Triggers which prompt weed control. • Methods and a schedule for weed control and eradication • Success standards <p>Pesticides will be used in accordance with label directions.</p> <p>PDF BIO-1. Pre-construction Special Species and Habitat Survey. Following licensing and access to the Central Project Area, surveys for special species and habitats that could support special species will be conducted. A thorough examination of the Central Project Area and local springs and seeps will provide information to determine if any avoidance or adaptive management is required. Simultaneously, the site will be assessed for use by other wildlife. Based on the results of these surveys, the biological mitigation and monitoring program will be modified in ongoing consultation with the USFWS and the CDFW. Reporting requirements for the pre-construction surveys are specified in MM BIO-2.</p> <p>PDF BIO-2. Pre-construction Plant Survey. Preconstruction surveys will identify special-status plant populations and also species protected by the CDNPA. For annuals or herbaceous perennials that are dormant during certain seasons, data from 2008, 2009, and 2010 surveys will be used to assist in locating populations during dormant seasons. Based on these combined surveys, avoidance areas in construction zones will be established for special</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>plant resources. The perimeters will be marked with wooden stakes, at least 3 feet high, and no more than 10 feet apart. Each stake will be flagged with red and white candy-striped flagging or other obvious barrier tape.</p> <p>Where avoidance is not feasible, and the species can be reasonably transplanted (e.g., foxtail cactus, Wiggins' cholla, other cacti and species protected by the CDNPA), plants will be salvaged and transplanted in areas approved in the Re-Vegetation Plan. Transplantation will be part of the Re-Vegetation Plan developed for the Project. Salvaging seed and replanting may also be an option considered for certain species (e.g., smoke tree, ironwood).</p>	
<p>Impact 3.5-4 Operational Effects to Wildlife Species. Loss of resources to wildlife is expected to be functionally negligible for most species. The primary on-site impacts to species from operation of the Project are limited to loss of individuals that move onto the site, including during transmission line maintenance. Faunal community structure may be altered if predators are attracted to reservoirs due to available water or night lighting.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM BIO-1. Biological Mitigation and Monitoring Program. Concurrent with Final engineering design a comprehensive site-specific biological mitigation and monitoring program shall be verified and implemented in consultation with the Biological Technical Advisory Team. The Technical Advisory Team shall be composed of the Licensee's Environmental Coordinator and consultants, and staff from the resource managing agencies (BLM, USFWS, and CDFW).</p> <p>MM BIO-2. Biological Reporting to Resource Agencies. As part of implementing protection measures, regular reports shall be submitted to the relevant resource agencies to document the Project activities, mitigation implemented and mitigation effectiveness. As a performance standard, adaptive management recommendations shall be updated as needed and in consultation with the coordinating agencies. Reporting shall include monthly reports during construction, annual comprehensive reports, and special-incident reports. The Project Biologist shall be responsible for reviewing and signing reports prior to submittal to the</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>agencies.</p> <p>MM BIO-3. Designation of an Authorized Project Biologist. An Authorized Project Biologist, approved of by USFWS, the State Water Board, and CDFW, shall be responsible for implementing and overseeing the biological compliance program. This person shall be sufficiently qualified to ensure approval by the USFWS and CDFW for all biological protection measures that may be implemented by the Project. The USFWS describes a single designation for biologists who can be approved to handle tortoises - "Authorized Biologist." Such biologists have demonstrated to the USFWS that they possess sufficient desert tortoise knowledge and experience to handle and move tortoises appropriately. Authorized Biologists are permitted to then approve specific monitors to handle tortoises, at their discretion. The CDFW must also approve such biologists, potentially including individual approvals for monitors approved by the Authorized Biologist.</p> <p>MM BIO-4. Worker Environmental Awareness Program. A Worker Environmental Awareness Program (WEAP) (see Section 12.14) shall be implemented to ensure that Project construction and operation occur within a framework of safeguarding environmentally sensitive resources. Although facility construction has the greatest potential to harm environmental resources, the WEAP shall be designed to address those environmental issues that pertain to Project operations, such as general conduct, repairs and maintenance. All project workers will be required to attend the program.</p> <p>The WEAP shall include information on biological resources that may occur on the site, with emphasis on listed and special-status species. Education shall include, but not be</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>limited to, ecology, natural history, endangerment factors, legal protection, site mitigation measures, and hierarchy of command. Site rules of conduct shall be identified, including but not limited to: speed limits, work areas that must be accompanied by a biological monitor, parking areas, looking under parked vehicles prior to moving them, trash deposition, off-site conduct in the area of the Project, and other employee response protocols. Willful non-compliance shall result in sufficiently severe penalties to the contractor that the contractor may dismiss the offending employee.</p> <p>The educational format will be a video, shown initially by the Project Biologist and ultimately by a limited staff of trained and approved personnel. The Project Biologist also may be videotaped giving the first program, for assistance to further instructors.</p> <p>All workers completing the education program shall be given a wallet card with site “rules” and contact cell phone numbers, and an environmental training completion sticker to affix to their hard hat. Each shall sign a sheet attesting to completing the training program.</p> <p>MM BIO-9. Couch’s Spadefoot. The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan requirements shall be implemented to avoid disturbance of impoundments and restriction of surface flow to impoundments. Surveys on the Central Project Area shall elucidate the presence of any artificial impoundments that could subsidize Couch’s spadefoot reproduction. Should those exist then surveys shall be conducted at the appropriate time to determine if larvae are present. If present, the impoundment will be avoided, if possible. If avoidance is not possible, then a new impoundment will be constructed as close as is feasible, to replicate and replace</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>each lost impoundment with similar characteristics. All larvae shall be removed to the new impoundment.</p> <p>During construction on all Project facilities, should ephemeral pools develop in response to intense rainfall showers from early spring through fall these shall be examined for larvae of Couch's spadefoot. If larvae are present, the pools shall be flagged and avoided by construction activities. Where pools cannot be avoided, new pools shall be constructed and larvae transplanted by the Authorized Project Biologist.</p> <p>MM BIO-10. Breeding Bird Surveys and Avoidance. For all construction activities in vegetated habitat that are scheduled to occur between approximately February 15 and July 30, surveys shall be completed in all potential nesting sites for active bird nests. Unless otherwise directed by the CDFW, if an active bird nest is located, the nest site shall be flagged or staked a minimum of 5 yards in all directions. This flagged zone shall not be disturbed until the nest becomes inactive. Alternatively, grading and site preparation may occur prior to February 15 to preclude interference with nesting birds.</p> <p>MM BIO-11. Brine Ponds Management. Brine ponds shall be managed to minimize their attractiveness and access to migratory birds. This consists of making resources provided by the ponds less available to birds through their design (steep slopes to discourage wading birds, etc.) and netting the ponds to prevent access by birds (Figure 3.5-19).</p> <p>MM BIO-12. Burrowing Owls Phase III Survey. Based on the results of the 2009 surveys, a Phase III survey shall be completed to further assess bird use of the Project area and potential impacts (CBOC, 1993). This includes a nesting season survey, followed by a winter survey if no burrows or</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>owls are observed during the nesting season. Each of these surveys shall span several visits and days.</p> <p>A pre-construction survey shall be conducted within 30 days of the start of Project construction to assess species presence and the need for avoidance. In consultation with the CDFW, the pre-construction survey may obviate the need for the Phase III Survey (see MM BIO-13).</p> <p>MM BIO-13. Burrowing Owl Breeding Season. The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan limits the construction period to September 1 through February 1 if burrowing owls are present, to avoid disruption of breeding activities. Following CDFW (1995) guidance, mitigation measures for resident owls will be implemented:</p> <ul style="list-style-type: none"> • Disruption of burrowing owl nesting activities shall be avoided during construction. • Active nests shall be avoided by a minimum of a 250-foot buffer until fledging has occurred (February 1 through August 31). • Following fledging, owls may be passively relocated. <p>MM BIO-14. Raptor Buffer. The NECO Plan identifies ¼-mile as an important buffer distance for prairie falcon or golden eagle aerie. No aeries or nests have been observed within a ¼-mile, but pre-construction surveys on the Central Project Area will confirm if any raptor aeries are within ¼-mile of construction. If so, a ¼-mile construction buffer will be required during the nesting seasons.</p> <p>MM BIO-15. Bat Survey. The following applicable measures are required by the NECO Plan:</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<ul style="list-style-type: none"> • Survey for bat roosts within 1 mile of a project, or within 5 miles of any permanent stream or riparian habitat on a project site • Projects authorized within 1 mile of a significant bat roost site would have applicable mitigation measures, including, but not restricted to seasonal restrictions, light abatement, bat exclusion, and gating of alternative sites. Any exclusion must be performed at a non-critical time, by an authorized bat biologist. <p>Pre-construction bat surveys shall be completed by a qualified bat biologist to determine the existence, location and condition of bat roosts on the site. Because foraging areas used by resident bats may be critical to the functioning of those colonies, foraging habitat within the Project lands will be identified. If needed based on the results of these surveys, actions will be taken to avoid roosting and foraging impacts to resident bats, minimize that disturbance or, as an inescapable measure, evict bats. These actions shall include (as relevant):</p> <ul style="list-style-type: none"> • Designation of avoidance areas and associated measures • Eviction of bats outside of the maternity season • A monitoring program to determine impacts from the Project • Extending the monitoring program for the brine ponds to include bats, as deemed necessary <p>MM BIO-16. Wildlife Fencing. The NECO Plan recommends fencing potential hazards to bighorn sheep. A security fence shall be constructed around portions of the Central Project Area to <i>exclude larger terrestrial wildlife</i> – bighorn sheep, deer, coyotes, foxes, badgers – from</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>entering Project areas that could pose a hazard to these species (Figure 3.6-4). Such areas shall include the transmission switchyard and other structures that may be dangerous to wildlife. Where exclusion fencing is required, security gates will be remain closed except during specific vehicle entry and may be electronically activated to open and close immediately after vehicle(s) have entered or exited.</p> <p>Permanent security fences will be installed around the Upper and Lower reservoirs, switchyard and brine ponds, for security, safety and general liability purposes, and will prevent wildlife access except. These fences will also be equipped with tortoise exclusion fencing. In addition, temporary tortoise exclusion fences will be installed around work zones during construction, and will be sufficiently low (3 feet) to permit passage by sheep. These temporary fences will be removed at the end of construction. Figure 3.6-4 shows the concept for the temporary construction fencing. If additional fencing is needed during construction to protect tortoises, this fencing will be installed and maintained during the construction period.</p> <p>All required exclusion fencing shall be maintained for the life of the Project. All fences will be inspected monthly and during/following all major rainfall events. Any damage to the fencing shall be temporarily repaired immediately, followed by permanent repair within 1 week.</p> <p>MM BIO-20. Minimize Nighttime Lighting Impacts. Facility lighting will be designed, installed, and maintained to prevent casting of nighttime light into adjacent native habitat. See also MM AES-1.</p> <p>MM BIO-22. Habitat Compensation. CDFW standard off-site compensation for loss of occupied burrowing owl</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>habitat consists of a minimum of 6.5 acres of lands, approved by CDFW and protected in perpetuity, for each pair of owls or unpaired resident bird. In addition, existing unsuitable burrows on the protected lands should be enhanced (i.e., cleared of debris or enlarged) or new burrows installed at a ratio of 2:1. Habitat compensation for burrowing owls, if needed, will be subsumed by compensation for lost desert tortoise habitat, which also constitutes burrowing owl habitat.</p> <p>The NECO Plan requires compensation for disturbance of Desert Dry Wash Woodland in WHMAs at the rate of 3:1. The Project does not disturb any Desert Dry Woodland inside a WHMA. However, the compensation for desert tortoise habitat that is lost to the Project will compensate for the loss of Desert Dry Wash Woodland expected to be lost or disturbed during construction activities.</p> <p>PDF BIO-4. Avian Protection of Transmission Line. The Licensee will develop an avian protection plan in consultation with the USFWS. The plan will: meet Avian Power Line Interaction Committee/Fish and Wildlife Service (APLIC/FWS) guidelines for an avian protection plan; present designs to reduce potential for avian electrocution and collisions; provide methods for surveying and reporting Project-related raptor mortality and managing nesting on the proposed transmission lines; and include a workers education program.</p> <p>The raptor-friendly transmission lines will be developed in strict accordance with the industry standard guidelines set forth in <i>Suggested Practices for Raptor Protection on Power Lines: The State of the Art in 2006</i>, by Avian Power Line Interaction Committee, Edison Electric Institute, and Raptor Research Foundation and the USFWS-approved Avian and</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		Bat Protection Guidelines. The design plan (filed for FERC approval) will include adequate insulation, and any other measures necessary to protect bats and raptors from electrocution hazards.	
<p>Impact 3.5-5 Indirect Impacts of Operation and Maintenance. Neither the Central Project Area nor the transmission or pipeline corridors will experience greater disturbance than currently exists. The Project will not affect the normal movements of wildlife. It is not likely that there would be a measurable change in the density of predators, or, as a result, a significant change in impacts to local fauna.</p>	<i>Less than significant</i>	No mitigation is required.	N/A
<p>Impact 3.5-6 Impacts of Brine Ponds. Birds and bats may be affected by ingesting harmful elements and/or highly saline water in the brine ponds.</p>	<i>Potentially significant and subject to the mitigation program</i>	MM BIO-11. Brine Ponds Management. Brine ponds shall be managed to minimize their attractiveness and access to migratory birds. This consists of making resources provided by the ponds less available to birds through their design (steep slopes to discourage wading birds, etc.) and netting the ponds to prevent access by birds (Figure 3.5-19).	Less than significant
<p>Impact 3.5-7 Transmission Impacts to Birds. Birds (including golden eagles) could be affected by collision with transmission lines or electrocution.</p>	<i>Potentially significant and subject to the mitigation program</i>	PDF BIO-4. Avian Protection of Transmission Line. The Licensee will develop an avian protection plan in consultation with the USFWS. The plan will: meet Avian Power Line Interaction Committee/Fish and Wildlife Service (APLIC/FWS) guidelines for an avian protection plan; present designs to reduce potential for avian electrocution and collisions provide methods for surveying and reporting Project-related raptor mortality and managing nesting on the proposed transmission lines and include a workers	Less than significant

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>education program.</p> <p>The raptor-friendly transmission lines will be developed in strict accordance with the industry standard guidelines set forth in <i>Suggested Practices for Raptor Protection on Power Lines: The State of the Art in 2006</i>, by Avian Power Line Interaction Committee, Edison Electric Institute, and Raptor Research Foundation and the USFWS-approved Avian and Bat Protection Guidelines. The design plan (filed for FERC approval) will include adequate insulation, and any other measures necessary to protect bats and raptors from electrocution hazards.</p>	
<p>Impact 3.5-8 Wetlands, Seeps, and Springs. Since there are no wetlands in the Project vicinity, there will be no impacts to wetlands. There will be no impact on seeps and springs in the Eagle Mountains. Available information indicates that these springs are not hydrologically connected to the Pinto or Chuckwalla Valley Basin aquifers since they are located in the mountains above the Pinto and Chuckwalla basins.</p>	<p><i>No impact</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>
<p>Impact 3.5-9 Dry Desert Washes. There are many small washes crossed by the pipeline and transmission line that will be regulated by the CDFW under Section 1602 of the CDFG Code. This impact to local washes may</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM BIO-21. Dry Desert Washes. There are many small washes crossed by the pipeline and transmission line that are regulated by the CDFW. A Streambed Alteration Agreement (Section 1602 of the Fish and Game Code) shall be obtained, which will identify the condition and location of all state jurisdictional waters, impacts, and mitigation measures. Mitigation includes the acreage assessment of</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
include degradation or loss of wash habitat, which would be monitored and limited under standard terms of the Streambed Alteration Agreement; and which will identify the condition and location of all state jurisdictional waters, impacts, and mitigation measures.		washes that may be affected, construction requirements associated with working on or near the washes, and compensation for lost or damaged acreage. It is anticipated that this compensation will be included in the habitat compensation for special-status species (MM BIO-22 and MM TE-6).	
Impact 3.5-10 Operational Effects to Fish Species. Project lands include no streams or ponds that could support any species of fish.	<i>No impact</i>	No mitigation is required.	N/A
Section 3.6 Threatened & Endangered Species			
Impact 3.6-1 Coachella Valley Milkvetch. Based on site reconnaissance and literature review, this species is not expected to be located on-site, or in areas that will be affected by the Project. Therefore, it is highly unlikely that there would be any Project effects on the milkvetch. However, pre-construction surveys will be conducted to insure that no Coachella Valley Milkvetch will be disturbed.	<i>Potentially significant and subject to the mitigation program</i>	PDF BIO-2. Pre-construction Plant Survey. Preconstruction surveys will identify special-status plant populations and also species protected by the CDNPA. For annuals or herbaceous perennials that are dormant during certain seasons, data from 2008, 2009, and 2010 surveys will be used to assist in locating populations during dormant seasons. Based on these combined surveys, avoidance areas in construction zones will be established for special plant resources. The perimeters will be marked with wooden stakes, at least 3 feet high, and no more than 10 feet apart. Each stake will be flagged with red and white candy-striped flagging or other obvious barrier tape. Where avoidance is not feasible, and the species can be reasonably transplanted (e.g., foxtail cactus, Wiggins' cholla, other cacti and species protected by the CDNPA), plants will be salvaged and transplanted in areas approved in the Re-Vegetation Plan. Transplantation will be part of the Re-	Less than significant.

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		Vegetation plan developed for the Project. Salvaging seed and replanting may be an option considered for certain species (e.g., smoke tree, ironwood).	
<p>Impact 3.6-2 American Peregrine Falcon. Based on site reconnaissance and literature review, this species is not expected to be located on-site or in areas affected by the Project. This species is unknown to inhabit Riverside and Imperial counties, and has not been found during previous surveys in the Project area, including the Central Project Area. Therefore it is highly unlikely that there would be any Project effects on peregrine falcon. However, pre-construction surveys will be conducted to insure that no American Peregrine Falcon will be disturbed.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>PDF BIO-1. Pre-construction Special Species and Habitat Survey. Following licensing and access to the Central Project Area, surveys for special status species (endangered, rare or threatened) and habitats that could support special status species will be conducted. A thorough examination of the Central Project Area and local springs and seeps will provide information to determine if any avoidance or adaptive management is required. Simultaneously, the site will be assessed for use by other wildlife. Based on the results of these surveys, the biological mitigation and monitoring program will be modified in ongoing consultation with the USFWS and the CDFW. Reporting requirements for the pre-construction surveys are specified in MM BIO-2.</p>	<p>Less than significant</p>
<p>Impact 3.6-3 Gila Woodpecker. Based on site reconnaissance and literature review, this species is not expected to be located on-site or in areas affected by the Project, nor residential areas. Between the small residential areas and the Project is a broad area of inhospitable habitat. However, pre-construction surveys will be conducted to insure that no Gila Woodpecker</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>PDF BIO-1. Pre-construction Special Species and Habitat Survey. Following licensing and access to the Central Project Area, surveys for special species and habitats that could support special species will be conducted. A thorough examination of the Central Project Area and local springs and seeps will provide information to determine if any avoidance or adaptive management is required. Simultaneously, the site will be assessed for use by other wildlife. Based on the results of these surveys, the biological mitigation and monitoring program will be modified in ongoing consultation with the USFWS and the CDFW. Reporting requirements for the pre-construction surveys are</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
will be disturbed.		specified in MM BIO-2.	
<p>Impact 3.6-4 Desert Tortoise. Desert tortoise may be affected by Project construction and operations, particularly along the proposed transmission corridor.</p>	<p><i>Potentially significant and subject to the mitigation program.</i></p>	<p>MM TE-1. Desert Tortoise Pre-construction Surveys and Clearance Surveys. Desert tortoises shall be removed from construction areas by the Project Biologist. Such tortoises shall be processed (cataloged, photographed, and numbered) prior to placement outside the construction zones but on public or private land, or the Project ROW (see Appendix 12.14 Desert Tortoise Removal and Translocation Plan). On the linear facilities, this is achieved by first surveying for all desert tortoises that might be within construction zones or are likely to enter construction zones, immediately prior to the start of construction. (These surveys can be simultaneous with those for badger and kit fox.). Active burrows will be identified, measured, and the entrance “gated” (a 3-inch twig inserted into the floor of the runway) for monitoring tortoise use. The locations of all desert tortoises will be mapped so that those locations can be monitored for tortoise use during construction.</p> <p>On the Central Project Area, there is little likelihood of desert tortoises except along the southern and eastern edges because of the altered landscape and massive and abundant tailings piles. Surveys first will be conducted in the Central Project Area to determine the presence of desert tortoise. If there is any suggestion of tortoise presence, either due to the presence of tortoise habitat and/or tortoise sign, a clearance survey (see Appendix 12.14 Desert Tortoise Removal and Translocation Plan) will be completed in those areas after tortoise-proof fencing is installed (see MM TE-3: Desert Tortoise Exclusion Fencing). A minimum of two clearance passes will be completed. Surveys will coincide with heightened tortoise activity, from mid-March to mid-April and during October. This will maximize the</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>probability of finding all tortoises. Any tortoises found will be removed per mitigation MM TE-3: Desert Tortoise Translocation or Removal.</p> <p>Surveys and clearance on the substation will proceed identically to that on the Central Project Area, with the exception that a pre-construction survey prior to clearance surveys is not necessary.</p> <p>MM TE-2. Desert Tortoise Construction Monitoring. No construction in unfenced areas (see MM TE-3: Desert Tortoise Exclusion Fencing) on the linear facilities will occur without biological monitors. This includes both construction monitoring and maintenance activities that require surface disturbance. An adequate number of trained and experienced monitors must be present during all construction activities, depending on the various construction tasks, locations, and season. The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan suggests that construction activities occur when tortoises are inactive—November 1 to March 15—where possible. However, adequate monitoring will mitigate concerns about take due to heightened activity levels the remainder of the year.</p> <p>All desert tortoises will be removed from harm’s way by a biologist approved by the Project Biologist (MM BIO-2). The Project Biologist must be sufficiently qualified to ensure approval by USFWS and CDFW for all tortoise protection measures that may be implemented by the Project. USFWS describes a single designation for biologists who can be approved to handle tortoises, “Authorized Biologist.” Such biologists have demonstrated to the USFWS that they possess sufficient desert tortoise knowledge and experience to handle and move tortoises appropriately. Authorized</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Biologists are permitted to then approve specific monitors to handle tortoises, at their discretion. The CDFW must also approve such biologists, potentially including individual approvals for monitors approved by the Authorized Biologist.</p> <p>Active burrows and special-resource burrows will be avoided, where possible. Where avoidance of any burrow is infeasible, occupancy will first be determined through the use of fiberoptics, probes or mirrors. All burrows that could potentially host a tortoise will be excavated with hand tools in the method prescribed by the Desert Tortoise Council (1994, rev. 1999), <i>Guidelines for handling desert tortoises during construction projects</i>. Any tortoises found will be removed from the construction area per MM TE-4: Revised Desert Tortoise Clearance and Relocation/Translocation Plan.</p> <p>Pipeline trenches will be closed, temporarily fenced, or covered each day. Each day, any open trenches will be inspected by an approved biological monitor at first light, midday, and at the end of each day to ensure tortoise safety.</p> <p>If necessary, temporary fencing will be installed in the active work area to separate a tortoise from active construction, in order to maximize protection.</p> <p>If a tortoise is injured or killed, surface- disturbing activities must cease in the area of the killed or injured tortoise and the Project Biologist contacted. Injured tortoises will immediately be taken to a qualified veterinarian regardless, if their survival is expected. The USFWS will determine if the tortoise can be returned to the wild, should it recover.</p> <p>As a mitigation performance standard, following site clearance, a report will be prepared by the Project Biologist</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>to document the clearance surveys, construction monitoring, the capture and release locations of all tortoises found, individual tortoise data, and other relevant data. This report will be submitted to the CDFW and USFWS.</p> <p>MM TE-3. Desert Tortoise Exclusion Fencing. The substation will be enclosed with a permanent tortoise exclusion fence to keep adjacent tortoises from entering the site. The fencing type will be 1- by 2-inch vertical mesh galvanized fence material, extending at least 2 feet above the ground and buried at least 1 foot. Where burial is impossible, the mesh will be bent at a right angle toward the outside of the fence and covered with dirt, rocks, or gravel to prevent the tortoise from digging under the fence. Tortoise-proof gates will be established at all site entry points. All fence construction will be monitored by qualified biologists to ensure that no tortoises are harmed. Following installation, the fencing will be inspected monthly and during all major rainfall events. Any damage to the fencing will be repaired immediately. Parking and storage will occur within the substation and disturbed, previously fenced areas.</p> <p>Any areas on the Central Project Area that are determined through surveys to require fencing will be fenced as outlined above (Figure 3.6-4). Where a fence is discontinuous (between tailings piles for example), the fence ends will extend well up the slope of the piles, to ensure that tortoises cannot go around the end. Alternative methods may be explored to ensure that the fences are functional at excluding tortoises.</p> <p>MM TE-4. Revised Desert Tortoise Clearance and Relocation/Translocation Plan. The Revised Desert Tortoise Clearance and Relocation/Translocation Plan is found in its entirety within Section 12.14.</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>For both the Central Project Area and the linear facilities, it is anticipated that any tortoises removed would not be “translocated” or “relocated” in the biological sense of putting an animal in a location outside its home range. Instead, any tortoise would simply be removed to another part of its home range. Because construction on the Central Project Area will occur on highly disturbed previously mined areas, any tortoise found there during clearance would likely be a transient or in a peripheral part of its home range, certainly outside its core use areas or parts of its home range that could support its survival. By moving such a tortoise to a location immediately adjacent to its capture site outside the fenced construction area, the Project would be maintaining the tortoise within its home range, not translocating it. The tortoise merely would be excluded from undesirable areas. For utility corridors and fence construction, tortoises would be removed a short distance from the construction zone. Tasks will include the following:</p> <ul style="list-style-type: none"> • Tortoise handling and temperature requirements • Data gathered on removed tortoises • Translocation site preparation (if any) and choice • Monitoring – all tortoises removed will be monitored sufficiently to ensure safety. <p>MM TE-6. Habitat Compensation. The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan states that all lands within a DWMA will be designated as Category I Desert Tortoise Habitat,³ with required</p>	

³ BLM habitat categories (BLM, 1988), ranging in decreasing importance from Category I to Category III, were designed as management tools to ensure future protection and management of desert tortoise habitat and its populations. These designations were based on tortoise density, estimated local tortoise population trends, habitat quality, and other land-use conflicts. Category I habitat areas are considered essential to the maintenance of large, viable populations.

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>compensation of 5 acres for every acre disturbed. All lands outside a DWMA are considered Category III habitat, with a 1:1 compensation ratio.</p> <p>The Project overlaps 16.7 acres of Category I Habitat and an estimated 125.5 acres of Category III Habitat. The total habitat compensation is estimated to be 209 acres, which assumes the entire 60.1 acres of potential habitat estimated for the Central Project Area is found to be desert tortoise habitat (Figure 3.6-3). The acreage of appropriate habitat compensation will be finalized during the pre-construction habitat surveys.</p> <p>This land would need to be purchased in the same population of desert tortoises as occupy the site. In addition, the following features should apply to compensation lands:</p> <ul style="list-style-type: none"> • Be part of a larger block of lands that are currently protected or able to be protected • Are not subject to intensive habitat degradation (e.g., recreational use, grazing use, agriculture) • Have inherently moderate to good habitat that will naturally and ultimately regenerate when current disturbances are removed • Preferably are bordered by native habitat suitable for tortoises, and/or • In part, may represent a buffer for a block of good habitat <p>MM TE-7. Operations and Maintenance. Tortoises observed during routine maintenance activities will be allowed to voluntarily move out of harm's way. Transmission line repair activities that will result in surface disturbance will require biological monitoring, per MM TE-2.</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>MM BIO-1. Biological Mitigation and Monitoring Program. Concurrent with final engineering design a comprehensive site-specific biological mitigation and monitoring program shall be verified and implemented in consultation with the Biological Technical Advisory Team. The Technical Advisory Team shall be composed of the Licensee's Environmental Coordinator and consultants, and staff from the resource managing agencies (BLM, USFWS, and CDFW).</p> <p>MM BIO-2. Biological Reporting to Resource Agencies. As part of implementing protection measures, regular reports shall be submitted to the relevant resource agencies to document the Project activities, mitigation implemented and mitigation effectiveness. As a performance standard, adaptive management recommendations shall be updated as needed and in consultation with the coordinating agencies. Reporting shall include monthly reports during construction, annual comprehensive reports, and special-incident reports. The Project Biologist shall be responsible for reviewing and signing reports prior to submittal to the agencies.</p> <p>MM BIO-3. Designation of an Authorized Project Biologist. An Authorized Project Biologist, approved of by USFWS, the State Water Board, and CDFW, shall be responsible for implementing and overseeing the biological compliance program. This person shall be sufficiently qualified to ensure approval by the USFWS and CDFW for all biological protection measures that may be implemented by the Project. The USFWS describes a single designation for biologists who can be approved to handle tortoises - "Authorized Biologist." Such biologists have demonstrated to the USFWS that they possess sufficient desert tortoise knowledge and experience to handle and move tortoises</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>appropriately. Authorized Biologists are permitted to then approve specific monitors to handle tortoises, at their discretion. The CDFW must also approve such biologists, potentially including individual approvals for monitors approved by the Authorized Biologist.</p> <p>MM BIO-4. Worker Environmental Awareness Program. A Worker Environmental Awareness Program (WEAP) (see Section 12.14) shall be implemented to ensure that Project construction and operation occur within a framework of safeguarding environmentally sensitive resources. Although facility construction has the greatest potential to harm environmental resources, the WEAP shall be designed to address those environmental issues that pertain to Project operations, such as general conduct, repairs and maintenance. All project workers will be required to attend the program.</p> <p>The WEAP shall include information on biological resources that may occur on the site, with emphasis on listed and special-status species. Education shall include, but not be limited to, ecology, natural history, endangerment factors, legal protection, site mitigation measures, and hierarchy of command. Site rules of conduct shall be identified, including but not limited to: speed limits, work areas that must be accompanied by a biological monitor, parking areas, looking under parked vehicles prior to moving them, trash deposition, off-site conduct in the area of the Project, and other employee response protocols. Willful non-compliance shall result in sufficiently severe penalties to the contractor that the contractor may dismiss the offending employee.</p> <p>The educational format will be a video, shown initially by the Project Biologist and ultimately by a limited staff of trained and approved personnel. The Project Biologist also may be</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>videotaped giving the first program, for assistance to further instructors.</p> <p>All workers completing the education program shall be given a wallet card with site “rules” and contact cell phone numbers, and an environmental training completion sticker to affix to their hard hat. Each shall sign a sheet attesting to completing the training program.</p>	
<p>Impact 3.5-5 Increase to Raven Population. If ravens were to increase in response to additional water resources at the Project, these ravens could forage in the JTNP or disperse into the JTNP from enhanced reproductive opportunities at the Project.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM TE-5. Predator Monitoring and Control Program. The Predator Monitoring and Control Program is found in its entirety within Section 12.14. Proposed projects on federal lands that may result in increased desert tortoise predator populations must incorporate mitigation to reduce or eliminate the opportunity for raven proliferation. One of the most significant desert tortoise predators are ravens. The USFWS has developed a program to monitor and manage raven populations in the California desert in an effort to enhance desert tortoise recovery. In order to integrate monitoring and management, the USFWS has agreed to an “in-lieu” fee to replace quantitative raven monitoring on new projects in the range of the desert tortoise. The Licensee will pay in-lieu fees to the USFWS that will be directed toward a future quantitative regional monitoring program aimed at understanding the relationship between ongoing development in the desert region, raven population growth and expansion and raven impacts on desert tortoise populations. The vehicle for this program is a Memorandum of Understanding between the Licensee,, CDFW, and USFWS.</p> <p>The Predator Monitoring and Control Program may include this in-lieu fee if it is determined that the raven population may increase over current levels due to the Project.</p> <p>In addition to this in-lieu fee, the program will include, at a</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		minimum: <ul style="list-style-type: none"> • A suite of construction and operations measures to reduce food scavenging and drinking by ravens (e.g., trash containment, minimization of pooling water on roadways and construction right-of-ways) • Roadkill removal • Qualitative monitoring of raven use of the Project site during operations, conducted on a pre-determined schedule by the on-site Project environmental compliance officer • Breeding season nest surveys • Baseline and post-construction surveys for other desert tortoise predators, including coyotes, wild dogs, and gulls • Mitigation measures to be implemented if the number of predators increases • A schedule for post-construction surveys during the second year of Project operation, followed by surveys once every 5 years • The Licensee will continue to work collaboratively with the resource management agencies to conduct adaptive management as needed to control ravens and other predators in the Project area 	
Section 3.6 Aesthetics			
Impact 3.7-1 Central Project Area. Visual impacts associated with the development of the Project's central facility are largely short-term due to construction	<i>Potentially significant and subject to the mitigation program</i>	MM AES-1. Lighting. To minimize lighting effects and potential light pollution outside of the proposed Project boundaries, the final engineering design shall incorporate directional lighting, light hoods, low pressure sodium bulbs or light emitting diode (LED) lighting, and operational	Less than significant

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
activity and have a low potential to impact scenic vistas within the vicinity of the Project area.		devices to allow surface night-lighting in the central site to be turned on as-needed for safety to minimize lights that would be directly visible from the National Park. The Licensee shall fund night sky monitoring to be conducted in collaboration with the National Park Service (NPS) during the post-licensing design period (to represent baseline conditions) and during construction and the initial operational period. In addition, the NPS will be consulted during the Project design phase to ensure that feasible measures to minimize light trespass are incorporated into final design.	
Impact 3.7-2 Transmission Line Construction Activities. The Project's transmission line will create short-term visual impacts associated with construction activities including: visibility of Project vegetation disturbance, as well as from construction equipment, materials, personnel, and construction staging areas.	<i>Potentially significant and subject to the mitigation program</i>	PDF AES-1. Staging Areas. Staging areas and areas needed for equipment operation, material storage and assembly shall be combined with construction lands to the extent feasible, and organized to minimize the total footprint needed. Staging, storage, and temporary construction areas shall be reclaimed as soon as the use of each such area is completed. MM AES-4. Transmission Line. For construction of the transmission line, existing access roads and construction laydown areas shall be used to the extent feasible. The transmission line disturbed zones that will not be required for long-term maintenance access will be revegetated with native vegetation immediately following completion of transmission line construction, consistent with the recommendations in the Biological Resources Revegetation Plan (see Section 12.14).	Less than significant
Impact 3.7-3 Operation of Transmission Line from the Project Site to MWD Eagle Mountain Pump Station. No	<i>Less than significant</i>	No mitigation is required.	N/A

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
significant visual impacts would occur for this line segment.			
<p>Impact 3.7-4 Operation of Transmission Line from the MWD Eagle Mountain Pump Station to Eagle Mountain Road Turnoff. Visual impacts would result from construction of this segment of the transmission line. The project would be designed consistent with VRM Class III management objectives (regulatory LORS).</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM AES-3. Road Crossings. For design of the transmission line, road crossings shall be aligned perpendicular to the road to minimize views up and down ROW corridors, and towers should be placed at the maximum distance from the road ROW. Steel lattice structures with a dull, galvanized steel finish shall be utilized to reduce visual contrast. Conductors shall be selected to reduce glare and visual contrast. The corridor should be collocated with the existing MWD transmission corridor, and tower spacing at Victory Pass designed so that as few towers as possible are skylighted on the ridgeline. These considerations will be balanced with engineering constraints and concerns for minimizing impacts to other resources such a desert tortoise and cultural resources. Final design will be approved by the FERC.</p> <p>MM AES-4. Transmission Line. For construction of the transmission line, existing access roads and construction laydown areas shall be used to the extent feasible. The transmission line disturbed zones that will not be required for long-term maintenance access will be revegetated with native vegetation immediately following completion of transmission line construction, consistent with the recommendations in the Biological Resources Revegetation Plan (see Section 12.14).</p>	<p>Less than significant</p>
<p>Impact 3.7-5 Operation of Transmission Line from the Eagle Mountain Road Turnoff to the Interconnection Substation. The transmission line segment from the Eagle Mountain Road</p>	<p><i>Significant and unavoidable</i></p>	<p>MM AES-3. Road Crossings. For design of the transmission line, road crossings shall be aligned perpendicular to the road to minimize views up and down ROW corridors, and towers should be placed at the maximum distance from the road ROW. Steel lattice structures with a dull, galvanized steel finish shall be utilized</p>	<p>Significant and unavoidable</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
turnoff to the interconnection substation (2.5 miles) would constitute a new utility feature within the landscape, creating high visual contrast within foreground view zones, resulting in a significant and unavoidable impact.		to reduce visual contrast. Conductors shall be selected to reduce glare and visual contrast. The corridor should be collocated with the existing MWD transmission corridor, and tower spacing at Victory Pass designed so that as few towers as possible are skylighted on the ridgeline. These considerations will be balanced with engineering constraints and concerns for minimizing impacts to other resources such a desert tortoise and cultural resources. Final design will be approved by the FERC. MM AES-4. Transmission Line. For construction of the transmission line, existing access roads and construction laydown areas shall be used to the extent feasible. The transmission line disturbed zones that will not be required for long-term maintenance access will be revegetated with native vegetation immediately following completion of transmission line construction, consistent with the recommendations in the Biological Resources Revegetation Plan (see Section 12.14).	
Impact 3.7-6 Construction and Operation of the Water Pipeline. Short-term construction impacts are anticipated due to the water pipeline's low profile and proximity to existing access roads, State Route 177 and transmission utilities.	<i>Potentially significant and subject to the mitigation program</i>	MM AES-2. Water Pipeline. For construction of the water pipeline, reduce side cast disposal of soils from open cut construction (by replacing disturbed soil within the trench and limiting the width of the construction disturbance) to reduce color contrast and disturbance with surrounding landscape. The area disturbed during pipeline construction shall be backfilled and revegetated with native vegetation immediately following completion of pipeline construction.	Less than significant
Section 3.8 Cultural Resources			
Impact 3.8-1 Transmission Line Route from the Crossing of the CRA to the Interconnector Substation. Construction of the substation and transmission lines	<i>Potentially significant and subject to the mitigation</i>	MM CR-3. Implement the Historic Properties Management Plan and a Worker Environmental Awareness Program. Pursuant to CEQA Guidelines §15126.4(b)(3)(A-D) preservation in place is the preferred manner in which to mitigate impacts to archeological sites.	Less than significant

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>will not result in significant impacts on cultural resources related to the World War II DTC/CAMA. Historic sites are more likely to occur within the study corridor (which extends out 1 mile on each side of the Project area proper).</p>	<p><i>program.</i></p>	<p>Preservation in place maintains the relationship between the artifacts and context, and seeks to avoid conflict values of groups associated with the site. The Historic Properties Management Plan and a Worker Environmental Awareness Program have been prepared to address procedures and treatment for data recovery and will be adopted prior to site excavation.</p> <p>Management Activity: Implement project-specific education program.</p> <ul style="list-style-type: none"> • A qualified archaeologist will implement a cultural resources element for the Worker Environmental Awareness Program that is tailored to the Eagle Mountain Pumped Storage Project and workforce. This Program will focus on possible discovery and mitigation procedures during the construction phase of the Project as well as preservation obligations of Project staff. • The program will include a printed handout for all Project personnel and a PowerPoint presentation or video that all Project personnel will be required to view. • The program will present concepts of cultural resources management in a simple, understandable format, including a review of preservation laws and sanctions, examples of possible discoveries, and notification procedures in the event of discoveries. These are key elements of the HPMP including the Unanticipated Discoveries Plan and the steps to follow in evaluating potential cultural resources needs that are triggered by proposed construction activities. • The program will include a Monitoring Protocol and Provisions for Enforcement that may be presented to refresh personnel and introduce new staff to cultural resource concepts and Project-specific issues. 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<ul style="list-style-type: none"> • Project equipment and vehicle operators will be educated on the importance of staying within Project boundaries and also the prohibitions of going off designated routes of travel such as Eagle Mountain Road or Kaiser Road. <p>MM CR-4. Offer Opportunities for Public Interpretation. Unlike other hydroelectric projects where public access and recreational opportunities may be afforded, safety concerns and proximity to a proposed landfill project preclude offering public access within the core of the Project boundaries. Opportunities for public interpretation are therefore extremely limited. Some appropriate signage that interprets the history of the area already exists, including the 2009 E Clampus Vitus monument on Eagle Mountain Road for the 36th Evacuation Hospital associated with the World War II DTC and a Riverside County historical marker that acknowledges the Iron Chief, Eagle Mountain, and other mines of the area. The DTC/CAMA is also thoroughly and professionally interpreted at the General Patton Memorial Museum in Chiriaco Summit, located off of I-10 between Indio and Desert Center. The prehistory and Native American cultural traditions of the region are interpreted at the Agua Caliente Cultural Museum in Palm Springs, the Malki Museum on the Morongo Indian Reservation, the Palm Spring Desert Museum, the Coachella Valley Museum and Cultural Center, and at Joshua Tree National Park.</p> <p>Management Activity: Develop informative signage that will be available to the public.</p> <p>The Licensee will develop and install one weather-tolerant sign that will be placed outside the main gate of the facility. The sign will provide information about the prehistory and history of the general area, Native American groups who</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>inhabited the area, and background on the functioning of the Project. Local museums and historical monuments will also be identified.</p> <p>The public interpretive sign will be developed in coordination with the development of the HPMP and will be installed within 1 year of completion of the boundary fence.</p> <p>MM CR-5. Review Effectiveness of the Historic Properties Management Plan.</p> <p>Management Activity: Every 6 years, the Licensee will determine if modifications will improve the effectiveness of the HPMP.</p> <p>Develop recommendations for changes to the HPMP that may be discussed with SHPO, the BLM, Riverside County, interested Indian Tribes, FERC, and other consulting parties.</p> <p>MM CR-6. Consult with SHPO, the BLM, Riverside County, interested Indian Tribes, and FERC.</p> <p>Management Activity: Develop a HPMP Implementation Report. The HPMP Implementation Report will be distributed for review according to a 2-year cycle during the construction phase of the Project because cultural resource discoveries and treatments are most likely during that period. Thereafter, in the operation and maintenance phase, the HPMP Implementation Reports will be coordinated with the 6-year cycle of the Licensed Hydropower Recreation Development Report (FERC Form 80). The report will summarize, in table format, all Licensee cultural resources consultations and/or surveys performed for Project modifications, activities related to the Erosion Control Plan, or any other activities that have been reviewed due to their potential to result in soil disturbance in areas not previously</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>disturbed. The HPMP Implementation Report will:</p> <ul style="list-style-type: none"> • Describe the proposed modifications, the type of cultural survey or other activity performed, the results of the survey or other activity, and actions taken (e.g., SHPO consultation and/or other consultation, mitigation, no action determined appropriate, etc.) • Summarize observations made of historic properties • Include summaries of cultural resource treatments as an update to a HPMP implementation summary table • Report the status of Licensee’s public interpretation projects • Recommend modifications to the Project HPMP that will improve its implementation if appropriate <p>Implementation Steps for Performance: Develop a format for the HPMP Implementation Report and its associated Summary Table that will present the cultural resources activities and considerations in which the Licensee participated over a 2-year reporting cycle during construction and the 6-year reporting cycle thereafter. The HPMP Implementation Report will be provided to the SHPO, BLM, Riverside County, and interested Indian Tribes for a 30-day review and comment period every 6 years in coordination with FERC Form 80. Following a consideration of review comments, the Licensee will file the HPMP Implementation Report with the FERC.</p> <p>MM CR-7. Class I Investigation. In the event that Project activities would extend beyond the areas previously surveyed, then background literature will be reviewed to</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>identify the location, character, and significance of known cultural resources in the area of a proposed action and the potential of the proposed action to affect historic properties. The Class I Investigation will rely on information contained within the Licensee's Project archives. Should these data not prove sufficient, the Project Environmental Coordinator may determine that additional documentation is necessary to address a particular action under consideration that extends beyond the 1-mile buffer of the already completed Class I Investigation. The most important source of Class I Literature Review is the EIC at the University of California, Riverside.</p> <p>Management Activity: compare proposed Project location with Cultural Resources Management Maps.</p> <ul style="list-style-type: none"> • Determine if the Project area is located within 100 feet of a potentially significant previously recorded archeological site • Determine if Project area has been characterized as actively eroding or previously disturbed by other ground-disturbing activity (e.g., by machine excavation or underground utility line) • Determine if the area has been previously surveyed for cultural resources <p>Implementation Steps for Performance: Based on the results of the above-noted Management Activity.</p> <ul style="list-style-type: none"> • Project area is located within 100 feet of a previously recorded potentially significant archeological site. Delay Project pending SHPO consultation and possible follow-up studies by a Secretary of the Interior-qualified professional 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>archaeologist.</p> <ul style="list-style-type: none"> • Previous ground-disturbing activity may be documented or observed therefore no Project effect on cultural resources expected. Project may proceed. The Licensee shall include Project description and permit considerations in the HPMP Implementation Report that will be distributed to the SHPO, the BLM, Riverside County, interested Indian Tribes and FERC on a 2-year cycle during the construction phase and on a 6-year review cycle thereafter in coordination with Form 80. <p>MM CR-8. Class III Cultural Resources Field Investigation. Any modifications or additions to the APE in previously unsurveyed and undisturbed areas will require a Class III survey in compliance with Section 106 of the National Historic Preservation Act and according to 36 CFR 800. The Licensee will conduct an on-the-ground inventory of the APE for a proposed action that confirms the presence of known cultural resources and that may result in identification of previously unrecorded cultural resources. A Class III investigation may involve the excavation of shovel tests placed at 50-foot intervals within the APE or implementation of an alternative investigative strategy approved by the Licensee's Project Environmental Coordinator and the SHPO. Any investigations on easements through BLM land require a Fieldwork Authorization to a BLM permit-holding archaeologist in compliance with the Federal Land Policy and Management Act of 1976, as amended (PL 94-579).</p> <p>Management Activity: Consult with the BLM or other land holding agencies as to what Section 106 or Section 110 compliance needs may still be required and implement as specified. Engage services of a qualified archaeologist to</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>brief the Project Environmental Coordinator on correct scoping and protocols and conduct Class III Survey such as a walkover survey and/or systematic subsurface shovel testing (e.g., perform an identification level archeological field survey.) The actual scope of work will depend upon the proposed Project location and size of the proposed activity as well as BLM requirements on BLM land. The archaeologist will perform the Class III Survey and prepare a report that describes the investigation and results. The Licensee will forward this report to the SHPO, interested Indian Tribes and FERC. All new reports and site forms will be submitted to the EIC, University of California, Riverside.</p> <p>Implementation Steps for Performance: Review results of the Class III Survey and the associated recommendations.</p> <ul style="list-style-type: none"> • If the Class III Survey did not locate cultural resources, then the proposed action may proceed following consultation with the BLM and SHPO. • If the Class III Survey locates cultural resources that the archaeologist recommends as not potentially significant, then the Licensee's Project Environmental Coordinator consults with the SHPO. If consensus is reached on the recommendation, then the action may proceed. If the SHPO does not concur, then the resource is treated as potentially significant. • If the Class III survey locates cultural resources that the archaeologist recommends as potentially significant (i.e., demonstrates good integrity, identifiable limits, structure, function, research potential, and cultural/historical context – see definition in Section 4.2.3), then Licensee's Project Environmental Coordinator consults with the SHPO. If the SHPO concurs with evaluation, then a Testing Phase 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>investigation is recommended unless action may be designed to avoid the resource. Alternative Project locations will be reviewed.</p> <p>MM CR-9. Testing Phase Cultural Resources Field Investigation. Conduct limited archeological excavations and analyses, possibly including documentation of structures, will be conducted to assess the National Register eligibility of individual resources and Project effects on historic properties.</p> <p>The criteria for sites eligible to the NRHP may be found at 36 CFR 60.4. A site is eligible to the NRHP if it contains qualities that are significant in American history, architecture, archaeology, engineering, and culture and possesses integrity of location, design, setting, materials, workmanship, feeling, and association and:</p> <ul style="list-style-type: none"> • is associated with events that have made a significant contribution to the broad patterns of history • is associated with the lives of persons significant in the past • embodies the distinctive characteristics of a type, period or method of construction; or represents a significant and distinguishable entity whose components may lack individual distinction or • has yielded, or may be likely to yield, information important in prehistory or history <p>Management Activity: Engage services of a qualified archaeologist to collect data sufficient to determine if a cultural resource qualifies as significant. If the site is located on BLM land, an excavation permit is required for testing programs that remove more than one cubic meter of soil</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>from an individual site, in compliance with the Archaeological Resources Protection Act of 1979, as Amended (PL 96-95). Archaeological Resources Protection Act permits require submittal of a Treatment Plan/Research Design for which the BLM is required to consult with the SHPO and interested Indian Tribes prior to approving field investigation. The archaeologist will perform a Testing Phase investigation and prepare a report that describes the Testing Phase investigation and results. The Licensee will forward this report to the BLM for consultation with the SHPO, interested Indian Tribes and FERC.</p> <p>Implementation Steps for Performance: Review results of the Testing Phase Report and the associated recommendations, and consult with the BLM and SHPO.</p> <ul style="list-style-type: none"> • If the Testing Phase investigation indicates that the cultural resource does not qualify as significant, the Project may proceed following consultation with SHPO. • If the Testing Phase investigation indicates that the cultural resource qualifies as significant, Licensee Manager consults with the BLM and SHPO. If SHPO concurs with the recommendation that the cultural resource is potentially eligible for listing in the NRHP and if the Project is not amended to avoid the resource, consultation with the SHPO will continue. A qualified archaeologist will develop the scope of work that will serve as mitigation of Project effects. The Licensee will consult with the SHPO and gain consensus on the appropriate mitigation (may involve further Data Recovery field investigation, monitoring, or another alternative treatment measure). <p>MM CR-10. Data Recovery or Alternative Mitigation. The Licensee will investigate activities designed to mitigate effects upon a historic property that an action will affect. This</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>may include data recovery, documentation, restoration or other measures. Such investigations will be preceded by development of an action-specific Memorandum of Agreement that has been approved by the Licensee, SHPO, BLM, Advisory Council on Historic Preservation, FERC, and as appropriate, interested Indian Tribes</p> <p>Management Activity: The Licensee's Project Environmental Coordinator works with Licensee and qualified archaeologist and consults with the SHPO to avoid Project adverse impacts, minimize Project adverse effects through possible design modifications and or through data recovery or an alternative mutually agreed-upon method. If NRHP-eligible resource may not be avoided, the Licensee's archaeologist develops a Memorandum of Agreement (MOA) and the Licensee consults with SHPO, BLM, Advisory Council on Historic Preservation, and interested Indian Tribes, as appropriate and files the MOA with FERC for approval. When an appropriate MOA is agreed upon, the archaeologist will perform the Data Recovery mitigation and prepare a report that describes the mitigation and the results. The Licensee will forward this report to the consulting parties.</p> <p>Implementation Steps for Performance: Review results of the data recovery or other mitigation and consult with the SHPO, BLM, Advisory Council on Historic Preservation, interested Indian Tribes, and FERC. When consulting parties concur that mitigation has been successfully achieved, the action may proceed.</p> <p>MM CR-11. Treatment of Unanticipated Discoveries of Cultural Resources and Human Remains. As with all development projects in the state, should unforeseen artifacts become uncovered during site grading, the</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Licensee is required to adhere to all state of California procedures, including Section 21083.2(i) of the CEQA Statutes and Section 15064.5 of the CEQA Guidelines regarding stoppage of work, handling of discovered materials, and notification of proper authorities to ensure that the construction/operation of the Project would not have an adverse effect on cultural resources. The Licensee is responsible for addressing action impacts to cultural sites and human remains should they be exposed as a result of ground disturbing activities by the Licensee or one of its contractors; erosion control measures; erosion of any inventoried historic properties; or it resources that are exposed in the event of a Project operation emergency.</p> <p>Management Activities: The Licensee shall follow the Project specific Plan and Procedures Addressing Unanticipated Discoveries of Cultural Resources and Human Remains, found in Appendix A of the HPMP in the event that unanticipated cultural materials or human remains are found within the Project area.</p> <p>Implementation Steps for Performance: The Licensee shall consult with SHPO, BLM, interested Indian Tribes, Riverside County Coroner, as appropriate and depending on the land jurisdiction on which any discovery is made, and FERC.. If the Licensee or its contractors discovers contemporary contexts with human remains, local law enforcement agencies and the Riverside County Coroner shall be notified and consulted.</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>Impact 3.8-2 Transmission Line and Water Pipeline Crossing of the CRA. This impact is considered <i>potentially significant and subject to the mitigation program</i>. The transmission and water pipelines cross over buried portions of the CRA, which is very likely eligible for the NRHP based on its historical and engineering significance. The CRA is not visible from the surface in this area, however, except for a road and flood control berm.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM CR-1. Protect Known Historic Properties. Of the cultural resources recorded within the Project boundaries (see Table 3.8.4), only the CRA (P-33-6726) is evaluated as potentially eligible for listing under Criterion “A” – broad patterns of history; and Criterion “C” – embodies distinctive characteristics of a type, period, region, or method of construction. No formal determination of eligibility has been made, but the CRA will be treated as potentially eligible.</p> <p>Management Activity: Design transmission line and water pipes to avoid direct or indirect impacts to the buried portion of the CRA. Inspect once every 2 years to observe if conditions are stable or if any disturbance or deterioration has occurred.</p> <p>The Licensee will design transmission tower locations, plan conductor installation procedures, and design water line placements to avoid impacts to this crucial element of southern California’s water delivery infrastructure. Consultation with the MWD will occur for that purpose. The CRA is buried in the areas of the Project APE and no impacts to its integrity are anticipated.</p> <ul style="list-style-type: none"> • The inspections will be made at ground surface level as appropriate. • Digital photographs will be taken and compared with photographs from the previous inspections. • The Licensee (Project Environmental Coordinator or designee) will summarize observations made during inspections every 2 years during construction. This summary will be included in the HPMP Implementation Summary Report (HPMP Implementation Report). The Licensee will provide a HPMP Implementation Report on a 6-year review cycle after construction, in coordination with 	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>SHPO.</p> <ul style="list-style-type: none"> • Although none are presently identified, in the event that interested Indian Tribes identify TCPs in the future during the planning, construction, and/or operation of the Project within the APE, the Project Environmental Coordinator shall direct qualified individuals to conduct additional consultation with the Indian Tribes, BLM, and SHPO to evaluate and document the properties in accordance with National Register Bulletin 38 (Parker and King, 1998). If the properties are determined to be eligible for listing in the NRHP, appropriate measures will be developed to mitigate adverse effects through consultation with the Indian Tribes, BLM, and SHPO. Priority will be given to preservation in place when possible, followed by data recovery, documentation, restoration or other measures as approved by the Tribes, BLM and SHPO. <p><u>Implementation Steps for Performance:</u></p> <ul style="list-style-type: none"> • Inspect the CRA in the area of the APE every 2 years during construction • Provide a summary of observations on a 2-year cycle during the construction phase and a 6-year reporting cycle thereafter • If notable changes are observed in site conditions consult with SHPO to determine if further remedial actions are appropriate • Conduct appropriate consultation and treatment if TCP are identified in the future <p>MM CR-3. Implement the Historic Properties Management Plan and a Worker Environmental Awareness Program. Pursuant to CEQA Guidelines</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>§15126.4(b)(3)(A-D) preservation in place is the preferred manner in which to mitigate impacts to archeological sites. Preservation in place maintains the relationship between the artifacts and context, and seeks to avoid conflict values of groups associated with the site. The Historic Properties Management Plan and a Worker Environmental Awareness Program have been prepared to address procedures and treatment for data recovery and will be adopted prior to site excavation.</p> <p>Management Activity: Implement project-specific education program.</p> <ul style="list-style-type: none"> • A qualified archaeologist will implement a cultural resources element for the Worker Environmental Awareness Program that is tailored to the Eagle Mountain Pumped Storage Project and workforce. This Program will focus on possible discovery and mitigation procedures during the construction phase of the Project as well as preservation obligations of Project staff. • The program will include a printed handout for all Project personnel and a PowerPoint presentation or video that all Project personnel will be required to view. • The program will present concepts of cultural resources management in a simple, understandable format, including a review of preservation laws and sanctions, examples of possible discoveries, and notification procedures in the event of discoveries. These are key elements of the HPMP including the Unanticipated Discoveries Plan and the steps to follow in evaluating potential cultural resources needs that are triggered by proposed construction activities. • The program will include a Monitoring Protocol and Provisions for Enforcement that may be presented to 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>refresh personnel and introduce new staff to cultural resource concepts and Project-specific issues.</p> <ul style="list-style-type: none"> • Project equipment and vehicle operators will be educated on the importance of staying within Project boundaries and also the prohibitions of going off designated routes of travel such as Eagle Mountain Road or Kaiser Road. <p>MM CR-5. Review Effectiveness of the Historic Properties Management Plan.</p> <p>Management Activity: Every 6 years, the Licensee will determine if modifications will improve the effectiveness of the HPMP.</p> <p>Develop recommendations for changes to the HPMP that may be discussed with SHPO, the BLM, Riverside County, interested Indian Tribes, FERC, and other consulting parties.</p> <p>MM CR-6. Consult with SHPO, the BLM, Riverside County, interested Indian Tribes, and FERC.</p> <p>Management Activity: Develop a HPMP Implementation Report. The HPMP Implementation Report will be distributed for review according to a 2-year cycle during the construction phase of the Project because cultural resource discoveries and treatments are most likely during that period. Thereafter, in the operation and maintenance phase, the HPMP Implementation Reports will be coordinated with the 6-year cycle of the Licensed Hydropower Recreation Development Report (FERC Form 80). The report will summarize, in table format, all Licensee cultural resources consultations and/or surveys performed for Project modifications, activities related to the Erosion Control Plan, or any other activities that have been reviewed due to their potential to result in soil disturbance in areas not previously</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>disturbed. The HPMP Implementation Report will:</p> <ul style="list-style-type: none"> • Describe the proposed modifications, the type of cultural survey or other activity performed, the results of the survey or other activity, and actions taken (e.g., SHPO consultation and/or other consultation, mitigation, no action determined appropriate, etc.). • Summarize observations made of historic properties. • Include summaries of cultural resource treatments as an update to a HPMP implementation summary table. • Report the status of Licensee’s public interpretation projects. • Recommend modifications to the Project HPMP that will improve its implementation if appropriate. <p>Implementation Steps for Performance: Develop a format for the HPMP Implementation Report and its associated Summary Table that will present the cultural resources activities and considerations in which the Licensee participated over a 2-year reporting cycle during construction and the 6-year reporting cycle thereafter. The HPMP Implementation Report will be provided to SHPO, BLM, Riverside County, and interested Indian Tribes for a 30-day review and comment period every 6 years in coordination with FERC Form 80. Following a consideration of review comments, the Licensee will file the HPMP Implementation Report with FERC.</p> <p>MM CR-11. Treatment of Unanticipated Discoveries of Cultural Resources and Human Remains. As with all development projects in the state, should unforeseen artifacts become uncovered during site grading, the Licensee is required to adhere to all state of California</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>procedures, including Section 21083.2(i) of the CEQA Statutes and Section 15064.5 of the CEQA Guidelines regarding stoppage of work, handling of discovered materials, and notification of proper authorities to ensure that the construction/operation of the Project would not have an adverse effect on cultural resources. The Licensee is responsible for addressing action impacts to cultural sites and human remains should they be exposed as a result of ground disturbing activities by the Licensee or one of its contractors; erosion control measures; erosion of any inventoried historic properties; or it resources that are exposed in the event of a Project operation emergency.</p> <p>Management Activities: The Licensee shall follow the Project specific Plan and Procedures Addressing Unanticipated Discoveries of Cultural Resources and Human Remains, found in Appendix A of the HPMP in the event that unanticipated cultural materials or human remains are found within the Project area.</p> <p>Implementation Steps for Performance: The Licensee shall consult with SHPO, BLM, interested Indian Tribes, Riverside County Coroner, as appropriate and depending on the land jurisdiction on which any discovery is made, and FERC.,. If the Licensee or its contractors discovers contemporary contexts with human remains, local law enforcement agencies and the Riverside County Coroner shall be notified and consulted.</p>	
<p>Impact 3.8-3 Transmission Line Crossing of the Eagle Mountain Railroad. The transmission line crosses over the Eagle Mountain Railroad in two places. A formal significance</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM CR-2. Inventory and Evaluate Cultural Resources Within the Kaiser Mine Property. An inventory of this portion of the APE will be undertaken in compliance with Section 106 of the National Historic Preservation Act and according to regulatory procedures provide in 36 CFR 800. The inventory will also include other accessible portions</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>determination of the rail line remains to be undertaken by the BLM but there have been substantial previous impacts to its integrity and it is unlikely to be found NRHP-eligible.</p>		<p>of the APE within the Kaiser property. The entire townsite and associated portions of the railroad will be re-recorded, and the various elements will be considered as contributors to a National Register district.</p> <p>Management Activity: A Work Plan will be developed and executed following issuance of the FERC license and upon gaining legal access to the subject lands. A phased approach will be taken in order to make prudent and well-informed decisions on Section 106 compliance within the Kaiser property. The first phase will be a scoping reconnaissance of the APE within the Kaiser property and the entirety of the Eagle Mountain townsite. Portions of the site have been re-used from 1988 until 2003 for a prison. A high school and residential community has occupied portions of the site until recent years. Today it exists as a mix of abandoned and re-occupied post-war minimal traditional style dwellings, Kaiser operations buildings, modern buildings, ruins, and foundations. Questions concerning what remains of the original townsite plan and integrity of the Eagle Mountain townsite will be assessed to determine whether a district is feasible or warranted and what the scope of a survey should include. This information will be applied to the development of a Work Plan for the recording and evaluation of the site.</p> <ul style="list-style-type: none"> • The Work Plan will include a draft historic context and historical information about the footprint and content of the original townsite and its development over time. The context will include a consideration of the Eagle Mountain as a late example of a company town in the American West. This information will be used to develop an approach to the documentation of the site and consideration of whether a potential district may exist. The 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>draft Work Plan will be submitted to the SHPO, BLM, and FERC for review, comment, and approval of the survey approach.</p> <ul style="list-style-type: none"> • Updates to DPR 523 forms will be developed for the townsite, mine, and railroad and will be used as the basis for formal evaluations of the townsite, mine, and railroad for listing in the NRHP will be made according to 36 CFR 800 and 36 CFR 60.4. Individual buildings or structures will be documented on DPRb forms. A District Record (DPR 523d) will be completed, if appropriate. Any other resources discovered during survey also will be documented and evaluated. The results will be provided in California Archaeological Resource Management Report format and to the Secretary of the Interior's standards for archaeological reporting. <p><u>Implementation Steps for Performance:</u></p> <ul style="list-style-type: none"> • SHPO, BLM, and FERC concurrence will be obtained for the determination of NRHP-eligibility of the Eagle Mountain townsite, mine, railroad, and any other documented cultural resources within the Project APE, including consideration for the potential of any resources as contributing elements to a historic district, if evidence exists for one to be present. • If any resources are determined to be historic properties, recommendations will be developed to avoid or mitigate impacts through appropriate treatments in accordance with the Secretary of the Interior's standards. These include in order of preference: project design to avoid direct impacts; moving of standing buildings or structures in the APE to other areas of the townsite or mine so that integrity of setting, feeling, and materials can be retained; or data 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>recovery and documentation.</p> <p>MM CR-3. Implement the Historic Properties Management Plan and a Worker Environmental Awareness Program.</p> <p>Pursuant to CEQA Guidelines §15126.4(b)(3)(A-D) preservation in place is the preferred manner in which to mitigate impacts to archeological sites. Preservation in place maintains the relationship between the artifacts and context, and seeks to avoid conflict values of groups associated with the site. The Historic Properties Management Plan and a Worker Environmental Awareness Program have been prepared to address procedures and treatment for data recovery and will be adopted prior to site excavation.</p> <p>Management Activity: Implement project-specific education program.</p> <ul style="list-style-type: none"> • A qualified archaeologist will implement a cultural resources element for the Worker Environmental Awareness Program that is tailored to the Eagle Mountain Pumped Storage Project and workforce. This Program will focus on possible discovery and mitigation procedures during the construction phase of the Project as well as preservation obligations of Project staff. • The program will include a printed handout for all Project personnel and a PowerPoint presentation or video that all Project personnel will be required to view. • The program will present concepts of cultural resources management in a simple, understandable format, including a review of preservation laws and sanctions, examples of possible discoveries, and notification procedures in the event of discoveries. These are key elements of the HPMP including the Unanticipated Discoveries Plan and the steps 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>to follow in evaluating potential cultural resources needs that are triggered by proposed construction activities.</p> <ul style="list-style-type: none"> • The program will include a Monitoring Protocol and Provisions for Enforcement that may be presented to refresh personnel and introduce new staff to cultural resource concepts and Project-specific issues. • Project equipment and vehicle operators will be educated on the importance of staying within Project boundaries and also the prohibitions of going off designated routes of travel such as Eagle Mountain Road or Kaiser Road. <p>MM CR-4. Offer Opportunities for Public Interpretation. Unlike other hydroelectric projects where public access and recreational opportunities may be afforded, safety concerns and proximity to a proposed landfill project preclude offering public access within the core of the Project boundaries. Opportunities for public interpretation are therefore extremely limited. Some appropriate signage that interprets the history of the area already exists, including the 2009 E Clampus Vitus monument on Eagle Mountain Road for the 36th Evacuation Hospital associated with the World War II DTC and a Riverside County historical marker that acknowledges the Iron Chief, Eagle Mountain, and other mines of the area. The DTC/CAMA is also thoroughly and professionally interpreted at the General Patton Memorial Museum in Chiriaco Summit, located off of I-10 between Indio and Desert Center. The prehistory and Native American cultural traditions of the region are interpreted at the Agua Caliente Cultural Museum in Palm Springs, the Malki Museum on the Morongo Indian Reservation, the Palm Spring Desert Museum, the Coachella Valley Museum and Cultural Center, and at Joshua Tree National Park.</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Management Activity: Develop informative signage that will be available to the public.</p> <p>The Licensee will develop and install one weather-tolerant sign that will be placed outside the main gate of the facility. The sign will provide information about the prehistory and history of the general area, Native American groups who inhabited the area, and background on the functioning of the Project. Local museums and historical monuments will also be identified.</p> <p>The public interpretive sign will be developed in coordination with the development of the HPMP and will be installed within 1 year of completion of the boundary fence.</p> <p>MM CR-5. Review Effectiveness of the Historic Properties Management Plan.</p> <p>Management Activity: Every 6 years, the Licensee will determine if modifications will improve the effectiveness of the HPMP.</p> <p>Develop recommendations for changes to the HPMP that may be discussed with SHPO, the BLM, Riverside County, interested Indian Tribes, FERC, and other consulting parties.</p> <p>MM CR-6. Consult with SHPO, the BLM, Riverside County, interested Indian Tribes, and FERC.</p> <p>Management Activity: Develop a HPMP Implementation Report. The HPMP Implementation Report will be distributed for review according to a 2-year cycle during the construction phase of the Project because cultural resource discoveries and treatments are most likely during that period. Thereafter, in the operation and maintenance phase, the HPMP Implementation Reports will be coordinated with the 6-year cycle of the Licensed Hydropower Recreation</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Development Report (FERC Form 80). The report will summarize, in table format, all Licensee cultural resources consultations and/or surveys performed for Project modifications, activities related to the Erosion Control Plan, or any other activities that have been reviewed due to their potential to result in soil disturbance in areas not previously disturbed. The HPMP Implementation Report will:</p> <ul style="list-style-type: none"> • Describe the proposed modifications, the type of cultural survey or other activity performed, the results of the survey or other activity, and actions taken (e.g., SHPO consultation and/or other consultation, mitigation, no action determined appropriate, etc.) • Summarize observations made of historic properties • Include summaries of cultural resource treatments as an update to a HPMP implementation summary table • Report the status of Licensee’s public interpretation projects • Recommend modifications to the Project HPMP that will improve its implementation if appropriate <p>Implementation Steps for Performance: Develop a format for the HPMP Implementation Report and its associated Summary Table that will present the cultural resources activities and considerations in which the Licensee participated over a 2-year reporting cycle during construction and the 6-year reporting cycle thereafter. The HPMP Implementation Report will be provided to the SHPO, BLM, Riverside County, and interested Indian Tribes for a 30-day review and comment period every 6 years in coordination with FERC Form 80. Following a consideration of review comments, the Licensee will file the HPMP Implementation</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Report with the FERC.</p> <p>MM CR-7. Class I Investigation. In the event that Project activities would extend beyond the areas previously surveyed, then background literature will be reviewed to identify the location, character, and significance of known cultural resources in the area of a proposed action and the potential of the proposed action to affect historic properties. The Class I Investigation will rely on information contained within Licensee's Project archives. Should these data not prove sufficient, the Project Environmental Coordinator may determine that additional documentation is necessary to address a particular action under consideration that extends beyond the 1-mile buffer of the already completed Class I Investigation. The most important source of Class I Literature Review is the EIC at the University of California, Riverside.</p> <p>Management Activity: compare proposed Project location with Cultural Resources Management Maps.</p> <ul style="list-style-type: none"> • Determine if the Project area is located within 100 feet of a potentially significant previously recorded archeological site. • Determine if Project area has been characterized as actively eroding or previously disturbed by other ground-disturbing activity (e.g., by machine excavation or underground utility line). • Determine if the area has been previously surveyed for cultural resources. <p>Implementation Steps for Performance: Based on the results of the above-noted Management Activity.</p> <ul style="list-style-type: none"> • Project area is located within 100 feet of a previously 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>recorded potentially significant archeological site. Delay Project pending SHPO consultation and possible follow-up studies by a Secretary of the Interior-qualified professional archaeologist.</p> <ul style="list-style-type: none"> • Previous ground-disturbing activity may be documented or observed therefore no Project effect on cultural resources expected. Project may proceed. The Licensee shall include Project description and permit considerations in the HPMP Implementation Report that will be distributed to the SHPO, the BLM, Riverside County, interested Indian Tribes and FERC on a 2-year cycle during the construction phase and on a 6-year review cycle thereafter in coordination with Form 80. <p>MM CR-8. Class III Cultural Resources Field Investigation. Any modifications or additions to the APE in previously unsurveyed and undisturbed areas will require a Class III survey in compliance with Section 106 of the National Historic Preservation Act and according to 36 CFR 800. The Licensee will conduct an on-the-ground inventory of the APE for a proposed action that confirms the presence of known cultural resources and that may result in identification of previously unrecorded cultural resources. A Class III investigation may involve the excavation of shovel tests placed at 50-foot intervals within the APE or implementation of an alternative investigative strategy approved by the Licensee's Project Environmental Coordinator and the SHPO. Any investigations on easements through BLM land require a Fieldwork Authorization to a BLM permit-holding archaeologist in compliance with the Federal Land Policy and Management Act of 1976, as amended (PL 94-579).</p> <p>Management Activity: Consult with BLM or other land</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>holding agencies as to what Section 106 or Section 110 compliance needs may still be required and implement as specified. Engage services of a qualified archaeologist to brief the Project Environmental Coordinator on correct scoping and protocols and conduct Class III Survey such as a walkover survey and/or systematic subsurface shovel testing (e.g., perform an identification level archeological field survey.) The actual scope of work will depend upon the proposed Project location and size of the proposed activity as well as BLM requirements on BLM land. The archaeologist will perform the Class III Survey and prepare a report that describes the investigation and results. The Licensee will forward this report to the SHPO, interested Indian Tribes and FERC. All new reports and site forms will be submitted to the EIC, University of California, Riverside.</p> <p>Implementation Steps for Performance: Review results of the Class III Survey and the associated recommendations.</p> <ul style="list-style-type: none"> • If the Class III Survey did not locate cultural resources, then the proposed action may proceed following consultation with the BLM and SHPO. • If the Class III Survey locates cultural resources that the archaeologist recommends as not potentially significant, then the Licensee Project Environmental Coordinator consults with the SHPO. If consensus is reached on the recommendation, then the action may proceed. If the SHPO does not concur, then the resource is treated as potentially significant. • If the Class III Survey locates cultural resources that the archaeologist recommends as potentially significant (i.e., demonstrates good integrity, identifiable limits, structure, function, research potential, and cultural/historical context 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>– see definition in Section 4.2.3), then Licensee’s Project Environmental Coordinator consults with the SHPO. If the SHPO concurs with evaluation, then a Testing Phase investigation is recommended unless action may be designed to avoid the resource. Alternative Project locations will be reviewed.</p> <p>MM CR-9. Testing Phase Cultural Resources Field Investigation. Limited archeological excavations and analyses, possibly including documentation of structures, will be conducted to assess the National Register eligibility of individual resources and Project effects on historic properties.</p> <p>The criteria for sites eligible to the NRHP may be found at 36 CFR 60.4. A site is eligible to the NRHP if it contains qualities that are significant in American history, architecture, archaeology, engineering, and culture and possesses integrity of location, design, setting, materials, workmanship, feeling, and association and:</p> <ul style="list-style-type: none"> • is associated with events that have made a significant contribution to the broad patterns of history • is associated with the lives of persons significant in the past • embodies the distinctive characteristics of a type, period or method of construction; or represents a significant and distinguishable entity whose components may lack individual distinction or • has yielded, or may be likely to yield, information important in prehistory or history <p>Management Activity: Engage services of a qualified archaeologist to collect data sufficient to determine if a</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>cultural resource qualifies as significant. If the site is located on BLM land, an excavation permit is required for testing programs that remove more than one cubic meter of soil from an individual site, in compliance with the Archaeological Resources Protection Act of 1979, as Amended (PL 96-95). Archaeological Resources Protection Act permits require submittal of a Treatment Plan/Research Design for which the BLM is required to consult with the SHPO and interested Indian Tribes prior to approving field investigation. The archaeologist will perform a Testing Phase investigation and prepare a report that describes the Testing Phase investigation and results. The Licensee will forward this report to the BLM for consultation with the SHPO, interested Indian Tribes and FERC.</p> <p>Implementation Steps for Performance: Review results of the Testing Phase Report and the associated recommendations, and consult with the BLM and SHPO.</p> <ul style="list-style-type: none"> • If the Testing Phase investigation indicates that the cultural resource does not qualify as significant, the Project may proceed following consultation with SHPO. • If the Testing Phase investigation indicates that the cultural resource qualifies as significant, Licensee Manager consults with the BLM and SHPO. If SHPO concurs with the recommendation that the cultural resource is potentially eligible for listing in the NRHP and if the Project is not amended to avoid the resource, consultation with the SHPO will continue. A qualified archaeologist will develop the scope of work that will serve as mitigation of Project effects. The Licensee will consult with the SHPO and gain consensus on the appropriate mitigation (may involve further Data Recovery field investigation, monitoring, or another alternative treatment measure). 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>MM CR-10. Data Recovery or Alternative Mitigation. The Licensee will investigate activities designed to mitigate effects upon a historic property that an action will affect. This may include data recovery, documentation, restoration or other measures. Such investigations will be preceded by development of an action-specific Memorandum of Agreement that has been approved by the Licensee, SHPO, BLM, Advisory Council on Historic Preservation, FERC, and as appropriate, interested Indian Tribes</p> <p>Management Activity: The Licensee's Project Environmental Coordinator works with Licensee and qualified archaeologist and consults with the SHPO to avoid Project adverse impacts, minimize Project adverse effects through possible design modifications and or through data recovery or an alternative mutually agreed-upon method. If NRHP-eligible resource may not be avoided, the Licensee's archaeologist develops a Memorandum of Agreement (MOA) and the Licensee consults with SHPO, BLM, Advisory Council on Historic Preservation, and interested Indian Tribes, as appropriate and files the MOA with FERC for approval. When an appropriate MOA is agreed upon, the archaeologist will perform the Data Recovery mitigation and prepare a report that describes the mitigation and the results. The Licensee will forward this report to the consulting parties.</p> <p>Implementation Steps for Performance: Review results of the data recovery or other mitigation and consult with the SHPO, BLM, Advisory Council on Historic Preservation, interested Indian Tribes, and FERC. When consulting parties concur that mitigation has been successfully achieved, the action may proceed.</p> <p>MM CR-11. Treatment of Unanticipated Discoveries</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>of Cultural Resources and Human Remains. As with all development projects in the state, should unforeseen artifacts become uncovered during site grading, the Licensee is required to adhere to all state of California procedures, including Section 21083.2(i) of the CEQA Statutes and Section 15064.5 of the CEQA Guidelines regarding stoppage of work, handling of discovered materials, and notification of proper authorities to ensure that the construction/operation of the Project would not have an adverse effect on cultural resources. The Licensee is responsible for addressing action impacts to cultural sites and human remains should they be exposed as a result of ground disturbing activities by the Licensee or one of its contractors; erosion control measures; erosion of any inventoried historic properties; or it resources that are exposed in the event of a Project operation emergency.</p> <p>Management Activities: The Licensee shall follow the Project specific Plan and Procedures Addressing Unanticipated Discoveries of Cultural Resources and Human Remains, found in Appendix A of the HPMP in the event that unanticipated cultural materials or human remains are found within the Project area.</p> <p>Implementation Steps for Performance: The Licensee shall consult with SHPO, BLM, interested Indian Tribes, Riverside County Coroner, as appropriate and depending on the land jurisdiction on which any discovery is made, and FERC.,. If the Licensee or its contractors discovers contemporary contexts with human remains, local law enforcement agencies and the Riverside County Coroner shall be notified and consulted.</p>	
<p>Impact 3.8-4 Central Project Site. Because of the large degree</p>	<p><i>Potentially significant and</i></p>	<p>MM CR-2. Inventory and Evaluate Cultural Resources Within the Kaiser Mine Property. An inventory</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>of disturbance on the site, it is unlikely that significant pre-historic cultural resources remaining on the site. However, there is the potential for historic resources</p>	<p><i>subject to the mitigation program</i></p>	<p>of this portion of the APE will be undertaken in compliance with Section 106 of the National Historic Preservation Act and according to regulatory procedures provide in 36 CFR 800. The inventory will also include other accessible portions of the APE within the Kaiser property. The entire townsite and associated portions of the railroad will be re-recorded, and the various elements will be considered as contributors to a National Register district.</p> <p>Management Activity: A Work Plan will be developed and executed following issuance of the FERC license and upon gaining legal access to the subject lands. A phased approach will be taken in order to make prudent and well-informed decisions on Section 106 compliance within the Kaiser property. The first phase will be a scoping reconnaissance of the APE within the Kaiser property and the entirety of the Eagle Mountain townsite. Portions of the site have been re-used from 1988 until 2003 for a prison. A high school and residential community has occupied portions of the site until recent years. Today it exists as a mix of abandoned and re-occupied post-war minimal traditional style dwellings, Kaiser operations buildings, modern buildings, ruins, and foundations. Questions concerning what remains of the original townsite plan and integrity of the Eagle Mountain townsite will be assessed to determine whether a district is feasible or warranted and what the scope of a survey should include. This information will be applied to the development of a Work Plan for the recording and evaluation of the site.</p> <ul style="list-style-type: none"> • The Work Plan will include a draft historic context and historical information about the footprint and content of the original townsite and its development over time. The context will include a consideration of the Eagle Mountain as a late example of a company town in the American 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>West. This information will be used to develop an approach to the documentation of the site and consideration of whether a potential district may exist. The draft Work Plan will be submitted to SHPO, BLM, and FERC for review, comment, and approval of the survey approach.</p> <ul style="list-style-type: none"> • Updates to DPR 523 forms will be developed for the townsite, mine, and railroad and will be used as the basis for formal evaluations of the townsite, mine, and railroad for listing in the NRHP will be made according to 36 CFR 800 and 36 CFR 60.4. Individual buildings or structures will be documented on DPRb forms. A District Record (DPR 523d) will be completed, if appropriate. Any other resources discovered during survey also will be documented and evaluated. The results will be provided in California Archaeological Resource Management Report format and to the Secretary of the Interior's standards for archaeological reporting. <p><u>Implementation Steps for Performance:</u></p> <ul style="list-style-type: none"> • SHPO, BLM, and FERC concurrence will be obtained for the determination of NRHP-eligibility of the Eagle Mountain townsite, mine, railroad, and any other documented cultural resources within the Project APE, including consideration for the potential of any resources as contributing elements to a historic district, if evidence exists for one to be present. • If any resources are determined to be historic properties, recommendations will be developed to avoid or mitigate impacts through appropriate treatments in accordance with the Secretary of the Interior's standards. These include in order of preference: project design to avoid direct impacts; moving of standing buildings or structures in the APE to 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>other areas of the townsite or mine so that integrity of setting, feeling, and materials can be retained; or data recovery and documentation.</p> <p>MM CR-3. Implement the Historic Properties Management Plan and a Worker Environmental Awareness Program.</p> <p>Pursuant to CEQA Guidelines §15126.4(b)(3)(A-D) preservation in place is the preferred manner in which to mitigate impacts to archeological sites. Preservation in place maintains the relationship between the artifacts and context, and seeks to avoid conflict values of groups associated with the site. The Historic Properties Management Plan and a Worker Environmental Awareness Program have been prepared to address procedures and treatment for data recovery and will be adopted prior to site excavation.</p> <p>Management Activity: Implement project-specific education program.</p> <ul style="list-style-type: none"> • A qualified archaeologist will implement a cultural resources element for the Worker Environmental Awareness Program that is tailored to the Eagle Mountain Pumped Storage Project and workforce. This Program will focus on possible discovery and mitigation procedures during the construction phase of the Project as well as preservation obligations of Project staff. • The program will include a printed handout for all Project personnel and a PowerPoint presentation or video that all Project personnel will be required to view. • The program will present concepts of cultural resources management in a simple, understandable format, including a review of preservation laws and sanctions, examples of possible discoveries, and notification procedures in the 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>event of discoveries. These are key elements of the HPMP including the Unanticipated Discoveries Plan and the steps to follow in evaluating potential cultural resources needs that are triggered by proposed construction activities.</p> <ul style="list-style-type: none"> • The program will include a Monitoring Protocol and Provisions for Enforcement that may be presented to refresh personnel and introduce new staff to cultural resource concepts and Project-specific issues. • Project equipment and vehicle operators will be educated on the importance of staying within Project boundaries and also the prohibitions of going off designated routes of travel such as Eagle Mountain Road or Kaiser Road. <p>MM CR-4. Offer Opportunities for Public Interpretation. Unlike other hydroelectric projects where public access and recreational opportunities may be afforded, safety concerns and proximity to a proposed landfill project preclude offering public access within the core of the Project boundaries. Opportunities for public interpretation are therefore extremely limited. Some appropriate signage that interprets the history of the area already exists, including the 2009 E Clampus Vitus monument on Eagle Mountain Road for the 36th Evacuation Hospital associated with the World War II DTC and a Riverside County historical marker that acknowledges the Iron Chief, Eagle Mountain, and other mines of the area. The DTC/CAMA is also thoroughly and professionally interpreted at the General Patton Memorial Museum in Chiriaco Summit, located off of I-10 between Indio and Desert Center. The prehistory and Native American cultural traditions of the region are interpreted at the Agua Caliente Cultural Museum in Palm Springs, the Malki Museum on the Morongo Indian Reservation, the Palm Spring Desert Museum, the</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Coachella Valley Museum and Cultural Center, and at Joshua Tree National Park.</p> <p>Management Activity: Develop informative signage that will be available to the public.</p> <p>The Licensee will develop and install one weather-tolerant sign that will be placed outside the main gate of the facility. The sign will provide information about the prehistory and history of the general area, Native American groups who inhabited the area, and background on the functioning of the Project. Local museums and historical monuments will also be identified.</p> <p>A public interpretive sign will be developed in coordination with the development of the HPMP and will be installed within 1 year of completion of the boundary fence.</p> <p>MM CR-5. Review Effectiveness of the Historic Properties Management Plan.</p> <p>Management Activity: Every 6 years, the Licensee will determine if modifications will improve the effectiveness of the HPMP.</p> <p>Develop recommendations for changes to the HPMP that may be discussed with SHPO, the BLM, Riverside County, interested Indian Tribes, FERC, and other consulting parties.</p> <p>MM CR-6. Consult with SHPO, the BLM, Riverside County, interested Indian Tribes, and FERC.</p> <p>Management Activity: Develop a HPMP Implementation Report. The HPMP Implementation Report will be distributed for review according to a 2-year cycle during the construction phase of the Project because cultural resource discoveries and treatments are most likely during that period. Thereafter, in the operation and maintenance phase,</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>the HPMP Implementation Reports will be coordinated with the 6-year cycle of the Licensed Hydropower Recreation Development Report (FERC Form 80). The report will summarize, in table format, all Licensee cultural resources consultations and/or surveys performed for Project modifications, activities related to the Erosion Control Plan, or any other activities that have been reviewed due to their potential to result in soil disturbance in areas not previously disturbed. The HPMP Implementation Report will:</p> <ul style="list-style-type: none"> • Describe the proposed modifications, the type of cultural survey or other activity performed, the results of the survey or other activity, and actions taken (e.g., SHPO consultation and/or other consultation, mitigation, no action determined appropriate, etc.). • Summarize observations made of historic properties. • Include summaries of cultural resource treatments as an update to a HPMP implementation summary table. • Report the status of Licensee's public interpretation projects. • Recommend modifications to the Project HPMP that will improve its implementation if appropriate. <p>Implementation Steps for Performance: Develop a format for the HPMP Implementation Report and its associated Summary Table that will present the cultural resources activities and considerations in which the Licensee participated over a 2-year reporting cycle during construction and the 6-year reporting cycle thereafter. The HPMP Implementation Report will be provided to SHPO, BLM, Riverside County, and interested Indian Tribes for a 30-day review and comment period every 6 years in</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>coordination with FERC Form 80. Following a consideration of review comments, the Licensee will file the HPMP Implementation Report with FERC.</p> <p>MM CR-7. Class I Investigation. In the event that Project activities would extend beyond the areas previously surveyed, then background literature will be reviewed to identify the location, character, and significance of known cultural resources in the area of a proposed action and the potential of the proposed action to affect historic properties. The Class I Investigation will rely on information contained within the Licensee's Project archives. Should these data not prove sufficient, the Project Environmental Coordinator may determine that additional documentation is necessary to address a particular action under consideration that extends beyond the 1-mile buffer of the already completed Class I Investigation. The most important source of Class I Literature Review is the EIC at the University of California, Riverside.</p> <p>Management Activity: compare proposed Project location with Cultural Resources Management Maps.</p> <ul style="list-style-type: none"> • Determine if the Project area is located within 100 feet of a potentially significant previously recorded archeological site • Determine if Project area has been characterized as actively eroding or previously disturbed by other ground-disturbing activity (e.g., by machine excavation or underground utility line) • Determine if the area has been previously surveyed for cultural resources <p>Implementation Steps for Performance: Based on the</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>results of the above-noted Management Activity.</p> <ul style="list-style-type: none"> • Project area is located within 100 feet of a previously recorded potentially significant archeological site. Delay Project pending SHPO consultation and possible follow-up studies by a Secretary of the Interior-qualified professional archaeologist. • Previous ground-disturbing activity may be documented or observed therefore no Project effect on cultural resources expected. Project may proceed. The Licensee shall include Project description and permit considerations in the HPMP Implementation Report that will be distributed to the SHPO, the BLM, Riverside County, interested Indian Tribes and FERC on a 2-year cycle during the construction phase and on a 6-year review cycle thereafter in coordination with Form 80. <p>MM CR-8. Class III Cultural Resources Field Investigation. Any modifications or additions to the APE in previously unsurveyed and undisturbed areas will require a Class III survey in compliance with Section 106 of the National Historic Preservation Act and according to 36 CFR 800. The Licensee will conduct an on-the-ground inventory of the APE for a proposed action that confirms the presence of known cultural resources and that may result in identification of previously unrecorded cultural resources. A Class III investigation may involve the excavation of shovel tests placed at 50-foot intervals within the APE or implementation of an alternative investigative strategy approved by the Licensee's Project Environmental Coordinator and the SHPO. Any investigations on easements through BLM land require a Fieldwork Authorization to a BLM permit-holding archaeologist in compliance with the Federal Land Policy and Management</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Act of 1976, as amended (PL 94-579).</p> <p>Management Activity: Consult with the BLM or other land holding agencies as to what Section 106 or Section 110 compliance needs may still be required and implement as specified. Engage services of a qualified archaeologist to brief the Project Environmental Coordinator on correct scoping and protocols and conduct Class III Survey such as a walkover survey and/or systematic subsurface shovel testing (e.g., perform an identification level archeological field survey.) The actual scope of work will depend upon the proposed Project location and size of the proposed activity as well as BLM requirements on BLM land. The archaeologist will perform the Class III Survey and prepare a report that describes the investigation and results. The Licensee will forward this report to the SHPO, interested Indian Tribes and the FERC. All new reports and site forms will be submitted to the EIC, University of California, Riverside.</p> <p>Implementation Steps for Performance: Review results of the Class III Survey and the associated recommendations.</p> <ul style="list-style-type: none"> • If the Class III survey did not locate cultural resources, then the proposed action may proceed following consultation with the BLM and SHPO. • If the Class III Survey locates cultural resources that the archaeologist recommends as not potentially significant, then the Licensee Project Environmental Coordinator consults with the SHPO. If consensus is reached on the recommendation, then the action may proceed. If the SHPO does not concur, then the resource is treated as potentially significant. 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<ul style="list-style-type: none"> • If the Class III Survey locates cultural resources that the archaeologist recommends as potentially significant (i.e., demonstrates good integrity, identifiable limits, structure, function, research potential, and cultural/historical context – see definition in Section 4.2.3), then the Licensee’s Project Environmental Coordinator consults with the SHPO. If the SHPO concurs with evaluation, then a Testing Phase investigation is recommended unless action may be designed to avoid the resource. Alternative Project locations will be reviewed. <p>MM CR-9. Testing Phase Cultural Resources Field Investigation. Limited archeological excavations and analyses, possibly including documentation of structures will be conducted to assess the National Register eligibility of individual resources Project effects on historic properties.</p> <p>The criteria for sites eligible to the NRHP may be found at 36 CFR 60.4. A site is eligible to the NRHP if it contains qualities that are significant in American history, architecture, archaeology, engineering, and culture and possesses integrity of location, design, setting, materials, workmanship, feeling, and association and:</p> <ul style="list-style-type: none"> • is associated with events that have made a significant contribution to the broad patterns of history • is associated with the lives of persons significant in the past • embodies the distinctive characteristics of a type, period or method of construction; or represents a significant and distinguishable entity whose components may lack individual distinction or • has yielded, or may be likely to yield, information important 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>in prehistory or history</p> <p>Management Activity: Engage services of a qualified archaeologist to collect data sufficient to determine if a cultural resource qualifies as significant. If the site is located on BLM land, an excavation permit is required for testing programs that remove more than one cubic meter of soil from an individual site, in compliance with the Archaeological Resources Protection Act of 1979, as Amended (PL 96-95). Archaeological Resources Protection Act permits require submittal of a Treatment Plan/Research Design for which the BLM is required to consult with the SHPO and interested Indian Tribes prior to approving field investigation. The archaeologist will perform a Testing Phase investigation and prepare a report that describes the Testing Phase investigation and results. The Licensee will forward this report to the BLM for consultation with the SHPO, interested Indian Tribes and FERC.</p> <p>Implementation Steps for Performance: Review results of the Testing Phase Report and the associated recommendations, and consult with the BLM and SHPO.</p> <ul style="list-style-type: none"> • If the Testing Phase investigation indicates that the cultural resource does not qualify as significant, the Project may proceed following consultation with SHPO. • If the Testing Phase investigation indicates that the cultural resource qualifies as significant, Licensee Manager consults with the BLM and SHPO. If SHPO concurs with the recommendation that the cultural resource is potentially eligible for listing in the NRHP and if the Project is not amended to avoid the resource, consultation with SHPO will continue. A qualified archaeologist will develop the scope of work that will serve as mitigation of Project effects. The Licensee will consult with the SHPO and gain 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>consensus on the appropriate mitigation (may involve further Data Recovery field investigation, monitoring, or another alternative treatment measure).</p> <p>MM CR-10. Data Recovery or Alternative Mitigation. The Licensee will investigate activities designed to mitigate effects upon a historic property that an action will affect. This may include data recovery, documentation, restoration or other measures. Such investigations will be preceded by development of an action-specific Memorandum of Agreement that has been approved by the Licensee, SHPO, BLM, Advisory Council on Historic Preservation, FERC, and, as appropriate, interested Indian Tribes.</p> <p>Management Activity: The Licensee Project Environmental Coordinator works with the Licensee and qualified archaeologist and consults with SHPO to avoid Project adverse impacts, minimize Project adverse effects through possible design modifications and or through data recovery or an alternative mutually agreed-upon method. If NRHP-eligible resource may not be avoided, the Licensee's archaeologist develops a Memorandum of Agreement (MOA) and the Licensee consults with the SHPO, BLM, Advisory Council on Historic Preservation, and interested Indian Tribes, as appropriate and files the MOA with FERC for approval. When an appropriate MOA is agreed upon, the archaeologist will perform the Data Recovery mitigation and prepare a report that describes the mitigation and the results. The Licensee will forward this report to the consulting parties.</p> <p>Implementation Steps for Performance: Review results of the data recovery or other mitigation and consult with the SHPO, BLM, Advisory Council on Historic Preservation, interested Indian Tribes, and the FERC. When consulting</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>parties concur that mitigation has been successfully achieved, the action may proceed.</p> <p>MM CR-11. Treatment of Unanticipated Discoveries of Cultural Resources and Human Remains.As with all development projects in the state, should unforeseen artifacts become uncovered during site grading, the Licensee is required to adhere to all state of California procedures, including Section 21083.2(i) of the CEQA Statutes and Section 15064.5 of the CEQA Guidelines regarding stoppage of work, handling of discovered materials, and notification of proper authorities to ensure that the construction/operation of the Project would not have an adverse effect on cultural resources. The Licensee is responsible for addressing action impacts to cultural sites and human remains should they be exposed as a result of ground disturbing activities by the Licensee or one of its contractors; erosion control measures; erosion of any inventoried historic properties; or it resources that are exposed in the event of a Project operation emergency.</p> <p>Management Activities: The Licensee shall follow the Project specific Plan and Procedures Addressing Unanticipated Discoveries of Cultural Resources and Human Remains, found in Appendix A of the HPMP in the event that unanticipated cultural materials or human remains are found within the Project area.</p> <p>Implementation Steps for Performance: The Licensee shall consult with SHPO, BLM, interested Indian Tribes, Riverside County Coroner, as appropriate and depending on the land jurisdiction on which any discovery is made, and FERC.,. If the Licensee or its contractors discovers contemporary contexts with human remains, local law enforcement agencies and the Riverside County Coroner</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		shall be notified and consulted.	
<p>Impact 3.8-5 Unknown/Buried Cultural Resources. The only substantial prehistoric and historic sites identified in either the Class I inventory or Class III survey within the study corridor are located outside of the Project boundaries or APE. The Project involves grading and excavation for several Project features. In the event that any unknown (remaining) cultural resources are found, the mitigation program would be triggered.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM CR-2. Inventory and Evaluate Cultural Resources Within the Kaiser Mine Property. An inventory of this portion of the APE will be undertaken in compliance with Section 106 of the National Historic Preservation Act and according to regulatory procedures provide in 36 CFR 800. The inventory will also include other accessible portions of the APE within the Kaiser property. The entire townsite and associated portions of the railroad will be re-recorded, and the various elements will be considered as contributors to a National Register district.</p> <p>Management Activity: A Work Plan will be developed and executed following issuance of the FERC license and upon gaining legal access to the subject lands. A phased approach will be taken in order to make prudent and well-informed decisions on Section 106 compliance within the Kaiser property. The first phase will be a scoping reconnaissance of the APE within the Kaiser property and the entirety of the Eagle Mountain townsite. Portions of the site have been re-used from 1988 until 2003 for a prison. A high school and residential community has occupied portions of the site until recent years. Today it exists as a mix of abandoned and re-occupied post-war minimal traditional style dwellings, Kaiser operations buildings, modern buildings, ruins, and foundations. Questions concerning what remains of the original townsite plan and integrity of the Eagle Mountain townsite will be assessed to determine whether a district is feasible or warranted and what the scope of a survey should include. This information will be applied to the development of a Work Plan for the recording and evaluation of the site.</p> <ul style="list-style-type: none"> • The Work Plan will include a draft historic context and 	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>historical information about the footprint and content of the original townsite and its development over time. The context will include a consideration of the Eagle Mountain as a late example of a company town in the American West. This information will be used to develop an approach to the documentation of the site and consideration of whether a potential district may exist. The draft Work Plan will be submitted to SHPO, BLM, and FERC for review, comment, and approval of the survey approach.</p> <ul style="list-style-type: none"> • Updates to DPR 523 forms will be developed for the townsite, mine, and railroad and will be used as the basis for formal evaluations of the townsite, mine, and railroad for listing in the NRHP will be made according to 36 CFR 800 and 36 CFR 60.4. Individual buildings or structures will be documented on DPRb forms. A District Record (DPR 523d) will be completed, if appropriate. Any other resources discovered during survey also will be documented and evaluated. The results will be provided in California Archaeological Resource Management Report format and to the Secretary of the Interior's standards for archaeological reporting. <p><u>Implementation Steps for Performance:</u></p> <ul style="list-style-type: none"> • SHPO, BLM, and FERC concurrence will be obtained for the determination of NRHP-eligibility of the Eagle Mountain townsite, mine, railroad, and any other documented cultural resources within the Project APE, including consideration for the potential of any resources as contributing elements to a historic district, if evidence exists for one to be present. • If any resources are determined to be historic properties, recommendations will be developed to avoid or mitigate 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>impacts through appropriate treatments in accordance with the Secretary of the Interior’s standards. These include in order of preference: project design to avoid direct impacts; moving of standing buildings or structures in the APE to other areas of the townsite or mine so that integrity of setting, feeling, and materials can be retained; or data recovery and documentation.</p> <p>MM CR-3. Implement the Historic Properties Management Plan and a Worker Environmental Awareness Program.</p> <p>Pursuant to CEQA Guidelines §15126.4(b)(3)(A-D) preservation in place is the preferred manner in which to mitigate impacts to archeological sites. Preservation in place maintains the relationship between the artifacts and context, and seeks to avoid conflict values of groups associated with the site. The Historic Properties Management Plan and a Worker Environmental Awareness Program have been prepared to address procedures and treatment for data recovery and will be adopted prior to site excavation.</p> <p>Management Activity: Implement project-specific education program.</p> <ul style="list-style-type: none"> • A qualified archaeologist will implement a cultural resources element for the Worker Environmental Awareness Program that is tailored to the Eagle Mountain Pumped Storage Project and workforce. This Program will focus on possible discovery and mitigation procedures during the construction phase of the Project as well as preservation obligations of Project staff. • The program will include a printed handout for all Project personnel and a PowerPoint presentation or video that all 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Project personnel will be required to view.</p> <ul style="list-style-type: none"> • The program will present concepts of cultural resources management in a simple, understandable format, including a review of preservation laws and sanctions, examples of possible discoveries, and notification procedures in the event of discoveries. These are key elements of the HPMP including the Unanticipated Discoveries Plan and the steps to follow in evaluating potential cultural resources needs that are triggered by proposed construction activities. • The program will include a Monitoring Protocol and Provisions for Enforcement that may be presented to refresh personnel and introduce new staff to cultural resource concepts and Project-specific issues. • Project equipment and vehicle operators will be educated on the importance of staying within Project boundaries and also the prohibitions of going off designated routes of travel such as Eagle Mountain Road or Kaiser Road. <p>MM CR-4. Offer Opportunities for Public Interpretation. Unlike other hydroelectric projects where public access and recreational opportunities may be afforded, safety concerns and proximity to a proposed landfill project preclude offering public access within the core of the Project boundaries. Opportunities for public interpretation are therefore extremely limited. Some appropriate signage that interprets the history of the area already exists, including the 2009 E Clampus Vitus monument on Eagle Mountain Road for the 36th Evacuation Hospital associated with the World War II DTC and a Riverside County historical marker that acknowledges the Iron Chief, Eagle Mountain, and other mines of the area. The DTC/CAMA is also thoroughly and professionally interpreted at the General Patton Memorial Museum in Chiriaco</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Summit, located off of I-10 between Indio and Desert Center. The prehistory and Native American cultural traditions of the region are interpreted at the Agua Caliente Cultural Museum in Palm Springs, the Malki Museum on the Morongo Indian Reservation, the Palm Spring Desert Museum, the Coachella Valley Museum and Cultural Center, and at Joshua Tree National Park.</p> <p>Management Activity: Develop informative signage that will be available to the public.</p> <p>The Licensee will develop and install one weather-tolerant sign that will be placed outside the main gate of the facility. The sign will provide information about the prehistory and history of the general area, Native American groups who inhabited the area, and background on the functioning of the Project. Local museums and historical monuments will also be identified.</p> <p>A public interpretive sign will be developed in coordination with the development of the HPMP and will be installed within 1 year of completion of the boundary fence.</p> <p>MM CR-5. Review Effectiveness of the Historic Properties Management Plan.</p> <p>Management Activity: Every 6 years, the Licensee will determine if modifications will improve the effectiveness of the HPMP.</p> <p>Develop recommendations for changes to the HPMP that may be discussed with SHPO, the BLM, Riverside County, interested Indian Tribes, FERC, and other consulting parties.</p> <p>MM CR-6. Consult with SHPO, the BLM, Riverside County, interested Indian Tribes, and FERC.</p> <p>Management Activity: Develop a HPMP Implementation</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Report. The HPMP Implementation Report will be distributed for review according to a 2-year cycle during the construction phase of the Project because cultural resource discoveries and treatments are most likely during that period. Thereafter, in the operation and maintenance phase, the HPMP Implementation Reports will be coordinated with the 6-year cycle of the Licensed Hydropower Recreation Development Report (FERC Form 80). The report will summarize, in table format, all Licensee cultural resources consultations and/or surveys performed for Project modifications, activities related to the Erosion Control Plan, or any other activities that have been reviewed due to their potential to result in soil disturbance in areas not previously disturbed. The HPMP Implementation Report will:</p> <ul style="list-style-type: none"> • Describe the proposed modifications, the type of cultural survey or other activity performed, the results of the survey or other activity, and actions taken (e.g., SHPO consultation and/or other consultation, mitigation, no action determined appropriate, etc.) • Summarize observations made of historic properties • Include summaries of cultural resource treatments as an update to a HPMP implementation summary table • Report the status of Licensee's public interpretation projects • Recommend modifications to the Project HPMP that will improve its implementation if appropriate <p>Implementation Steps for Performance: Develop a format for the HPMP Implementation Report and its associated Summary Table that will present the cultural resources activities and considerations in which the Licensee</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>participated over a 2-year reporting cycle during construction and the 6-year reporting cycle thereafter. The HPMP Implementation Report will be provided to SHPO, BLM, Riverside County, and interested Indian Tribes for a 30-day review and comment period every 6 years in coordination with FERC Form 80. Following a consideration of review comments, the Licensee will file the HPMP Implementation Report with FERC.</p> <p>MM CR-7. Class I Investigation. In the event that Project activities would extend beyond the areas previously surveyed, then background literature will be reviewed to identify the location, character, and significance of known cultural resources in the area of a proposed action and the potential of the proposed action to affect historic properties. The Class I investigation will rely on information contained within the Licensee's Project archives. Should these data not prove sufficient, the Project Environmental Coordinator may determine that additional documentation is necessary to address a particular action under consideration that extends beyond the 1-mile buffer of the already completed Class I Investigation. The most important source of Class I Literature Review is the EIC at the University of California, Riverside.</p> <p>Management Activity: compare proposed Project location with Cultural Resources Management Maps.</p> <ul style="list-style-type: none"> • Determine if the Project area is located within 100 feet of a potentially significant previously recorded archeological site • Determine if Project area has been characterized as actively eroding or previously disturbed by other ground-disturbing activity (e.g., by machine excavation or 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>underground utility line)</p> <ul style="list-style-type: none"> • Determine if the area has been previously surveyed for cultural resources <p>Implementation Steps for Performance: Based on the results of the above-noted Management Activity.</p> <ul style="list-style-type: none"> • Project area is located within 100 feet of a previously recorded potentially significant archeological site. Delay Project pending SHPO consultation and possible follow-up studies by a Secretary of the Interior-qualified professional archaeologist. • Previous ground-disturbing activity may be documented or observed therefore no Project effect on cultural resources expected. Project may proceed. The Licensee shall include Project description and permit considerations in the HPMP Implementation Report that will be distributed to the SHPO, the BLM, Riverside County, interested Indian Tribes and FERC on a 2-year cycle during the construction phase and on a 6-year review cycle thereafter in coordination with Form 80. <p>MM CR-8. Class III Cultural Resources Field Investigation. Any modifications or additions to the APE in previously unsurveyed and undisturbed areas will require a Class III survey in compliance with Section 106 of the National Historic Preservation Act and according to 36 CFR 800. The Licensee will conduct an on-the-ground inventory of the APE for a proposed action that confirms the presence of known cultural resources and that may result in identification of previously unrecorded cultural resources. A Class III investigation may involve the excavation of shovel tests placed at 50-foot intervals within the APE or implementation of an alternative investigative strategy</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>approved by the Licensee's Project Environmental Coordinator and the SHPO. Any investigations on easements through BLM land require a Fieldwork Authorization to a BLM permit-holding archaeologist in compliance with the Federal Land Policy and Management Act of 1976, as amended (PL 94-579).</p> <p>Management Activity: Consult with BLM or other land holding agencies as to what Section 106 or Section 110 compliance needs may still be required and implement as specified. Engage services of a qualified archaeologist to brief the Project Environmental Coordinator on correct scoping and protocols and conduct Class III Survey such as a walkover survey and/or systematic subsurface shovel testing (e.g., perform an identification level archeological field survey.) The actual scope of work will depend upon the proposed Project location and size of the proposed activity as well as BLM requirements on BLM land. The archaeologist will perform the Class III Survey and prepare a report that describes the investigation and results. The Licensee will forward this report to the SHPO, interested Indian Tribes and FERC. All new reports and site forms will be submitted to the EIC, University of California, Riverside.</p> <p>Implementation Steps for Performance: Review results of the Class III Survey and the associated recommendations.</p> <ul style="list-style-type: none"> • If the Class III Survey did not locate cultural resources, then the proposed action may proceed following consultation with BLM and SHPO. • If the Class III Survey locates cultural resources that the archaeologist recommends as not potentially significant, then the Licensee's Project Environmental Coordinator consults with SHPO. If consensus is reached on the recommendation, then the action may proceed. If SHPO 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>does not concur, then the resource is treated as potentially significant.</p> <ul style="list-style-type: none"> • If the Class III Survey locates cultural resources that the archaeologist recommends as potentially significant (i.e., demonstrates good integrity, identifiable limits, structure, function, research potential, and cultural/historical context – see definition in Section 4.2.3), then the Licensee’s Project Environmental Coordinator consults with SHPO. If SHPO concurs with evaluation, then a Testing Phase investigation is recommended unless action may be designed to avoid the resource. Alternative Project locations will be reviewed. <p>MM CR-9. Testing Phase Cultural Resources Field Investigation. Limited archeological excavations and analyses, possibly including documentation of structures, will be conducted to assess the National Register eligibility of individual resources and Project effects on historic properties</p> <p>The criteria for sites eligible to the NRHP may be found at 36 CFR 60.4. A site is eligible to the NRHP if it contains qualities that are significant in American history, architecture, archaeology, engineering, and culture and possesses integrity of location, design, setting, materials, workmanship, feeling, and association and:</p> <ul style="list-style-type: none"> • is associated with events that have made a significant contribution to the broad patterns of history • is associated with the lives of persons significant in the past • embodies the distinctive characteristics of a type, period or method of construction; or represents a significant and distinguishable entity whose components may lack 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>individual distinction or</p> <ul style="list-style-type: none"> • has yielded, or may be likely to yield, information important in prehistory or history <p>Management Activity: Engage services of a qualified archaeologist to collect data sufficient to determine if a cultural resource qualifies as significant. If the site is located on BLM land, an excavation permit is required for testing programs that remove more than one cubic meter of soil from an individual site, in compliance with the Archaeological Resources Protection Act of 1979, as Amended (PL 96-95). Archaeological Resources Protection Act permits require submittal of a Treatment Plan/Research Design for which the BLM is required to consult with the SHPO and interested Indian Tribes prior to approving field investigation. The archaeologist will perform a Testing Phase investigation and prepare a report that describes the Testing Phase investigation and results. The Licensee will forward this report to the BLM for consultation with SHPO, interested Indian Tribes and FERC.</p> <p>Implementation Steps for Performance: Review results of the Testing Phase Report and the associated recommendations, and consult with the BLM SHPO.</p> <ul style="list-style-type: none"> • If the Testing Phase investigation indicates that the cultural resource does not qualify as significant, Project may proceed following consultation with the SHPO. • If the Testing Phase investigation indicates that the cultural resource qualifies as significant, Licensee Manager consults with the BLM and SHPO. If the SHPO concurs with the recommendation that the cultural resource is potentially eligible for listing in the NRHP and if the Project is not amended to avoid the resource, 	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>consultation with SHPO will continue. A qualified archaeologist will develop the scope of work that will serve as mitigation of Project effects. The Licensee will consult with the SHPO and gain consensus on the appropriate mitigation (may involve further Data Recovery field investigation, monitoring, or another alternative treatment measure).</p> <p>MM CR-10. Data Recovery or Alternative Mitigation. The Licensee will investigate activities designed to mitigate effects upon a historic property that an action will affect. This may include data recovery, documentation, restoration or other measures. Such investigations will be preceded by development of an action-specific Memorandum of Agreement that has been approved by the Licensee, SHPO, BLM, Advisory Council on Historic Preservation, FERC, and, as appropriate, interested Indian Tribes.</p> <p>Management Activity: The Licensee's Project Environmental Coordinator works with the Licensee and qualified archaeologist and consults with SHPO to avoid Project adverse impacts, minimize Project adverse effects through possible design modifications and or through data recovery or an alternative mutually agreed-upon method. If NRHP-eligible resource may not be avoided, the Licensee's archaeologist develops a Memorandum of Agreement (MOA) and the Licensee consults with SHPO, BLM, Advisory Council on Historic Preservation, and interested Indian Tribes, as appropriate and files the MOA with FERC for approval. When an appropriate MOA is agreed upon, the archaeologist will perform the Data Recovery mitigation and prepare a report that describes the mitigation and the results. The Licensee will forward this report to the consulting parties.</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Implementation Steps for Performance: Review results of the data recovery or other mitigation and consult with the SHPO, BLM, Advisory Council on Historic Preservation, interested Indian Tribes, and the FERC. When consulting parties concur that mitigation has been successfully achieved, the action may proceed.</p> <p>MM CR-11. Treatment of Unanticipated Discoveries of Cultural Resources and Human Remains.As with all development projects in the state, should unforeseen artifacts become uncovered during site grading, the Licensee is required to adhere to all state of California procedures, including Section 21083.2(i) of the CEQA Statutes and Section 15064.5 of the CEQA Guidelines regarding stoppage of work, handling of discovered materials, and notification of proper authorities to ensure that the construction/operation of the Project would not have an adverse effect on cultural resources. The Licensee is responsible for addressing action impacts to cultural sites and human remains should they be exposed as a result of ground disturbing activities by the Licensee or one of its contractors; erosion control measures; erosion of any inventoried historic properties; or it resources that are exposed in the event of a Project operation emergency.</p> <p>Management Activities: The Licensee shall follow the Project specific Plan and Procedures Addressing Unanticipated Discoveries of Cultural Resources and Human Remains, found in Appendix A of the HPMP in the event that unanticipated cultural materials or human remains are found within the Project area.</p> <p>Implementation Steps for Performance: The Licensee shall consult with SHPO, BLM, interested Indian Tribes, Riverside County Coroner, as appropriate and depending on</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		the land jurisdiction on which any discovery is made, and FERC.,. If the Licensee or its contractors discovers contemporary contexts with human remains, local law enforcement agencies and the Riverside County Coroner shall be notified and consulted.	
Section 3.9 Land Use/Public Services			
<p>Impact 3.9-1 Short-term Construction Impact from Transmission Line and Interconnection to Substation. The proposed transmission line and substation will cause short-term land use impacts as a result of construction activity.</p>	<i>Potentially significant and subject to the mitigation program</i>	<p>PDF LU-1. Construction Access. Construction access to/from the substation site will be from the Eagle Mountain Road exit and follow the Frontage Road east to the site. The Contractor will be responsible for monitoring construction access points.</p> <p>PDF LU-2. Construction Monitoring. Two weeks prior to beginning construction, notices shall be posted locally stating hours of operation for construction near the Desert Center community and along State Route 177.</p> <p>PDF LU-5. Public Outreach Program. The Licensee will hold public meetings in the Project area to brief the public on Project activities and to hear and respond to comments. These meetings will be held quarterly in the Project area during engineering and construction and annually during Project operation for the life of the Project.</p>	Less than significant
<p>Impact 3.9-2 Operational Impact from Transmission Line and Interconnection to Substation. Long-term land use-related impacts associated with the transmission line/substation construction will be the permanent change from undeveloped desert to lands reserved for utilities. Except for the tower locations, land</p>	<i>Less than significant</i>	No mitigation is required.	N/A

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>within the ROW will remain undeveloped after construction. The transmission line will be in excess of 500 feet from any school, day care, or other sensitive receptor, so no health impacts from EMF are anticipated.</p>			
<p>Impact 3.9-3 Short-term Construction Impacts from the Water Pipeline Corridor. Construction of the water pipeline will cause short-term impacts as a result of construction activity.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>PDF LU-1. Construction Access. Construction access to/from the substation site will be from the Eagle Mountain Road exit and follow the Frontage Road east to the site. The Contractor will be responsible for monitoring construction access points.</p> <p>PDF LU-2. Construction Monitoring. Two weeks prior to beginning construction, notices shall be posted locally stating hours of operation for construction near the Desert Center community and along State Route 177.</p> <p>PDF LU-3. Pipeline Construction. Impacts from water pipeline construction will be minimized or avoided by: (1) grading out the sidecast to meet existing grades; (2) minimizing disturbance, and construction timing to avoid seasonal rain, and maintaining surface contours and natural function of washes crossed; and (3) use of existing access roads, when feasible, thereby avoiding new ground disturbance.</p> <p>PDF LU-5. Public Outreach Program. The Licensee will hold public meetings in the Project area to brief the public on Project activities and to hear and respond to comments. These meetings will be held quarterly in the Project area during engineering and construction and annually during Project operation for the life of the Project.</p>	<p>Less than significant</p>
<p>Impact 3.9-4 Operational Impacts</p>	<p><i>Less than</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>from the Water Pipeline Corridor. Long-term land use-related impacts associated with the water pipeline corridor construction will be the permanent change from undeveloped desert to lands reserved for utilities.</p>	<p><i>significant</i></p>		
<p>Impact 3.9-5 Local Land Use Policies. The proposed Project would not conflict with any land use plan of an agency having jurisdiction over the Project. Local land use policies and zoning codes do not apply to the Project site, due to the overriding Federal Power Reserve land designation.</p>	<p><i>Less than significant</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>
<p>Impact 3.9-6 CDCA Plan Amendment for Utility Right-of-Way. Based upon review of BLM's CDCA plan amendment criteria and required determinations, it appears that the Project is consistent with all criteria, and that a determination in favor of adopting a plan amendment can be made.</p>	<p><i>Less than significant</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>
<p>Impact 3.9-7 Existing and Proposed Land Uses in the Central Project Site. Implementation of the proposed Project will result in a change in the use of land within the Central</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>PDF LU-4. Coordination with Adjacent Projects. The Project layout has been modified to eliminate conflicts with existing and proposed land uses. For example, construction staging and lay-down areas have been relocated to a parcel southwest of the Lower Reservoir and outside of the proposed landfill to eliminate conflict with the proposed</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>Project Area from an inactive iron mine to a pumped storage hydroelectric facility. Additionally, this Project could be operating in conjunction with the proposed Eagle Mountain Landfill. The Project layout has been modified to eliminate conflicts with existing and proposed land uses.</p>		<p>landfill truck marshalling and railyard facilities. Low voltage cables from the underground powerhouse have been routed through the underground powerhouse access tunnel to avoid conflicts with landfill Phase 3. Water treatment facilities have been relocated further from the CRA to address concerns of the MWD regarding the proximity of the brine ponds to the CRA.</p> <p>These efforts will continue during the final design and construction of the proposed Project. Because several large and complex projects are proposed in the same general area (including the landfill project and several proposed solar energy projects), detailed coordination will occur as the Project progresses in order to eliminate conflicts of facility locations, supporting infrastructure, designs, permits, and operations. The Licensee will be required to have regular Project coordination meetings with the owners of the landfill project, the adjacent solar projects, MWD, and any other interested landowners and project developers during construction of the Project. As the Project progresses into the design phase, the Project layout will be designed to preserve landfill capacity in Phases 1 through 4.</p> <p>MM LU-2. Coordinate with MWD. The Licensee will submit design plans for proposed Project facilities which may affect MWD facilities to the MWD for its review and approval for any Project component that may affect MWD facilities or rights-of-way. MWD's approval will be contingent on review and approval of design plans. MWD will also be notified of the construction of Project features that may affect MWD facilities or rights-of-way and will have an opportunity to observe construction of such features.</p> <p>PDF LU-5. Public Outreach Program. The Licensee will hold public meetings in the Project area to brief the</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		public on Project activities and to hear and respond to comments. These meetings will be held quarterly in the Project area during engineering and construction and annually during Project operation for the life of the Project.	
<p>Impact 3.9-8 Landfill Construction Timing. The pumped storage Project is likely to be built and operational prior to initiation of landfill construction at Eagle Mountain. Construction periods for the two projects are not likely to overlap or create any conflicts</p>	<i>Less than significant</i>	No mitigation is required.	N/A
<p>Impact 3.9-9 Landfill Operations. The proposed Eagle Mountain Pumped Storage Project will use the Central and East pits to store water, areas that are not proposed to be used during Phases 1-4 of the landfill. The powerhouse and water conveyance tunnels will be underground and will not affect landfill construction or operations.</p>	<i>Less than significant</i>	No mitigation is required.	Less than significant
<p>Impact 3.9-10 Landfill Use of the East Pit. The Eagle Mountain Pumped Storage Project's use of the East Pit does not exclude the East Pit's use as a landfill in perpetuity. In the event that, at some future date many decades from now, decision-makers</p>	<i>Less than significant</i>	No mitigation is required.	N/A

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
determine that the landfill use of the East Pit has greater social or economic value than the proposed Project's use of the East Pit, the water could be drained and the East Pit used as a component of the landfill.			
<p>Impact 3.9-11 Potential Impacts to the Landfill Liner. Seepage from the Upper Reservoir could potentially encounter the lining of the landfill.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>PDF GW-1. Groundwater Seepage. The Licensee will limit seepage from the Project reservoirs to the extent feasible using specified grouting, seepage blankets, and RCC or soil cement treatments. This includes the Upper Reservoir, Lower Reservoir, and the brine disposal ponds that will be part of the water quality management system for the Project. Final design for seepage control will be approved by the State Water Board and FERC prior to construction. Seepage control from the Project reservoirs will be accomplished using systematic procedures such as design and construction control measures that will include the following:</p> <ul style="list-style-type: none"> • During final engineering design, a detailed reconnaissance of the reservoir basins and pond areas will be conducted to identify zones where leakage and seepage would be expected to occur. These areas will include faults, fissures and cracks in the bedrock, and zones that may have direct connection to the alluvial deposits of the Chuckwalla Valley. During the reconnaissance, the effectiveness of various methods for seepage and leakage control to mitigate the effects of these particular features will be evaluated, including grouting, seepage blankets, and RCC or soil cement treatments, and other methods if needed. • Methods for seepage and leakage control will include curtain grouting of the foundation beneath the dam 	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>footprint and around the reservoir rim, as needed; backfill concrete placement and/or slush grouting of faults, fissures, and cracks detected in the field reconnaissance; placement of low permeability materials over zones too large to be grouted and over areas of alluvium within the Lower Reservoir; seepage and leakage collection systems positioned based upon the results of the hydrogeologic analyses; and clay or membrane lining of the brine ponds associated with the Project's water quality management system. The collection systems would recycle water into the Project reservoirs or the reverse osmosis (RO) system.</p> <ul style="list-style-type: none"> • Design and construction of a Comprehensive Monitoring Program, consisting of observation wells and piezometers that will be used to assess the effectiveness of the seepage and leakage control measures. • Based on monitoring results, additional actions may be taken to further control leakage and seepage from the reservoirs and ponds. Such measures may include curtain grouting and the expansion of seepage and leakage collection systems. • Other measures, such as use of stepped RCC or soil cement overlay on the eastern portion of the Lower Reservoir, may also be used depending on results of final engineering design analyses. • In addition, portions of the tunnels and shaft of the Project will experience very high water pressures; whereas, current plans are based on lining of the tunnels with concrete, and in some locations steel liners will be installed. These liners are expected to effectively prevent seepage. <p>MM GW-5. Upper Reservoir Seepage Recovery</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Wells. Seepage from the Upper Reservoir will be controlled through a separate set of seepage recovery wells, locations of which are shown on Figure 3.3-18. Seepage from the Upper Reservoir will be maintained at least five feet below the bottom elevation of the proposed landfill project liner. Target levels have been assigned to the monitoring wells as shown in Table 3.3-10. A testing program will also be employed for seepage recovery wells for the Upper Reservoir to assess the interconnectedness of the joints and fractures and the pumping extraction rate. Drawdown observations will be made in nearby observation wells to support final engineering design. Groundwater monitoring will be performed on a quarterly basis for the first four years of Project pumping. This program may be extended to bi-annually or annually depending on the findings. Annual reports will be prepared and distributed to interested parties.</p> <p>Based upon testing for final design, or if indicated by groundwater level monitoring, additional seepage extraction wells may be constructed to meet target groundwater levels listed in Table 3.3-10. PDF GW-1 would also apply should water levels approach target levels listed in Table 3.3-10. Based upon testing for final design, or if indicated by groundwater level monitoring, additional seepage extraction wells may be constructed.</p> <p><i>Performance Standard:</i> Seepage from the Upper Reservoir will be maintained at least five feet below the bottom elevation of the liner of the proposed landfill so that the landfill will comply with title 27 CCR Section 20240, subdivision (c). Target levels have been assigned to the monitoring wells as shown in Table 3.3-10.</p>	
Impact 3.9-12 Compatibility of Specific Features and Ancillary	<i>Potentially significant and</i>	PDF LU-4. Coordination with Adjacent Projects. The Project layout has been modified to eliminate conflicts with	Less than significant

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>Facilities Interferences.</p> <p>Design adjustments have been made to avoid interference with proposed landfill components, so that the proposed pumped storage Project does not conflict with construction or long-term operation of the proposed landfill project's specific features and ancillary facilities.</p>	<p><i>subject to the mitigation program</i></p>	<p>existing and proposed land uses. For example, construction staging and lay-down areas have been relocated to a parcel southwest of the Lower Reservoir and outside of the proposed landfill to eliminate conflict with the proposed landfill truck marshalling and railyard facilities. Low voltage cables from the underground powerhouse have been routed through the underground powerhouse access tunnel to avoid conflicts with landfill Phase 3. Water treatment facilities have been relocated further from the CRA to address concerns of the MWD regarding the proximity of the brine ponds to the CRA.</p> <p>These efforts will continue during the final design and construction of the proposed Project. Because several large and complex projects are proposed in the same general area (including the landfill project and several proposed solar energy projects), detailed coordination will occur as the Project progresses in order to eliminate conflicts of facility locations, supporting infrastructure, designs, permits, and operations. The Licensee will be required to have regular Project coordination meetings with the owners of the landfill project, the adjacent solar projects, MWD, and any other interested landowners and project developers during construction of the Project. As the Project progresses into the design phase, the Project layout will be designed to preserve landfill capacity in Phases 1 through 4.</p> <p>PDF LU-5. Public Outreach Program. The Licensee will hold public meetings in the Project area to brief the public on Project activities and to hear and respond to comments. These meetings will be held quarterly in the Project area during engineering and construction and annually during Project operation for the life of the Project.</p>	
<p>Impact 3.9-13 Potential</p>	<p><i>Less than</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>Conflicts with Other Landfill Facilities and Rock Resources. On the basis of the analysis presented, it is concluded that the proposed pumped storage Project does not conflict with construction roads, other operational components, or use of rock and fine-tailings resources at the mine site.</p>	<p><i>significant</i></p>		
<p>Impact 3.9-14 Methane Gas from Eagle Mountain Landfill. Based upon the analysis presented, it is concluded that methane gas produced by the proposed landfill will not be affected in any way by the proposed pumped storage Project.</p>	<p><i>Less than significant</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>
<p>Impact 3.9-15 Impact to Public Services. To insure that there is no impact to public facilities, the Project will pay Development Impact Fees. The payment of these fees will insure that acceptable response times and service ratios are maintained for public services.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM LU-1. Development Impact Fee. Prior to the start of commercial operation the Licensee shall pay to Riverside County the required Development Impact Fee for the Project area in accordance with Riverside County Ordinance 659, as amended through 659.7 and Chapter 4.60 of the Riverside County Code (Development Impact Fees).</p> <p>PDF LU-5. Public Outreach Program. The Licensee will hold public meetings in the Project area to brief the public on Project activities and to hear and respond to comments. These meetings will be held quarterly in the Project area during engineering and construction and annually during Project operation for the life of the Project.</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
Section 3.10 Recreation			
Impact 3.10-1 Recreational Use. The proposed transmission line and water pipeline corridors cross lands, in part, managed by the BLM, which are available for dispersed recreational use. Access to some OHV tracks may be impeded temporarily during construction of the linear facilities.	<i>Less than significant</i>	No mitigation required.	N/A
Impact 3.10-2 Wilderness Area. The Project would not directly or indirectly disrupt activities in an established federal, state, or local recreation and/or wilderness area. The Project area is not located in a designated federal wilderness area.	<i>Less than significant</i>	No mitigation required.	N/A
Section 3.11 Population and Housing			
Impact 3.11-1 Residential or Business Displacement During Construction. Implementation of the Project will not displace significant number of people, affect existing housing or business establishments, or require replacement housing elsewhere.	<i>Less than significant</i>	No mitigation is required.	N/A
Impact 3.11-2 Impacts on Community Infrastructure	<i>Less than significant</i>	No mitigation is required.	N/A

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>and Services. Because of the available infrastructure capacity within the region, the Project would not require construction of significant additional infrastructure.</p>			
<p>Impact 3.11-3 Impacts on Local Government Finances. Payment of Riverside County Development Impact fees is required. In addition, purchase of construction materials and equipment required to construct the Project would increase local and regional tax bases. The substantial sales tax revenues would be considered beneficial impact as a direct result of Project implementation.</p>	<p><i>Less than significant</i></p>	<p>No additional mitigation is required. See MM LU-1.</p>	<p>N/A</p>
<p>Section 3.12 Transportation</p>			
<p>Impact 3.12-1 Construction-related Traffic. The Project will cause an increase in traffic that is not substantial in relation to the existing traffic load and capacity of the street system. The Project will not decrease a level of service standard established by the County.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM AQ-6 Transportation Management Plan. The Licensee shall be responsible to develop and implement a Transportation Management Plan (TMP) for employees, including provisions for ridesharing, use of shuttle transit for Project employees, and provision of on-site food service to reduce vehicle trips, where feasible. The TMP shall also consider availability of local housing that can be secured for use by a voluntary portion of the employees throughout the construction period. The TMP will target a minimum 25% reduction in employee vehicle trips.</p> <p>PDF LU-1. Construction Access. Construction access</p>	<p>Less than significant</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>to/from the substation site will be from the Eagle Mountain Road exit and follow the Frontage Road east to the site. The Contractor will be responsible for monitoring construction access points.</p> <p>PDF LU-2. Construction Monitoring. Two weeks prior to beginning construction, notices shall be posted locally stating hours of operation for construction near the Desert Center community and along State Route 177.</p>	
<p>Impact 3.12-2 Operational Traffic. Daily traffic, including service and delivery trucks, will be approximately 64 one-way trips.</p>	<p><i>Less than significant</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>
<p>Section 3.13 Air Quality</p>			
<p>Impact 3.13-1 Annual Emissions during Construction. The proposed Project represents less than 0.07 percent of the forecasted annual NO_x emissions within the Mojave Desert Air Basin.</p>	<p><i>Less than significant</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>
<p>Impact 3.13-2 Daily Emissions during Construction. These emissions are less than the SCAQMD CEQA thresholds for all pollutants except NO_x where the threshold is 100 pounds per day (significant and unavoidable).</p>	<p><i>Potentially significant and subject to the mitigation program.</i></p>	<p>MM AQ-1. Fugitive Dust. Periodic watering or application of suitable surfactant will be conducted for short-term stabilization of disturbed surface areas and storage piles as needed to minimize visible fugitive dust emissions. For dirt roads, watering, with complete coverage, shall occur at least twice daily, preferably in the late morning and after work is done for the day.</p> <p>MM AQ-2. Trackout. To prevent Project-related trackout onto paved surfaces, the following measures will be undertaken through the construction period:</p>	<p>Significant and unavoidable</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<ul style="list-style-type: none"> • Prevention and clean-up of Project-related trackout or spills on publicly maintained paved surfaces within 24 hours • Covering loaded haul vehicles operating on public paved roads • Material transported off-site shall be either sufficiently watered or securely covered to prevent excessive amounts of dust • Paving, gravel covering, or chemically stabilizing on-site roads as soon as feasible • Limiting on-site vehicle speeds on unpaved surfaces to 25 miles per hour (mph) • Operating a wash rack for drivers to wet down material before leaving the facility • Operate a wheel washer (or equivalent) to remove soil from vehicle tires as needed <p>MM AQ-3. Grading. Graded site surfaces will be stabilized upon completion of grading when subsequent development is delayed or expected to be delayed more than 30 days, except when such a delay is due to precipitation that dampens the disturbed surface sufficiently to eliminate visible fugitive dust emissions.</p> <p>MM AQ-4. Surface Disturbance. Areas of active surface disturbance (such as grading) will be limited to no more than 15 acres per day.</p> <p>MM AQ-5. Earth-moving Activities. Non-essential earth-moving activities will be reduced during windy conditions; i.e., when visible dusting occurs from moist and dry surfaces due to wind erosion. Clearing, grading, earth-</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>moving, or excavation activities will cease if winds exceed 25 mph averaged over 1-hour duration.</p> <p>In addition, compliance with MM AQ-6 through AQ-12 would further reduce impacts from engine exhaust and NOx and other criteria pollutant emissions.</p> <p>MM AQ-6. Transportation Management Plan. The Licensee shall be responsible to develop and implement a Transportation Management Plan (TMP) for employees, including provisions for ridesharing, use of shuttle transit for Project employees, and provision of on-site food service to reduce vehicle trips, where feasible. The TMP shall also consider availability of local housing that can be secured for use by a voluntary portion of the employees throughout the construction period. The TMP will target a minimum 25% reduction in employee vehicle trips.</p> <p>MM AQ-7. Diesel Trucks. All diesel truck operators shall strictly abide by the applicable state law requirements for idling, as described in the airborne toxic control measure (CCR, Title 13, section 2485), which limits vehicles with gross vehicular weight ratings of more than 10,000 pounds to no more than 5 minutes in a 60-minute period of idling of the primary engine or the diesel-fueled auxiliary power system at any location.</p> <p>MM AQ-8. Equipment. Use electrical drops in place of temporary electrical generators, and substitute low- and zero emitting construction equipment and/or alternative fueled or catalyst equipped diesel construction equipment wherever economically feasible.</p> <p>MM AQ-9. Generators. Electrical generators must be properly permitted with the SCAQMD. <i>enforcement.</i> State</p>	

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
		<p>Water Board and FERC</p> <p>MM AQ-10. Heavy-duty Diesel Trucks. Heavy-duty diesel trucks shall be properly tuned and maintained to manufacturers' specifications to ensure minimum emissions under normal operations.</p> <p>MM AQ-11. Construction Equipment. At least 50 percent diesel fleet hours will utilize 2002 or later year diesel construction equipment, where feasible.</p> <p>MM AQ-12. Off-road Construction Equipment. Older off-road construction equipment shall be retrofitted with appropriate emission control devices prior to on-site use.</p> <p>MM AQ-13. Air Quality Study Design. The Licensee shall work collaboratively with the National Park Service (NPS) to establish an air quality study design for 2 years of ozone monitoring to be conducted upon completion of construction and Project operations beginning. The Licensee will fund the annual expenses as a cost-share with the NPS and other transmission operators. The funding contribution for this study will be based on a percentage of total miles of transmission line.</p>	
<p>Impact 3.13-3 Emissions during Operation. Air pollutant emissions associated with operations and maintenance activities (employee, delivery vehicle trips and miscellaneous area sources) would be minimal and would not exceed SCAQMD significance thresholds for operation.</p>	<p><i>Less than significant</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
Section 3.14 Noise			
<p>Impact 3.14-1 Construction Noise, Central Project Site. The maximum construction noise coming from the Central Project Site would likely not be audible at the school or nearby residences. The same construction activities would generate noise levels at the boundary of JTNP that would be up to 43 dBA temporarily.</p>	<p><i>Less than significant</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>
<p>Impact 3.14-2 Construction Noise, Linear Features. The maximum construction noise at the nearest sensitive receptors attributed to the transmission line and water pipeline would be adverse for up to several weeks during construction, but due to the nature of linear facilities, only for several days at any one location. About 20 residences would be affected by noise from increased traffic along Kaiser Road during construction.</p>	<p><i>Potentially significant impact and subject to the mitigation program</i></p>	<p>MM N-1. Construction Equipment. The Licensee shall use construction equipment with properly operating and maintained noise mufflers and intake silencers, consistent with manufacturers' standards in order to reduce or avoid construction noise levels.</p>	<p>Less than significant</p>
<p>Impact 3.14-3 Operational Noise. The operation of the proposed Project would result in a minimal increase in road traffic and would not substantially increase ambient noise levels along Kaiser Road. The proposed</p>	<p><i>Less than significant</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
powerhouse would be located underground and would not affect noise levels aboveground. Noise from operation of the transmission line (low level hissing or crackling), could be adverse but would only be noticeable in wet weather conditions in close proximity to the transmission line.			
Section 3.15 Greenhouse Gas Emissions			
Impact 3.15-1 Generate GHG emissions, either directly or indirectly, that may have a significant impact on the environment. The proposed Project would offset CO ₂ e production and enhance integration of reliable of wind and solar power to meet the state's RPS, thus having a beneficial impact on GHG production. Although the impact is less than significant, the proposed Project includes PDF GHG-1 which addresses the potential effect of the transmission line on greenhouse gases.	<i>Less than significant</i>	PDF GHG-1: SF₆ Monitoring. All SF ₆ -containing circuit breakers that are installed under the Project shall be cataloged and monitored pursuant to California state law and the recommendations of the SF ₆ Reduction Partnership for Electric Power Systems.	N/A
Impact 3.15-2 Conflict with an applicable plan, policy or regulation adopted for the purpose of reducing the emissions of GHGs. The State	<i>Less than significant</i>	No mitigation is required.	N/A

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
<p>Water Board currently does not have an adopted climate action plan or general plan policies related to GHG emissions. In addition, the Project would not conflict with the State's ability to reach the overall goals of AB 32. Therefore, the Project would not conflict with an applicable plan, policy, or regulation adopted for the purpose of reducing the emissions of GHGs.</p>			
Section 3.16 Hazards and Hazardous Materials			
<p>Impact 3.16-1 Hazardous Materials during Construction. Due to the proximity of the transmission line to the World War II-era camps, and the recent history of military training on the Central Project site, any unexploded ordnance (UXO) found on-site could be hazardous to workers on-site.</p>	<p><i>Potentially significant and subject to the mitigation program</i></p>	<p>MM HM-1. UXO Plan. The Licensee, in consultation with the Licensee's Environmental Coordinator, shall implement a UXO Identification, Training and Reporting Plan (UXO Plan) to properly train all site workers in the recognition, avoidance and reporting of military waste debris and ordnance. Implementation shall include: (1) a description of the training program outline and materials, and the qualifications of the trainers; (2) identification of available trained experts that will respond to notification of discovery of any ordnance (unexploded or not); (3) a work plan to recover and remove discovered ordnance; and (4) work stoppage until site is determined clear by the Environmental Coordinator.</p> <p>Verification: The UXO Plan shall be implemented no less than 60 days prior to the initiation of construction activities at the site.</p>	<p>Less than significant</p>
<p>Impact 3.16-2 Hazardous Materials during Operation. Hazardous material usage in the</p>	<p><i>Less than significant</i></p>	<p>No mitigation is required.</p>	<p>N/A</p>

Potential Environmental Impact Summary	Level of Significance	Mitigation Program	Level of Significance after Implementation of Mitigation Program
vicinity would mainly be limited to the Project site. The Project site is not located within one-quarter mile of a school.			
Impact 3.16-3 Located on a Hazardous Materials Site per Government Code Section 65962.5. The site is not on a list of hazardous materials sites pursuant to Government Code Section 65962.5	<i>Less than significant</i>	No mitigation is required.	N/A
Section 3.17 Environmental Justice			
The Project will not result in a disproportionate effect on minority populations, low income populations, or Native Americans, and the Project does not pose any substantial effects relative to environmental justice.	<i>No impact</i>	No mitigation required.	N/A

Table 6-2 Mitigation Monitoring or Reporting Program

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<i>Geology and Soils</i>		
<p>MM GEO-1. Erosion Control Plan. Erosion and sediment control measures for each area type, including proposed best management practices (BMPs), are listed in the Erosion Control Plan in Section 12.2. The Applicant shall limit impacts to soil erosion through implementation of an Erosion Control Plan limiting surface disturbance to only those areas necessary for construction as required by California Code of Regulations, title 23, section 122.26. Where natural topsoil occurs, it would be salvaged and stockpiled prior to construction, and the soil piles stabilized.</p> <p>Following construction, all areas where natural topsoils were removed that are not occupied by permanent Project facilities would be re-graded, have the topsoils replaced, and be seeded with native vegetation to reduce erosion potential.</p> <p>Erosion control measures will be maintained throughout the life of the Project.</p> <p>At minimum, the Applicant shall use and implement the following BMPs for effective temporary and final soil stabilization during construction:</p> <ul style="list-style-type: none"> • Preserving existing vegetation where required and when feasible to prevent or minimize erosion. • Once existing vegetation is cleared, construction will follow immediately behind to reduce unnecessary exposure of scarified soil to wind and water. • Sloping roadways and excavations away from washes will prevent or minimize erosion into washes. Where haul roads cross surface washes, the ground will be cleared of loose soil and pre-existing sediments, as necessary. • Installation of riprap at the washes prevent or minimize 	<p>Licensee (Contractor/Environmental Coordinator) in consultation with State Water Board.</p>	<p>The Erosion Control Plan will be developed during Final Engineering/Pre-construction and implemented during Construction and Operation.</p> <p>The Licensee shall submit the SWPPP to the Deputy Director for Water Rights (Deputy Director) for review and approval. The Deputy Director may require modifications as part of the approval. Project construction should not start until the SWPPP is approved by the Deputy Director.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>erosion.</p> <ul style="list-style-type: none"> • Small earthen embankments will be built within washes in order to slow or divert surface water to reduce erosion. • Silt fences will be installed when working around a wash to prevent sediment from entering washes during a rain storm and will be constructed as described in Attachment B of Section 12.2 (e.g., buried to a depth of at least 12 inches). • The Applicant contractor will be required to preserve and protect existing vegetation not required, or otherwise authorized, to be removed. Vegetation will be protected from damage or injury caused by construction operations, personnel, or equipment by the use of temporary fencing, protective barriers, or other similar methods. • Water will be applied to disturbed soil areas of the Project site to control wind erosion and dust. Water applications will be monitored to prevent excessive runoff. • Sediment controls, structural measures that are intended to complement and enhance the soil stabilization (erosion control) measures, will be implemented. Sediment controls are designed to intercept and filter out soil particles detached and transported by the force of water. <p>Prior to construction, a Stormwater Pollution Prevention Plan (SWPPP) will be prepared detailing BMPs that will be implemented at the site. The Applicant will comply with the General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities (Construction General Permit; Order No. 2009-0009-DWQ and amendments thereto; National Pollutant Discharge Elimination System No. CAS000002).</p>		
<p>PDF GEO-1. Subsurface Investigations. Detailed investigations to support final engineering will be conducted in two stages, as detailed in Section 12.1. These generally</p>	<p>Licensee in consultation with State Water Board.</p>	<p>Upon Site Access. Phase 1 Site Investigations will be initiated after licensing and receipt of site access, at</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>include:</p> <p>Phase I Site Investigations: Based on available information and the current Project configuration, conduct a limited field program designed to confirm that basic Project feature locations are appropriate and to provide basic design parameters for the final layout of the Project features. Phase I Site Investigations will be initiated after licensing and receipt of site access, at the initiation of the Project engineering design phase. Field work will be completed within 6 months of the start of field investigations, and results filed with the State Water Board and FERC 12 months after the start of field investigations. Phase I Field Work is focused on the pumped physical facilities associated with the pumped storage Project to provide the owner with additional information needed to confirm feasibility and project cost.</p> <p>Phase II Site Investigations: Using the results of the Phase I Work, and based on any design refinements developed during pre-design engineering, conduct additional explorations that will support final design of the Project features and bids for construction of the Project. The Phase II Program will also include field investigations and modeling to support detailed evaluation of potential seepage from the Project features (reservoirs and water conveyance tunnels). Seepage evaluations will include groundwater modeling to refine plans for seepage control, seepage recovery, and monitoring as required to avoid potential adverse impacts on the local ground water regime and water quality, the Colorado River Aqueduct and the proposed landfill if and when it is implemented. It should be noted that the Phase II Program may be implemented in a number of progressive steps. Geotechnical field programs during the design stage of implementation are usually implemented in a phased or step-wise manner with subsequent field work planned based on what is learned from the preceding field work.</p>		<p>the initiation of the project engineering design phase. Field work will be completed within 6 months of the start of field investigations.</p> <p>Results of the Phase I Site Investigation shall be compiled in a report and submitted to the Deputy Director within twelve months after the start of the Phase I Site Investigation. The Deputy Director may require modification of the Phase I Site Investigation</p> <p>Following the Deputy Director approval of the Phase I Site Investigation report, and based on any design refinements developed during pre-design engineering, Phase II Site Investigation studies shall be completed to support final design of the Project features and bids for Project construction. The Applicant shall provide the Phase II Site Investigation Plan to the Deputy Director for review and approval. The Phase II Site Investigation shall not begin until the Phase II Site Investigation Plan is approved by the Deputy Director. The Deputy Director may require modification of the Phase II Site Investigation. The Phase II Site Investigation Report, summarizing the comprehensive findings of the Phase I and</p> <p>Phase II Site Investigations, shall be submitted to the Deputy Director for approval before the Project's final design is implemented. Project construction, including, but not limited to groundwater pumping and reservoir filling shall not proceed until the Deputy Director approves</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>The scopes of the Phase I and II programs are discussed in a technical memorandum found in Section 12..</p>		<p>the Project's final design.</p>
<p>PDF GEO-2. Geologic Mapping. During site investigations, geologic mapping will be performed by Project Engineers to identify conditions of the overburden and bedrock exposed in the mine pits (reservoir areas) that may affect the stability of existing slopes during reservoir level fluctuations. Mapping will identify the degree and orientation of jointing and fracturing, faulting, weathering, and the dimensions of the benches excavated during mining. The stability of the cut slopes and benches will be assessed at this time.</p> <p>Geologic mapping will begin during the Phase I Site Investigations (see Section 12.1 for details) and will continue during Phase II Site Investigations.</p> <p>During construction, areas within the pits that exhibit unstable slopes because of adverse fracture sets exposed in the pit walls will be scaled of loose rock and unstable blocks. Material scaled from the side slopes will be removed and disposed of outside the pit, or pushed downslope and buried in the bottom of the pit. Rock slopes within the East and Central pits that lie below an elevation of five feet above the maximum water level will be scaled of loose and unstable rock during construction. Existing cut slopes that lie above these elevations will not be modified unless there is evidence of potential failure areas that could impact Project facilities. Final Project design will be reviewed by the State Water Board and approved by the FERC.</p>	<p>Licensee, in consultation with State Water Board.</p>	<p>Geologic mapping will be initiated after licensing and receipt of site access, at the start of engineering design.</p> <p>Results from the Geologic Mapping work will be submitted concurrently with the Phase II Site Investigations Report outlined in PDF GEO-1.</p>
<p>Surface Water</p>		

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>MM SW-1. On-site Studies of Acid Production Potential. When access is granted to the Licensee for the purpose of collecting samples, the field and analytical program will be undertaken as described in the Phase 1 Geotechnical Program detailed in Section 12.1. This program will:</p> <ol style="list-style-type: none"> 1. Obtain samples from each pit (upper and lower) across the stratigraphic section (porphyritic quartz monzonite, upper quartzite, middle quartzite, schistose meta arkose, vitreous quartzite and the ore zones). 2. Perform analysis for total, pyrite and sulfate sulfur (ASTM Method 1915-97 (2000) for total sulfur, and ASTM 1915-99 method E (2000) for sulfide sulfur). 3. Calculate acid production potential (APP) by the method of Sobek et al. (1978) and calculate acid production. 4. Determine the neutralization potential (NP) by the method of Sobek et al. (1978). Calculate the net neutralizing potential (NNP): $NNP = NP - APP$ expressed as kilogram calcium carbonate/ton. <p>In the event that AAP is found, water treatment to neutralize acid will be added to the treatment program to the water treatment facility (PDF GW-2), consisting of one or more of the following strategies:</p> <ul style="list-style-type: none"> • Use of limestone, hydrated lime, soda ash, or other similar neutralizing substances to increase pH of the water • Increased seepage control to reduce seepage through the reservoir • Construction of limestone drains or limestone ponds to treat water • Modifications to the RO system to increase pH <p>Phase I Site Investigations will be initiated after licensing and receipt of site access, at the initiation of the Project engineering design phase. Field work will be completed within 6 months of the start of field investigations, and</p>	<p>Licensee, in consultation with State Water Board.</p>	<p>Results from the APP studies will be submitted concurrently with the Phase I Site Investigations Report outlined in PDF GEO-1.</p> <p>Water treatment for acid production, if needed, will be conducted for the life of the Project.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>results filed with the State Water Board and FERC 12 months after the start of field investigations.</p> <p><i>Performance Standard:</i> As a performance standard, the proposed Project must not cause or contribute to the degradation of background water quality of the aquifer, as required by the Region 7 Colorado River Water Quality Control Plan. Water quality in the reservoirs will be maintained at the existing quality of the source groundwater.</p>		
<p>See PDF GW-2. Water Treatment Facility.</p>	--	--
<p>See MM GW-6. Water Quality Sampling.</p>	--	--
<p>See MM GEO-1. Erosion Control Plan.</p>	--	--
<p>Groundwater</p>		
<p>MM GW-1. Groundwater Level Monitoring. A groundwater level monitoring network will be installed to confirm that Project pumping is maintained at levels that are in the range of historic pumping. The monitoring network will consist of both existing and new monitoring wells to assess changes in groundwater levels beneath the CRA, and the Pinto Basin, as well as in areas east of the Project water supply wells. Table 3.3-10 lists the proposed monitoring network and Figure 3.3-17 shows its proposed locations. In addition to the proposed monitoring wells, groundwater levels, water quality, and production will be recorded at the Project pumping wells.</p> <p>The Project will report the static water levels beneath each of the Project's production wells annually along with a reference either to the accounting surface as proposed by USGS in 2008 or to a valid accounting surface methodology set forth in future legislation, rule-making or applicable judicial determination. A "static water level" shall be when the well has been idle for an equal time that it has been pumping or the measurement taken after the longest</p>	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with State Water Board.</p>	<p>Within 6 months of license issuance, the Applicant shall submit a Groundwater Level Monitoring Plan to the Deputy Director for Water Resources (Deputy Director) for approval. No pumping shall commence until the Groundwater Level Monitoring Plan is approved by the Deputy Director. The Deputy Director may require modifications as part of the approval. Monitoring should commence prior to onset of groundwater pumping for the Project.</p> <p>All monitoring conducted as part of the Groundwater Level Monitoring Plan shall be submitted to the State Water Board within 30 days after each sampling event and annually in a summary report.</p> <p>Groundwater level monitoring will continue for the life of the Project.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>period of Project non-pumping.</p> <p>If monitoring indicates that groundwater is being draw down at greater levels and faster rates than expected (exceeding the "Maximum Allowable Changes" identified in Table 3.3-9), pumping rates for the initial fill will be reduced to a level that meets the levels specified in Table 3.3-9. The initial fill period would therefore be extended to a maximum of 4.5 to 6 years.</p>		
<p>MM GW-2. Well Monitoring. Wells on neighboring properties whose water production may be impaired by Project groundwater pumping will be monitored quarterly at a minimum during the initial fill pumping period and for 4 years following the initial fill. Monitoring will be semi-annual, at a minimum, for the remainder of the Project. If it is determined that Project pumping is lowering static water levels in those wells by 5 feet or more, the Project will replace or lower the pumps, deepen the existing well, construct a new well, and/or compensate the well owner for increased pumping costs to maintain water supply to those neighboring properties.</p>	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with State Water Board.</p>	<p>Well monitoring will begin in the Pre-construction period and continue for the life of the Project.</p> <p>The Licensee will submit groundwater monitoring results as part of an Annual Project Summary report to the State Water Board and provide copies to interested parties upon request. The Deputy Director for Water Rights may modify this monitoring and reporting requirement.</p>
<p>MM GW-3. Extensometers. Two extensometers shall be constructed to measure potential inelastic subsidence that could affect operation of the CRA; one in the upper Chuckwalla Valley near OW-3 and the other in the Orocopia Valley near OW-15. Figures 3.3-17 and 18 show the locations of the extensometers.</p> <p>In the unlikely event that the data show inelastic subsidence is occurring due to Project groundwater pumping the Project will eliminate inelastic subsidence by:</p> <ul style="list-style-type: none"> • Redistributing pumping by constructing additional wells and modifying the pumping rates to reduce drawdown • Reducing pumping or by artificially increasing recharge in order to better match the net annual groundwater withdrawal to the net annual recharge 	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with State Water Board.</p>	<p>Extensometers will be installed during the Pre-construction period and will be maintained and monitored for the life of the Project.</p> <p>The Licensee will submit subsidence monitoring results as part of an Annual Project Summary report to the Agencies and provide copies to interested parties upon request. The Deputy Director for Water Rights may modify this monitoring and reporting requirement.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>If structures are impacted, they will be mitigated to pre-subsidence condition through engineered solutions that may consist of re-leveling, placement of compacted fill, soil-cement, pressure grouting, installation of piles and grade-beams, or steel-reinforcement. As necessary, portions or all of the impacted structure will be repaired or replaced in consultation with Metropolitan Water District of Southern California (MWD).</p>		
<p>MM GW-4. Lower Reservoir Seepage Recovery Wells. Seepage from the Lower Reservoir will be extracted through seepage recovery wells. The proposed recovery well locations are shown on Figure 3.3-18. Seepage from the Lower Reservoir will be maintained to prevent a significant rise in water levels beneath the CRA or a rise in groundwater that could potentially impact the liner of the proposed landfill. Target water levels have been assigned to the monitoring wells as shown in Table 3.3-10. Aquifer tests will be performed during final engineering design to confirm the seepage recovery well pumping rates and aquifer characteristics. The tests will be performed by constructing one of the seepage recovery wells and pumping the well while observing the drawdown in at least two seepage recovery or monitoring wells. Upon completion of this testing, the model will be re-run and the optimal locations of the remainder of the seepage recovery wells will be determined to effectively capture water from the Lower Reservoir and maintain groundwater level changes at less than significant levels beneath the CRA and the liner of the proposed landfill. Groundwater monitoring will be performed on a quarterly basis for the first 4 years of Project pumping. This program may be modified to bi-annually or annually depending on the findings as approved by the State Water Board and FERC. Annual reports will be prepared and distributed to interested parties.</p> <p>If needed based upon monitoring results, and acceptable based upon water quality monitoring results, as an adaptive management measure Project pumping drawdown can be</p>	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with State Water Board.</p>	<p>Seepage recovery wells will be designed during final engineering, built during construction, and maintained for the life of the Project.</p> <p>Seepage monitoring for groundwater levels and groundwater quality will be performed quarterly. Sampling results will be submitted to the Deputy Director for Water Rights (Deputy Director) and interested parties in the Annual Project Summary report. The Deputy Director may modify this monitoring and reporting requirement.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>mitigated by allowing seepage from the reservoirs without pump-back recovery, which, if left unimpeded, could raise groundwater levels beneath the CRA by up to 3 feet.</p> <p><i>Performance Standard:</i> Seepage from the Lower Reservoir will be maintained to prevent a significant rise in water levels beneath the CRA or a rise in groundwater that could potentially impact the liner of the proposed landfill. Target levels for protection of the landfill and the CRA have been assigned to the monitoring wells as shown in Table 3.3-10.</p>		
<p>MM GW-5. Upper Reservoir Seepage Recovery Wells. Seepage from the Upper Reservoir will be controlled through a separate set of seepage recovery wells, locations of which are shown on Figure 3.3-18. Seepage from the Upper Reservoir will be maintained at least five feet below the bottom elevation of the proposed landfill project liner. Target levels have been assigned to the monitoring wells as shown in Table 3.3-10. A testing program will also be employed for seepage recovery wells for the Upper Reservoir to assess the interconnectedness of the joints and fractures and the pumping extraction rate. Drawdown observations will be made in nearby observation wells to support final engineering design. Groundwater monitoring will be performed on a quarterly basis for the first four years of Project pumping. This program may be extended to bi-annually or annually depending on the findings. Annual reports will be prepared and distributed to interested parties.</p> <p>Based upon testing for final design, or if indicated by groundwater level monitoring, additional seepage extraction wells may be constructed to meet target groundwater levels listed in Table 3.3-10. PDF GW-1 would also apply should water levels approach target levels listed in Table 3.3-10. Based upon testing for final design, or if indicated by groundwater level monitoring, additional</p>	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with State Water Board.</p>	<p>Seepage recovery wells will be designed during final engineering, built during construction, and maintained for the life of the Project.</p> <p>Seepage monitoring for groundwater levels and groundwater quality will be performed quarterly. Sampling results will be submitted to the Deputy Director for Water Rights (Deputy Director) and interested parties in the Annual Project Summary report. The Deputy Director may modify this monitoring and reporting requirement.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>seepage extraction wells may be constructed.</p> <p><i>Performance Standard:</i> Seepage from the Upper Reservoir will be maintained at least five feet below the bottom elevation of the liner of the proposed landfill so that the landfill will comply with title 27 CCR Section 20240, subdivision (c). Target levels have been assigned to the monitoring wells as shown in Table 3.3-10.</p>		
<p>MM GW-6. Water Quality Sampling. Water quality sampling will be done at the source wells, and within the reservoirs, and in monitoring wells upgradient and downgradient of the reservoirs and brine disposal lagoon consistent with applicable portions of California Code of Regulations Title 27. Figure 3.3-18 shows the proposed locations of these wells. The Licensee shall prepare and implement a site-specific monitoring and reporting plan for groundwater and surface waters which will specify the location and timing of water quality monitoring, and constituents to be monitored. Monitoring will be done on a quarterly basis for the first four years and may be reduced to biannually thereafter based on initial results. Results of the sampling will be used to adjust water treatment volume, and to add or adjust treatment modules for TDS and other potential contaminants as needed to maintain groundwater quality under the direction of the State Water Board and FERC. Groundwater quality monitoring results will be made available to MWD upon request.</p> <p><i>Performance Standard:</i> As a performance standard, the proposed Project: 1) must not cause or contribute to the degradation of background water quality; and 2) water quality in the reservoirs will be maintained at the existing quality of the source groundwater.</p>	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with State Water Board.</p>	<p>Well monitoring will begin in the pre-construction period and will be conducted for the life of the Project.</p> <p>The Licensee will submit groundwater monitoring results as part of an Annual Project Summary report to the State Water Board and provide copies to interested parties upon request. The Deputy Director may modify this monitoring and reporting requirement.</p>
<p>MM GW-7. Replacement Wells. Existing wells located within the central and eastern mining pits which are to be developed as Project reservoirs, will be replaced at</p>	<p>Licensee/Environmental Coordinator in consultation with State Water Board.</p>	<p>Replacement wells will be constructed during the construction period.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>locations outside of the reservoirs as shown on Figure 3.3-18. Table 3.3-10 lists those wells scheduled for replacement.</p>		
<p>PDF GW-1. Groundwater Seepage. The Licensee will limit seepage from the Project reservoirs to the extent feasible using specified grouting, seepage blankets, and RCC or soil cement treatments. This includes the Upper Reservoir, Lower Reservoir, and the brine disposal ponds that will be part of the water quality management system for the Project. Final design for seepage control will be approved by the State Water Board and FERC prior to construction. Seepage control from the Project reservoirs will be accomplished using systematic procedures such as design and construction control measures that will include the following:</p> <ul style="list-style-type: none"> • During final engineering design, a detailed reconnaissance of the reservoir basins and pond areas will be conducted to identify zones where leakage and seepage would be expected to occur. These areas will include faults, fissures and cracks in the bedrock, and zones that may have direct connection to the alluvial deposits of the Chuckwalla Valley. During the reconnaissance, the effectiveness of various methods for seepage and leakage control to mitigate the effects of these particular features will be evaluated, including grouting, seepage blankets, and RCC or soil cement treatments, and other methods if needed. • Methods for seepage and leakage control will include curtain grouting of the foundation beneath the dam footprint and around the reservoir rim, as needed; backfill concrete placement and/or slush grouting of faults, fissures, and cracks detected in the field reconnaissance; placement of low permeability materials over zones too large to be grouted and over areas of alluvium within the Lower Reservoir; seepage and leakage collection systems positioned based upon the results of the 	<p>Licensee in consultation with State Water Board.</p>	<p>The Licensee shall submit a Seepage Management Plan to the Deputy Director for Water Rights (Deputy Director) for review and approval prior to filling the reservoirs. The Deputy Director may require modifications as part of the approval. The Seepage Management Plan should be reviewed and updated by the Licensee no less than every two years. The updated Seepage Management Plan shall be provided to the Deputy Director by January 15 of each reporting year for approval. The seepage control measures identified in the approved Seepage Management Plan must be in place prior to filling the reservoirs.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>hydrogeologic analyses; and clay or membrane lining of the brine ponds associated with the Project's water quality management system. The collection systems would recycle water into the Project reservoirs or the reverse osmosis (RO) system.</p> <ul style="list-style-type: none"> • Design and construction of a Comprehensive Monitoring Program, consisting of observation wells and piezometers that will be used to assess the effectiveness of the seepage and leakage control measures. • Based on monitoring results, additional actions may be taken to further control leakage and seepage from the reservoirs and ponds. Such measures may include curtain grouting and the expansion of seepage and leakage collection systems. • Other measures, such as use of stepped RCC or soil cement overlay on the eastern portion of the Lower Reservoir, may also be used depending on results of final engineering design analyses. • In addition, portions of the tunnels and shaft of the Project will experience very high water pressures; whereas, current plans are based on lining of the tunnels with concrete, and in some locations steel liners will be installed. These liners will also effectively block seepage from occurring. 		
<p>PDF GW-2. Water Treatment Facility. In order to maintain TDS at a level consistent with existing groundwater quality, a water treatment plant using a RO desalination system and brine disposal lagoon will be constructed as a part of the Project to remove salts and metals from reservoir water and maintain TDS concentrations equivalent to the source groundwater.</p> <p>Treated water will be returned to the Lower Reservoir while the concentrated brine from the RO process will be directed to brine ponds. In addition to removing salts from the water</p>	<p>Licensee, in consultation with State Water Board.</p>	<p>Prior to construction, the Applicant shall submit a Water Treatment, Waste Management, Storage, and Disposal Plan to the Deputy Director for approval. Project construction shall not begin until the plan is approved by the Deputy Director.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>supply, other contaminants, nutrients, and minerals, if present, would be removed, preventing eutrophication from occurring.</p> <p>Salts from the brine disposal lagoon will be removed and disposed of at an approved facility when the lagoons become full, approximately every 10 years. The lagoons will be maintained in a wetted condition, to maintain air quality in the Project area.</p>		
Agricultural and Forestry Resources		
No mitigation required.	--	--
Biological Resources		
<p>MM BIO-1. Biological Mitigation and Monitoring Program. Concurrent with final engineering design a comprehensive site-specific biological mitigation and monitoring program shall be verified and implemented in consultation with the Biological Technical Advisory Team. The Technical Advisory Team shall be composed of the Licensee's Environmental Coordinator and consultants, and staff from the resource managing agencies (BLM, USFWS, and CDFW).</p>	Licensee (Environmental Coordinator/ Biological Technical Advisory Team/Project Biologist) in consultation with CDFW and State Water Board.	The Biological Technical Advisory Team will be formed at the initiation of Project design. The site-specific biological mitigation and monitoring program will be verified during final engineering and implemented during construction and operation.
<p>MM BIO-2. Biological Reporting to Resource Agencies. As part of implementing protection measures, regular reports shall be submitted to the relevant resource agencies to document the Project activities, mitigation implemented and mitigation effectiveness. As a performance standard, adaptive management recommendations shall be updated as needed and in consultation with the coordinating agencies. Reporting shall include monthly reports during construction, annual comprehensive reports, and special-incident reports. The Project Biologist shall be responsible for reviewing and signing reports prior to submittal to the agencies.</p>	Licensee (Environmental Coordinator/ Biological Technical Advisory Team/Project Biologist) in consultation with CDFW and State Water Board.	Biological reporting will be initiated during final engineering and continued for the life of the Project.
MM BIO-3. Designation of an Authorized Project	Licensee (Environmental	The Project biologist will be designated

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>Biologist. An Authorized Project Biologist approved of by the SWRCP and CDFW shall be responsible for implementing and overseeing the biological compliance program. This person shall be sufficiently qualified to ensure approval by the USFWS and the CDFW for all biological protection measures that may be implemented by the Project. The USFWS describes a single designation for biologists who can be approved to handle tortoises - "Authorized Biologist." Such biologists have demonstrated to the USFWS that they possess sufficient desert tortoise knowledge and experience to handle and move tortoises appropriately. Authorized Biologists are permitted to then approve specific monitors to handle tortoises, at their discretion. The CDFW must also approve such biologists, potentially including individual approvals for monitors approved by the Authorized Biologist.</p>	<p>Coordinator/ Biological Technical Advisory Team/Project Biologist) in consultation with CDFW and State Water Board.</p>	<p>during engineering and will continue through the life of the pProject.</p>
<p>MM BIO-4. Worker Environmental Awareness Program. A Worker Environmental Awareness Program (WEAP) (see Section 12.14) shall be implemented to ensure that Project construction and operation occur within a framework of safeguarding environmentally sensitive resources. Although facility construction has the greatest potential to harm environmental resources, the WEAP shall be designed to address those environmental issues that pertain to Project operations, such as general conduct, repairs and maintenance. All project workers will be required to attend the program.</p> <p>The WEAP shall include information on biological resources that may occur on the site, with emphasis on listed and special-status species. Education shall include, but not be limited to, ecology, natural history, endangerment factors, legal protection, site mitigation measures, and hierarchy of command. Site rules of conduct shall be identified, including but not limited to: speed limits, work areas that must be accompanied by a biological monitor, parking areas, looking under parked vehicles prior to moving them, trash deposition,</p>	<p>Licensee (Environmental Coordinator/ Contractor) in consultation with CDFW and State Water Board.</p>	<p>The WEAP will be finalized prior to the start of construction and implemented during construction and operation for the life of the project.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>off-site conduct in the area of the Project, and other employee response protocols. Willful non-compliance shall result in sufficiently severe penalties to the contractor that the contractor may dismiss the offending employee.</p> <p>The educational format will be a video, shown initially by the Project Biologist and ultimately by a limited staff of trained and approved personnel. The Project Biologist also may be videotaped giving the first program, for assistance to further instructors.</p> <p>All workers completing the education program shall be given a wallet card with site “rules” and contact cell phone numbers, and an environmental training completion sticker to affix to their hard hat. Each shall sign a sheet attesting to completing the training program.</p>		
<p>MM BIO-5. Minimize Surface Disturbance. During construction in native habitats, all surface disturbance shall be restricted to the smallest area necessary to complete the construction. New spur roads and improvements to existing access roads shall be designed to preserve existing desert wash topography and flow patterns.</p>	<p>Licensee (Environmental Coordinator/ Contractor) in consultation with CDFW and State Water Board.</p>	<p>Construction</p>
<p>MM BIO-6. California Desert Native Plants Act. In compliance with the California Desert Native Plants Act (CDNPA), the County Agricultural Commissioner shall be consulted for direction regarding disposal of plants protected by the CDNPA. This may include salvage for subsequent revegetation of temporarily disturbed areas on-site, salvage by an approved nursery, landscaper or other group, or landfill disposal.</p>	<p>Licensee (Project Biologist/Contractor) in consultation with the County Agricultural Commissioner and State Water Board.</p>	<p>Final Engineering/Construction</p>
<p>MM BIO-7. Revegetation Plan. A revegetation plan (see Section 12.14) shall be implemented for areas that are temporarily disturbed during construction. In order to accommodate the specific features of the desert that make revegetation difficult – namely lack of predictable rainfall, lack of an “A” soil horizon, and the difficulty of re-</p>	<p>Licensee (Project Biologist/Contractor) in consultation with CDFW and State Water Board.</p>	<p>The Revegetation Plan will be implemented during and after construction.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>establishing a soil community of micro-organisms – a detailed Revegetation Plan shall address the following measures and include:</p> <ul style="list-style-type: none"> • Quantitative identification of the baseline community, both annual, herbaceous perennial and woody perennial species • Soil salvage and replacement on areas to be revegetated • Final site preparation and grading to include features that enhance germination and growth of native species. This includes surface pitting for the accumulation of sediments, water and seed and the construction of small swales for such species as California ditaxis and desert unicorn plant, which are commonly found in road swales and shoulders. All disturbed washes shall be recontoured to eliminate erosion and encourage the reestablishment of the drainage to its pre-construction condition. • Vertical mulching and other techniques to promote a hospitable environment for germination and growth • Seeding and/or planting of seedlings of colonizing species • Development of a soil micro-community by inoculation of mycorrhizal fungi and planting species that develop a mycorrhizal net • Weed control • Initial irrigation, if necessary • A realistic schedule of regrowth of native species, and remedial measures, if needed • Monitoring and reporting 		
<p>MM BIO-8. Invasive Species Monitoring and Control. To minimize the spread of invasive non-native vegetation a weed control program shall be implemented during</p>	<p>Licensee (Project Biologist/Contractor) in consultation with CDFW and</p>	<p>The Invasive Species Monitoring and Control Program will be implemented during construction and operation.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>construction. This program (see Section 12.14) includes:</p> <ul style="list-style-type: none"> • Baseline surveys for weed species that are present and/or are most likely to invade the Project site and surrounding area • Methods quantifying weed invasion • Methods for minimizing weed introduction and/or spread • Triggers which prompt weed control • Methods and a schedule for weed control and eradication • Success standards <p>Pesticides will be used in accordance with label directions.</p>	<p>State Water Board.</p>	
<p>MM BIO-9. Couch's Spadefoot. The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan requirements shall be implemented to avoid disturbance of impoundments and restriction of surface flow to impoundments. Surveys on the Central Project Area shall elucidate the presence of any artificial impoundments that could subsidize Couch's spadefoot reproduction. Should those exist then surveys shall be conducted at the appropriate time to determine if larvae are present. If present, the impoundment will be avoided, if possible. If avoidance is not possible, then a new impoundment will be constructed as close as is feasible, to replicate and replace each lost impoundment with similar characteristics. All larvae shall be removed to the new impoundment.</p> <p>During construction on all Project facilities, should ephemeral pools develop in response to intense rainfall showers from early spring through fall these shall be examined for larvae of Couch's spadefoot. If larvae are present, the pools shall be flagged and avoided by construction activities. Where pools cannot be avoided, new pools shall be constructed and larvae transplanted under the supervision of the Project Biologist.</p>	<p>Licensee (Project Biologist/Contractor) in consultation with CDFW and State Water Board.</p>	<p>Pre-construction surveys and construction monitoring.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>MM BIO-10. Breeding Bird Surveys and Avoidance. For all construction activities in vegetated habitat that are scheduled to occur between approximately February 15 and July 30, surveys shall be completed in all potential nesting sites for active bird nests. Unless otherwise directed by the CDFW, if an active bird nest is located, the nest site shall be flagged or staked a minimum of 5 yards in all directions. This flagged zone shall not be disturbed until the nest becomes inactive. Alternatively, grading and site preparation may occur prior to February 15 to preclude interference with nesting birds.</p>	<p>Licensee (Project Biologist) in consultation with CDFW and State Water Board.</p>	<p>Pre-construction survey, with avoidance during construction.</p>
<p>MM BIO-11. Brine Ponds Management. Brine ponds shall be managed to minimize their attractiveness and access to migratory birds. This consists of making resources provided by the ponds less available to birds through their design (steep slopes to discourage wading birds, etc.) and netting the ponds to prevent access by birds (Figure 3.5-19).</p>	<p>Licensee (Project Biologist) in consultation with CDFW and State Water Board.</p>	<p>Brine ponds will be built during construction and maintained for the life of the Project.</p>
<p>MM BIO-12. Burrowing Owls Phase III Survey. Based on the results of the 2009 surveys, a Phase III survey shall be completed to further assess bird use of the Project area and potential impacts if required by the CDFW (CBOC, 1993). This includes a nesting season survey, followed by a winter survey if no burrows or owls are observed during the nesting season. Each of these surveys shall span several visits and days.</p> <p>A pre-construction survey shall be conducted within 30 days of the start of Project construction to assess species presence and the need for avoidance. In consultation with the CDFW, the pre-construction survey may obviate the need for the Phase III Survey (see MM BIO-13).</p>	<p>Licensee (Project Biologist) in consultation with CDFW and State Water Board.</p>	<p>Pre-construction</p>
<p>MM BIO-13. Burrowing Owl Breeding Season. The NECO Plan limits the construction period to September 1 through February 1 if burrowing owls are present, to avoid</p>	<p>Licensee (Project Biologist/Contractor) in consultation with CDFW and</p>	<p>Construction</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>disruption of breeding activities. Following CDFW (1995) guidance, mitigation measures for resident owls will be implemented:</p> <ul style="list-style-type: none"> • Disruption of burrowing owl nesting activities shall be avoided during construction • Active nests shall be avoided by a minimum of a 250-foot buffer until fledging has occurred (February 1 through August 31) • Following fledging, owls may be passively relocated 	State Water Board.	
<p>MM BIO-14. Raptor Buffer. The NECO Plan identifies ¼-mile as an important buffer distance for prairie falcon or golden eagle aerie. No aeries or nests have been observed within a ¼-mile, but pre-construction surveys on the Central Project Area will confirm if any raptor aeries are within ¼-mile of construction. If so, a ¼-mile construction buffer will be required during the nesting seasons.</p>	Licensee (Project Biologist/Contractor) in consultation with CDFW and State Water Board.	Pre-construction and construction.
<p>MM BIO-15. Bat Survey. The following applicable measures are required by the NECO Plan:</p> <ul style="list-style-type: none"> • Survey for bat roosts within 1 mile of a project, or within 5 miles of any permanent stream or riparian habitat on a project site • Projects authorized within 1 mile of a significant bat roost site would have applicable mitigation measures, including, but not restricted to seasonal restrictions, light abatement, bat exclusion, and gating of alternative sites. Any exclusion must be performed at a non-critical time, by an authorized bat biologist. <p>Pre-construction bat surveys shall be completed by a qualified bat biologist to determine the existence, location and condition of bat roosts on the site. Because foraging areas used by resident bats may be critical to the functioning of those colonies, foraging habitat within the Project lands will be identified. If needed, based on the results of these surveys, actions will be taken to avoid roosting and foraging impacts to resident bats, minimize</p>	Licensee (Project Biologist/Contractor) in consultation with CDFW and State Water Board.	Pre-construction bat survey, with bat mitigation plan and monitoring (if needed) during construction.

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>that disturbance or, as an inescapable measure, evict bats. These actions shall include (as relevant):</p> <ul style="list-style-type: none"> • Designation of avoidance areas and associated measures • Eviction of bats outside of the maternity season • A monitoring program to determine impacts from the Project • Extending the monitoring program for the brine ponds to include bats, as deemed necessary 		
<p>MM BIO-16. Wildlife Fencing. The NECO Plan recommends fencing potential hazards to bighorn sheep. A security fence shall be constructed around portions of the Central Project Area to <i>exclude larger terrestrial wildlife</i> – bighorn sheep, deer, coyotes, foxes, badgers – from entering Project areas that could pose a hazard to these species (Figure 3.6-). Such areas shall include the transmission switchyard and other structures that may be dangerous to wildlife. Where exclusion fencing is required, security gates will be remain closed except during specific vehicle entry and may be electronically activated to open and close immediately after vehicle(s) have entered or exited.</p> <p>Permanent security fences will be installed around the Upper and Lower reservoirs, switchyard and brine ponds, for security, safety and general liability purposes, and will prevent wildlife access. These fences will also be equipped with tortoise exclusion fencing. In addition, temporary tortoise exclusion fences will be installed around work zones during construction, and will be sufficiently low (3 feet) to permit passage by sheep.</p> <p>These temporary fences will be removed at the end of construction. Figure 3.6-4 shows the concept for the temporary construction fencing. If additional fencing is needed during construction to protect tortoises, this fencing will be installed and maintained during the construction</p>	<p>Licensee (Project Biologist/Contractor) in consultation with CDFW and State Water Board.</p>	<p>Wildlife fencing will be constructed at the beginning of the construction period, with permanent fences maintained for the life of the Project.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>period.</p> <p>All required exclusion fencing shall be maintained for the life of the Project. All fences will be inspected monthly and during/following all major rainfall events. Any damage to the fencing shall be temporarily repaired immediately, followed by permanent repair within 1 week.</p>		
<p>MM BIO-17. Construction and Operation Restricted Areas. Construction and maintenance activities shall be restricted to minimize biological Project impacts. These restrictions shall include vehicle speed limits on both paved and dirt roads (the speed limit shall be based on County regulations); avoidance areas, work areas in which workers must be accompanied by a biological monitor, specified parking areas, trash deposition, repair, and refueling areas; looking under parked vehicles prior to movement; and the appropriate response upon finding a special-status species. For construction, this will include the entire construction period. For operations, this will apply to scheduled and unscheduled maintenance activities.</p>	<p>Licensee (Project Biologist/Contractor) in consultation with CDFW and State Water Board.</p>	<p>Construction/Life of the Project</p>
<p>MM BIO-18. Construction during Daylight Hours. The NECO Plan requires that, in areas without wildlife exclusion fencing or those areas that have not been cleared of tortoises, construction activities will only take place during daylight hours. This permits avoidance of construction-related mortalities of fossorial, diurnal species such as the desert tortoise, or nocturnally active species, such as the desert rosy boa.</p>	<p>Licensee (Project Biologist/Contractor) in consultation with CDFW and State Water Board.</p>	<p>Construction</p>
<p>MM BIO-19. Construction of Pipeline Trenches. The NECO Plan identifies that pipeline trenches must be closed, covered, and/or inspected. Pipeline trenches shall be closed, temporarily fenced, or covered each day. Each day, any open trenches shall be inspected by an approved biological monitor, under the supervision of the Authorized Biologist, at first light, midday, and at the end of each day to ensure animal safety. Ramps shall be provided to encourage animals to escape on their own. The biological</p>	<p>Licensee (Project Biologist/Contractor) in consultation with CDFW and State Water Board.</p>	<p>Construction</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
monitor shall be confirmed by the Approved Project Biologist.		
<p>MM BIO-20. Minimize Nighttime Lighting Impacts. Facility lighting will be designed, installed, and maintained to prevent casting of nighttime light into adjacent native habitat. See also MM AES-1.</p>	Licensee (Environmental Coordinator/ Contractor) in consultation with CDFW and State Water Board.	Minimized lighting will be installed during construction and maintained for the life of the Project
<p>MM BIO-21. Dry Desert Washes. There are many small washes crossed by the pipeline and transmission line that are regulated by the CDFW. A Streambed Alteration Agreement (Section 1602 of the Fish and Game Code) shall be obtained, which will identify the condition and location of all state jurisdictional waters, impacts, and mitigation measures. Mitigation includes the acreage assessment of washes that may be affected, construction requirements associated with working on or near the washes, and compensation for lost or damaged acreage. It is anticipated that this compensation will be included in the habitat compensation for special-status species (MM BIO-22 and MM TE-6).</p>	Licensee (Environmental Coordinator/ Biological Technical Advisory Team/Project Biologist) in consultation with CDFW and State Water Board.	Engineering design (designs will establish proper desert wash crossings). Habitat compensation will be established during Project engineering.
<p>MM BIO-22. Habitat Compensation. CDFW standard off-site compensation for loss of occupied burrowing owl habitat consists of a minimum of 6.5 acres of lands, approved by CDFW and protected in perpetuity, for each pair of owls or unpaired resident bird. In addition, existing unsuitable burrows on the protected lands should be enhanced (i.e., cleared of debris or enlarged) or new burrows installed at a ratio of 2:1. Habitat compensation for burrowing owls, if needed, will be subsumed by compensation for lost desert tortoise habitat, which also constitutes burrowing owl habitat.</p> <p>The NECO Plan requires compensation for disturbance of Desert Dry Wash Woodland in WHMAs at the rate of 3:1. The Project does not disturb any Desert Dry Woodland inside a WHMA. However, the compensation for desert tortoise habitat that is lost to the Project will compensate for the loss of Desert Dry Wash Woodland expected to be lost</p>	Licensee (Environmental Coordinator/ Biological Technical Advisory Team/Project Biologist) in consultation with CDFW and State Water Board.	Construction/Life of the Project

Mitigation Program	Responsible Party	Timing for Mitigation Measure
or disturbed during construction activities.		
<p>PDF BIO-1. Pre-construction Special Species and Habitat Survey. Following licensing and access to the Central Project Area, surveys for special species and habitats that could support special species will be conducted. A thorough examination of the Central Project Area and local springs and seeps will provide information to determine if any avoidance or adaptive management is required. Simultaneously, the site will be assessed for use by other wildlife. Based on the results of these surveys, the biological mitigation and monitoring program will be modified in ongoing consultation with the USFWS and the CDFW. Reporting requirements for the pre-construction surveys are specified in MM BIO-2.</p>	<p>Licensee (Project Biologist/Contractor) in consultation with USFWS, CDFW and State Water Board.</p>	<p>The Licensee shall conduct sensitive species surveys after it has gained access to the Central Project Area. Any modifications to protection measures should be developed in consultation with USFWS and CDFW and presented in a Wildlife Protection Plan. The Wildlife Protection Plan must be approved by USFWS and CDFW, and provided to the Deputy Director for Water Rights (Deputy Director) for approval before starting construction. No construction activities may commence until the Wildlife Protection Plan is approved by the Deputy Director.</p>
<p>PDF BIO-2. Pre-construction Plant Survey. Preconstruction surveys will identify special-status plant populations and also species protected by the CDNPA. For annuals or herbaceous perennials that are dormant during certain seasons, data from 2008, 2009, and 2010 surveys will be used to assist in locating populations during dormant seasons. Based on these combined surveys, avoidance areas in construction zones will be established for special plant resources. The perimeters will be marked with wooden stakes, at least 3 feet high, and no more than 10 feet apart. Each stake will be flagged with red and white candy-striped flagging or other obvious barrier tape.</p> <p>Where avoidance is not feasible, and the species can be reasonably transplanted (e.g., foxtail cactus, Wiggins' cholla, other cacti and species protected by the CDNPA), plants will be salvaged and transplanted in areas approved in the Re-Vegetation Plan. Transplantation will be part of the Re-Vegetation plan developed for the Project. Salvaging seed and replanting may be an option considered for certain species (e.g., smoke tree, ironwood).</p>	<p>Licensee (Project Biologist/Contractor) in consultation with USFWS, CDFW and State Water Board.</p>	<p>The Licensee shall conduct sensitive species surveys after it has gained access to the Central Project Area. Any modifications to protection measures should be developed in consultation with USFWS and CDFW and presented in a Wildlife Protection Plan. The Wildlife Protection Plan must be approved by USFWS and DFG, and provided to the Deputy Director for Water Rights (Deputy Director) for approval before starting construction. No construction activities may commence until the Wildlife Protection Plan is approved by the Deputy Director.</p>
<p>PDF BIO-3. Pre-construction Mammals Surveys. Prior</p>	<p>Licensee (Project</p>	<p>The Licensee shall conduct sensitive</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>to construction, surveys will be conducted for all burrows that might host a badger or kit fox. (These surveys can be simultaneous with those for desert tortoise burrows.) Active burrows and all fox natal dens will be avoided, where possible. The perimeters of all avoidance areas will be marked with wooden stakes, at least 3 feet high, and no more than 10 feet apart. Each stake will be flagged with red and white candy-striped flagging or other obvious barrier tape.</p> <p>Where avoidance is infeasible, occupancy of burrows will be determined through fiberoptics and/or night vision equipment. All occupants will be encouraged to leave their burrows using one-way doors, burrow excavation in the late afternoon/early evening (to encourage escape at night), or other approved methods. All burrows from which badgers or foxes have been removed will be fully excavated and collapsed to ensure that animals cannot return prior to or during construction.</p>	<p>Biologist/Contractor) in consultation with USFWS, CDFW and State Water Board.</p>	<p>species surveys after it has gained access to the Central Project Area. Any modifications to protection measures should be developed in consultation with USFWS and CDFW and presented in a Wildlife Protection Plan. The Wildlife Protection Plan must be approved by USFWS and CDFW, and provided to the Deputy Director for Water Rights (Deputy Director) for approval before starting construction. No construction activities may commence until the Wildlife Protection Plan is approved by the Deputy Director.</p>
<p>PDF BIO-4. Avian Protection of Transmission Line. The Licensee will develop an avian protection plan in consultation with the U.S. Fish and Wildlife Service (USFWS). The plan will: meet Avian Power Line Interaction Committee/Fish and Wildlife Service (APLIC/FWS) guidelines for an avian protection plan; present designs to reduce potential for avian electrocution and collisions; provide methods for surveying and reporting Project-related raptor mortality and managing nesting on the proposed transmission lines; and include a workers education program.</p> <p>The raptor-friendly transmission lines will be developed in strict accordance with the industry standard guidelines set forth in <i>Suggested Practices for Raptor Protection on Power Lines: The State of the Art in 2006</i>, by Avian Power Line Interaction Committee, Edison Electric Institute, and Raptor Research Foundation and the USFWS-approved Avian and Bat Protection Guidelines. The design plan</p>	<p>Licensee/Project Biologist/Contractor in consultation with USFWS, CDFW and State Water Board.</p>	<p>Avian protection measures will be developed during engineering design, implemented during construction, and maintained for the life of the Project.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
(filed for FERC approval) will include adequate insulation, and any other measures necessary to protect bats and raptors from electrocution hazards.		
<i>Threatened & Endangered Species</i>		
<p>MM TE-1. Desert Tortoise Pre-construction Surveys and Clearance Surveys. Desert tortoises shall be removed from construction areas by the Project Biologist. Such tortoises shall be processed (cataloged, photographed, and numbered) prior to placement outside the construction zones but on public or private land, or the Project ROW (see Appendix 12.14 Desert Tortoise Removal and Translocation Plan). On the linear facilities, this is achieved by first surveying for all desert tortoises that might be within construction zones or are likely to enter construction zones, immediately prior to the start of construction. (These surveys can be simultaneous with those for badger and kit fox.). Active burrows will be identified, measured, and the entrance “gated” (a 3-inch twig inserted into the floor of the runway) for monitoring tortoise use. The locations of all desert tortoises will be mapped so that those locations can be monitored for tortoise use during construction.</p> <p>On the Central Project Area, there is little likelihood of desert tortoises except along the southern and eastern edges because of the altered landscape and massive and abundant tailings piles. Surveys first will be conducted in the Central Project Area to determine the presence of desert tortoise. If there is any suggestion of tortoise presence, either due to the presence of tortoise habitat and/or tortoise sign, a clearance survey (see Appendix 12.14 Desert Tortoise Removal and Translocation Plan) will be completed in those areas after tortoise-proof fencing is installed (see MM TE-3: Desert Tortoise Exclusion</p>	Licensee (Project Biologist) in consultation with CDFW and State Water Board.	Pre-construction survey

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>Fencing). A minimum of two clearance passes will be completed. Surveys will coincide with heightened tortoise activity, from mid-March to mid-April and during October. This will maximize the probability of finding all tortoises. Any tortoises found will be removed per mitigation MM TE-3: Desert Tortoise Translocation or Removal.</p> <p>Surveys and clearance on the substation will proceed identically to that on the Central Project Area, with the exception that a pre-construction survey prior to clearance surveys is not necessary.</p>		
<p>MM TE-2. Desert Tortoise Construction Monitoring. No construction in unfenced areas (see MM TE-3: Desert Tortoise Exclusion Fencing) on the linear facilities will occur without biological monitors. This includes both construction monitoring and maintenance activities that require surface disturbance. An adequate number of trained and experienced monitors must be present during all construction activities, depending on the various construction tasks, locations, and season. The Northern and Eastern Colorado Desert Coordinated Management (NECO Plan) suggests that construction activities occur when tortoises are inactive—November 1 to March 15—where possible. However, adequate monitoring will mitigate concerns about take due to heightened activity levels the remainder of the year.</p> <p>All desert tortoises will be removed from harm's way by a biologist approved by the Project Biologist (MM BIO-2). The Project Biologist must be sufficiently qualified to ensure approval by USFWS and CDFW for all tortoise protection measures that may be implemented by the Project. USFWS describes a single designation for biologists who can be approved to handle tortoises, "Authorized Biologist." Such biologists have demonstrated to USFWS that they possess sufficient desert tortoise knowledge and experience to handle and move tortoises appropriately. Authorized Biologists are permitted to then approve specific monitors</p>	<p>Licensee (Project Biologist/Contractor) in consultation with USFWS, CDFW and State Water Board.</p>	<p>Construction</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>to handle tortoises, at their discretion. The CDFW must also approve such biologists, potentially including individual approvals for monitors approved by the Authorized Biologist.</p> <p>Active burrows and special-resource burrows will be avoided, where possible. Where avoidance of any burrow is infeasible, occupancy will first be determined through the use of fiberoptics, probes or mirrors. All burrows that could potentially host a tortoise will be excavated with hand tools in the method prescribed by the Desert Tortoise Council (1994, rev. 1999), <i>Guidelines for handling desert tortoises during construction projects</i>. Any tortoises found will be removed from the construction area per MM TE-4: Revised Desert Tortoise Clearance and Relocation/ Translocation Plan.</p> <p>Pipeline trenches will be closed, temporarily fenced, or covered each day. Each day, any open trenches will be inspected by an approved biological monitor at first light, midday, and at the end of each day to ensure tortoise safety.</p> <p>If necessary, temporary fencing will be installed in the active work area to separate a tortoise from active construction, in order to maximize protection.</p> <p>If a tortoise is injured or killed, surface- disturbing activities must cease in the area of the killed or injured tortoise and the Project Biologist contacted. Injured tortoises will immediately be taken to a qualified veterinarian regardless, if their survival is expected. USFWS will determine if the tortoise can be returned to the wild, should it recover.</p> <p>As a mitigation performance standard, following site clearance, a report will be prepared by the Project Biologist to document the clearance surveys, construction monitoring, the capture and release locations of all tortoises found, individual tortoise data, and other relevant data. This report will be submitted to the CDFW and USFWS.</p>		

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>MM TE-3. Desert Tortoise Exclusion Fencing. The substation will be enclosed with a permanent tortoise exclusion fence to keep adjacent tortoises from entering the site. The fencing type will be 1- by 2-inch vertical mesh galvanized fence material, extending at least 2 feet above the ground and buried at least 1 foot. Where burial is impossible, the mesh will be bent at a right angle toward the outside of the fence and covered with dirt, rocks, or gravel to prevent the tortoise from digging under the fence. Tortoise-proof gates will be established at all site entry points. All fence construction will be monitored by qualified biologists to ensure that no tortoises are harmed. Following installation, the fencing will be inspected monthly and during all major rainfall events. Any damage to the fencing will be repaired immediately. Parking and storage will occur within the substation and disturbed, previously fenced areas.</p> <p>Any areas on the Central Project Area that are determined through surveys to require fencing will be fenced as outlined above (Figure 3.6-). Where a fence is discontinuous (between tailings piles for example), the fence ends will extend well up the slope of the piles, to ensure that tortoises cannot go around the end. Alternative methods may be explored to ensure that the fences are functional at excluding tortoises.</p>	<p>Licensee (Project Biologist/Contractor) in consultation with CDFW and State Water Board.</p>	<p>Temporary tortoise exclusion fences that allows passage of sheep of all life stages shall be installed around work zones prior to beginning construction and should be removed only after construction and subsequent mitigation measures are complete. If additional fencing is needed during construction to protect tortoises, this fencing should be installed and maintained during the construction period. All permanent fences shall be maintained in a fully functional condition for the life of the Project.</p>
<p>MM TE-4. Revised Desert Tortoise Clearance and Relocation/Translocation Plan.</p> <p>The Revised Desert Tortoise Clearance and Relocation/Translocation Plan is found in its entirety within Section 12.14. For both the Central Project Area and the linear facilities, it is anticipated that any tortoises removed would not be “translocated” or “relocated” in the biological sense of putting an animal in a location outside its home range. Instead, any tortoise would simply be removed to another part of its home range. Because construction on the Central Project Area will occur on highly disturbed previously mined areas, any tortoise found there during</p>	<p>Licensee (Project Biologist/Contractor) in consultation with CDFW and State Water Board.</p>	<p>Plan will be revised if needed during final design, then implemented during construction for the life of the Project.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>clearance would likely be a transient or in a peripheral part of its home range, certainly outside its core use areas or parts of its home range that could support its survival. By moving such a tortoise to a location immediately adjacent to its capture site outside the fenced construction area, the Project would be maintaining the tortoise within its home range, not translocating it. The tortoise merely would be excluded from undesirable areas. For utility corridors and fence construction, tortoises would be removed a short distance from the construction zone. Tasks will include the following:</p> <ul style="list-style-type: none"> • Tortoise handling and temperature requirements • Data gathered on removed tortoises • Translocation site preparation (if any) and choice • Monitoring – all tortoises removed will be monitored sufficiently to ensure safety. 		
<p>MM TE-5. Predator Monitoring and Control Program. The Predator Monitoring and Control Program is found in its entirety within Section 12.14. Proposed projects on federal lands that may result in increased desert tortoise predator populations must incorporate mitigation to reduce or eliminate the opportunity for raven proliferation. One of the most significant desert tortoise predators are ravens. The USFWS has developed a program to monitor and manage raven populations in the California desert in an effort to enhance desert tortoise recovery. In order to integrate monitoring and management, the USFWS has agreed to an “in-lieu” fee to replace quantitative raven monitoring on new projects in the range of the desert tortoise. The Licensee will pay in-lieu fees to USFWS that will be directed toward a future quantitative regional monitoring program aimed at understanding the relationship between ongoing development in the desert region, raven population growth and expansion and raven impacts on desert tortoise populations. The vehicle for this program is a Memorandum</p>	<p>Licensee (Project Biologist) in consultation with USFWS, CDFW and State Water Board.</p>	<p>Plan to be revised as needed during final design and implemented during construction and operation.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>of Understanding between the Licensee, CDFW, and USFWS.</p> <p>The Predator Monitoring and Control Program may include this in-lieu fee if it is determined that the raven population may increase over current levels due to the Project.</p> <p>In addition to this in-lieu fee, the program will include, at a minimum:</p> <ul style="list-style-type: none"> • A suite of construction and operations measures to reduce food scavenging and drinking by ravens (e.g., trash containment, minimization of pooling water on roadways and construction right-of-ways) • Roadkill removal • Qualitative monitoring of raven use of the Project site during operations, conducted on a pre-determined schedule by the on-site Project environmental compliance officer • Breeding season nest surveys • Baseline and post-construction surveys for other desert tortoise predators, including coyotes, wild dogs, and gulls • Mitigation measures to be implemented if the number of predators increases • A schedule for post-construction surveys during the second year of Project operation, followed by surveys once every 5 years • The Licensee will continue to work collaboratively with the resource management agencies to conduct adaptive management as needed to control ravens and other predators in the Project area 		
<p>MM TE-6. Habitat Compensation. The Northern and Eastern Colorado Desert Coordinated Management (NECO) Plan states that all lands within a DWMA will be</p>	<p>Licensee in consultation with CDFW and State Water Board.</p>	<p>Construction/Life of the Project</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>designated as Category I Desert Tortoise Habitat⁴, with required compensation of 5 acres for every acre disturbed. All lands outside a DWMA are considered Category III habitat, with a 1:1 compensation ratio.</p> <p>The Project overlaps 19 acres of Category I Habitat and 65 acres of Category III Habitat. A minimum total compensation, then, would be 160 acres (Figure 3.6-3).</p> <p>This land would need to be purchased in the same population of desert tortoises as occupy the site. In addition, the following features should apply to compensation lands:</p> <ul style="list-style-type: none"> • Be part of a larger block of lands that are currently protected or able to be protected • Are not subject to intensive habitat degradation (e.g., recreational use, grazing use, agriculture) • Have inherently moderate to good habitat that will naturally and ultimately regenerate when current disturbances are removed • Preferably are bordered by native habitat suitable for tortoises • In part, may represent a buffer for a block of good habitat 		
<p>MM TE-7. Operations and Maintenance. Tortoises observed during routine maintenance activities will be allowed to voluntarily move out of harm's way. Transmission line repair activities that will result in surface disturbance will require biological monitoring, per MM TE-2.</p>	<p>Licensee (Project Biologist/Contractor) in consultation with CDFW and State Water Board.</p>	<p>Project Operation.</p>
<p>Aesthetic Resources</p>		

⁴ BLM habitat categories (BLM 1988), ranging in decreasing importance from Category I to Category III, were designed as management tools to ensure future protection and management of desert tortoise habitat and its populations. These designations were based on tortoise density, estimated local tortoise population trends, habitat quality, and other land-use conflicts. Category I habitat areas are considered essential to the maintenance of large, viable populations.

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>MM AES-1. Lighting. To minimize lighting effects and potential light pollution outside of the proposed Project boundaries, the final engineering design shall incorporate directional lighting, light hoods, low pressure sodium bulbs or light emitting diode (LED) lighting, and operational devices to allow surface night-lighting in the central site to be turned on as-needed for safety to minimize lights that would be directly visible from the National Park . Lighting systems will be designed to use the warmest light practicable for the application. The Licensee shall fund night sky monitoring to be conducted in collaboration with the National Park Service (NPS) during the post-licensing design period (to represent baseline conditions) and during construction and the initial operational period. In addition, the NPS will be consulted during the Project design phase to ensure that feasible measures to minimize light trespass are incorporated into final design.</p>	<p>Licensee (Contractor/ Environmental Coordinator) in consultation with State Water Board.</p>	<p>Final Engineering/Pre-construction/ Construction/Operation</p>
<p>MM AES-2. Water Pipeline. For construction of the water pipeline, reduce side cast disposal of soils from open cut construction (by replacing disturbed soil within the trench and limiting the width of the construction disturbance) to reduce color contrast and disturbance with surrounding landscape. The area disturbed during pipeline construction shall be backfilled and revegetated with native vegetation immediately following completion of pipeline construction.</p>	<p>Licensee (Contractor/ Environmental Coordinator) in consultation with State Water Board.</p>	<p>Final Engineering/Pre-construction/ Construction</p>
<p>MM AES-3. Road Crossings. For design of the transmission line, road crossings shall be aligned perpendicular to the road to minimize views up and down ROW corridors, and towers should be placed at the maximum distance from the road ROW. Steel lattice structures with a dull, galvanized steel finish shall be utilized to reduce visual contrast. Conductors shall be selected to reduce glare and visual contrast. The corridor should be collocated with the existing MWD transmission corridor, and tower spacing at Victory Pass designed so that as few towers as possible are skylighted on the ridgeline. These considerations will be balanced with</p>	<p>Licensee (Contractor/ Environmental Coordinator) in consultation with State Water Board.</p>	<p>Aesthetic measures will be incorporated into the Project design and implemented during construction.</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
engineering constraints and concerns for minimizing impacts to other resources such a desert tortoise and cultural resources. Final design will be approved by the FERC.		
MM AES-4. Transmission Line. For construction of the transmission line, existing access roads and construction laydown areas shall be used to the extent feasible. The transmission line disturbed zones that will not be required for long-term maintenance access will be revegetated with native vegetation immediately following completion of transmission line construction, consistent with the recommendations in the Biological Resources Revegetation Plan (see Section 12.14).	Licensee (Contractor/ Environmental Coordinator) in consultation with State Water Board.	Construction
PDF AES-1. Staging Areas. Staging areas and areas needed for equipment operation, material storage and assembly shall be combined with construction lands to the extent feasible, and organized to minimize the total footprint needed. Staging, storage, and temporary construction areas shall be reclaimed as soon as the use of each such area is completed.	Licensee (Contractor/ Environmental Coordinator) in consultation with State Water Board.	Construction
Cultural Resources		
<p>MM CR-1. Protect Known Historic Properties. Of the cultural resources recorded within the Project boundaries (see Table 3.8.4), only the CRA (P-33-6726) is evaluated as potentially eligible for listing under Criterion “A” – broad patterns of history; and Criterion “C” – embodies distinctive characteristics of a type, period, region, or method of construction. No formal determination of eligibility has been made, but the CRA will be treated as potentially eligible.</p> <p>Management Activity: Design transmission line and water pipes to avoid direct or indirect impacts to the buried portion of the CRA. Inspect once every 2 years to observe if conditions are stable or if any disturbance or deterioration has occurred.</p>	Licensee (Environmental Coordinator/ Contractor) in consultation with SHPO and State Water Board.	Engineering Design/ Construction/ Operation

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>The Licensee will design transmission tower locations, plan conductor installation procedures, and design water line placements to avoid impacts to this crucial element of southern California's water delivery infrastructure. Consultation with the MWD will occur for that purpose. The CRA is buried in the areas of the Project APE and no impacts to its integrity are anticipated.</p> <ul style="list-style-type: none"> • The inspections will be made at ground surface level as appropriate • Digital photographs will be taken and compared with photographs from the previous inspections • The Licensee (Project Environmental Coordinator or designee) will summarize observations made during inspections every 2 years during construction. This summary will be included in the HPMP Implementation Summary Report (HPMP Implementation Report). The Licensee will provide a HPMP Implementation Report on a 6-year review cycle after construction, in coordination with SHPO. • Although none are presently identified, in the event that interested Indian Tribes identify TCPs in the future during the planning, construction, and/or operation of the Project within the APE, the Project Environmental Coordinator shall direct qualified individuals to conduct additional consultation with the Indian Tribes, BLM, and SHPO to evaluate and document the properties in accordance with National Register Bulletin 38 (Parker and King, 1998). If the properties are determined to be eligible for listing in the NRHP, appropriate measures will be developed to mitigate adverse effects through consultation with the Indian Tribes, BLM, and SHPO. Priority will be given to preservation in place when possible , followed by data recovery, documentation, restoration or other measures as approved by the Tribes, BLM and SHPO. 		

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>Implementation Steps for Performance:</p> <ul style="list-style-type: none"> • Inspect the CRA in the area of the APE every 2 years during construction • Provide a summary of observations on a 2-year cycle during the construction phase and a 6-year reporting cycle thereafter • If notable changes are observed in site conditions consult with SHPO to determine if further remedial actions are appropriate • Conduct appropriate consultation and treatment if TCP are identified in the future 		
<p>MM CR-2. Inventory and Evaluate Cultural Resources Within the Kaiser Mine Property. An inventory of this portion of the APE will be undertaken in compliance with Section 106 of the National Historic Preservation Act and according to regulatory procedures provide in 36 CFR 800. The inventory will also include other accessible portions of the APE within the Kaiser property. The entire townsite and associated portions of the railroad will be re-recorded, and the various elements will be considered as contributors to a National Register district.</p> <p>Management Activity: A Work Plan will be developed and executed following issuance of the FERC license and upon gaining legal access to the subject lands. A phased approach will be taken in order to make prudent and well-informed decisions on Section 106 compliance within the Kaiser property. The first phase will be a scoping reconnaissance of the APE within the Kaiser property and the entirety of the Eagle Mountain townsite. Portions of the site have been re-used from 1988 until 2003 for a prison. A high school and residential community has occupied portions of the site until recent years. Today it exists as a mix of abandoned and re-occupied post-war minimal traditional style dwellings, Kaiser operations buildings,</p>	<p>Licensee (Environmental Coordinator) in consultation with BLM, FERC, SHPO and State Water Board.</p>	<p>Pre-construction</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>modern buildings, ruins, and foundations. Questions concerning what remains of the original townsite plan and integrity of the Eagle Mountain townsite will be assessed to determine whether a district is feasible or warranted and what the scope of a survey should include. This information will be applied to the development of a Work Plan for the recording and evaluation of the site.</p> <ul style="list-style-type: none"> • The Work Plan will include a draft historic context and historical information about the footprint and content of the original townsite and its development over time. The context will include a consideration of the Eagle Mountain as a late example of a company town in the American West. This information will be used to develop an approach to the documentation of the site and consideration of whether a potential district may exist. The draft Work Plan will be submitted to SHPO, BLM, and FERC for review, comment, and approval of the survey approach. • Updates to DPR 523 forms will be developed for the townsite, mine, and railroad and will be used as the basis for formal evaluations of the townsite, mine, and railroad for listing in the NRHP will be made according to 36 CFR 800 and 36 CFR 60.4. Individual buildings or structures will be documented on DPRb forms. A District Record (DPR 523d) will be completed, if appropriate. Any other resources discovered during survey also will be documented and evaluated. The results will be provided in California Archaeological Resource Management Report format and to the Secretary of the Interior's standards for archaeological reporting. <p><u>Implementation Steps for Performance:</u></p> <ul style="list-style-type: none"> • SHPO, BLM, and FERC concurrence will be obtained for the determination of NRHP-eligibility of the Eagle Mountain townsite, mine, railroad, and any other documented cultural resources within the Project APE, 		

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>including consideration for the potential of any resources as contributing elements to a historic district, if evidence exists for one to be present.</p> <ul style="list-style-type: none"> • If any resources are determined to be historic properties, recommendations will be developed to avoid or mitigate impacts through appropriate treatments in accordance with the Secretary of the Interior's standards. These include in order of preference: project design to avoid direct impacts; moving of standing buildings or structures in the APE to other areas of the townsite or mine so that integrity of setting, feeling, and materials can be retained; or data recovery and documentation. 		
<p>MM CR-3. Implement the Historic Properties Management Plan and a Worker Environmental Awareness Program. Pursuant to CEQA Guidelines §15126.4(b)(3)(A-D) preservation in place is the preferred manner in which to mitigate impacts to archeological sites. Preservation in place maintains the relationship between the artifacts and context, and seeks to avoid conflict values of groups associated with the site. The Historic Properties Management Plan and a Worker Environmental Awareness Program have been prepared to address procedures and treatment for data recovery and will be adopted prior to site excavation.</p> <p>Management Activity: Implement project-specific education program.</p> <ul style="list-style-type: none"> • A qualified archaeologist will implement a cultural resources element for the Worker Environmental Awareness Program that is tailored to the Eagle Mountain Pumped Storage Project and workforce. This Program will focus on possible discovery and mitigation procedures during the construction phase of the Project as well as preservation obligations of Project staff. • The program will include a printed handout for all Project 	<p>Licensee (Environmental Coordinator/ Contractor) in consultation with SHPO and State Water Board.</p>	<p>Pre-construction/Construction/ Operation</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>personnel and a PowerPoint presentation or video that all Project personnel will be required to view.</p> <ul style="list-style-type: none"> • The program will present concepts of cultural resources management in a simple, understandable format, including a review of preservation laws and sanctions, examples of possible discoveries, and notification procedures in the event of discoveries. These are key elements of the HPMP including the Unanticipated Discoveries Plan and the steps to follow in evaluating potential cultural resources needs that are triggered by proposed construction activities. • The program will include a Monitoring Protocol and Provisions for Enforcement that may be presented to refresh personnel and introduce new staff to cultural resource concepts and Project-specific issues. • Project equipment and vehicle operators will be educated on the importance of staying within Project boundaries and also the prohibitions of going off designated routes of travel such as Eagle Mountain Road or Kaiser Road. 		
<p>MM CR-4. Offer Opportunities for Public Interpretation. Unlike other hydroelectric projects where public access and recreational opportunities may be afforded, safety concerns and proximity to a proposed landfill project preclude offering public access within the core of Project boundaries. Opportunities for public interpretation are therefore extremely limited. Some appropriate signage that interprets the history of the area already exists, including the 2009 E Clampus Vitus monument on Eagle Mountain Road for the 36th Evacuation Hospital associated with the World War II DTC and a Riverside County historical marker that acknowledges the Iron Chief, Eagle Mountain, and other mines of the area. The DTC/CAMA is also thoroughly and professionally interpreted at the General Patton Memorial Museum in Chiriaco Summit, located off of I-10 between Indio and Desert Center. The prehistory and Native</p>	<p>Licensee (Environmental Coordinator/ Contractor) in consultation with SHPO and State Water Board.</p>	<p>Pre-construction/Construction/ Operation</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>American cultural traditions of the region are interpreted at the Agua Caliente Cultural Museum in Palm Springs, the Malki Museum on the Morongo Indian Reservation, the Palm Spring Desert Museum, the Coachella Valley Museum and Cultural Center, and at Joshua Tree National Park.</p> <p>Management Activity: Develop informative signage that will be available to the public.</p> <p>The Licensee will develop and install one weather-tolerant sign that will be placed outside the main gate of the facility. The sign will provide information about the prehistory and history of the general area, Native American groups who inhabited the area, and background on the functioning of the Project. Local museums and historical monuments will also be identified.</p> <p>A public interpretive sign will be developed in coordination with the development of the HPMP and will be installed within 1 year of completion of the boundary fence.</p>		
<p>MM CR-5. Review Effectiveness of the Historic Properties Management Plan.</p> <p>Management Activity: Every 6 years, the Licensee will determine if modifications will improve the effectiveness of the HPMP.</p> <p>Develop recommendations for changes to the HPMP that may be discussed with SHPO, the BLM, Riverside County, interested Indian Tribes, FERC, and other consulting parties.</p>	<p>Licensee (Environmental Coordinator/ Contractor) in consultation with SHPO, and State Water Board, BLM, Riverside County, interested Indian Tribes, FERC, and other consulting parties.</p>	<p>Pre-construction/Construction/Operation</p>
<p>MM CR-6. Consult with SHPO, the BLM, Riverside County, interested Indian Tribes, and FERC.</p> <p>Management Activity: Develop a HPMP Implementation Report. The HPMP Implementation Report will be distributed for review according to a 2-year cycle during the construction phase of the Project because cultural resource</p>	<p>Environmental Coordinator/ Contractor in consultation with BLM, FERC, Riverside County, interested Indian tribes, SHPO and State Water Board.</p>	<p>Pre-construction/Construction/Operation</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>discoveries and treatments are most likely during that period. Thereafter, in the operation and maintenance phase, the HPMP Implementation Reports will be coordinated with the 6-year cycle of the Licensed Hydropower Recreation Development Report (FERC Form 80). The report will summarize, in table format, all Licensee cultural resources consultations and/or surveys performed for Project modifications, activities related to the Erosion Control Plan, or any other activities that have been reviewed due to their potential to result in soil disturbance in areas not previously disturbed. The HPMP Implementation Report will:</p> <ul style="list-style-type: none"> • Describe the proposed modifications, the type of cultural survey or other activity performed, the results of the survey or other activity, and actions taken (e.g., SHPO consultation and/or other consultation, mitigation, no action determined appropriate, etc.) • Summarize observations made of historic properties • Include summaries of cultural resource treatments as an update to a HPMP implementation summary table • Report the status of Licensee's public interpretation projects • Recommend modifications to the Project HPMP that will improve its implementation if appropriate <p>Implementation Steps for Performance: Develop a format for the HPMP Implementation Report and its associated Summary Table that will present the cultural resources activities and considerations in which the Licensee participated over a 2-year reporting cycle during construction and the 6-year reporting cycle thereafter. The HPMP Implementation Report will be provided to SHPO, BLM, Riverside County, and interested Indian Tribes for a 30-day review and comment period every 6 years in coordination with FERC Form 80. Following a consideration</p>		

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>of review comments, the Licensee will file the HPMP Implementation Report with the FERC.</p>		
<p>MM CR-7. Class I Investigation. In the event that Project activities would extend beyond the areas previously surveyed, then background literature will be reviewed to identify the location, character, and significance of known cultural resources in the area of a proposed action and the potential of the proposed action to affect historic properties. The Class I Investigation will rely on information contained within the Licensee’s Project archives. Should these data not prove sufficient, the Project Environmental Coordinator may determine that additional documentation is necessary to address a particular action under consideration that extends beyond the 1-mile buffer of the already completed Class I Investigation. The most important source of Class I Literature Review is the EIC at the University of California, Riverside.</p> <p>Management Activity: compare proposed Project location with Cultural Resources Management Maps.</p> <ul style="list-style-type: none"> • Determine if the Project area is located within 100 feet of a potentially significant previously recorded archeological site • Determine if Project area has been characterized as actively eroding or previously disturbed by other ground-disturbing activity (e.g., by machine excavation or underground utility line) • Determine if the area has been previously surveyed for cultural resources <p>Implementation Steps for Performance: based on the results of the above-noted Management Activity.</p> <ul style="list-style-type: none"> • Project area is located within 100 feet of a previously recorded potentially significant archeological site. Delay Project pending SHPO consultation and possible follow-up studies by a Secretary of the Interior-qualified 	<p>Licensee (Environmental Coordinator/Contractor) in consultation with BLM, FERC, Riverside County, interested Indian tribes, SHPO and State Water Board.</p>	<p>Pre-construction/Construction/Operation</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>professional archaeologist.</p> <ul style="list-style-type: none"> • Previous ground-disturbing activity may be documented or observed therefore no Project effect on cultural resources expected. Project may proceed. The Licensee shall include the Project description and permit considerations in the HPMP Implementation Report that will be distributed to the SHPO, the BLM, Riverside County, interested Indian Tribes and FERC on a 2-year cycle during the construction phase and on a 6-year review cycle thereafter in coordination with Form 80. 		
<p>MM CR-8. Class III Cultural Resources Field Investigation. Any modifications or additions to the APE in previously unsurveyed and undisturbed areas will require a Class III survey in compliance with Section 106 of the National Historic Preservation Act and according to 36 CFR 800. The Licensee will conduct an on-the-ground inventory of the APE for a proposed action that confirms the presence of known cultural resources and that may result in identification of previously unrecorded cultural resources. A Class III investigation may involve the excavation of shovel tests placed at 50-foot intervals within the APE or implementation of an alternative investigative strategy approved by the Licensee's Project Environmental Coordinator and the SHPO. Any investigations on easements through BLM land require a Fieldwork Authorization to a BLM permit-holding archaeologist in compliance with the Federal Land Policy and Management Act of 1976, as amended (PL 94-579).</p> <p>Management Activity: Consult with BLM or other land holding agencies as to what Section 106 or Section 110 compliance needs may still be required and implement as specified. Engage services of a qualified archaeologist to brief the Project Environmental Coordinator on correct scoping and protocols and conduct Class III Survey such as a walkover survey and/or systematic subsurface shovel testing (e.g., perform an identification level archeological</p>	<p>Licensee (Environmental Coordinator/ Contractor) in consultation with BLM, SHPO and State Water Board.</p>	<p>Pre-construction/Construction/Operation</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>field survey.) The actual scope of work will depend upon the proposed Project location and size of the proposed activity as well as BLM requirements on BLM land. The archaeologist will perform the Class III Survey and prepare a report that describes the investigation and results. The Licensee will forward this report to the SHPO, interested Indian Tribes and FERC. All new reports and site forms will be submitted to the EIC, University of California, Riverside.</p> <p>Implementation Steps for Performance: Review results of the Class III Survey and the associated recommendations.</p> <ul style="list-style-type: none"> • If the Class III Survey did not locate cultural resources, then the proposed action may proceed following consultation with BLM and SHPO. • If the Class III Survey locates cultural resources that the archaeologist recommends as not potentially significant, then the Licensee Project Environmental Coordinator consults with SHPO. If consensus is reached on the recommendation, then the action may proceed. If SHPO does not concur, then the resource is treated as potentially significant. • If the Class III Survey locates cultural resources that the archaeologist recommends as potentially significant (i.e., demonstrates good integrity, identifiable limits, structure, function, research potential, and cultural/historical context – see definition in Section 4.2.3), then the Licensee's Project Environmental Coordinator consults with SHPO. If SHPO concurs with evaluation, then a Testing Phase investigation is recommended unless action may be designed to avoid the resource. Alternative Project locations will be reviewed. 		
<p>MM CR-9. Testing Phase Cultural Resources Field Investigation. Limited archeological excavations and analyses, possibly including documentation of structures, will be conducted to assess the National Register eligibility</p>	<p>Licensee (Environmental Coordinator/ Contractor) in consultation with BLM, FERC,</p>	<p>Pre-construction/Construction/Operation</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>of individual resources and Project effects on historic properties.</p> <p>The criteria for sites eligible to the NRHP may be found at 36 CFR 60.4. A site is eligible to the NRHP if it contains qualities that are significant in American history, architecture, archaeology, engineering, and culture and possesses integrity of location, design, setting, materials, workmanship, feeling, and association and:</p> <ul style="list-style-type: none"> • is associated with events that have made a significant contribution to the broad patterns of history • is associated with the lives of persons significant in the past • embodies the distinctive characteristics of a type, period or method of construction; or represents a significant and distinguishable entity whose components may lack individual distinction or • has yielded, or may be likely to yield, information important in prehistory or history <p>Management Activity: Engage services of a qualified archaeologist to collect data sufficient to determine if a cultural resource qualifies as significant. If the site is located on BLM land, an excavation permit is required for testing programs that remove more than one cubic meter of soil from an individual site, in compliance with the Archaeological Resources Protection Act of 1979, as Amended (PL 96-95). Archaeological Resources Protection Act permits require submittal of a Treatment Plan/Research Design for which the BLM is required to consult with the SHPO and interested Indian Tribes prior to approving field investigation. The archaeologist will perform a Testing Phase investigation and prepare a report that describes the Testing Phase investigation and results. The Licensee will forward this report to the BLM for consultation with SHPO, interested Indian Tribes and FERC.</p>	<p>SHPO and State Water Board.</p>	

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>Implementation Steps for Performance: Review results of the Testing Phase Report and the associated recommendations, and consult with the BLM and SHPO.</p> <ul style="list-style-type: none"> • If the Testing Phase investigation indicates that the cultural resource does not qualify as significant, Project may proceed following consultation with SHPO • If the Testing Phase investigation indicates that the cultural resource qualifies as significant, the Licensee consults with the BLM and SHPO. If the SHPO concurs with the recommendation that the cultural resource is potentially eligible for listing in the NRHP and if the Project is not amended to avoid the resource, consultation with the SHPO will continue. A qualified archaeologist will develop the scope of work that will serve as mitigation of Project effects. The Licensee will consult with the SHPO and gain consensus on the appropriate mitigation (may involve further Data Recovery field investigation, monitoring, or another alternative treatment measure). 		
<p>MM CR-10. Data Recovery or Alternative Mitigation. The Licensee will investigate activities designed to mitigate effects upon a historic property that an action will affect. This may include data recovery, documentation, restoration or other measures. Such investigations will be preceded by development of an action-specific Memorandum of Agreement that has been approved by the Licensee,, SHPO, BLM, Advisory Council on Historic Preservation, FERC, and, as appropriate, interested Indian Tribes.</p> <p>Management Activity: The Licensee's Project Environmental Coordinator works with Project proponent and qualified archaeologist and consults with SHPO to avoid Project adverse impacts, minimize Project adverse effects through possible design modifications and or through data recovery or an alternative mutually agreed-upon method. If NRHP-eligible resource may not be avoided, The Licensee's archaeologist develops a</p>	<p>Licensee (Environmental Coordinator/ Contractor) in consultation with BLM, FERC, Advisory Council on Historic Preservation, interested Indian tribes, SHPO and State Water Board.</p>	<p>Pre-construction/Construction/Operation</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>Memorandum of Agreement (MOA) and the Licensee consults with SHPO, BLM, Advisory Council on Historic Preservation, and interested Indian Tribes, as appropriate and files the MOA with FERC for approval. When an appropriate MOA is agreed upon, the archaeologist will perform the Data Recovery mitigation and prepare a report that describes the mitigation and the results. The Licensee will forward this report to the consulting parties.</p> <p>Implementation Steps for Performance: Review results of the data recovery or other mitigation and consult with the SHPO, BLM, Advisory Council on Historic Preservation, interested Indian Tribes, and the FERC. When consulting parties concur that mitigation has been successfully achieved, the action may proceed.</p>		
<p>MM CR-11. Treatment of Unanticipated Discoveries of Cultural Resources and Human Remains. As with all development projects in the state, should unforeseen artifacts become uncovered during site grading, the Licensee is required to adhere to all state of California procedures, including Section 21083.2(i) of the CEQA Statutes and Section 15064.5 of the CEQA Guidelines regarding stoppage of work, handling of discovered materials, and notification of proper authorities to ensure that the construction/operation of the Project would not have an adverse effect on cultural resources. The Licensee is responsible for addressing action impacts to cultural sites and human remains should they be exposed as a result of ground disturbing activities by the Licensee or one of its contractors; erosion control measures; erosion of any inventoried historic properties; or it resources that are exposed in the event of a Project operation emergency.</p> <p>Management Activities: The Licensee shall follow the Project specific Plan and Procedures Addressing Unanticipated Discoveries of Cultural Resources and Human Remains, found in Appendix A of the HPMP in the event that unanticipated cultural materials or human</p>	<p>Licensee (Environmental Coordinator/ Contractor Project Archeologist/ Riverside County Coroner), as required in consultation with BLM, FERC, interested Indian tribes, SHPO and State Water Board.</p>	<p>Construction</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>remains are found within the Project area.</p> <p>Implementation Steps for Performance: The Licensee shall consult with SHPO, BLM, interested Indian Tribes, Riverside County Coroner, as appropriate and depending on the land jurisdiction on which any discovery is made, and FERC.,. If the Licensee or its contractors discovers contemporary contexts with human remains, local law enforcement agencies and the Riverside County Coroner shall be notified and consulted.</p>		
<p>Land Use/Public Services</p>		
<p>MM LU-1. Development Impact Fee. Prior to the start of commercial operation the Licensee shall pay to Riverside County the required Development Impact Fee for the Project area in accordance with Riverside County Ordinance 659, as amended through 659.7 and Chapter 4.60 of the Riverside County Code (Development Impact Fees).</p>	<p>Licensee/Environmental Coordinator in consultation with Riverside County and State Water Board.</p>	<p>Prior to start of Commercial Operations</p>
<p>MM LU-2. Coordinate with MWD. The Licensee will submit design plans for proposed Project facilities which may affect MWD facilities to the MWD for its review and approval for any Project component that may affect MWD facilities or rights-of-way. MWD's approval will be contingent on review and approval of design plans. MWD will also be notified of the construction of Project features that may affect MWD facilities or rights-of-way and will have an opportunity to observe construction of such features.</p>	<p>Licensee, in consultation with MWD and State Water Board.</p>	<p>Pre-construction/Construction</p>
<p>PDF LU-1. Construction Access. Construction access to/from the substation site will be from the Eagle Mountain Road exit and follow the Frontage Road east to the site. The Contractor will be responsible for monitoring construction access points.</p>	<p>Licensee (Contractor/ Environmental Coordinator) in consultation with Riverside County, CalTrans and State Water Board.</p>	<p>Construction</p>
<p>PDF LU-2. Construction Monitoring. Two weeks prior to beginning construction, notices shall be posted locally</p>	<p>Licensee (Contractor/ Environmental Coordinator in</p>	<p>Construction</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
stating hours of operation for construction near the Desert Center community and along State Route 177.	consultation with Riverside County, CalTrans and State Water Board.	
<p>PDF LU-3. Pipeline Construction. Impacts from water pipeline construction will be minimized or avoided by: (1) grading out the sidecast to meet existing grades; (2) minimizing disturbance, and construction timing to avoid seasonal rain, and maintaining surface contours and natural function of washes crossed; and (3) use of existing access roads, when feasible, thereby avoiding new ground disturbance.</p>	Licensee (Contractor/ Environmental Coordinator) in consultation with State Water Board.	Construction
<p>PDF LU-4. Coordination with Adjacent Projects. The Project layout has been modified to eliminate conflicts with existing and proposed land uses. For example, construction staging and lay-down areas have been relocated to a parcel southwest of the Lower Reservoir and outside of the proposed landfill to eliminate conflict with the proposed landfill truck marshalling and railyard facilities. Low voltage cables from the underground powerhouse have been routed through the underground powerhouse access tunnel to avoid conflicts with landfill Phase 3. Water treatment facilities have been relocated further from the CRA to address concerns of the MWD regarding the proximity of the brine ponds to the CRA.</p> <p>These efforts will continue during the final design and construction of the proposed Project. Because several large and complex projects are proposed in the same general area (including the landfill project and several proposed solar energy projects), detailed coordination will occur as the Project progresses in order to eliminate conflicts of facility locations, supporting infrastructure, designs, permits, and operations. The Licensee will be required to have regular Project coordination meetings with the owners of the landfill project, the adjacent solar projects, MWD, and any other interested landowners and project developers during construction of the Project. As</p>	Licensee (Contractor/ Environmental Coordinator) in consultation with MWD and State Water Board, landfill proponents, adjacent land owners, and any other interested land owners and project developers..	Engineering design will be developed in consultation with adjacent projects. Coordination will continue for the life of the Project.

Mitigation Program	Responsible Party	Timing for Mitigation Measure
the Project progresses into the design phase, the Project layout will be designed to preserve landfill capacity in Phases 1 through 4.		
PDF LU-5. Public Outreach Program. The Licensee will hold public meetings in the Project area to brief the public on Project activities and to hear and respond to comments. These meetings will be held quarterly in the Project area during engineering and construction and annually during Project operation for the life of the Project.	Licensee (Environmental Coordinator) in consultation with State Water Board	Starting during the engineering design phase and continuing for the life of the Project.
See PDF GW-1. Groundwater Seepage.	--	--
See MM GW-5. Seepage Recovery Wells.	--	--
Recreation		
No mitigation is required.	--	--
Population & Housing		
No mitigation is required.	--	--
Transportation		
See MM AQ-6. Transportation Management Plan.	--	--
See PDF LU-1. Construction Access.	--	--
See PDF LU-2. Construction Notice.	--	--
Air Quality		
MM AQ-1. Fugitive Dust. Periodic watering or application of suitable surfactant will be conducted for short-term stabilization of disturbed surface areas and storage piles as needed to minimize visible fugitive dust emissions. For dirt roads, watering, with complete coverage, shall occur at least twice daily, preferably in the late morning and after work is done for the day.	Licensee (Construction Contractor/ Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.	Construction

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>MM AQ-2. Trackout. To prevent Project-related trackout onto paved surfaces, the following measures will be undertaken through the construction period:</p> <ul style="list-style-type: none"> • Prevention and clean-up of Project-related trackout or spills on publicly maintained paved surfaces within 24 hours • Covering loaded haul vehicles operating on public paved roads • Material transported off-site shall be either sufficiently watered or securely covered to prevent excessive amounts of dust • Paving, gravel covering, or chemically stabilizing on-site roads as soon as feasible • Limiting on-site vehicle speeds on unpaved surfaces to 25 miles per hour (mph) • Operating a wash rack for drivers to wet down material before leaving the facility • Operate a wheel washer (or equivalent) to remove soil from vehicle tires as needed 	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.</p>	<p>Construction</p>
<p>MM AQ-3. Grading. Graded site surfaces will be stabilized upon completion of grading when subsequent development is delayed or expected to be delayed more than 30 days, except when such a delay is due to precipitation that dampens the disturbed surface sufficiently to eliminate visible fugitive dust emissions.</p>	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.</p>	<p>Construction</p>
<p>MM AQ-4. Surface Disturbance. Areas of active surface disturbance (such as grading) will be limited to no more than 15 acres per day.</p>	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.</p>	<p>Construction</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
<p>MM AQ-5. Earth-moving Activities. Non-essential earth-moving activities will be reduced during windy conditions; i.e., when visible dusting occurs from moist and dry surfaces due to wind erosion. Clearing, grading, earth-moving, or excavation activities will cease if winds exceed 25 mph averaged over 1-hour duration.</p> <p>In addition, compliance with MM AQ-6 through AQ-12 would further reduce impacts from engine exhaust and NOx and other criteria pollutant emissions.</p>	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.</p>	<p>Construction</p>
<p>MM AQ-6. Transportation Management Plan. The Licensee shall be responsible to develop and implement a Transportation Management Plan (TMP) for employees, including provisions for ridesharing, use of shuttle transit for Project employees, and provision of on-site food service to reduce vehicle trips, where feasible. The TMP shall also consider availability of local housing that can be secured for use by a voluntary portion of the employees throughout the construction period. The TMP will target a minimum 25% reduction in employee vehicle trips.</p>	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.</p>	<p>Construction</p>
<p>MM AQ-7. Diesel Trucks. All diesel truck operators shall strictly abide by the applicable state law requirements for idling, as described in the airborne toxic control measure (CCR, Title 13, section 2485), which limits vehicles with gross vehicular weight ratings of more than 10,000 pounds to no more than 5 minutes in a 60-minute period of idling of the primary engine or the diesel-fueled auxiliary power system at any location.</p>	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.</p>	<p>Construction</p>
<p>MM AQ-8. Equipment. Use electrical drops in place of temporary electrical generators, and substitute low- and zero emitting construction equipment and/or alternative fueled or catalyst equipped diesel construction equipment wherever economically feasible.</p>	<p>Licensee (Construction Contractor/ Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.</p>	<p>Construction</p>
<p>MM AQ-9. Generators. Electrical generators must be</p>	<p>Licensee (Construction Contractor/ Environmental</p>	<p>Construction</p>

Mitigation Program	Responsible Party	Timing for Mitigation Measure
properly permitted with the SCAQMD.	Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.	
MM AQ-10. Heavy-duty Diesel Trucks. Heavy-duty diesel trucks shall be properly tuned and maintained to manufacturers' specifications to ensure minimum emissions under normal operations.	Licensee (Construction Contractor/ Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.	Construction
MM AQ-11. Construction Equipment. At least 50 percent diesel fleet hours will utilize 2002 or later year diesel construction equipment.	Licensee (Construction Contractor/ Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.	Construction
MM AQ-12. Off-road Construction Equipment. Older off-road construction equipment shall be retrofitted with appropriate emission control devices prior to on-site use.	Licensee (Construction Contractor/ Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.	Construction
MM AQ-13. Air Quality Study Design. The Licensee shall work collaboratively with the National Park Service (NPS) to establish an air quality study design for 2 years of ozone monitoring to be conducted upon completion of construction and Project operations beginning. The Licensee will fund the annual expenses as a cost-share with the NPS and other transmission operators. The funding contribution for this study will be based on a percentage of total miles of transmission line.	Licensee (Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.	Construction/Project Operation
Noise		
MM N-1. Construction Equipment. The Licensee shall use construction equipment with properly operating and	Licensee (Contractor/Environmental	Construction

Mitigation Program	Responsible Party	Timing for Mitigation Measure
maintained noise mufflers and intake silencers, consistent with manufacturers' standards in order to reduce or avoid construction noise levels.	Coordinator) in consultation with Riverside County and State Water Board.	
Greenhouse Gas Emissions		
PDF GHG-1. SF₆ Monitoring. All SF ₆ -containing circuit breakers that are installed under the Project shall be cataloged and monitored pursuant to California state law and the recommendations of the SF ₆ Reduction Partnership for Electric Power Systems.	Licensee (Environmental Coordinator) in consultation with South Coast Air Quality Management District and State Water Board.	Construction and Operation
Hazards & Hazardous Materials		
<p>MM HM-1. UXO Plan. The Licensee, in consultation with the Licensee's Environmental Coordinator, shall implement a UXO Identification, Training and Reporting Plan (UXO Plan) to properly train all site workers in the recognition, avoidance and reporting of military waste debris and ordnance. Implementation shall include: (1) a description of the training program outline and materials, and the qualifications of the trainers; (2) identification of available trained experts that will respond to notification of discovery of any ordnance (unexploded or not); (3) a work plan to recover and remove discovered ordnance; and (4) work stoppage until site is determined clear by the Environmental Coordinator.</p> <p>Verification: The UXO Plan shall be implemented no less than 60 days prior to the initiation of construction activities at the site.</p>	Licensee (Environmental Coordinator/ Contractor) in consultation with State Water Board.	Final Engineering/Pre-construction/ Construction
Environmental Justice		
No mitigation is required.	--	--