

State of California
CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
LOS ANGELES REGION
320 West 4th Street, Suite 200, Los Angeles

FACT SHEET
WASTE DISCHARGE REQUIREMENTS
GEORGE & ERIKA FAMILY TRUST, LA CIENEGA CENTER
NPDES NO. CAG994004
CI-7938

PROJECT LOCATION

99 La Cienega Blvd.,
Beverly Hills, CA 90211

FACILITY MAILING ADDRESS

250 N. Roberson Blvd., #421
Beverly Hills, CA 90211

PROJECT DESCRIPTION

George & Erika Family Trust (GEF Trust) operates a groundwater dewatering system at 99 La Cienega Boulevard, Beverly Hills. The dewatering is necessary to protect the integrity of the building structure from rising groundwater. Discharge from the site is regulated under general NPDES Permit CAG994004 (Order No. R4-2003-0111) which was issued on April 22, 2004. GEF Trust submitted a Notice of Intent (NOI) form, and analytical results of groundwater samples to continue enrollment under the general NPDES Permit No. CAG994004, Order No. R4-2008-0032, which was adopted by the Board on June 5, 2008.

VOLUME AND DESCRIPTION OF DISCHARGE

Up to 150,000 gallons per day of groundwater is discharged to a storm drain (located at Latitude 34°03' 25", Longitude 118°22' 33"), thence to the Ballona Creek, a water of the United States. The site location diagram is shown as Figure 1.

APPLICABLE EFFLUENT LIMITATIONS

Based on the information provided in the NPDES Application Supplemental Requirements, the following constituents listed in the table below have been determined to show reasonable potential to exist in the discharge. The discharge of groundwater flows into the Ballona Creek which is designated as MUN (Potential) beneficial use. Therefore, the discharge limitations under the "Other Water" column apply to the discharge. In addition, the discharge limitations in Attachment B are not applicable to the discharge.

October 6, 2008

This Table lists the specific constituents and effluent limitations applicable to the discharge.

Constituents	Units	Discharge Limitations	
		Daily Maximum	Monthly Average
Total Suspended Solids	mg/L	150	50
Turbidity	NTU	150	50
BOD ₅ 20°C	mg/L	30	20
Oil and Grease	mg/L	15	10
Settleable Solids	ml/L	0.3	0.1
Sulfides	mg/L	1.0	---
Phenols	mg/L	1.0	---
Residual Chlorine	mg/L	0.1	---
Methylene Blue Active Substances (MBAS)	mg/L	0.5	---


FREQUENCY OF DISCHARGE

The continuous discharge is permanent for the building life.

REUSE OF WATER

It is not feasible to discharge the water to the sanitary sewer system. It is not economically feasible to haul the groundwater for off-site disposal and the facility lacks landscaped area at the site. There are no feasible reuse options for the discharge; therefore, the groundwater is discharged to the storm drain in compliance with the requirements of the attached order.

FIGURE 1

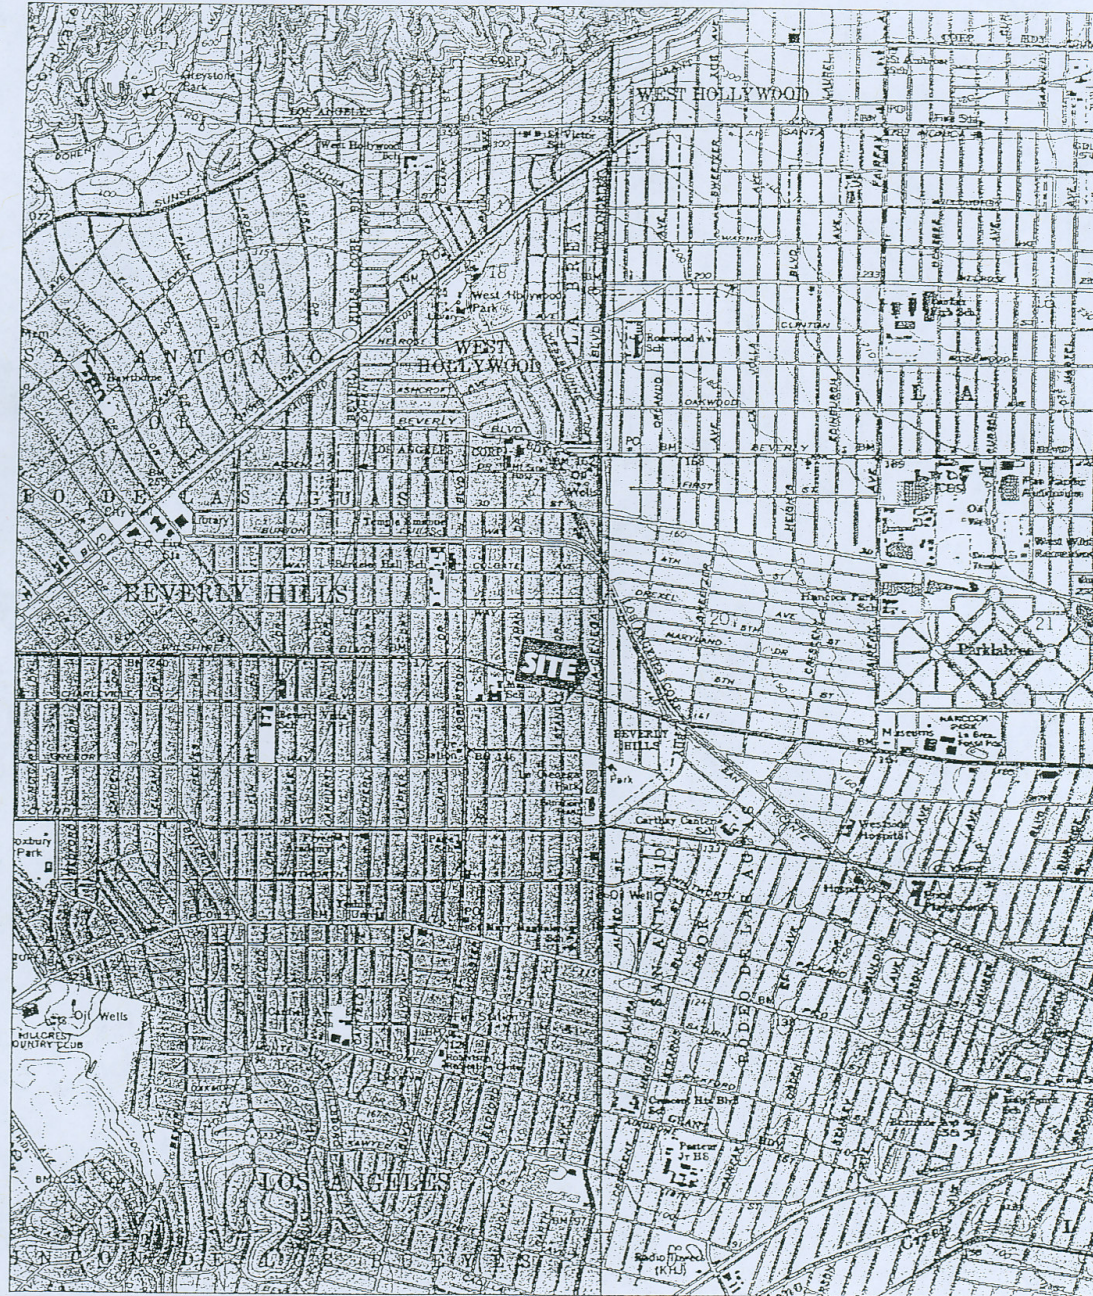

TN MN
132°

0 1000 FEET 0 500 1000 METERS

Printed from TOPO! ©2000 National Geographic Holdings (www.topo.com)