

C. Exposure Pathways. The contaminants addressed in this Covenant are present in soil and groundwater on the Burdened Property. Without the mitigation measures which have been performed on the Burdened Property, exposure to these contaminants could take place via dermal contact, inhalation and ingestion. The risk of public exposure to the contaminants has been substantially lessened by the remediation and controls described herein.

D. Adjacent Land Uses and Population Potentially Affected. The Burdened Property is used for Residential Housing and community parks and is adjacent to Commercial land uses.

E. Full and voluntary disclosure to the Board of the presence of hazardous materials on the Burdened Property has been made and extensive sampling of the Burdened Property has been conducted.

F. Covenantor desires and intends that in order to benefit the Board, and to protect the present and future public health and safety, the Burdened Property shall be used in such a manner as to avoid potential harm to persons or property that may result from hazardous materials that may have been deposited on portions of the Burdened Property.

G. Environmental Fact Sheet. An Environmental Fact Sheet has been prepared for the Burdened Property and is attached hereto and incorporated herein by this reference as **Exhibit B**. Prospective purchasers of the Burdened Property must be made aware of the existence of the Environmental Fact Sheet and a copy provided to them prior to entering into any sales agreement. The seller is responsible for providing a copy of the Fact Sheet to prospective purchasers in a timely manner and prior to accepting any purchase offer.

ARTICLE I GENERAL PROVISIONS

1.1 Provisions to Run with the Land. This Covenant sets forth protective provisions, covenants, conditions and restrictions (collectively referred to as "Restrictions") upon and subject to which the Burdened Property and every portion thereof shall be improved, held, used, occupied, leased, sold, hypothecated, encumbered, and/or conveyed. The restrictions set forth in Article III are reasonably necessary to protect present and future human health and safety or the environment as a result of the presence on the land of hazardous materials. Each and all of the Restrictions shall run with the land, and pass with each and every portion of the Burdened Property, and shall apply to, inure to the benefit of, and bind the respective successors in interest thereof, for the benefit of the Board and all Owners and Occupants. Each and all of the Restrictions are imposed upon the entire Burdened Property unless expressly stated as applicable to a specific portion of the Burdened Property. Each and all of the Restrictions run with the land pursuant to section 1471 of the Civil Code. Each and all of the Restrictions are enforceable by the Board.

1.2 Concurrence of Owners and Lessees Presumed. All purchasers, lessees, or possessors of any portion of the Burdened Property shall be deemed by their purchase, leasing, or possession of such Burdened Property, to be in accord with the foregoing and to agree for and among themselves, their heirs, successors, and assignees, and the agents, employees, and lessees of such owners, heirs, successors, and assignees, that the Restrictions as herein established must be adhered to for the benefit of the Board and the Owners and Occupants of the Burdened Property and that the interest of the Owners and Occupants of the Burdened Property shall be subject to the Restrictions contained herein.

1.3 Incorporation into Deeds and Leases. Covenantor desires and covenants that the Restrictions set out herein shall be incorporated in and attached to each and all deeds and leases of any portion of the Burdened Property. Recordation of this Covenant shall be deemed binding on all successors, assigns, and lessees, regardless of whether a copy of this Covenant and Agreement has been attached to or incorporated into any given deed or lease.

1.4 Purpose. It is the purpose of this instrument to convey to the Board real property rights, which will run with the land, to facilitate the remediation of past environmental contamination and to protect human health and the environment by reducing the risk of exposure to residual hazardous materials.

ARTICLE II DEFINITIONS

2.1 Board. "Board" shall mean the California Regional Water Quality Control Board for the San Francisco Bay Region and shall include its successor agencies, if any.

2.2 Improvements. "Improvements" shall mean all buildings, roads, driveways, regradings, and paved parking areas, constructed or placed upon any portion of the Burdened Property.

2.3 Occupants. "Occupants" shall mean Owners and those persons entitled by ownership, leasehold, or other legal relationship to the exclusive right to use and/or occupy all or any portion of the Burdened Property.

2.4 Owner or Owners. "Owner" or "Owners" shall mean the Covenantor and/or its successors in interest, who hold title to all or any portion of the Burdened Property.

ARTICLE III DEVELOPMENT, USE AND CONVEYANCE OF THE BURDENED PROPERTY

3.1 Restrictions on Development and Use. Covenantor promises to restrict the use of the Burdened Property as follows:

a. No Owners or Occupants of the Property or any portion thereof shall dig deeper than 2 feet from the existing grade for any purpose, drill, bore, otherwise construct, or use a well for the

purpose of extracting water for any use, including but not limited to, domestic, potable, or industrial uses, unless expressly permitted in writing by the Board.

b. The Covenantor agrees that the Board, and/or any persons acting pursuant to Board orders, shall have reasonable access to the Burdened Property for the purposes of inspection, surveillance, maintenance, or monitoring, as provided for in Division 7 of the Water Code.

c. No Owner or Occupant of the Burdened Property shall act in any manner that will aggravate or contribute to the existing environmental conditions of the Burdened Property. All use and development of the Burdened Property shall preserve the integrity of any capped areas.

d. The Owner shall notify the Board of each of the following: (1) The type, cause, location and date of any disturbance to any cap, any remedial measures taken or remedial equipment installed, and of the groundwater monitoring system installed on the Burdened Property pursuant to the requirements of the Board, which could affect the ability of such cap or remedial measures, remedial equipment, or monitoring system to perform their respective functions and (2) the type and date of repair of such disturbance. Notification to the Board shall be made by registered mail within ten (10) working days of both the discovery of such disturbance and the completion of repairs.

3.2 Enforcement. Failure of an Owner or Occupant to comply with any of the restrictions, as set forth in paragraph 3.1, shall be grounds for the Board, by reason of this Covenant, to have the authority to require that the Owner modify or remove any Improvements constructed in violation of that paragraph. Violation of the Covenant shall be grounds for the Board to file civil actions against the Owner as provided by law.

3.3 Notice in Agreements. After the date of recordation hereof, all Owners and Occupants shall execute a written instrument which shall accompany all purchase agreements or leases relating to the property. Any such instrument shall contain the following statement:

The land described herein contains hazardous materials (arsenic, lead and petroleum hydrocarbons) in soil and/or ground water under the property, and is subject to an environmental deed restriction dated as of (fill in), 2010, and recorded on (fill in), 2010, in the Official Records of Alameda County, California, as Document No. (fill in), which Covenant and Restriction imposes certain covenants, conditions, and restrictions on usage of the property described herein. This statement is not a declaration that a hazard exists.

In conjunction with and incorporated into the Environmental Deed Restriction as Exhibit B is an Environmental Fact Sheet, which has been prepared in order to provide an understanding of the residual environmental conditions in beneath the property. Any owner selling any portion of their property within this development must provide a copy of this Environmental Fact Sheet to all prospective purchasers. In addition, the property owner

must allow all prospective purchasers adequate time to review the Environmental Fact Sheet, prior to accepting a purchase offer. Should any prospective purchaser request a copy of the Environmental Deed Restriction, the seller must provide a copy in a timely manner.

ARTICLE IV VARIANCE AND TERMINATION

4.1 Variance. Any Owner or, with the Owner's consent, any Occupant of the Burdened Property or any portion thereof may apply to the Board for a written variance from the provisions of this Covenant.

4.2 Termination. Any Owner or, with the Owner's consent, any Occupant of the Burdened Property or a portion thereof may apply to the Board for a termination of the Restrictions as they apply to all or any portion of the Burdened Property.

4.3 Term. Unless terminated in accordance with paragraph 4.2 above, by law or otherwise, this Covenant shall continue in effect in perpetuity.

ARTICLE V MISCELLANEOUS

5.1 No Dedication Intended. Nothing set forth herein shall be construed to be a gift or dedication, or offer of a gift or dedication, of the Burdened Property or any portion thereof to the general public.

5.2 Notices. Whenever any person gives or serves any notice, demand, or other communication with respect to this Covenant, each such notice, demand, or other communication shall be in writing and shall be deemed effective (1) when delivered, if personally delivered to the person being served or official of a government agency being served, or (2) three (3) business days after deposit in the mail if mailed by United States mail, postage paid certified, return receipt requested:

If To: "Covenantor"
Warmington Grand Marina Associates, LP
3090 Pullman Street
Costa Mesa, CA 92626

If To: "Board"
Regional Water Quality Control Board
San Francisco Bay Region
Attention: Executive Officer
1515 Clay Street, Suite 1400
Oakland, California 94612

5.3 Partial Invalidity. If any portion of the Restrictions or terms set forth herein is determined to be invalid for any reason, the remaining portion shall remain in full force and effect as if such portion had not been included herein.

5.4 Article Headings. Headings at the beginning of each numbered article of this Covenant are solely for the convenience of the parties and are not a part of the Covenant.

5.5 Recordation. This instrument shall be executed by the Covenantor and by the Executive Officer of the Board. This instrument shall be recorded by the Covenantor in the County of Alameda within ten (10) days of the date of execution.


5.6 References. All references to Code sections include successor provisions.

5.7 Construction. Any general rule of construction to the contrary notwithstanding, this instrument shall be liberally construed in favor of the Covenant to effect the purpose of this instrument and the policy and purpose of the Water Code. If any provision of this instrument is found to be ambiguous, an interpretation consistent with the purpose of this instrument that would render the provision valid shall be favored over any interpretation that would render it invalid.

IN WITNESS WHEREOF, the parties execute this Covenant as of the date set forth above.

Covenantor:

Warmington Grand Marina Associates, LP,
a California limited partnership,
By: Warmington Residential California,
a California corporation, its general partner


By:  _____

Title: Division President _____

Date: 4/2/10 _____

Agency:

State of California
Regional Water Quality Board,
San Francisco Bay Region

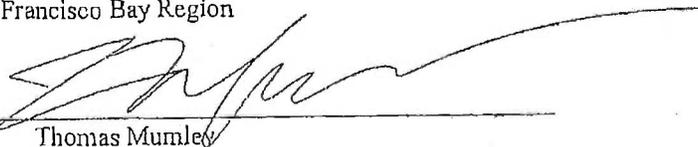By:  _____

Title: Acting Executive Officer _____

Date: Apr. 11, 2010 _____

CALIFORNIA ALL-PURPOSE CERTIFICATE OF ACKNOWLEDGMENT

State of California

County of Alameda

On APRIL 1, 2010 before me, Howard Leong, Notary Public
(Here insert name and title of the officer)


personally appeared THOMAS MUMLEY

who proved to me on the basis of satisfactory evidence to be the person(s) whose name(s) is/are subscribed to the within instrument and acknowledged to me that he/she/they executed the same in his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the person(s), or the entity upon behalf of which the person(s) acted, executed the instrument.

I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing paragraph is true and correct.

WITNESS my hand and official seal.

Howard Leong
Signature of Notary Public

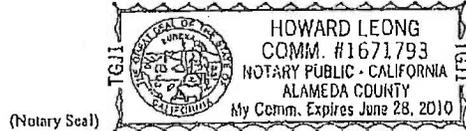

ADDITIONAL OPTIONAL INFORMATION

DESCRIPTION OF THE ATTACHED DOCUMENT

COVENANT
(Title or description of attached document)

(Title or description of attached document continued)

Number of Pages _____ Document Date _____

(Additional information)

CAPACITY CLAIMED BY THE SIGNER

Individual (s)

Corporate Officer

(Title)

Partner(s)

Attorney-in-Fact

Trustee(s)

Other _____

INSTRUCTIONS FOR COMPLETING THIS FORM

Any acknowledgment completed in California must contain verbiage exactly as appears above in the notary section or a separate acknowledgment form must be properly completed and attached to that document. The only exception is if a document is to be recorded outside of California. In such instances, any alternative acknowledgment verbiage as may be printed on such a document so long as the verbiage does not require the notary to do something that is illegal for a notary in California (i.e. certifying the authorized capacity of the signer). Please check the document carefully for proper notarial wording, and attach this form if required.

- State and County information must be the State and County where the document signer(s) personally appeared before the notary public for acknowledgment
- Date of notarization must be the date that the signer(s) personally appeared which must also be the same date the acknowledgment is completed
- The notary public must print his or her name as it appears within his or her commission followed by a comma and then your title (notary public)
- Print the name(s) of document signer(s) who personally appear at the time of notarization
- Indicate the correct singular or plural forms by crossing off incorrect forms (i.e. he/she/they, is/are) or circling the correct forms. Failure to correctly indicate this information may lead to rejection of document recording
- The notary seal impression must be clear and photographically reproducible. Impression must not cover text or lines. If seal impression smudges, re-seal if a sufficient area permits, otherwise complete a different acknowledgment form
- Signature of the notary public must match the signature on file with the office of the county clerk
 - Additional information is not required but could help to ensure this acknowledgment is not misused or attached to a different document
 - Indicate title or type of attached document, number of pages and date
 - Indicate the capacity claimed by the signer. If the claimed capacity is a corporate officer, indicate the title (i.e. CEO, CFO, Secretary)
- Securely attach this document to the signed document


CALIFORNIA ALL-PURPOSE ACKNOWLEDGMENT

State of California

County of Contra Costa

On 4/2/10 before me, Robin L. Neizman Notary Public
Date Here Insert Name and Title of the Officer

personally appeared Gregory N. Mix
Name(s) of Signor(s)

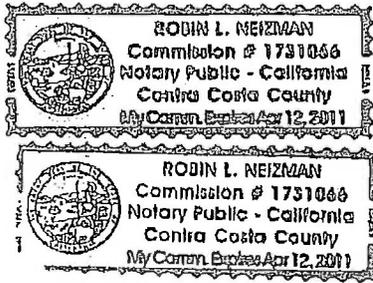

who proved to me on the basis of satisfactory evidence to be the person(s) whose name(s) is/are subscribed to the within instrument and acknowledged to me that he/she/they executed the same in his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the person(s), or the entity upon behalf of which the person(s) acted, executed the instrument.

I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing paragraph is true and correct.

WITNESS my hand and official seal.

Signature [Handwritten Signature]
Signature of Notary Public

Place Notary Seal Above

OPTIONAL

Though the information below is not required by law, it may prove valuable to persons relying on the document and could prevent fraudulent removal and reattachment of this form to another document

Description of Attached Document

Title or Type of Document: Covenant & Environmental Restriction

Document Date: _____ Number of Pages: _____

Signer(s) Other Than Named Above: _____

Capacity(ies) Claimed by Signer(s)

Signer's Name: _____


- Individual
- Corporate Officer --- Title(s): _____
- Partner --- Limited General
- Attorney In Fact
- Trustee
- Guardian or Conservator
- Other: _____



Signer is Representing: _____

Signer's Name: _____

- Individual
- Corporate Officer --- Title(s): _____
- Partner --- Limited General
- Attorney In Fact
- Trustee
- Guardian or Conservator
- Other: _____



Signer is Representing: _____


EXHIBIT A

LEGAL DESCRIPTION OF PROPERTY

Real property in the City of Alameda, County of Alameda, State of California, described as follows:

LOTS 1 THROUGH 40 AND PARCELS A, B, D AND E, AS SHOWN ON THE MAP ENTITLED "TRACT 7723, GRAND MARINA VILLAGE", FILED SEPTEMBER 8, 2009 IN BOOK 305 OF MAPS, PAGES 6 THROUGH 14, ALAMEDA COUNTY RECORDS.

APN: 072-0381-005 (portion), 072-0381-008 (portion) and 072-0381-011 (portion)

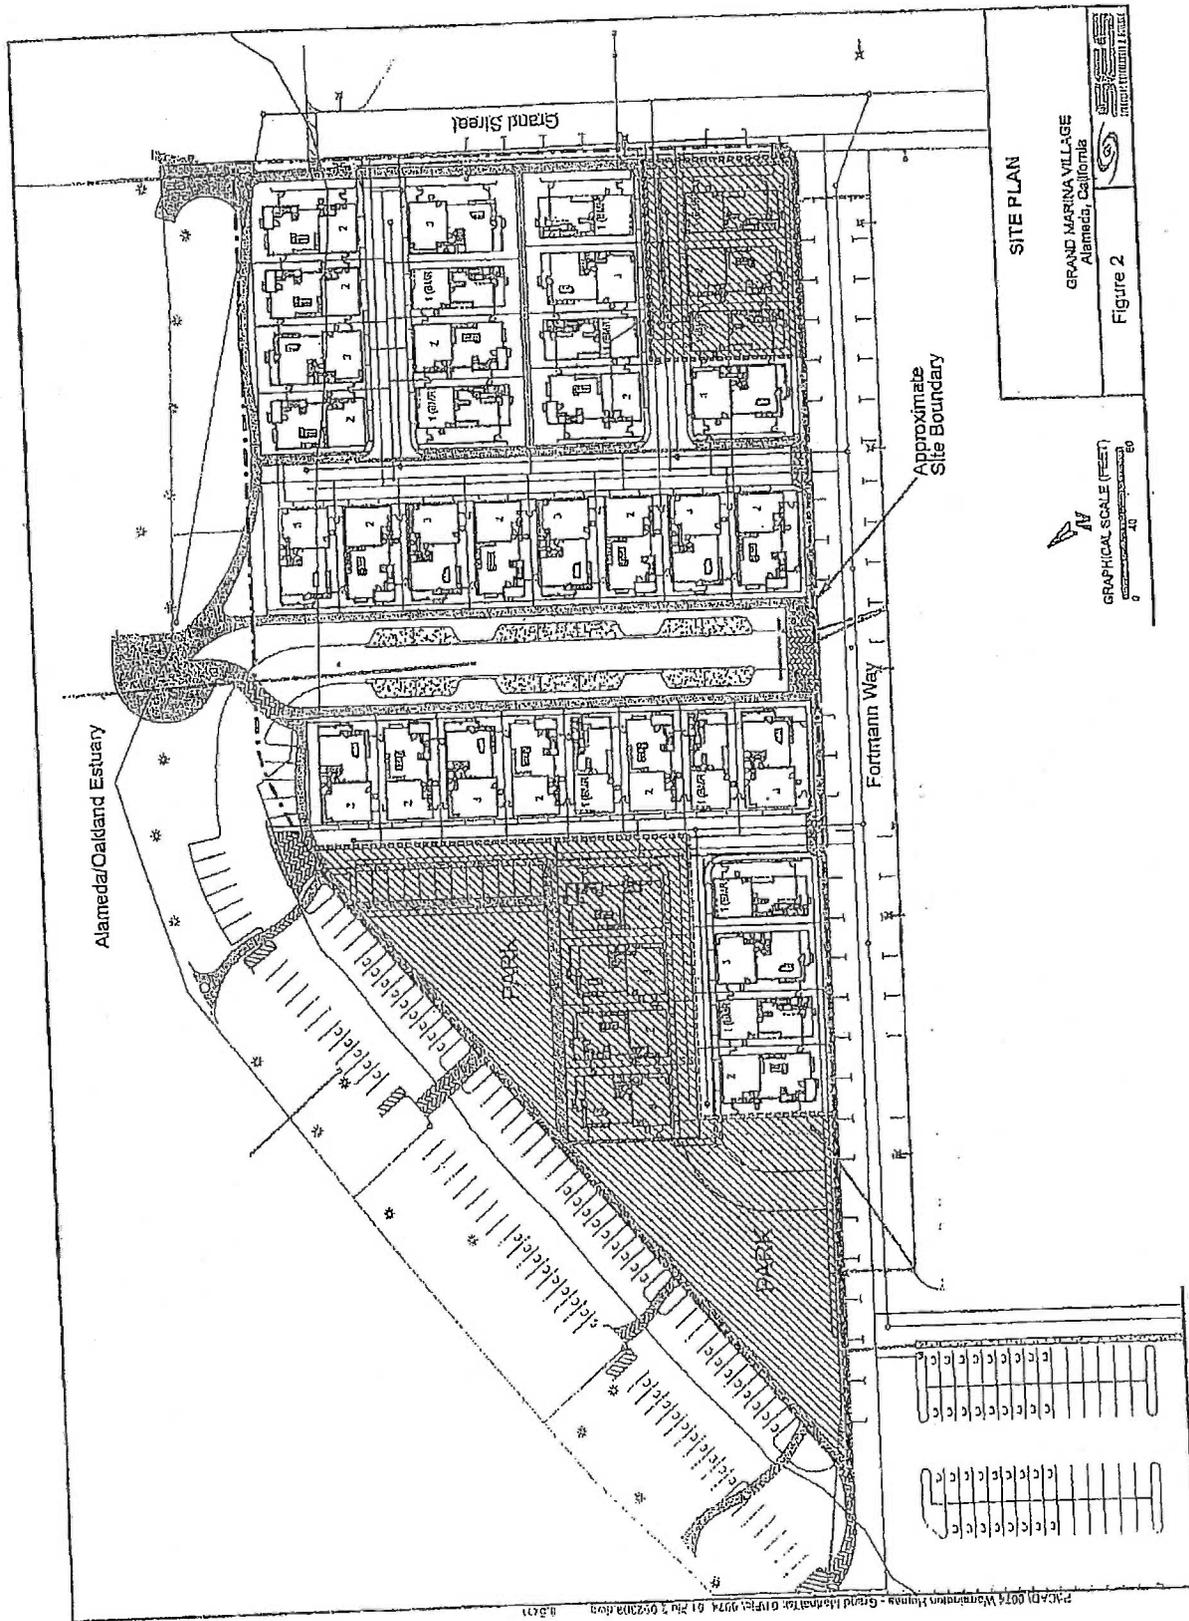

SITE PLAN
 GRAND MARINA VILLAGE
 Alameda, California
 Figure 2

GRAPHICAL SCALE (FEET)
 0 40 80
 N

P:\MAD\0074 Warehouse Plans - Grand Marina Village - Office\0074_0121_052019.dwg 11/2/19

EXHIBIT B
ENVIRONMENTAL FACT SHEET



Environmental Fact Sheet

March 2010

FORMER USES OF THE GRAND MARINA VILLAGE COMMUNITY AND SITE

The Grand Marina Village community and adjacent property ("Site") have had a long history of uses including: a fishing vessel fleet harbor for the Alaska Packer Association, a lumber yard, a ship repair yard, auto repair, carpentry, blacksmith and animal shelter facilities. The uses included above-ground storage tank farm, underground storage tanks, and related facilities for the storage of gasoline, diesel, fuel, fuel oil, kerosene, aviation fuel, and other petroleum compounds. The uses also included the storage of marine construction equipment. The Site was purchased in 1986 by Encinal Partners. Since that time, portions of the property were used as parking areas associated with the Grand Marina, dry storage of outriggers and boats, office areas, boat building and repair, car restoration, production of marine canvas products, and locksmith activities.

The conversion of the Site from these previous industrial uses to the current Grand Marina Village development included a series of environmental investigations and cleanup activities. These activities were overseen by the Regional Water Quality Control Board, San Francisco Bay Region (Water Board), which is one of the agencies under the larger California Environmental Protection Agency.

The initial cleanup activities that occurred included the removal of above-ground petroleum storage tanks, underground storage tanks and over-excavation of contaminated soil in the area of a former

above-ground storage tank farm. For additional information, please refer to the "Third Draft Remedial Action Work Plan, Grand Marina Village, Alameda, California, SES No. 074-01, Prepared for Warmington Homes, San Ramon, California, January 21, 2010". This report is available in the Warmington sales office during the construction of the community, at the City of Alameda, the Grand Marina Village

Owners' Association management company and at the Water Board's offices (note: Water Board file number 01S0668) for your review. The Water Board also maintains the complete case file for the Site electronically on its Geotracker website at: <https://geotracker.waterboards.ca.gov/>. Please use the case file to find the case on the website.

CONTAMINANTS OF CONCERN AND CLEANUP PLAN

The primary contaminants of concern (COC) at the Site after completion of the initial clean up activities previously described were arsenic, lead, and petroleum hydrocarbons. The source of the arsenic and lead appears to be generally associated with dredged fill material that was placed on the property. Some of the arsenic may also be associated with surface application of herbicides for weed control.

The cleanup plan as described in Section 4.0 of the "Third Draft Remedial Action Work Plan" addresses the arsenic, lead and petroleum hydrocarbons. With respect to the petroleum hydrocarbon impacted soil the plan called for excavation and offsite disposal of all soil above the approved cleanup goals. There is also some residual

petroleum in the groundwater. The petroleum in groundwater is not migrating and no active cleanup is necessary. Additionally, the underlying groundwater is brackish and is not being used.

To address the arsenic and lead impacted soil, the cleanup plan called for placing a minimum of two feet of clean imported fill soil across the entire Site as a cap. In addition to the clean cap, an environmental deed restriction has been recorded on the deeds of all properties within the Site. This document prohibits digging or other intrusive activities below a depth of two feet across the entire Site, in order to prevent exposure to the underlying soil. By preventing exposure to the underlying soil, health risks associated with the pollutants are effectively mitigated.

HOMEOWNER RESPONSIBILITIES

The homeowners in this Community will have no maintenance responsibility specific to the cleanup described above; however, limitations through the Environmental Deed Restriction attached hereto and described in the rules and regulations set forth by the Grand Marina Village Owners' Association limit the homeowners use on the property.

ENVIRONMENTAL DEED RESTRICTION AND USE RESTRICTIONS

Once the clean up was completed, the Water Board further requires all Owners be permanently restricted from digging deeper than 2 feet from the existing grade for any purpose, drill, bore, otherwise construct, or use a well for the purpose of extracting water for any use, including but not limited to, domestic, potable, or industrial uses. The Covenant and Environmental Deed Restriction on Property ("Deed Restriction") which this document is attached to is provided to you and recorded with the County of Alameda Recorder's Office.

The Rules adopted by the Grand Marina Village Owners' Association ("Association") further restrict owners from planting trees in the enclosed portions of the yards. The unenclosed portions of the yard are maintained by the Association and whose responsibility it is to adhere to the restrictions as set forth in the Deed Restriction.

Pursuant to Article III, Section 3.3 (Notice in Agreements) of the Environmental Deed Restriction recorded for the Site properties, all prospective purchasers of any portion of the property must be given a copy of this Fact Sheet to review and consider, prior to committing to purchase any properties within the community. It is the responsibility of the property owner to provide prospective purchasers a copy of this Fact Sheet and allow adequate time to review it prior to accepting any commitment to purchase. Additionally, should a prospective purchaser request a copy of the Environmental Deed Restriction, the seller must provide a copy in a timely manner.

ARSENIC AND LEAD INFORMATION

Attached as Exhibits B-1 and B-2 is information regarding arsenic and lead which is available on the U.S. Department of Health and Human Services, Public Health Service Agency for Toxic Substances and Disease Registry at: <http://www.atsdr.cdc.gov/tfacts2.html> and <http://www.atsdr.cdc.gov/tfacts13.html>. It is important to review the information and follow up on the information as it may be updated from time to time through the Public Health Service Agency.

This fact sheet answers the most frequently asked health questions (FAQs) about arsenic. For more information, call the ATSDR Information Center at 1-800-232-4636. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It is important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Exposure to higher than average levels of arsenic occur mostly in the workplace, near hazardous waste sites, or in areas with high natural levels. At high levels, inorganic arsenic can cause death. Exposure to lower levels for a long time can cause a discoloration of the skin and the appearance of small corns or warts. Arsenic has been found in at least 1,149 of the 1,684 National Priority List sites identified by the Environmental Protection Agency (EPA).

What is arsenic?

Arsenic is a naturally occurring element widely distributed in the earth's crust. In the environment, arsenic is combined with oxygen, chlorine, and sulfur to form inorganic arsenic compounds. Arsenic in animals and plants combines with carbon and hydrogen to form organic arsenic compounds.

Inorganic arsenic compounds are mainly used to preserve wood. Copper chromated arsenate (CCA) is used to make "pressure-treated" lumber. CCA is no longer used in the U.S. for residential uses; it is still used in industrial applications. Organic arsenic compounds are used as pesticides, primarily on cotton fields and orchards.

What happens to arsenic when it enters the environment?

- Arsenic occurs naturally in soil and minerals and may enter the air, water, and land from wind-blown dust and may get into water from runoff and leaching.
- Arsenic cannot be destroyed in the environment. It can only change its form.
- Rain and snow remove arsenic dust particles from the air.
- Many common arsenic compounds can dissolve in water. Most of the arsenic in water will ultimately end up in soil or sediment.
- Fish and shellfish can accumulate arsenic; most of this arsenic is in an organic form called arsenobetaine that is much less harmful.

How might I be exposed to arsenic?

- Ingesting small amounts present in your food and water or breathing air containing arsenic.
- Breathing sawdust or burning smoke from wood treated with arsenic.
- Living in areas with unusually high natural levels of arsenic in rock.
- Working in a job that involves arsenic production or use, such as copper or lead smelting, wood treating, or pesticide application.

How can arsenic affect my health?

Breathing high levels of inorganic arsenic can give you a sore throat or irritated lungs.

Ingesting very high levels of arsenic can result in death. Exposure to lower levels can cause nausea and vomiting, decreased production of red and white blood cells, abnormal heart rhythm, damage to blood vessels, and a sensation of "pins and needles" in hands and feet.

Ingesting or breathing low levels of inorganic arsenic for a long time can cause a darkening of the skin and the appearance of small "corns" or "warts" on the palms, soles, and torso.

Skin contact with inorganic arsenic may cause redness and swelling.

ToxFAQs Internet address is <http://www.atsdr.cdc.gov/toxfaqs.html>

Almost nothing is known regarding health effects of organic arsenic compounds in humans. Studies in animals show that some simple organic arsenic compounds are less toxic than inorganic forms. Ingestion of methyl and dimethyl compounds can cause diarrhea and damage to the kidneys

How likely is arsenic to cause cancer?

Several studies have shown that ingestion of inorganic arsenic can increase the risk of skin cancer and cancer in the liver, bladder, and lungs. Inhalation of inorganic arsenic can cause increased risk of lung cancer. The Department of Health and Human Services (DHHS) and the EPA have determined that inorganic arsenic is a known human carcinogen. The International Agency for Research on Cancer (IARC) has determined that inorganic arsenic is carcinogenic to humans.

How can arsenic affect children?

There is some evidence that long-term exposure to arsenic in children may result in lower IQ scores. There is also some evidence that exposure to arsenic in the womb and early childhood may increase mortality in young adults.

There is some evidence that inhaled or ingested arsenic can injure pregnant women or their unborn babies, although the studies are not definitive. Studies in animals show that large doses of arsenic that cause illness in pregnant females, can also cause low birth weight, fetal malformations, and even fetal death. Arsenic can cross the placenta and has been found in fetal tissues. Arsenic is found at low levels in breast milk.

How can families reduce the risks of exposure to arsenic?

If you use arsenic-treated wood in home projects, you should wear dust masks, gloves, and protective clothing to decrease exposure to sawdust.

If you live in an area with high levels of arsenic in water or soil, you should use cleaner sources of water and limit contact with soil.

If you work in a job that may expose you to arsenic, be aware that you may carry arsenic home on your clothing, skin, hair, or tools. Be sure to shower and change clothes before going home.

Is there a medical test to determine whether I've been exposed to arsenic?

There are tests available to measure arsenic in your blood, urine, hair, and fingernails. The urine test is the most reliable test for arsenic exposure within the last few days. Tests on hair and fingernails can measure exposure to high levels of arsenic over the past 6-12 months. These tests can determine if you have been exposed to above-average levels of arsenic. They cannot predict whether the arsenic levels in your body will affect your health.

Has the federal government made recommendations to protect human health?

The EPA has set limits on the amount of arsenic that industrial sources can release to the environment and has restricted or cancelled many of the uses of arsenic in pesticides. EPA has set a limit of 0.01 parts per million (ppm) for arsenic in drinking water.

The Occupational Safety and Health Administration (OSHA) has set a permissible exposure limit (PEL) of 10 micrograms of arsenic per cubic meter of workplace air (10 $\mu\text{g}/\text{m}^3$) for 8 hour shifts and 40 hour work weeks.

References

Agency for Toxic Substances and Disease Registry (ATSDR). 2007. Toxicological Profile for Arsenic (Update). Atlanta, GA: U.S. Department of Public Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology and Environmental Medicine, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-800-232-4636, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaqs.html>. ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about lead. For more information, call the ATSDR Information Center at 1-800-232-4636. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It is important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Exposure to lead can happen from breathing workplace air or dust, eating contaminated foods, or drinking contaminated water. Children can be exposed from eating lead-based paint chips or playing in contaminated soil. Lead can damage the nervous system, kidneys, and reproductive system. Lead has been found in at least 1,272 of the 1,684 National Priority List sites identified by the Environmental Protection Agency (EPA).

What is lead?

Lead is a naturally occurring bluish-gray metal found in small amounts in the earth's crust. Lead can be found in all parts of our environment. Much of it comes from human activities including burning fossil fuels, mining, and manufacturing.

Lead has many different uses. It is used in the production of batteries, ammunition, metal products (solder and pipes), and devices to shield X-rays. Because of health concerns, lead from paints and ceramic products, caulking, and pipe solder has been dramatically reduced in recent years. The use of lead as an additive to gasoline was banned in 1996 in the United States.

What happens to lead when it enters the environment?

- Lead itself does not break down, but lead compounds are changed by sunlight, air, and water.
- When lead is released to the air, it may travel long distances before settling to the ground.
- Once lead falls onto soil, it usually sticks to soil particles.
- Movement of lead from soil into groundwater will depend on the type of lead compound and the characteristics of the soil.

How might I be exposed to lead?

- Eating food or drinking water that contains lead. Water pipes in some older homes may contain lead solder. Lead can leach out into the water

- Spending time in areas where lead-based paints have been used and are deteriorating. Deteriorating lead paint can contribute to lead dust.

- Working in a job where lead is used or engaging in certain hobbies in which lead is used, such as making stained glass.

- Using health-care products or folk remedies that contain lead

How can lead affect my health?

The effects of lead are the same whether it enters the body through breathing or swallowing. Lead can affect almost every organ and system in your body. The main target for lead toxicity is the nervous system, both in adults and children. Long-term exposure of adults can result in decreased performance in some tests that measure functions of the nervous system. It may also cause weakness in fingers, wrists, or ankles. Lead exposure also causes small increases in blood pressure, particularly in middle-aged and older people and can cause anemia. Exposure to high lead levels can severely damage the brain and kidneys in adults or children and ultimately cause death. In pregnant women, high levels of exposure to lead may cause miscarriage. High-level exposure in men can damage the organs responsible for sperm production.

How likely is lead to cause cancer?

We have no conclusive proof that lead causes cancer in humans. Kidney tumors have developed in rats and mice that had been given large doses of some kind of lead compounds. The Department of Health and Human Services

ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaqs.html>

(DHHS) has determined that lead and lead compounds are reasonably anticipated to be human carcinogens and the EPA has determined that lead is a probable human carcinogen. The International Agency for Research on Cancer (IARC) has determined that inorganic lead is probably carcinogenic to humans and that there is insufficient information to determine whether organic lead compounds will cause cancer in humans.

How can lead affect children?

Small children can be exposed by eating lead-based paint chips, chewing on objects painted with lead-based paint, or swallowing house dust or soil that contains lead. Children are more vulnerable to lead poisoning than adults. A child who swallows large amounts of lead may develop blood anemia, severe stomachache, muscle weakness, and brain damage. If a child swallows smaller amounts of lead, much less severe effects on blood and brain function may occur. Even at much lower levels of exposure, lead can affect a child's mental and physical growth.

Exposure to lead is more dangerous for young and unborn children. Unborn children can be exposed to lead through their mothers. Harmful effects include premature births, smaller babies, decreased mental ability in the infant, learning difficulties, and reduced growth in young children. These effects are more common if the mother or baby was exposed to high levels of lead. Some of these effects may persist beyond childhood.

How can families reduce the risks of exposure to lead?

- Avoid exposure to sources of lead.
- Do not allow children to chew or mouth surfaces that may have been painted with lead-based paint.
- If you have a water lead problem, run or flush water that has been standing overnight before drinking or cooking with it.
- Some types of paints and pigments that are used as make-up or hair coloring contain lead. Keep these kinds of products away from children.
- If your home contains lead-based paint or you live in an area contaminated with lead, wash children's hands and faces

often to remove lead dusts and soil, and regularly clean the house of dust and tracked in soil.

Is there a medical test to determine whether I've been exposed to lead?

A blood test is available to measure the amount of lead in your blood and to estimate the amount of your recent exposure to lead. Blood tests are commonly used to screen children for lead poisoning. Lead in teeth or bones can be measured by X-ray techniques, but these methods are not widely available. Exposure to lead also can be evaluated by measuring erythrocyte protoporphyrin (EP) in blood samples. EP is a part of red blood cells known to increase when the amount of lead in the blood is high. However, the EP level is not sensitive enough to identify children with elevated blood lead levels below about 25 micrograms per deciliter ($\mu\text{g}/\text{dL}$). These tests usually require special analytical equipment that is not available in a doctor's office. However, your doctor can draw blood samples and send them to appropriate laboratories for analysis.

Has the federal government made recommendations to protect human health?

The Centers for Disease Control and Prevention (CDC) recommends that states test children at ages 1 and 2 years. Children should be tested at ages 3-6 years if they have never been tested for lead, if they receive services from public assistance programs for the poor such as Medicaid or the Supplemental Food Program for Women, Infants, and Children, if they live in a building or frequently visit a house built before 1950; if they visit a home (house or apartment) built before 1978 that has been recently remodeled; and/or if they have a brother, sister, or playmate who has had lead poisoning. CDC considers a blood lead level of 10 $\mu\text{g}/\text{dL}$ to be a level of concern for children.

EPA limits lead in drinking water to 15 μg per liter.

References

Agency for Toxic Substances and Disease Registry (ATSDR). 2007. Toxicological Profile for lead (Update). Atlanta, GA: U.S. Department of Public Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology and Environmental Medicine, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-800-232-4636, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaqs.html>. ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



APPENDIX G

DRAFT CEQA NOTICE OF PREPARATION (NOP) AND INITIAL STUDY (IS)

NOTICE OF PREPARATION OF A DRAFT ENVIRONMENTAL IMPACT REPORT

Date: March 19, 2014
To: State Clearinghouse
Office of Planning and Research
1400 Tenth Street
Sacramento, CA 95814

and

Responsible Agencies, Trustee Agencies, Federal Agencies, and Interested Organizations and Individuals (see Attachment 1 for list of agencies)

Lead Agency: State of California Regional Water Quality Control Board, Los Angeles Region

Contact: Paula Rasmussen, Assistant Executive Officer
Regional Water Quality Control Board
320 West 4th Street, Suite #200
Los Angeles, CA 90013
Phone: (213) 213-576-6791
E-mail: PRasmussen@waterboards.ca.gov

Project Title: Former Kast Property Tank Farm Site Remediation Project - Environmental Impact Report

Project Applicant: Shell Oil Products US

Project Location: The Former Kast Property Tank Farm (Site) is a 44-acre site located in Carson, California. The site is bounded to the north by East 244th Street, Lomita Boulevard to the south, Marbella Avenue to the west, and Panama Avenue to the east (see Figure 1). The Site currently is a residential neighborhood known as the Carousel Tract. Lomita Boulevard forms the jurisdictional boundary between the City of Los Angeles and the City of Carson. (See Figure 2 attached.)

Project Description: See Attachment 2 for a description of the Former Kast Property Tank Farm Remediation Project.

Purpose of the Notice of Preparation: The California Environmental Quality Act (CEQA) specifies that a public agency must prepare an Environmental Impact Report (EIR) for any project that it proposes to carry out or approve that may have a significant direct or indirect impact on the environment (Public Resources Code Section 21100[a]). The California Regional Water Quality Control Board, Los Angeles Region (LARWQCB) is the lead agency for the Former Kast Property Tank Farm Site Remediation Project. LARWQCB has determined that this project may have a significant impact on the environment and has determined that an EIR will be necessary to fully evaluate the potential environmental effects.

Comments on the Notice of Preparation: Responsible agencies, trustee agencies, Federal agencies, Native American Tribes, and interested organizations and individuals are encouraged to submit comments regarding the scope and content of the Draft EIR for LARWQCB's consideration. This Notice of Preparation (NOP) is being circulated for the required 30-day comment period. Comments on this NOP should be submitted as soon as possible and must be received no later than 5:00 p.m. on April 18, 2014. Please send written comments to: Thizar Tintut-Williams, LARWQCB Project Manager, 320 W. 4th Street, Suite 200, Los Angeles, CA 90013 or electronically to twilliams@waterboards.ca.gov

Prior studies, technical reports, the CEQA Initial Study and other documents related to the proposed project are available for review on the internet at <http://www.swrcb.ca.gov/rwqcb4/Kast/index.shtml> and at the following location(s):

Carson Public Library
151 E. Carson St.
Carson, CA 90745-2797
(310) 830-0901

Tuesday - Thursday: 10 am - 8 pm, Saturday:
8 am - 6 pm, Monday/Friday/Sunday: Closed

California Regional Water

Quality Control Board
Los Angeles Region
320 W. 4th Street, Suite 200
Los Angeles, CA 90013

Electronic copies of the documents are also available on the Regional Board's website at:

<http://www.waterboards.ca.gov/losangeles/> under "Announcements"

Contact: If you have any questions or wish to discuss the project, please contact:

Gita Kapahi
Director of Public Participation
State Water Resources Control Board
(916) 341-5501
(gkapahi@waterboards.ca.gov)

Thizar Tintut-Williams
Regional Board Project Manager
(213) 576-6723
thizar.williams@waterboards.ca.gov

Media Inquiries

Tim Moran
State Water Resources Control Board Public Information Officer
(916) 327-8239
timothy.moran@waterboards.ca.gov


Information for the Disabled and Hearing Impaired

Persons with hearing or speech impairments can contact us by using the California Relay Service Telecommunications Device for the Deaf (TDD). TDD is reachable only from phones equipped with a TDD Device. HEARING IMPAIRED REPLAY SERVICE: TDD to voice 1-(800)-735-2929; voice to TDD 1-(800)-735-2922.

Environmental Effects To Be Evaluated in the Draft EIR

The purpose of an EIR is to identify and consider the potentially significant adverse environmental effects of a proposed project and identify measures that can reduce, avoid, or mitigate significant adverse impacts. The LARWQCB has conducted consultations with interested parties, including an inter-agency scoping call held on September 11, 2013, a written public comment period from September 9 through October 8, 2013 related to the Site-Specific Cleanup Goals, and a Community Open House conducted on September 24, 2013 at the Carson Community Center on the Draft Work Plan. In addition, the LARWQCB prepared an Initial Study on the Draft RAP, which is available at <http://www.swrcb.ca.gov/rwqcb4/Kast/index.shtml>. See Attachment 2 for a Project Description. Based on input received from previous public meetings and the Initial Study, LARWQCB has determined that the proposed project may have a significant impact on the following resource areas:

- Air Quality
- Greenhouse Gas
- Geology and Soils
- Hazards and Hazardous Materials
- Hydrology and Water Quality
- Noise
- Transportation/Traffic
- Utilities (Solid Waste)

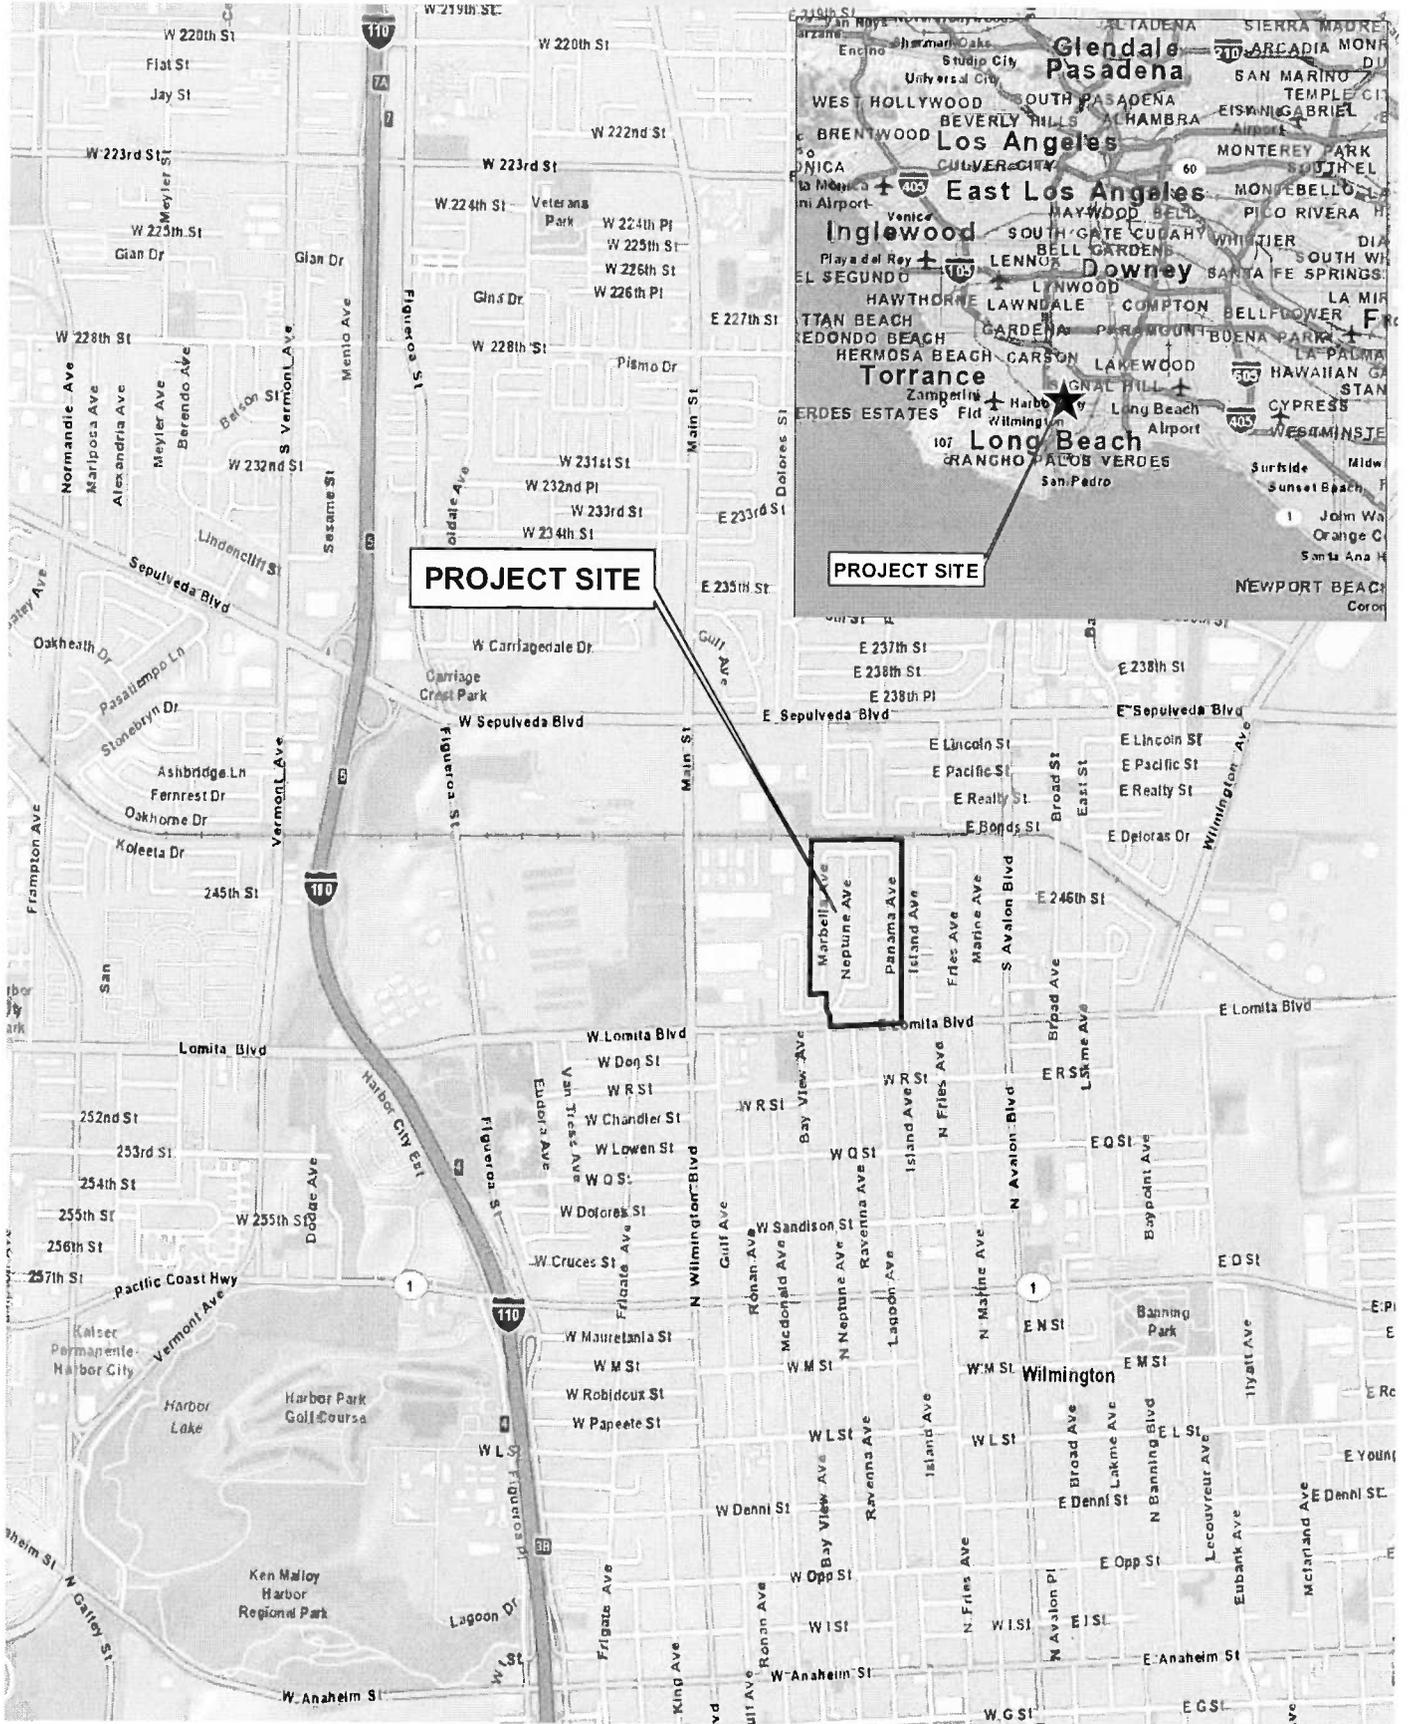


Regional and Location Map

FIGURE

1

KastSite RAP
Source: ESRI Street Map, 2009; PCR Services Corporation, 2013.



Aerial Photograph

KastSite RAP
Source: Microsoft, 2010; PCR Services Corporation, 2014.

FIGURE

2

ATTACHMENT 1
Distribution List for NOP (March 2014) - Agencies and RPs

derrick.mims@asm.ca.gov

ericf.boyd@mail.house.gov

Jim.Carlisle@oehha.ca.gov

Robert.Romero@dtsc.ca.gov

Wendy.Arano@dtsc.ca.gov

kkatona@bos.lacounty.gov

rtahara@bos.lacounty.gov

vharris@bos.lacounty.gov

abellomo@ph.lacounty.gov

clandowski@ph.lacounty.gov

crangan@ph.lacounty.gov

eramirez@ph.lacounty.gov

BC7@fire.lacounty.gov

biones@fire.lacounty.gov

Barry.Nugent@fire.lacounty.gov

Richard.Clark@fire.lacounty.gov

snourish@fire.lacounty.gov

Walter.Uroff@fire.lacounty.gov

alexander.morelan@lausd.net

pat.schanen@lausd.net

anthony.espinoza@lausd.net

pat.schanen@lausd.net

gwenn.godek@lausd.net

timothy.popejoy@lausd.net

ktruong@carson.ca.us

Mark.Caffee@edelman.com

Soojin.Yoon@edelman.com

Alan.Caldwell@Shell.Com

ed.platt@Shell.Com

Sara.Oneill@Shell.Com

douglas.weimer@shell.com

allen_blodgett@urscorp.com

Christian_Osterberg@urscorp.com

roy.patterson@urs.com

nancy.meilahn.fowler@urs.com

rettinger@geosyntec.com

Air Resources Board

California Emergency Management Agency

Native American Heritage Commission

ATTACHMENT 2 PROJECT DESCRIPTION

Site History

The Kast Property Tank Farm was owned and operated by Shell Oil Company from 1924 through 1966, when it was sold to developers. The Site included three crude oil storage reservoirs with a total capacity of 3.5 million barrels. Reservoirs had concrete-lined bottoms and sidewalls with frame roofs on wood posts, surrounded by earth levees averaging 20 feet in height. Demolition of the three crude oil reservoirs by the developers began in 1966. Site redevelopment into a single family residential neighborhood began in approximately 1967 and the property is referred to as the Carousel Tract.

In 2008, residual oil was discovered in soil and groundwater at the Site. Subsequently, the LARWQCB issued orders to Shell requiring investigation and cleanup of the Site pursuant to the Porter-Cologne Water Quality Control Act (Porter-Cologne Act, California Water Code §§13000 et seq.). Comprehensive multi-media Site investigations have been underway since 2008 and have included assessments of soil, soil vapor, sub-slab soil vapor, indoor air, and groundwater impacts. To date, investigations have been conducted in city streets within the Carousel Tract, at 270 of the 285 residential properties in the Carousel Tract, the adjacent Monterey Pines and Island Avenue Tracts, the adjacent railroad right-of-way north of the Site, , and at the Wilmington Middle School.

In 2011 the LARWQCB issued a Cleanup and Abatement Order (CAO) that requires Shell to propose and submit a Remedial Action Plan (RAP) for the cleanup of the Carousel Tract. Primary contaminants of concern are methane, benzene and petroleum hydrocarbons. Additional site characterization investigations, remediation pilot tests, a Human Health Risk Assessment (HHRA) and a Feasibility Study have been completed for the Site. Additionally, Site-specific Cleanup Goals (SSCGs) for soil, soil vapor, and groundwater were established in response to the Regional Board's Review of the Revised Site-Specific Cleanup Goal Report and Directive dated January 23, 2014. The Former Kast Site Remediation Project has been proposed to remediate the site with the intent of achieving the SSCGs.

Remedial Action Objectives

The Remedial Action Objectives are to:

- Remediate the site in compliance with Remedial Action Objectives (RAOs) approved by the LARWQCB. The RAOs are based on the HHRA completed for the site. Health risk assessments use two different values to evaluate potential health impacts: the Incremental Lifetime Cancer Risk (ILCR) and the non-cancer Hazard Index (HI). The ILCR is measured as the increased chance of developing cancer over a lifetime of exposure to a substance. In general, as specified in the National Oil and Hazardous Substances Pollution Contingency Plan, more commonly called the National Contingency Plan (NCP), the USEPA and Cal-EPA consider incremental cancer risks that are below about one (1) chance in 1,000,000 (1×10^{-6}) to be so small as to be negligible, and risks above one (1) chance in 10,000 (1×10^{-4}) to be sufficiently large that some sort of remediation is desirable. Incremental cancer risks that range between 1×10^{-6} and 1×10^{-4} may be considered to be acceptable.

When the HI is determined to be equal to or less than one (1), it is believed that there is no appreciable risk that non-cancer health effects will occur. If the HI exceeds 1, there may be concern for potential non-carcinogenic health effects. However, an HI above 1 does not indicate an effect will definitely occur due to the margin of safety associated with the exposure assumptions and chemical toxicity criteria used in health risk assessments. The following are RAOs for the project:

Attachment 2 – Project Description

- Prevent human exposures to concentrations of constituents of concern (COCs) in soil, soil vapor, and indoor air such that the resultant predicted (i.e., cumulative) lifetime incremental cancer risks are within the NCP risk range of one in a million (1×10^{-6}) to one in ten-thousand (1×10^{-4}) and non-cancer HIs are less than 1 or concentrations are below background, whichever is higher. In the event that background concentrations of a specific COC exceed the risk-based SSCG for that constituent, the RAO for these constituents will be the background level. Potential human exposures include onsite residents and construction and utility maintenance workers. For onsite residents, the lower end of the NCP risk range (i.e., 1×10^{-6}) and a non-cancer hazard index less than 1 are proposed. The guidance provided in the NCP for site remediation is commonly used for projects in California and throughout the United States.
- Prevent fire/explosion risks in indoor air and/or enclosed spaces (e.g., utility vaults) that may result from the accumulation of methane generated from the degradation of petroleum hydrocarbons in soils and eliminate methane in the subsurface to the extent technologically and economically feasible.
- Remove or treat petroleum hydrocarbon light non-aqueous phase liquid (LNAPL) to the extent technologically and economically feasible, and where a significant reduction in current and future risk to groundwater will result.
- Reduce COCs in groundwater to the extent technologically and economically feasible to achieve, at a minimum, the water quality objectives in the LARWQCB Basin Plan to protect the designated beneficial uses, including municipal supply.
- Conduct the remediation in a manner that maintains residential land-use of the Site, avoids displacing residents from their homes and/or physically divides the established Carousel community.
- Conduct the ground-disturbing remediation activities in a timely manner to minimize the duration of construction activities in the community.

Proposed Project

The approval and implementation of the RAP requires environmental review and compliance with the California Environmental Quality Act (CEQA). The LARWQCB will be evaluating the environmental impacts associated with the implementation of the RAP, in particular, the short-term impacts associated with the possible methods to be used and the extent of the cleanup. Shell evaluated several different methods during pilot tests for site cleanup, including:

- Soil vapor extraction (SVE);
- Excavation of soils impacted by petroleum hydrocarbons;
- Bioventing to biodegrade petroleum hydrocarbons in shallow soils;
- In-Situ chemical oxidation using ozone gas for cleanup of shallow soil; and
- Other technologies for cleanup of COCs in groundwater.

The proposed site remedy in the RAP will include shallow soil excavation, installation and long-term operation of a SVE and bioventing system, sub-slab vapor mitigation, recovery of light non-aqueous phase liquid hydrocarbons from groundwater wells, monitored natural attenuation of groundwater, and implementation of a soil management plan. The currently planned activities are described as follows:

- Excavation of shallow soils would occur at impacted residential properties identified based on the HHRA completed for the project. Excavation will be conducted in landscaped and hardscaped areas of identified residences (e.g., uncovered patios, walkways, etc.). Following excavation, hardscape and landscaping will be restored to like conditions. Based on findings of the HHRA and distribution of total petroleum hydrocarbon concentrations, approximately 180-185 properties have been identified for remedial excavation.
- Installation and operation of a SVE/bioventing system. This system will be installed and operated to

Attachment 2 – Project Description

address volatile petroleum hydrocarbons, volatile organic compounds (VOCs), and methane in soil vapor and soils in areas beneath existing paved areas and concrete foundations of homes, soils remaining below the depth of excavation, and the deeper vadose zone. SVE wells and piping will be installed in City streets and on residential properties. The treatment system equipment will either be located onsite or offsite at a yet to be determined location.

- Installation of a system to vent soil vapor from beneath the slabs of approximately 30 properties based on the HHRA completed for the project.
- Light non-aqueous phase liquid (LNAPL) will be recovered where LNAPL has accumulated in two monitoring wells (MW-3 and MW-12) located in City streets to the extent technologically and economically feasible, and where a significant reduction in current and future risk to groundwater will result. LNAPL recovery will be conducted periodically (currently monthly) using dedicated pumps installed in the wells.
- Groundwater monitoring will continue as part of remedial actions. If, based on a 5-year review following initiation of full SVE system operation, groundwater contamination does not show a stable or decreasing trend evaluation and implementation of hot spot groundwater treatment will be conducted.

Environmental Checklist Form

1. Project Title: Former Kast Property Tank Farm Site Remedial Action Plan
2. Lead Agency Name and Address: Los Angeles Regional Water Quality Control Board, 320 West 4th Street, Suite 200, Los Angeles, CA 90013
3. Contact Person and Phone Number: Paula Rasmussen, Assistant Executive Officer, (213)-576-6791
4. Project Location: City of Carson, CA; the Former Kast Property Tank Farm (Site) is a 44 acre site located in Carson, California. The site is bounded to the north by East 244th Street, Lomita Boulevard to the south, Marbella Avenue to the west, and Panama Avenue to the east (see Figure 1 attached). The Site currently is a residential neighborhood known as the Carousel Tract (see Figure 2 attached). Lomita Boulevard forms the jurisdictional boundary between the City of Los Angeles and the City of Carson.
5. Project Sponsor's Name and Address:
Shell Oil Products US,
Attn: Douglas Weimer
20945 S. Wilmington Ave
Carson, CA 90810
6. General Plan Designation: Low Density Residential 7. Zoning: Residential
8. Description of Project: (Describe the whole action involved, including but not limited to later phases of the project, and any secondary, support, or off-site features necessary for its implementation. Attach additional sheets if necessary.)
The project is the implementation of a Remedial Action Plan (RAP) for the cleanup of the Carousel Tract in response to a Cleanup and Abatement Order (CAO) issued by the RWQCB in 2011. Primary contaminants of concern are methane, benzene and petroleum hydrocarbons. Additional site characterization investigations, remediation pilot tests, a Human Health Risk Assessment (HHRA) and a Feasibility Study have been completed for the Site. Additionally, Site-specific Cleanup Goals (SSCGs) for soil, soil vapor, and groundwater were established in response to the Regional Board's Review of the Revised Site-Specific Cleanup Goal Report and Directive dated January 23, 2014. The Former Kast Property Tank Farm Site Remediation Project has been proposed to remediate the site with the intent of achieving the SSCGs.

See Attachment A, Project Description, for a more detailed description.
9. Surrounding Land Uses and Setting: Briefly describe the project's surroundings:
The site is a residential community known as the Carousel Tract in an urban area within the southern portion of the City of Carson. Residential uses are located to the north, east, and south of the tract. Commercial and light manufacturing uses are located adjacent to the northwestern portion of the tract with residential uses adjacent to the southwestern portion of the site. The BNSF railroad right-of-way is on the northern boundary of the project site. In addition, the Wilmington Middle School is located approximately 600 feet from the southwest corner of the site.
10. Other public agencies whose approval is required (e.g., permits, financing approval, or participation agreement.)
South Coast Air Quality Management District (SCAQMD), the City of Carson, and the Occupational Safety and Health Administration (OSHA).

ENVIRONMENTAL FACTORS POTENTIALLY AFFECTED:

The environmental factors checked below would be potentially affected by this project, involving at least one impact that is a "Potentially Significant Impact" as indicated by the checklist on the following pages.

- | | | |
|--|---|--|
| <input type="checkbox"/> Aesthetics | <input type="checkbox"/> Agriculture and Forestry Resources | <input checked="" type="checkbox"/> Air Quality |
| <input type="checkbox"/> Biological Resources | <input type="checkbox"/> Cultural Resources | <input checked="" type="checkbox"/> Geology /Soils |
| <input checked="" type="checkbox"/> Greenhouse Gas Emissions | <input checked="" type="checkbox"/> Hazards & Hazardous Materials | <input checked="" type="checkbox"/> Hydrology / Water Quality |
| <input type="checkbox"/> Land Use / Planning | <input type="checkbox"/> Mineral Resources | <input checked="" type="checkbox"/> Noise |
| <input type="checkbox"/> Population / Housing | <input type="checkbox"/> Public Services | <input type="checkbox"/> Recreation |
| <input checked="" type="checkbox"/> Transportation/Traffic | <input checked="" type="checkbox"/> Utilities / Service Systems | <input checked="" type="checkbox"/> Mandatory Findings of Significance |

DETERMINATION: (To be completed by the Lead Agency) On the basis of this initial evaluation:

- I find that the proposed project COULD NOT have a significant effect on the environment, and a NEGATIVE DECLARATION will be prepared.
- I find that although the proposed project could have a significant effect on the environment, there will not be a significant effect in this case because revisions in the project have been made by or agreed to by the project proponent. A MITIGATED NEGATIVE DECLARATION will be prepared.
- I find that the proposed project MAY have a significant effect on the environment, and an ENVIRONMENTAL IMPACT REPORT is required.
- I find that the proposed project MAY have a "potentially significant impact" or "potentially significant unless mitigated" impact on the environment, but at least one effect 1) has been adequately analyzed in an earlier document pursuant to applicable legal standards, and 2) has been addressed by mitigation measures based on the earlier analysis as described on attached sheets. An ENVIRONMENTAL IMPACT REPORT is required, but it must analyze only the effects that remain to be addressed.
- I find that although the proposed project could have a significant effect on the environment, because all potentially significant effects (a) have been analyzed adequately in an earlier EIR or NEGATIVE DECLARATION pursuant to applicable standards, and (b) have been avoided or mitigated pursuant to that earlier EIR or NEGATIVE DECLARATION, including revisions or mitigation measures that are imposed upon the proposed project, nothing further is required.

Signature

Date

Signature

Date

EVALUATION OF ENVIRONMENTAL IMPACTS:

- 1) A brief explanation is required for all answers except "No Impact" answers that are adequately supported by the information sources a lead agency cites in the parentheses following each question. A "No Impact" answer is adequately supported if the referenced information sources show that the impact simply does not apply to projects like the one involved (e.g., the project falls outside a fault rupture zone). A "No Impact" answer should be explained where it is based on project-specific factors as well as general standards (e.g., the project will not expose sensitive receptors to pollutants, based on a project-specific screening analysis).
- 2) All answers must take account of the whole action involved, including off-site as well as on-site, cumulative as well as project-level, indirect as well as direct, and construction as well as operational impacts.
- 3) Once the lead agency has determined that a particular physical impact may occur, then the checklist answers must indicate whether the impact is potentially significant, less than significant with mitigation, or less than significant. "Potentially Significant Impact" is appropriate if there is substantial evidence that an effect may be significant. If there are one or more "Potentially Significant Impact" entries when the determination is made, an EIR is required.
- 4) "Negative Declaration: Less Than Significant With Mitigation Incorporated" applies where the incorporation of mitigation measures has reduced an effect from "Potentially Significant Impact" to a "Less Than Significant Impact." The lead agency must describe the mitigation measures, and briefly explain how they reduce the effect to a less than significant level (mitigation measures from "Earlier Analyses," as described in (5) below, may be cross-referenced).
- 5) Earlier analyses may be used where, pursuant to the tiering, program EIR, or other CEQA process, an effect has been adequately analyzed in an earlier EIR or negative declaration. Section 15063(c)(3)(D). In this case, a brief discussion should identify the following:
 - a) Earlier Analysis Used. Identify and state where they are available for review.
 - b) Impacts Adequately Addressed. Identify which effects from the above checklist were within the scope of and adequately analyzed in an earlier document pursuant to applicable legal standards, and state whether such effects were addressed by mitigation measures based on the earlier analysis.
 - c) Mitigation Measures. For effects that are "Less than Significant with Mitigation Measures Incorporated," describe the mitigation measures which were incorporated or refined from the earlier document and the extent to which they address site-specific conditions for the project.
- 6) Lead agencies are encouraged to incorporate into the checklist references to information sources for potential impacts (e.g., general plans, zoning ordinances). Reference to a previously prepared or outside document should, where appropriate, include a reference to the page or pages where the statement is substantiated.
- 7) Supporting Information Sources: A source list should be attached, and other sources used or individuals contacted should be cited in the discussion.
- 8) This is only a suggested form, and lead agencies are free to use different formats; however, lead agencies should normally address the questions from this checklist that are relevant to a project's environmental effects in whatever format is selected.
- 9) The explanation of each issue should identify:
 - a) the significance criteria or threshold, if any, used to evaluate each question; and
 - b) the mitigation measure identified, if any, to reduce the impact to less than significance.

Issues:

I. AESTHETICS -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Have a substantial adverse effect on a scenic vista?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
b) Substantially damage scenic resources, including, but not limited to, trees, rock outcroppings, and historic buildings within a state scenic highway?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
c) Substantially degrade the existing visual character or quality of the site and its surroundings?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
d) Create a new source of substantial light or glare which would adversely affect day or nighttime views in the area?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
<p>Discussion: The proposed remediation would occur in various locations within an existing residential neighborhood. There are no scenic vistas or designated state scenic highways in the project area. No historic buildings are located on the site. The remediation activities would result in temporary changes to the visual environment in the residential neighborhood due to the staging of materials and equipment on site during excavation and installation of remediation systems. Equipment that may be used on the site include drill rigs, backhoes, mini-excavators, rubber-tired loaders, water buffalo trailers and soil vapor extraction equipment. Stockpiling of excavated soils would be minimized and if possible excavated soils would be loaded and transported off site the same day. Although the project would create minor short-term changes to the visual character during implementation of the remedy, the disturbed area would be restored and the visual character of the site and surroundings would not be substantially degraded.</p>				

II. AGRICULTURE AND FOREST RESOURCES:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
<p>In determining whether impacts to agricultural resources are significant environmental effects, lead agencies may refer to the California Agricultural Land Evaluation and Site Assessment Model (1997) prepared by the California Dept. of Conservation as an optional model to use in assessing impacts on agriculture and farmland. In determining whether impacts to forest resources, including timberland, are significant environmental effects, lead agencies may refer to information compiled by the California Department of Forestry and Fire Protection regarding the state's inventory of forest land, including the Forest and Range Assessment Project and the Forest Legacy Assessment project; and forest carbon measurement methodology provided in Forest Protocols adopted by the California Air Resources Board. -- Would the project:</p>				
a) Convert Prime Farmland, Unique Farmland, or Farmland of Statewide Importance (Farmland), as shown on the maps prepared pursuant to the Farmland Mapping and Monitoring Program of the California Resources Agency, to non- agricultural use?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
b) Conflict with existing zoning for agricultural use, or a Williamson Act contract?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

II. AGRICULTURE AND FOREST RESOURCES:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
c) Conflict with existing zoning for, or cause rezoning of, forest land (as defined in Public Resources Code section 12220(g)), timberland (as defined by Public Resources Code section 4526), or timberland zoned Timberland Production (as defined by Government Code section 51104(g))?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
d) Result in the loss of forest land or conversion of forest land to non-forest use?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
e) Involve other changes in the existing environment which, due to their location or nature, could result in conversion of Farmland, to non-agricultural use or conversion of forest land to non-forest use?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Discussion: The site is a residential development in a highly urban area with no agriculture or forest resources. The project would not conflict with existing zoning for agricultural use or convert agricultural or forest land to non-agricultural or non-forest use. Therefore, no impact would occur.				

III. AIR QUALITY -- Where available, the significance criteria established by the applicable air quality management or air pollution control district may be relied upon to make the following determinations. -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Conflict with or obstruct implementation of the applicable air quality plan?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
b) Violate any air quality standard or contribute substantially to an existing or projected air quality violation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
c) Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is non-attainment under an applicable federal or state ambient air quality standard (including releasing emissions which exceed quantitative thresholds for ozone precursors)?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
d) Expose sensitive receptors to substantial pollutant concentrations?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
e) Create objectionable odors affecting a substantial number of people?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Discussion: Air quality impacts and feasible mitigation will be assessed in the EIR to be prepared for the project.				

IV. BIOLOGICAL RESOURCES -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Have a substantial adverse effect, either directly or through habitat modifications, on any species identified as a candidate, sensitive, or special status species in local or regional plans, policies, or regulations, or by the California Department of Fish and Game or U.S. Fish and Wildlife Service?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

IV. BIOLOGICAL RESOURCES -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
b) Have a substantial adverse effect on any riparian habitat or other sensitive natural community identified in local or regional plans, policies, regulations or by the California Department of Fish and Game or US Fish and Wildlife Service?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
c) Have a substantial adverse effect on federally protected wetlands as defined by Section 404 of the Clean Water Act (including, but not limited to, marsh, vernal pool, coastal, etc.) through direct removal, filling, hydrological interruption, or other means?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
d) Interfere substantially with the movement of any native resident or migratory fish or wildlife species or with established native resident or migratory wildlife corridors, or impede the use of native wildlife nursery sites?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
e) Conflict with any local policies or ordinances protecting biological resources, such as a tree preservation policy or ordinance?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
f) Conflict with the provisions of an adopted Habitat Conservation Plan, Natural Community Conservation Plan, or other approved local, regional, or state habitat conservation plan?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Discussion: The project site is a residential development in a highly urbanized area. The site does not contain riparian habitat, a sensitive natural community, federally protected wetlands, migratory wildlife corridors, or native wildlife nursery sites.				

V. CULTURAL RESOURCES -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Cause a substantial adverse change in the significance of a historical resource as defined in § 15064.5?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
b) Cause a substantial adverse change in the significance of an archaeological resource pursuant to § 15064.5?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
c) Directly or indirectly destroy a unique paleontological resource or site or unique geologic feature?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
d) Disturb any human remains, including those interred outside of formal cemeteries?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Discussion: There are no known historic, archaeological, paleontological or unique geologic resources that exist at the site or near the site as described in a technical report entitled Cultural Resources Investigations, Former Kast Property, Carson, California, Site Cleanup No. 1230, Site ID 2040330 (URS, 2011). The remediation would result in excavation of shallow soils. However, given that the site has been previously disturbed with the removal of the reservoirs and development of homes and remediation activities would occur in these already disturbed areas, the likelihood of encountering cultural resources is considered low. Therefore, there would be no known significant cultural resources impacted by the project.				

VI. GEOLOGY AND SOILS -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Expose people or structures to potential substantial adverse effects, including the risk of loss, injury, or death involving:				
i) Rupture of a known earthquake fault, as delineated on the most recent Alquist-Priolo Earthquake Fault Zoning Map issued by the State Geologist for the area or based on other substantial evidence of a known fault? Refer to Division of Mines and Geology Special Publication 42.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
ii) Strong seismic ground shaking?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
iii) Seismic-related ground failure, including liquefaction?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
iv) Landslides?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
b) Result in substantial soil erosion or the loss of topsoil?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
c) Be located on a geologic unit or soil that is unstable, or that would become unstable as a result of the project, and potentially result in on- or off-site landslide, lateral spreading, subsidence, liquefaction or collapse?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
d) Be located on expansive soil, as defined in Table 18-1-B of the Uniform Building Code (1994), creating substantial risks to life or property?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
e) Have soils incapable of adequately supporting the use of septic tanks or alternative waste water disposal systems where sewers are not available for the disposal of waste water?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Discussion: The project would remediate impacted soil in an existing residential development and would not change the exposure of people or structures to adverse effects associated with ground shaking, ground failure, liquefaction, or expansive soils. Impacts and mitigation related to soil erosion and soil stability will be assessed in the EIR to be prepared for the project.

VII. GREENHOUSE GAS EMISSIONS -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Generate greenhouse gas emissions, either directly or indirectly, that may have a significant impact on the environment?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
b) Conflict with an applicable plan, policy or regulation adopted for the purpose of reducing the emissions of greenhouse gases?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Discussion: Impacts and mitigation related to GHG emissions will be assessed in the EIR to be prepared for the project.

VIII. HAZARDS AND HAZARDOUS MATERIALS -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Create a significant hazard to the public or the environment through the routine transport, use, or disposal of hazardous materials?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
b) Create a significant hazard to the public or the environment through reasonably foreseeable upset and accident conditions involving the release of hazardous materials into the environment?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
c) Emit hazardous emissions or handle hazardous or acutely hazardous materials, substances, or waste within one-quarter mile of an existing or proposed school?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
d) Be located on a site which is included on a list of hazardous materials sites compiled pursuant to Government Code Section 65962.5 and, as a result, would it create a significant hazard to the public or the environment?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
e) For a project located within an airport land use plan or, where such a plan has not been adopted, within two miles of a public airport or public use airport, would the project result in a safety hazard for people residing or working in the project area?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
f) For a project within the vicinity of a private airstrip, would the project result in a safety hazard for people residing or working in the project area?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
g) Impair implementation of or physically interfere with an adopted emergency response plan or emergency evacuation plan?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
h) Expose people or structures to a significant risk of loss, injury or death involving wildland fires, including where wildlands are adjacent to urbanized areas or where residences are intermixed with wildlands?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
<p>Discussion: Items a – d: Impacts and mitigation related to potential exposure to hazardous materials will be assessed in the EIR to be prepared for the project. The nearest school is the Wilmington Middle School located approximately 600 feet southwest from the southwest corner of the site. Therefore, these issues will be evaluated in the EIR that will be prepared for the project.</p>				
<p>Items e and f: The nearest airport to the site is the Torrance Municipal Airport, located over 3.3 miles to the west of the site. Therefore, no impacts would occur and no further evaluation is necessary.</p>				
<p>Item g: Lane closures needed during the soil excavation portion of the remedy would be done in accordance with the Traffic Management Plan and Encroachment Permits from the City of Carson. These temporary lane closures are not expected to interfere with emergency access or emergency evacuation plans. There may be temporary street blockage for several minutes at a time as trucks maneuver to dump loads (backfill soil as an example), but no long-term closures are expected. Drilling and trenching in the streets for well and piping installation would be required for installation of the soil vapor extraction system. Similar to installation of water and sewer lines, there may be short-term blockages of driveways to individual residential properties for less than a day. Trenching that interferes with access would be covered with steel plates to allow access at night and if construction activities are delayed. Therefore, impacts would be less than significant and no further evaluation is necessary.</p>				

IX. HYDROLOGY AND WATER QUALITY -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Violate any water quality standards or waste discharge requirements?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
b) Substantially deplete groundwater supplies or interfere substantially with groundwater recharge such that there would be a net deficit in aquifer volume or a lowering of the local groundwater table level (e.g., the production rate of pre-existing nearby wells would drop to a level which would not support existing land uses or planned uses for which permits have been granted)?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
c) Substantially alter the existing drainage pattern of the site or area, including through the alteration of the course of a stream or river, in a manner which would result in substantial erosion or siltation on- or off-site?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
d) Substantially alter the existing drainage pattern of the site or area, including through the alteration of the course of a stream or river, or substantially increase the rate or amount of surface runoff in a manner which would result in flooding on- or off-site?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
e) Create or contribute runoff water which would exceed the capacity of existing or planned stormwater drainage systems or provide substantial additional sources of polluted runoff?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
f) Otherwise substantially degrade water quality?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
g) Place housing within a 100-year flood hazard area as mapped on a federal Flood Hazard Boundary or Flood Insurance Rate Map or other flood hazard delineation map?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
h) Place within a 100-year flood hazard area structures which would impede or redirect flood flows?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
i) Expose people or structures to a significant risk of loss, injury or death involving flooding, including flooding as a result of the failure of a levee or dam?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
j) Inundation by seiche, tsunami, or mudflow?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Discussion: The site is not located in a 100-year floodplain and implementation of the RAP would not change drainage patterns within the Tract. Potential impacts to storm water may occur if storm water is exposed to contaminated soil during excavation activities. However, implementation of required best management practices would mitigate this potential impact. Impacts relative to water quality (Items a. and f.) will be assessed in the EIR to be prepared for the project.

X. LAND USE AND PLANNING -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Physically divide an established community?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
b) Conflict with any applicable land use plan, policy, or regulation of an agency with jurisdiction over the project (including, but not limited to the general plan, specific plan, local coastal program, or zoning ordinance) adopted for the purpose of avoiding or mitigating an environmental effect?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

X. LAND USE AND PLANNING -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
c) Conflict with any applicable habitat conservation plan or natural community conservation plan?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Discussion: The implementation of the RAP would not change the existing land use within the Carousel Tract. Therefore, the project would have no impact with regard to land use and planning.				

XI. MINERAL RESOURCES -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Result in the loss of availability of a known mineral resource that would be of value to the region and the residents of the state?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
b) Result in the loss of availability of a locally- important mineral resource recovery site delineated on a local general plan, specific plan or other land use plan?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Discussion: The site has no known mineral resources and implementation of the RAP would not change the availability of mineral resources at the site. Therefore, no impact to mineral resources would occur and no further evaluation is necessary.				

XII. NOISE -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Exposure of persons to or generation of noise levels in excess of standards established in the local general plan or noise ordinance, or applicable standards of other agencies?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
b) Exposure of persons to or generation of excessive ground-borne vibration or ground-borne noise levels?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
c) A substantial permanent increase in ambient noise levels in the project vicinity above levels existing without the project?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
d) A substantial temporary or periodic increase in ambient noise levels in the project vicinity above levels existing without the project?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
e) For a project located within an airport land use plan or, where such a plan has not been adopted, within two miles of a public airport or public use airport, would the project expose people residing or working in the project area to excessive noise levels?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
f) For a project within the vicinity of a private airstrip, would the project expose people residing or working in the project area to excessive noise levels?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Discussion: Items a., b., and d.: Impacts and mitigation related to potential noise and vibration exposure will be assessed in the EIR to be prepared for the project.				

XII. NOISE -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
Item c.: The implementation of the RAP would not result in a substantial permanent increase in ambient noise levels in the vicinity since the cleanup is a short-term project. Thus, long-term noise analysis is not warranted. However, Item d. will be evaluated in the EIR as indicated below.				
Items e. and f.: The nearest airport to the site is the Torrance Municipal Airport, located over 3.3 miles to the west of the site. There is no private airstrip within the vicinity of the site. Therefore, no noise impacts relative to airports would occur and no further evaluation is necessary.				

XIII. POPULATION AND HOUSING -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Induce substantial population growth in an area, either directly (for example, by proposing new homes and businesses) or indirectly (for example, through extension of roads or other infrastructure)?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
b) Displace substantial numbers of existing housing, necessitating the construction of replacement housing elsewhere?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
c) Displace substantial numbers of people, necessitating the construction of replacement housing elsewhere?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Discussion: The remediation project has no growth-inducing element and the project would not result in any impacts to population or housing. Population growth would not be affected and displacement of housing would not occur as the excavation would be conducted in landscaped and hardscaped areas of identified residences (e.g., uncovered patios, walkways, etc.). While some temporary relocation of residents may be required during excavation activities, there are a substantial number of hotel/motel rooms in the area and construction of replacement housing is not expected. Therefore, no significant impact with regards to population and housing would occur under the recommended project scope and no further analysis of the issue is necessary.				

XIV. PUBLIC SERVICES -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Would the project result in substantial adverse physical impacts associated with the provision of new or physically altered governmental facilities, need for new or physically altered governmental facilities, the construction of which could cause significant environmental impacts, in order to maintain acceptable service ratios, response times or other performance objectives for any of the public services:				
Fire protection?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Police protection?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Schools?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Parks?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Other public facilities?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

XIV. PUBLIC SERVICES -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
<p>Discussion: The project would not generate an increase in the demand for public services as the demand for public services is generally associated with population or employment growth. No new housing would be constructed that would generate a need for additional schools or parks. The RAP has no component or activity that would cause substantial adverse physical impacts requiring changes or impacts to fire, police, schools, parks or other public services facilities. The nature and extent of the proposed project would not generate a need for any new or physically altered governmental facilities. Therefore, no impact to public services would occur.</p>				

XV. RECREATION -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Would the project increase the use of existing neighborhood and regional parks or other recreational facilities such that substantial physical deterioration of the facility would occur or be accelerated?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
b) Does the project include recreational facilities or require the construction or expansion of recreational facilities which might have an adverse physical effect on the environment?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
<p>Discussion: No recreational facilities are on the project site and project activities would not require new/expanded recreational facilities or increase the use of existing facilities. The nature and extent of the proposed project would not generate a need for any new or physically altered recreational facilities. Therefore, no impact relative to recreation would occur and no further analysis is necessary.</p>				

XVI. TRANSPORTATION/TRAFFIC -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Conflict with an applicable plan, ordinance or policy establishing measures of effectiveness for the performance of the circulation system, taking into account all modes of transportation including mass transit and non-motorized travel and relevant components of the circulation system, including but not limited to intersections, streets, highways and freeways, pedestrian and bicycle paths, and mass transit?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
b) Conflict with an applicable congestion management program, including, but not limited to level of service standards and travel demand measures, or other standards established by the county congestion management agency for designated roads or highways?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
c) Result in a change in air traffic patterns, including either an increase in traffic levels or a change in location that result in substantial safety risks?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
d) Substantially increase hazards due to a design feature (e.g., sharp curves or dangerous intersections) or incompatible uses (e.g., farm equipment)?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
e) Result in inadequate emergency access?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

XVI. TRANSPORTATION/TRAFFIC -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
f) Conflict with adopted policies, plans, or programs regarding public transit, bicycle, or pedestrian facilities, or otherwise decrease the performance or safety of such facilities?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<p>Discussion: Items a., e., and f.: Implementation of the RAP would result in short-term, temporary traffic. Due to the nature of the project, conflicts with adopted policies, plans or programs regarding the circulation system or alternative transportation facilities would not occur because these plans address the long-term status and maintenance of the circulation systems. As such, impacts would be less than significant and no further analysis of the plans is necessary.</p> <p>Item b.: Implementation of the RAP would require the exportation of impacted soil from the site and would therefore, generate truck trips. Thus, construction activities could adversely impact the circulation system. A traffic study will be prepared and will be included and summarized in the EIR to be prepared for the project.</p> <p>Item c: As indicated under Section VIII, Hazards and Hazardous Materials, the nearest airport to the site is the Torrance Municipal Airport, located over 3.3 miles to the west of the site. Therefore, no impacts with regard to air traffic patterns would occur and no further evaluation is necessary.</p> <p>Item d: The project would not result in any changes to the existing circulation system. Therefore, the project would not increase hazards due to a design feature and no further evaluation is necessary.</p>				

XVII. UTILITIES AND SERVICE SYSTEMS -- Would the project:	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Exceed wastewater treatment requirements of the applicable Regional Water Quality Control Board?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
b) Require or result in the construction of new water or wastewater treatment facilities or expansion of existing facilities, the construction of which could cause significant environmental effects?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
c) Require or result in the construction of new storm water drainage facilities or expansion of existing facilities, the construction of which could cause significant environmental effects?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
d) Have sufficient water supplies available to serve the project from existing entitlements and resources, or are new or expanded entitlements needed?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
e) Result in a determination by the wastewater treatment provider which serves or may serve the project that it has adequate capacity to serve the project's projected demand in addition to the provider's existing commitments?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
f) Be served by a landfill with sufficient permitted capacity to accommodate the project's solid waste disposal needs?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
g) Comply with federal, state, and local statutes and regulations related to solid waste?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
<p>Discussion: Items a.-c. and e.: The implementation of the RAP would not include the development of uses that would generate new wastewater flows. The Project does not propose a change in land use that would result in greater average daily flows than are currently produced. Thus, no impacts regarding wastewater would occur with Project implementation. Further analysis of this issue in the EIR is not necessary. Potential impacts regarding runoff during the proposed remediation activities are addressed in Section IX, Hydrology and Water Quality, above.</p>				

Item d: The project could result in a marginal increase in water demand during the implementation of the RAP over what currently is experienced at the site. However, the amount of water usage is expected to be nominal as it would be limited primarily to watering down the site for dust control and irrigation of newly planted vegetation, and it would be short-term, lasting only through the duration of the project. It is expected that the City's municipal water sources can accommodate the project's water requirement. Furthermore, upon completion of the RAP, land uses are not expected to change from current uses, and therefore, no change to water demand would result that would generate a long-term effect to available water supplies provided by the City. As such, a less than significant impact would occur related to water supplies. Further analysis of this issue in the EIR is not necessary.

Items f. and g.: The impacted soil that would be excavated at the site would be disposed of at a facility that can accept such waste. The landfill disposal capacity for the materials will be assessed in the EIR to be prepared for the project. The project would comply with federal, state, and local statutes and regulations related to solid waste. Therefore, no further evaluation of consistency with the regulations would be necessary.

XVIII. MANDATORY FINDINGS OF SIGNIFICANCE

	Potentially Significant Impact	Less Than Significant with Mitigation Incorporated	Less Than Significant Impact	No Impact
a) Does the project have the potential to degrade the quality of the environment, substantially reduce the habitat of a fish or wildlife species, cause a fish or wildlife population to drop below self-sustaining levels, threaten to eliminate a plant or animal community, reduce the number or restrict the range of a rare or endangered plant or animal or eliminate important examples of the major periods of California history or prehistory?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
b) Does the project have impacts that are individually limited, but cumulatively considerable? ("Cumulatively considerable" means that the incremental effects of a project are considerable when viewed in connection with the effects of past projects, the effects of other current projects, and the effects of probable future projects)?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
c) Does the project have environmental effects which will cause substantial adverse effects on human beings, either directly or indirectly?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Discussion:

Item a.: As analyzed in this Initial Study, the project could result in environmental impacts that would have the potential to degrade the quality of the environment. As such, an EIR will be prepared to further analyze and document the project's potentially significant impacts.


Item b.: The project is not growth inducing and would not itself result in an increase in area population, employment, or new infrastructure. The issues relevant to this project are localized and primarily limited to the immediate vicinity of the site, with the exception of impacts regarding air quality, greenhouse gas emissions, noise, and truck traffic. Cumulative impacts for these issues will be assessed in the EIR to be prepared for the project.

Item c.: Based on the preceding responses, the project could result in environmental effects that could result in substantial adverse impacts to human beings, either directly or indirectly, which requires further analysis within the EIR.

Note: Authority cited: Sections 21083, 21083.05, Public Resources Code. Reference: Section 65088.4, Gov. Code; Sections 21080, 21083.05, 21095, Pub. Resources Code; Eureka Citizens for Responsible Govt. v. City of Eureka (2007) 147 Cal.App.4th 357; Protect the Historic Amador Waterways v. Amador Water Agency (2004) 116 Cal.App.4th at 1109; San Franciscans Upholding the Downtown Plan v. City and County of San Francisco (2002) 102 Cal.App.4th 656.



 Project Site
 City Boundary



Aerial Photograph

KastSite RAP
Source: Microsoft, 2010; PCR Services Corporation, 2014.

FIGURE

2

ATTACHMENT A - PROJECT DESCRIPTION

Site History

The Kast Property Tank Farm was owned and operated by Shell Oil Company from 1924 through 1966, when it was sold to developers. The Site included three crude oil storage reservoirs with a total capacity of 3.5 million barrels. Reservoirs had concrete-lined bottoms and sidewalls with frame roofs on wood posts, surrounded by earth levees averaging 20 feet in height. Demolition of the three crude oil reservoirs by the developers began in 1966. Site redevelopment into a single family residential neighborhood began in approximately 1967 and the property is referred to as the Carousel Tract.

In 2008, residual oil was discovered in soil and groundwater at the Site. Subsequently, the Los Angeles Regional Water Quality Control Board (LARWQCB) issued orders to Shell requiring investigation and cleanup of the Site pursuant to the Porter-Cologne Water Quality Control Act (Porter-Cologne Act, California Water Code §§13000 et seq.). Comprehensive multi-media Site investigations have been underway since 2008 and have included assessments of soil, soil vapor, sub-slab soil vapor, indoor air, and groundwater impacts. To date, investigations have been conducted in city streets within the Carousel Tract, at 270 of the 285 residential properties in the Carousel Tract, the adjacent Monterey Pines and Island Avenue Tracts, the adjacent railroad right-of-way north of the Site, and at the Wilmington Middle School.

In 2011 the LARWQCB issued a Cleanup and Abatement Order (CAO) that requires Shell to propose and submit a Remedial Action Plan (RAP) for the cleanup of the Carousel Tract. Primary contaminants of concern are methane, benzene and petroleum hydrocarbons. Additional site characterization investigations, remediation pilot tests, a Human Health Risk Assessment (HHRA) and a Feasibility Study have been completed for the Site. Additionally, Site-specific Cleanup Goals (SSCGs) for soil, soil vapor, and groundwater were established in response to the Regional Board's Review of the Revised Site-Specific Cleanup Goal Report and Directive dated January 23, 2014. The Former Kast Site Remediation Project has been proposed to remediate the site with the intent of achieving the SSCGs.

Proposed Project

The approval and implementation of the RAP requires environmental review and compliance with the California Environmental Quality Act (CEQA). The LARWQCB will be evaluating the environmental impacts associated with the implementation of the RAP, in particular, the short-term impacts associated with the possible methods to be used and the extent of the cleanup. Shell evaluated several different methods during pilot tests for site cleanup, including:

- Soil vapor extraction (SVE);
- Excavation of soils impacted by petroleum hydrocarbons;
- Bioventing to biodegrade petroleum hydrocarbons in shallow soils;
- In-Situ chemical oxidation using ozone gas for cleanup of shallow soil; and
- Other technologies for cleanup of COCs in groundwater.

The proposed site remedy in the RAP will include shallow soil excavation, installation and long-term operation of a SVE and bioventing system, sub-slab vapor mitigation, recovery of light non-aqueous phase liquid hydrocarbons from groundwater wells, monitored natural attenuation of groundwater, and implementation of a soil management plan. The currently planned activities are described as follows:

- Excavation of shallow soils would occur at impacted residential properties identified based on the HHRA completed for the project. Excavation will be conducted in landscaped and hardscaped areas of identified residences (e.g., uncovered patios, walkways, etc.). Following excavation, hardscape and landscaping will be restored to like conditions. Based on findings of the HHRA and distribution of total petroleum hydrocarbon concentrations, approximately 180-185 properties have been identified for remedial excavation.
- Installation and operation of a SVE/bioventing system. This system will be installed and operated to address volatile petroleum hydrocarbons, volatile organic compounds (VOCs), and methane in soil vapor and soils in areas beneath existing paved areas and concrete foundations of homes, soils remaining below the depth of excavation, and the deeper vadose zone. SVE wells and piping will be installed in City streets and on residential properties. The treatment system equipment will either be located onsite or offsite at a yet to be determined location.
- Installation of a system to vent soil vapor from beneath the slabs of approximately 30 properties based on the HHRA completed for the project.
- Light non-aqueous phase liquid (LNAPL) will be recovered where LNAPL has accumulated in two monitoring wells (MW-3 and MW-12) located in City streets to the extent technologically and economically feasible, and where a significant reduction in current and future risk to groundwater will result. LNAPL recovery will be conducted periodically (currently monthly) using dedicated pumps installed in the wells.
- Groundwater monitoring will continue as part of remedial actions. If, based on a 5-year review following initiation of full SVE system operation, groundwater contamination does not show a stable or decreasing trend evaluation and implementation of hot spot groundwater treatment will be conducted.

EXHIBIT 9

Prepared for:

Shell Oil Products US
20945 S. Wilmington Avenue
Carson, CA 90810

Feasibility Study Report

**Former Kast Property
Carson, California**

Prepared by:

Geosyntec 
consultants

engineers | scientists | innovators

2100 Main Street, Suite 150
Huntington Beach, CA 92648
Telephone: (714) 465-1238
Fax (714) 969-0800
www.geosyntec.com

Project Number: SB0484-03-03

March 10, 2014

FEASIBILITY STUDY REPORT

Former Kast Property Carson, California

Prepared for:

Shell Oil Products US

Prepared by:

Geosyntec Consultants, Inc.



Mark Grivetti, P.G., CHG
Principal Hydrogeologist



Mark Schultheis, P.E.
Principal

CERTIFICATION

FEASIBILITY STUDY REPORT
FORMER KAST PROPERTY
CARSON, CALIFORNIA

I am the Project Manager for Equilon Enterprises LLC doing business as Shell Oil Products US for this project. I am informed and believe that the matters stated in the Feasibility Study Report dated March 10, 2014 are true, and on that ground I declare, under penalty of perjury in accordance with Water Code section 13267, that the statements contained therein are true and correct.



Doug Weimer
Project Manager
Shell Oil Products US
March 10, 2014

TABLE OF CONTENTS

1. INTRODUCTION 1

 1.1 Regulatory Basis..... 1

 1.2 Feasibility Study Report Objectives 2

 1.3 Feasibility Study Organization 2

2. SITE BACKGROUND INFORMATION..... 4

 2.1 Site History 4

 2.2 Regulatory Involvement 5

 2.3 Site Setting, Geology and Hydrogeology 6

 2.4 Constituents of Concern 7

3. CLEANUP OBJECTIVES AND GOALS 9

 3.1 Remedial Action Objectives 9

 3.2 Site-Specific Cleanup Goals..... 10

 3.2.1 Soil 10

 3.2.2 Soil Vapor 11

 3.2.3 Soil Leaching to Groundwater 12

 3.2.4 Cumulative Risk and Potential Leaching to Groundwater
 Analysis using SSCGs 12

 3.3 Properties Requiring Remediation..... 13

4. IDENTIFICATION AND SCREENING OF REMEDIAL TECHNOLOGIES... 14

 4.1 Introduction 14

 4.2 Identification of Remedial Technologies 14

 4.2.1 Technologies that Interrupt the Human Health Exposure
 Pathway 14

 4.2.2 Technologies that Remove COC Mass and Interrupt the
 Human Health Exposure Pathway 18

 4.3 Screening of Remedial Technologies 21

 4.3.1 Sub-Slab Vapor Intrusion Mitigation..... 21

 4.3.2 Capping Portions of the Site 21

 4.3.3 Removal of All Site Features 22

 4.3.4 Institutional Controls..... 22

 4.3.5 Excavation..... 24

 4.3.6 Soil Vapor Extraction (SVE) 26

 4.3.7 Bioventing..... 27

TABLE OF CONTENTS (Continued)

	<u>Page</u>
4.3.8 In-Situ Chemical Oxidation (ISCO)	27
4.3.9 Light Non-Aqueous Phase Liquid (LNAPL) Removal.....	28
4.3.10 Groundwater Monitored Natural Attenuation (MNA).....	28
4.3.11 Supplemental Groundwater Remediation	29
4.4 Retained Remedial Technologies	29
5. REMEDIAL ALTERNATIVES IDENTIFICATION AND SCREENING.....	31
5.1 Identification of Preliminary Alternatives	31
5.2 Depth of Excavation Considerations	31
5.3 Technologies Common to Each Alternative.....	32
5.3.1 Institutional Controls.....	33
5.3.2 Sub-slab Vapor Intrusion Mitigation	33
5.3.3 SVE/Bioventing.....	33
5.3.4 LNAPL Removal	35
5.3.5 Groundwater MNA	35
5.3.6 Supplemental Groundwater Remediation.....	35
5.4 Assembly of Preliminary Remedial Alternatives	36
5.4.1 Alternative 1 – No Action Alternative.....	36
5.4.2 Alternative 2 – Entire Site Excavation of Impacted Soils	36
5.4.3 Alternative 3 – Entire Site Excavation of Impacted Soils to 10 Feet.....	37
5.4.4 Alternative 4 – Excavation beneath Landscape and Hardscape.....	38
5.4.5 Alternative 5 – Excavation beneath Landscape	43
5.4.6 Alternative 6 – Cap Site	44
5.4.7 Alternative 7 – Cap Exposed Soils	45
5.5 Screening of Preliminary Remedial Alternatives	45
5.5.1 Alternative 1.....	46
5.5.2 Screening of Alternative 2	47
5.5.3 Screening of Alternative 3	48
5.5.4 Screening of Alternative 4A	49
5.5.5 Screening of Alternative 4B.....	50
5.5.6 Screening of Alternative 4C.....	51
5.5.7 Screening of Alternative 4D	53
5.5.8 Screening of Alternative 5A	54
5.5.9 Screening of Alternative 5B.....	55
5.5.10 Screening of Alternative 5C.....	56

TABLE OF CONTENTS (Continued)

	<u>Page</u>
5.5.11 Screening of Alternative 5D.....	57
5.5.12 Screening of Alternative 6	58
5.5.13 Screening of Alternative 7	60
5.6 Retained Alternatives	60
6. DETAILED EVALUATION OF ALTERNATIVES	62
6.1 General.....	62
6.2 Detailed Evaluation Criteria	62
6.3 Retained Remedial Alternatives – Detailed Evaluation	65
6.3.1 General	65
6.3.2 Detailed Evaluation of Remedial Alternative 1	65
6.3.3 Detailed Evaluation of Alternative 4B.....	66
6.3.4 Detailed Evaluation of Alternative 4C.....	72
6.3.5 Detailed Evaluation of Alternative 4D.....	76
6.3.6 Detailed Evaluation of Alternative 5B.....	80
6.3.7 Detailed Evaluation of Alternative 5C.....	83
6.3.8 Detailed Evaluation of Alternative 5D.....	86
6.3.9 Detailed Evaluation of Alternative 7	89
7. COMPARATIVE EVALUATION OF ALTERNATIVES	93
7.1 Overall Protection of Human Health and the Environment	93
7.2 Compliance with ARARs	94
7.3 Long-term Effectiveness and Permanence	94
7.4 Reduction of Toxicity, Mobility, and Volume through Treatment	94
7.5 Short-term Effectiveness	95
7.6 Implementability.....	96
7.7 Estimated Cost.....	97
7.8 Consistency with Resolution 92-49	97
7.9 Social Considerations	98
7.10 Sustainability	98
7.11 State Acceptance.....	99
7.12 Community Acceptance	99
8. PREFERRED REMEDIAL ALTERNATIVE	100

TABLE OF CONTENTS (Continued)

LIST OF TABLES

Table 2-1:	Summary of Constituents of Concern
Table 3-1:	Site-Specific Cleanup Goals for Soil
Table 3-2:	Site-Specific Cleanup Goals for Soil Vapor
Table 3-3:	Property Addresses for Consideration in Remedial Planning
Table 4-1:	Screening of Remedial Technologies
Table 5-1:	Issues Associated with Various Excavation Depths
Table 5-2:	Preliminary Remedial Alternatives
Table 5-3:	Screening of Remedial Alternatives
Table 5-4:	Final Remedial Alternatives
Table 6-1:	Federal ARARs
Table 6-2:	State and Local ARARs
Table 6-3:	Preliminary Cost Estimate for Alternative 4B
Table 6-4:	Preliminary Cost Estimate for Alternative 4C
Table 6-5:	Preliminary Cost Estimate for Alternative 4D
Table 6-6:	Preliminary Cost Estimate for Alternative 5B
Table 6-7:	Preliminary Cost Estimate for Alternative 5C
Table 6-8:	Preliminary Cost Estimate for Alternative 5D
Table 6-9:	Preliminary Cost Estimate for Alternative 7
Table 6-10:	Detailed Evaluation of Remedial Alternatives
Table 7-1:	Comparative Evaluation of Remedial Alternatives

TABLE OF CONTENTS (Continued)

LIST OF FIGURES

- Figure 2-1: Site Location Map
- Figure 2-2: Site Vicinity Map
- Figure 3-1: Properties Exceeding Human Health and/or Leaching to Groundwater Criteria, ≤ 5 Feet Below Ground Surface
- Figure 3-2: Properties Exceeding Human Health and/or Leaching to Groundwater Criteria, > 5 Feet and ≤ 10 Feet Below Ground Surface
- Figure 3-3: Properties Exceeding Human Health Criteria for Sub-Slab Soil Vapor to Indoor Air
- Figure 5-1: Alternative 2 Elements
- Figure 5-2: Alternative 3 Elements
- Figure 5-3: Alternative 4 Elements
- Figure 5-4: Alternative 5 Elements
- Figure 5-5: Alternative 6 Elements
- Figure 5-6: Alternative 7 Elements

LIST OF ACRONYMS AND ABBREVIATIONS

ARARs	Applicable or Relevant and Appropriate Requirements
bgs	Below ground surface
BHC	Barclay Hollander Corporation
BTEX	Benzene, toluene, ethylbenzene, xylene
Cal/OSHA	State of California – Division of Occupational Safety and Health
Cal-Water	California Water Services Company
CAO	Cleanup and Abatement Order
City	City of Carson
CCR	California Code of Regulations
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CEQA	California Environmental Quality Act
CFR	Code of Federal Regulations
cm	Centimeters
CO ₂	Carbon dioxide
COCs	Constituents of Concern
CWC	California Water Code
cy	Cubic yard
dB	Decibel
Dole	Dole Food Company, Inc.
DTSC	Department of Toxic Substances Control
ECs	Engineering Controls
EHS	Environmental, Health and Safety
FEMA	Federal Emergency Management Agency
FS	Feasibility Study
ft	Foot or feet
g	Grams
GAC	Granular activated carbon
Geosyntec	Geosyntec Consultants, Inc.
HHRA	Human Health Risk Assessment
HI	Hazard Index
HQ	Hazard Quotient
HSC	Health and Safety Code
HSP	Health and Safety Plan
IRAP	Interim Remedial Action Plan
ISCO	In-situ chemical oxidation
L	Liter

LIST OF ACRONYMS AND ABBREVIATIONS (Continued)

LA	Los Angeles
LACDPW	Los Angeles County Department of Public Works
lb	Pound
LNAPL	Light Non-Aqueous Phase Liquid
m	Meter
MCL	Maximum Contaminant Level
mg/kg	Milligrams per kilogram
MNA	Monitored natural attenuation
msl	Mean sea level
NAPL	Non-aqueous phase liquid
NCP	National Oil and Hazardous Substances Pollution Contingency Plan
NL	Notification level
O&M	Operation and maintenance
OSHA	Occupational Safety and Health Administration
PAHs	Polycyclic aromatic hydrocarbons
PCE	Tetrachloroethene
PPE	Personnel protection equipment
ppm	Parts per million
PSI	Pounds per square inch
PSIG	Pound-force per square inch gauge
PVC	Polyvinyl chloride
RAOs	Remedial action objectives
RAP	Remedial Action Plan
Regional Board	Los Angeles Regional Water Quality Control Board
Residential Hardscape	Walkways, driveways, patios, hardscape associated with landscaping
RI	Risk Index
RI/FS	Remedial Investigation and Feasibility Study
ROI	Radius of influence
ROVI	Radius of vacuum influence
RWQCB	Los Angeles Regional Water Quality Control Board
SCAQMD	South Coast Air Quality Management District
scfm	Standard cubic feet per minute
SCM	Site Conceptual Model
Shell	Shell Oil Products United States
Site	Former Kast Property, Carson, California
SOPUS	Shell Oil Products United States
SP	Sodium persulfate
SSD	Sub-slab depressurization

LIST OF ACRONYMS AND ABBREVIATIONS (Continued)

SVE	Soil vapor extraction
SVOCs	Semi-volatile organic compounds
TCE	Trichloroethene
TPH	Total petroleum hydrocarbons
URS	URS Corporation
USEPA	United States Environmental Protection Agency
VOCs	Volatile organic compounds
VI	Vapor Intrusion
Work Plan	Pilot Test Work Plan
µg/kg	Micrograms per kilogram
µg/L	Micrograms per liter
µg/m ³	Micrograms per cubic meter
%	Percent

EXECUTIVE SUMMARY

Geosyntec Consultants, Inc. (Geosyntec), with support from URS Corporation (URS), prepared this Feasibility Study Report (FS Report) for the former Kast Property (Site) in Carson, California on behalf of Equilon Enterprises LLC, doing business as Shell Oil Products US (Shell or SOPUS). This FS Report is being submitted concurrently with two related and separate documents for the Site: Human Health Risk Assessment (HHRA) [Geosyntec, 2014] and Remedial Action Plan (RAP) [URS and Geosyntec, 2014].

Shell submitted a Revised Site-Specific Cleanup Goal Report (Revised SSCG Report) on October 21, 2013 [Geosyntec, 2013b] in response to a RWQCB directive dated August 21, 2013. In the Revised SSCG Report, Shell conducted a Screening FS which included a general evaluation of various alternatives for remediation of the Site. In a letter from RWQCB dated January 23, 2014, RWQCB provided comments and directives to Shell [LARWQCB, 2014]. The comments directed Shell to prepare a RAP containing remedial alternatives, and that would be consistent with the following directive:

“Consistent with State Water Board Resolution 92-49, the RAP shall evaluate the alternatives with respect to effectiveness, feasibility, and cost and propose a remedy or remedies that have a substantial likelihood to achieve compliance, within a reasonable time frame, with the cleanup goals and objectives.”

This FS Report, submitted concurrently with the RAP, fulfills this requirement with respect to evaluation of alternatives for remediation of the former Kast Property. This FS Report also meets the requirements set forth in CAO No. R4-2011-0046 issued to Shell by RWQCB on March 11, 2011. This FS replaces and updates the Screening FS included in the Revised SSCG Report, and contains a detailed evaluation of remedial alternatives as requested by the RWQCB [LARWQCB, 2014]. This FS Report follows the general form set forth in the *Guidance for Conducting Remedial Investigations and Feasibility Studies Under CERCLA* (RI/FS Guidance) [USEPA, 1988].

The FS Report addresses remediation for constituents of concern (COCs) found to be present at the Site. Based on the results of the HHRA, the primary Site COCs include the petroleum hydrocarbons TPH-diesel and TPH-motor oil, and VOCs such as benzene and naphthalene related to petroleum hydrocarbon impacts (**Table 2-1**).

In the HHRA, remedial action objectives (RAOs), which are specific to a medium (i.e., soil, soil vapor, or groundwater), and which contain numerical target risk levels for the Site COCs, are developed. RAOs also consider identified receptors at the Site and regulatory requirements. The following RAOs are proposed for the Site based on the above Site-specific considerations:

- Prevent human exposures to concentrations of COCs in soil, soil vapor, and indoor air such that total (i.e., cumulative) lifetime incremental carcinogenic risks are within the NCP risk range of 1×10^{-6} to 1×10^{-4} and noncancer hazard indices are less than 1 or concentrations are below background, whichever is higher. Potential human exposures include onsite residents and construction and utility maintenance workers. For onsite residents, the lower end of the NCP risk range (i.e., 1×10^{-6}) and a noncancer hazard index less than 1 have been used.
- Prevent fire/explosion risks in indoor air and/or enclosed spaces (e.g., utility vaults) due to the accumulation of methane generated from the anaerobic biodegradation of petroleum hydrocarbons in soils. Eliminate methane in the subsurface to the extent technologically and economically feasible.
- Remove or treat LNAPL to the extent technologically and economically feasible, and where a significant reduction in current and future risk to groundwater will result.
- Reduce COCs in groundwater to the extent technologically and economically feasible to achieve, at a minimum, the water quality objectives in the Basin Plan to protect the designated beneficial uses, including municipal supply.

A further consideration is to maintain residential land use of the Site and avoid displacing residents from their homes or physically dividing the established Carousel community.

Following development of RAOs, the FS Report includes identification and screening of a range of technologies, each of which can address a specific Site issue and contribute to meeting a RAO. Screening of technologies is followed in the FS Report by the identification, screening and detailed evaluation of a range of remedial alternatives for the Site.

Technologies in the FS Report are identified in two categories: (1) technologies that interrupt the human health exposure pathway; and (2) technologies that remove COC mass in addition to interrupting the human health exposure pathway. In the first category, the following technologies are identified:

- Potential sub-slab vapor intrusion mitigation, which may include the installation of passive barriers, passive venting, or active sub-slab depressurization;
- Capping portions of the Site, which involves the placement of cover over impacted media; and
- Institutional controls, which restrict access to impacted media.

Technologies that remove COC mass in addition to interrupting the human health exposure pathway include the following:

- Excavation
- Soil vapor extraction (SVE)
- Bioventing
- In-situ chemical oxidation (ISCO)
- Light non-aqueous phase liquid (LNAPL) source removal
- Supplemental remediation of groundwater
- Groundwater monitored natural attenuation (MNA)
- Three methods that may assist in mass removal, but do not themselves remove COCs:
 - Lifting and cribbing houses to allow excavation beneath houses
 - Temporarily moving houses to allow excavation beneath houses
 - Removal of residual concrete reservoir slabs.

After screening (**Table 4-1**), three technologies are eliminated from further consideration: in-situ chemical oxidation, lifting and cribbing houses to allow excavation beneath houses, and temporarily moving houses to allow excavation beneath houses.

Groups of technologies are combined into preliminary remedial alternatives to develop complete cleanup approaches. The following preliminary remedial alternatives are developed:

- Alternative 1 – No Action
- Alternative 2 – Entire Site Excavation of Impacted Soils
- Alternative 3 – Entire Site Excavation to 10 Feet

- Alternative 4 – Excavation of Site soils from both landscaped areas and beneath residential hardscape; existing institutional controls; sub-slab vapor intrusion mitigation; SVE/bioventing; LNAPL removal; groundwater MNA; and supplemental groundwater remediation. Three separate excavation alternatives in this category are evaluated in the FS Report:
 - Alternative 4B – Excavation to 3 feet bgs
 - Alternative 4C – Excavation to 5 feet bgs
 - Alternative 4D – Excavation to 10 feet bgs

- Alternative 5 – Excavation of Site soils from landscaped areas only; existing institutional controls; sub-slab vapor intrusion mitigation; SVE/bioventing; LNAPL removal; groundwater MNA; and supplemental groundwater remediation. Three separate excavation alternatives in this category are evaluated:
 - Alternative 5B – Excavation to 3 feet bgs
 - Alternative 5C – Excavation to 5 feet bgs
 - Alternative 5D – Excavation to 10 feet bgs

- Alternative 6 – Cap Site

- Alternative 7 – Capping the landscaped areas of the Site; existing institutional controls; sub-slab vapor intrusion mitigation; SVE/bioventing; LNAPL removal; groundwater MNA; and supplemental groundwater remediation

The preliminary remedial alternatives are screened to assess those which represent realistic approaches to Site cleanup (**Table 5-3**). In this screening step, three alternatives are eliminated: Alternatives 2, 3, and 6.

Remedial alternatives which are retained after screening (**Table 5-4**), and the specific technologies employed as part of those alternatives, then are evaluated against the following criteria (**Table 7-1**):

- Overall protection of human health and the environment
- Compliance with applicable or relevant and appropriate requirements (ARARs)
- Long-term effectiveness and permanence
- Reduction of toxicity, mobility, and volume through treatment

- Short-term effectiveness
- Implementability
- Cost
- Consistency with State Water Resources Control Board Resolution 92-49
- Social considerations
- Sustainability

Two additional criteria, State Acceptance and Community Acceptance, will be considered following public comment on the FS Report and on the RAP.

After the evaluation of alternatives is complete, the alternatives are compared against each other. This comparison, summarized below, leads to a recommended remedial alternative.

Alternative 1 does not provide treatment of the COCs, and therefore does not meet the requirement of overall protection of human health and the environment nor does it comply with ARARs.

Alternative 7 would have a very high social impact. A cap over all Site landscaped areas would likely decrease the aesthetic appeal of the community. All planting would need to be done above ground (such as in planters). This would likely have a more long-term effect on the community than any of the alternatives involving excavation.

The difference among Alternatives 4B, 4C, 4D and among 5B, 5C, 5D is the depth of excavation, which affects many of the evaluation criteria. Therefore, the comparative evaluation of these alternatives is a balancing of the benefits of deeper excavation versus the additional issues involved in deeper excavation. The City of Carson Building Code Section 8105, which amends the L.A. County Building Code Section 7003.1 is an existing institutional control that would limit, through permitting processes, contact with impacted soils beneath a depth of 3 feet. Since Alternatives 4B and 5B both would excavate impacted soils to a depth of 3 feet, the City of Carson Building Code is an institutional control which provides a regulatory basis for the protectiveness of excavation to 3 feet bgs.

Excavation to 5 or 10 feet bgs would require shoring of the excavation, setbacks from structures, sloped excavation sidewalls, and/or slot trenching in accordance with geotechnical requirements. These requirements may reduce the area of excavations and reduce the effectiveness of the alternative. Additionally, deeper excavation to 5 feet bgs or 10 feet bgs would result in more days when impacted soil would be exposed, and

therefore a greater potential exposure to the community and workers for a longer period than excavating to 3 feet bgs. This FS Report further shows that Alternatives 4D and 5D (excavation to 10 feet bgs) would not be implementable, for two key reasons. First, at properties where it is impractical for the necessary excavation equipment to be brought into residential back yards without removing the house; as a result, those yards could not be excavated to 10 feet. Second, the shoring, setbacks, sloped excavation sidewalls, and/or slot trenching requirements significantly reduce the effectiveness of excavation to 10 feet, even if it were implementable. Based on these comparisons, Alternatives 4B and 5B are preferred over the other alternatives with greater depths of excavation.

Alternative 4B differs from Alternative 5B in the approach to residential hardscape. In Alternative 4B, residential hardscape is removed and impacted soils are excavated to a depth of 3 feet prior to backfilling the excavation and replacing the hardscape. In Alternative 5B, no removal of residential hardscape occurs and no excavation is conducted beneath residential hardscape. This is a critical distinction, because the City of Carson does not require that homeowners obtain a permit or notify the City prior to removing residential hardscape from their property. Because of the lack of a permitting or notification requirement, Alternative 5B, which does not include excavation of impacted soils beneath residential hardscape, is not expected to be as protective as Alternative 4B which includes excavation beneath residential hardscape to 3 feet. For Alternative 5B to be protective, an additional land use covenant (LUC) or a notification system would be required to ensure notification to Shell for removal of residential hardscape or digging beneath residential hardscape. Such a LUC would not be effective absent homeowner agreement and cooperation.

Alternative 4B meets the threshold criterion of providing overall protection of human health and the environment and it complies with ARARs. It best balances the remaining evaluation criteria. Alternative 4B includes the following components: excavation of Site soils to 3 feet bgs from both landscaped areas and beneath residential hardscape; existing institutional controls; sub-slab vapor intrusion mitigation; SVE/bioventing; LNAPL removal; groundwater MNA; and supplemental groundwater remediation. Based on the evaluation presented in the FS Report, Alternative 4B is recommended and will be carried forward into the RAP, where more detail associated with its implementation is developed.

1. INTRODUCTION

1.1 Regulatory Basis

Geosyntec Consultants, Inc. (Geosyntec), with support from URS Corporation (URS), prepared this Feasibility Study Report (FS Report) for the former Kast Property (Site) in Carson, California on behalf of Equilon Enterprises LLC, doing business as Shell Oil Products US (Shell or SOPUS).

This FS Report, and companion Human Health Risk Assessment (HHRA) [Geosyntec, 2014] and Remedial Action Plan (RAP) [URS and Geosyntec, 2014], are being submitted concurrently as separate documents. Preparation of these documents follows a series of environmental investigations performed by URS and Geosyntec on Shell's behalf in response to Section 13267 letters issued to SOPUS by the Los Angeles Regional Water Quality Control Board (RWQCB or Regional Board) on May 8 and October 1, 2008 and November 18, 2009, Section 13304 letter dated October 15, 2009, and Cleanup and Abatement Order (CAO) R4-2011-0046 dated March 11, 2011.

Shell submitted a Revised Site-Specific Cleanup Goal Report (Revised SSCG Report) on October 21, 2013 [Geosyntec, 2013b] in response to a RWQCB directive in a letter of August 21, 2013. In the Revised SSCG Report, Shell conducted a Screening FS which included a general evaluation of various alternatives for remediation of the Site. In a letter from RWQCB dated January 23, 2014, RWQCB provided comments and directives to Shell [LARWQCB, 2014a]. The comments directed Shell to prepare a RAP including:

“Consistent with State Water Board Resolution 92-49, the RAP shall evaluate the alternatives with respect to effectiveness, feasibility, and cost and propose a remedy or remedies that have a substantial likelihood to achieve compliance, within a reasonable time frame, with the cleanup goals and objectives.”

This FS Report, submitted concurrently with the RAP and HHRA, fulfills this requirement with respect to evaluation of alternatives for remediation of the former Kast property, and it also meets the requirements set forth in CAO No. R4-2011-0046 issued to Shell by RWQCB on March 11, 2011. This FS replaces and updates the Screening FS included in the Revised SSCG Report, and contains a detailed evaluation of remedial alternatives as requested by RWQCB in their January 23, 2014 directive [LARWQCB, 2014a]. This FS Report is not required by RWQCB to be a CERCLA-compliant FS Report, but it follows the general form of the *Guidance for Conducting Remedial Investigations and Feasibility Studies Under CERCLA* (RI/FS Guidance) [USEPA, 1988].

RWQCB also directed Shell to use RWQCB-revised SSCGs in preparing the RAP and HHRA. The HHRA includes proposed modifications to certain of the soil SSCGs proposed by RWQCB to protect groundwater based on RWQCB's 1996 *Interim Site Assessment & Cleanup Guidebook* [LARWQCB, 1996]. The directed and modified SSCGs are presented in the HHRA and discussed in Section 3.2 of this FS Report. The SSCGs shown in these tables support unrestricted residential land use for the Site.

Additionally, RWQCB directed Shell to address recommendations from the UCLA Expert Panel, which was convened to provide input to RWQCB on Site cleanup. In its development and structure, this FS Report considers comments from the Expert Panel cautioning against eliminating remediation options prior to preparation of the RAP [UCLA Expert Panel, 2013]. The specific example provided by the Expert Panel to support this comment was that the Revised SSCG Report eliminated bioventing. Bioventing is now included in the FS Report, and is incorporated into most of the remedial alternatives. In addition to the inclusion of bioventing, this FS Report provides a broader assessment of applicable technologies (see Section 5) than was included in Screening FS included in the Revised SSCG Report.

1.2 Feasibility Study Report Objectives

The objective of this FS Report is to identify and screen remedial technologies capable of contributing to the Site cleanup, then to identify, screen and evaluate remedial alternatives capable of achieving the RAOs presented in the HHRA, leading to the recommendation of a remedial alternative for further development in the RAP.

1.3 Feasibility Study Organization

The remainder of this FS Report is organized as follows:

- **Section 2** provides Site background information;
- **Section 3** contains a brief summary of the remedial action objectives (RAOs), target risk levels, and identifies the resultant properties which require remediation;
- **Section 4** presents the identification and screening of technologies that may be used to remediate the former Kast Property;
- **Section 5** assembles the retained technologies into remedial alternatives, then screens these alternatives;
- **Section 6** presents the detailed evaluation of the retained remedial alternatives;

- **Section 7** provides a comparison of remedial alternatives to provide the basis for selection of a recommended alternative;
- **Section 8** summarizes the recommended alternative for further development in the RAP.

2. SITE BACKGROUND INFORMATION

2.1 Site History

The former Kast Property is a former petroleum storage facility that was operated by Shell Company of California and then Shell Oil Company from the mid-1920s to the mid-1960s. The property was sold to residential real estate developers who redeveloped it as the Carousel Community residential housing tract in the late 1960s. The Site is located in the City of Carson in the area inclusive of Marbella Avenue on the west side, Panama Avenue on the east side, E. 244th Street on the north side, and E. 249th Street on the south side (**Figure 2-1**). The Site is bordered by the Los Angeles County Metropolitan Transportation Authority (MTA) railroad tracks to the north (formerly owned by the BNSF Railway Company), Lomita Boulevard to the south, residential properties of the Monterey Pines Community and industrial property of the former Turco Products Facility to the west, and residential properties to the east (**Figure 2-2**).

Detailed Site background information, including information on historical Site operations, onsite structures formerly present, and Site demolition and development by the developers was provided in the Plume Delineation Report [URS, 2010a] and the Site Conceptual Model [Geosyntec, 2010], included as Appendix A to the Plume Delineation Report. The Site was undeveloped until 1923 when Shell Company of California purchased the 44-acre property from Mary Kast and constructed three oil storage reservoirs on the Site. Two of the reservoirs (the central and southern Reservoirs No. 5 and 6) had capacities of 750,000 barrels, and the third (northern Reservoir No. 7) had a capacity of 2 million barrels. The reservoirs were partially in-ground and partially aboveground and with earthen berms constructed using soils excavated from the below-ground portions of the reservoirs. The reservoirs had wire-mesh reinforced concrete-lined floors and side walls, and were covered with wood frame roofs supported by wooden posts on concrete pedestals [URS, 2010a]. The outer berms were 15 to 20 feet above surrounding grade, and the outer walls of the berms are believed to have been covered with asphalt. The oil storage reservoirs were primarily used to store crude oil. Historical records cited in the Plume Delineation Report [URS, 2010a] indicate that bunker oil or heavier intermediate refinery streams may also have been stored in the reservoirs at one time, but the time and quantity of bunker oil storage is unknown. The reservoirs were not used to store refined finished hydrocarbon products.

Site use remained as an active oil storage facility until approximately the late 1950s, when the Site became used on a standby reserve basis. In October of 1965, Shell Oil Company entered into a Purchase Option Agreement to sell the Site, with the oil storage reservoirs intact, to Richard Barclay or his nominee. Richard Barclay was a principal in

Barclay Hollander Curci, Inc., later renamed to Barclay Hollander Corporation (BHC), and Lomita Development Company (Lomita Development). Lomita Development was subsequently merged into Barclay Hollander Curci. BHC is now a wholly-owned subsidiary of Dole Food Company, Inc. (Dole).

In December 1965, Richard Barclay designated Lomita Development as his nominee for purchase of the Site. The property was evaluated for BHC and Lomita Development by Pacific Soils Engineering, which performed soil borings and developed engineering studies and grading plans for the Site. Beginning in 1966, BHC and its contractors conducted these studies, removed the remaining residual oil and water from the reservoirs, demolished the reservoirs and graded the Site. Lomita Development's request to rezone the Site from industrial to residential was approved by Los Angeles County in October 1966, and in the same month, title was transferred to Lomita Development under the Purchase Option Agreement. Construction of homes began in 1967 and was apparently completed in or around the early 1970s. The Site has remained residential since that time. More detailed information on the Site background is included in the Plume Delineation Report [URS, 2010a], in Appendix A [Geosyntec, 2010].

2.2 Regulatory Involvement

The Site came under the attention of the Regional Board in 2008 when environmental investigations for the neighboring former Turco Products Facility, located directly west of the Site, discovered contamination by petroleum hydrocarbons at sample locations within the former Kast Property. The Department of Toxic Substances Control (DTSC) communicated these findings to the Regional Board in March 2008, and in April 2008 the Regional Board sent an inquiry to Shell regarding the status of any environmental investigations at the Site. This inquiry was followed by the Regional Board's California Water Code (CWC) Section 13267 Order to Conduct an Environmental Investigation at the former Kast Property issued to Shell on May 8, 2008. Shell has conducted a series of investigations, pilot studies, and other environmental evaluations of the Site in response to that Order and subsequent 13267 Orders issued on October 1, 2008 and November 18, 2009, Section 13304 Order dated October 15, 2009, and Cleanup and Abatement Order (CAO) R4-2011-0046 dated March 11, 2011, as amended.

RWQCB's letter dated January 23, 2014 required that the RAP and supporting documents (including this FS) should address the comments by the Expert Panel, included as an attachment to that letter. This FS Report is being submitted in response to RWQCB's recommendation that a separate FS Report be prepared for this project [LARWQCB, 2014a]. This FS Report follows the general form of the *Guidance for Conducting Remedial Investigations and Feasibility Studies Under CERCLA (RI/FS*

Guidance) [USEPA, 1988]. The alternative recommended in this FS Report is further developed in the RAP.

2.3 Site Setting, Geology and Hydrogeology

The Site consists of approximately 44 acres occupied by 285 single-family residential properties and City streets collectively referred to as the Carousel Tract. It is located within the West Coast Basin of the Los Angeles Coastal Plain, approximately 3 miles northwest of Long Beach Harbor. The Site is relatively flat, with a gradual slope to the northwest. The elevation across the Site ranges from approximately 30 to 40 feet above mean sea level (msl). The Site is not located within a 100- or a 500-year Federal Emergency Management Agency (FEMA) designated flood zone [URS, 2008]. Historically, the Site area has been an oil production area, and active oil production wells are still present to the west and northwest of the Site. Due to historical oil production, the area directly south of the Site across Lomita Boulevard is designated as within the City of Los Angeles methane mitigation zone.

Geologically, the Basin consists of a very thick sequence of unconsolidated marine and continental sediments overlying consolidated sedimentary rocks that range in age from a few thousand years to tens of million years. Based on Site investigations, the upper 10 feet of soil beneath the Site generally is dominantly fine grained and consists of silt with layers or lenses of silty fine sand. Soils between 10 and 15 feet bgs consist primarily of silt and silty fine sand. From 15 to 85 feet bgs Site soils consist of fine sands to silty fine sand. Soils encountered between 85 and approximately 180 feet bgs consist of silt, silty sand, and fine to medium sand.

Shallowest groundwater encountered beneath the Site occurs within the Bellflower aquitard, an overall fine-grained unit that locally has sandy intervals. First groundwater occurs at a depth of approximately 53 feet beneath the Site, with a groundwater flow direction to the northeast [URS, 2014].

The Gage aquifer occurs beneath the Bellflower aquitard and extends from approximately 90 to 170 feet bgs. Groundwater flow direction in the Gage aquifer is to the east-northeast. The Lynwood aquifer, also known as the “400-foot Gravel,” and the deeper Silverado aquifer are located below the Gage aquifer and may be merged in the Site vicinity [DWR, 1961]. The Lynwood aquifer is dominated by coarse sand and gravel in the Site vicinity [Equilon, 2001]. These two aquifers extend from approximately 200 feet bgs to at least 550 feet bgs in the Site vicinity. The Lynwood and Silverado aquifers are major sources of groundwater for municipal drinking water wells in the Los Angeles Basin [Equilon, 2001]. However, neither the Gage aquifer,

nor the shallow Bellflower aquitard (in which the first regional unconfined groundwater was encountered at the Site) is a known source for drinking water in the Site area.

The nearest drinking water well, CWS Well 275, is located 435 feet west of the western Site boundary, upgradient of the Site and downgradient of the Former Fletcher Oil Refinery (**Figure 2-2**). CWS Well 275 produces water from the Lynwood and Silverado aquifers which are below 200 feet bgs in this area. Drinking water is supplied to the Carousel neighborhood and surrounding communities by California Water Services Company (Cal-Water), which regularly tests the drinking water to ensure that it meets state and federal drinking water standards. Information on the quality of water provided by Cal-Water is available from <https://www.calwater.com/docs/ccr/2012/rd-dom-2012.pdf>.

A significant body of additional background information for the Site is contained in the RAP [URS and Geosyntec, 2014].

2.4 Constituents of Concern

An initial step in the HHRA process is an evaluation of available data to identify media-specific COCs [Geosyntec, 2014]. Chemicals that were detected in at least one sample in a given media, were included in the COC selection process. A toxicity-concentration screen using conservative risk-based screening levels was then used to focus the list of COCs to those chemicals that have the potential to contribute significantly to potential risk at the Site [Geosyntec, 2013b]. In addition, the COC screening process for metals and carcinogenic PAHs (cPAHs as benzo(a)pyrene equivalents) included a comparison to background concentrations, with only those compounds exceeding background and the conservative risk-based screening level being selected as COCs for evaluation in the HHRA.

The COCs that have been identified for soil, sub-slab soil vapor, and soil vapor that were carried forward into the HHRA are summarized in **Table 2-1**.

As discussed in the Revised SSCG Report [Geosyntec, 2013b], some COCs may have migrated through the vadose zone to groundwater. However, based on groundwater data collected at and adjacent to the Site, it appears that the extent of the COCs in groundwater related to the Site is stable and decreasing. Furthermore, COC values in the downgradient wells near the Site boundary are below or very close to the MCLs and notification limits (NLs). Based on these facts and the age of the releases of COCs in the vadose zone (>~45 years), it is unlikely that significant additional groundwater impacts would result from the remaining soil impacts. However, COCs currently present in the vadose zone at the Site, which are also present in Site groundwater, may

theoretically represent a continuing source of potential groundwater contamination. To address this potential, soil COCs for the leaching to groundwater pathway were selected based on if the constituent was detected in groundwater above its respective maximum contaminant level (MCL) or notification level (NL). **Table 2-1** also includes the COCS that were identified for evaluation of potential leaching to groundwater in the HHRA.

Based on the results of the HHRA primary COCs identified for the Site include the petroleum hydrocarbons, TPH-diesel and TPH-motor oil, and petroleum related VOCs such as benzene, ethylbenzene and naphthalene. The remedy is designed to address these primary COCs and the other COCs identified in **Table 2-1**.

3. CLEANUP OBJECTIVES AND GOALS

3.1 Remedial Action Objectives

Medium-specific (i.e., soil, soil vapor, and groundwater) RAOs have been developed for the Site, and numerical target risk levels for the COCs have been developed to achieve the medium-specific RAOs. These medium-specific RAOs and target risk levels are included in the evaluation in this FS, including an analysis of economic and technological feasibility in accordance with State Water Resources Control Board Resolution 92-49 and other Applicable or Relevant and Appropriate Requirements (ARARs). RAOs provide the basis to identify the recommended remedial alternative that is then addressed in the RAP.

Various demarcations of acceptable risk have been established by regulatory agencies. The National Oil and Hazardous Substances Pollution Contingency Plan [NCP, 40 CFR 300] indicates that lifetime incremental cancer risks posed by a site should not exceed a range of one in one million (1×10^{-6}) to one hundred in one million (1×10^{-4}) and that noncarcinogenic chemicals should not be present at levels expected to cause adverse health effects (i.e., a Hazard Quotient [HQ] greater than 1). In addition, other relevant guidance [USEPA, 1991] states that sites posing a cumulative cancer risk of less than 1×10^{-4} and hazard indices less than unity (1) for noncancer endpoints are generally not considered to pose a significant risk warranting remediation. The California Hazardous Substances Account Act (HSAA) incorporates the NCP by reference, and thus also incorporates the acceptable risk range set forth in the NCP. In California, the Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65) regulates chemical exposures to the general population and is based on an acceptable risk level of 1×10^{-5} . The California Department of Toxic Substances Control (DTSC) considers the 1×10^{-6} risk level as the generally accepted point of departure for risk management decisions for unrestricted land use. Cumulative cancer risks in the range of 1×10^{-6} to 1×10^{-4} may therefore be considered to be acceptable, with cancer risks less than 1×10^{-6} considered *de minimis*. The risk range and target hazard index has been considered in developing RAOs based on human health exposures to soil and soil vapor. For groundwater and the soil leaching to groundwater pathway, water quality objectives in the Basin Plan to protect the designated beneficial uses, including municipal supply, have been considered.

The following RAOs are proposed for the Site based on the above and site-specific considerations:

- Prevent human exposures to concentrations of COCs in soil, soil vapor, and indoor air such that total (i.e., cumulative) lifetime incremental carcinogenic

risks are within the NCP risk range of 1×10^{-6} to 1×10^{-4} and noncancer hazard indices are less than 1 or concentrations are below background, whichever is higher. Potential human exposures include onsite residents and construction and utility maintenance workers. For onsite residents, the lower end of the NCP risk range (i.e., 1×10^{-6}) and a noncancer hazard index less than 1 have been used.

- Prevent fire/explosion risks in indoor air and/or enclosed spaces (e.g., utility vaults) due to the accumulation of methane generated from the anaerobic biodegradation of petroleum hydrocarbons in soils. Eliminate methane in the subsurface to the extent technologically and economically feasible.
- Remove or treat LNAPL to the extent technologically and economically feasible, and where a significant reduction in current and future risk to groundwater will result.
- Reduce COCs in groundwater to the extent technologically and economically feasible to achieve, at a minimum, the water quality objectives in the Basin Plan to protect the designated beneficial uses, including municipal supply.

A further consideration is to maintain residential land-use of the Site and avoid displacing residents from their homes or physically divide the established Carousel community.

3.2 Site-Specific Cleanup Goals

Medium-specific SSCGs for soil, soil vapor, and groundwater have been designed along with the results of the HHRA to achieve these RAOs. The SSCGs were developed using the guidance documents and agency policies identified by the Regional Board, as well as other applicable resources. The SSCGs for each medium are summarized below.

3.2.1 Soil

SSCGs for soil were calculated considering human health exposure pathways (i.e., risk-based SSCGs), and the leaching to groundwater pathway. Risk-based SSCGs were developed using a methodology and approach similar to that used to conduct the property-specific HHRSEs. Risk-based SSCGs for the residential scenario are based on: (1) frequent exposure assumptions (350 days per year) for shallow soil (e.g., from 0 to 5 feet bgs), and (2) infrequent exposure assumptions (4 days per year) for soils at depth that residents are unlikely to contact more than a few times per year (e.g., from 5 to 10 feet bgs). Risk-based SSCGs for the construction and utility maintenance worker scenario are developed assuming exposures can occur to soil at depths from 0 to 10 feet

below ground surface (bgs). Soil SSCGs for the leaching to groundwater pathway are calculated following methods recommended in RWQCB's "*Interim Site Assessment & Cleanup Guidebook*" [LARWQCB, 1996].

- The Soil SSCGs for residential exposures are chemical-specific numerical values for COCs assuming a target incremental cancer risk of 1×10^{-6} and a hazard quotient of 1. These numerical target risk levels are calculated for both frequent and infrequent exposure assumptions.
- The Soil SSCGs for construction and utility maintenance worker exposures are chemical-specific numerical values for COCs assuming a target incremental cancer risk of 1×10^{-5} and a hazard quotient of 1.
- The Soil SSCGs for the leaching to groundwater pathway are chemical-specific numerical values for COCs based on protection of groundwater to California Maximum Contaminant Levels (MCLs), Notification Levels (NLs), or risk-based values for COCs with no published MCL or NL.

As described in the HHRA, the soil SSCGs for the leaching to groundwater pathway are different than those listed in Table 1 of the January 23, 2014 RWQCB letter directing Shell to submit this RAP. The soil SSCGs for the leaching to groundwater pathway follow the methods presented in RWQCB's "*Interim Site Assessment & Cleanup Guidebook*" [LARWQCB, 1996]. Details of these soil SSCG calculations are provided in the HHRA [Geosyntec, 2014] and the results are presented in **Table 3-1**.

3.2.2 Soil Vapor

As requested in the January 23, 2014 RWQCB letter soil vapor SSCGs for the residential exposures have been calculated assuming a vapor intrusion attenuation factor of 0.002. Odor-based screening levels also have been developed and were considered. The odor-based screening levels for soil vapor published in the San Francisco Bay Regional Water Quality Control Board Environmental Screening Level documentation [SFBRWQCB, 2013] are used. Note that the risk-based SSCGs are lower than the odor-based screening levels for all COCs. Consequently, remedial planning to address risk-based SSCGs will also address odor concerns.

The SSCGs for construction and utility maintenance worker exposures are chemical-specific numerical values for COCs assuming a target incremental cancer risk of 1×10^{-5} and a hazard quotient of 1. These numerical SSCGs will be applied to soil vapor from 0 to 10 feet bgs. The soil vapor SSCGs are presented in **Table 3-2**.

The SSCGs for methane are the same as those presented in the Data Evaluation and Decision Matrix previously prepared for the Site. These SSCGs are consistent with

California Environmental Protection Agency Department of Toxic Substances Control [Cal-EPA DTSC, 2005] guidance for addressing methane detected at school sites.

Methane Level	Response
>10%LEL (> 5,000 ppmv or 0.5%) Soil vapor pressure > 13.9 in H ₂ O	Evaluate engineering controls
> 2% - 10%LEL (> 1,000 - 5,000 ppmv) Soil vapor pressure > 2.8 in H ₂ O	Perform follow-up sampling and evaluate engineering controls

3.2.3 Soil Leaching to Groundwater

Because no current or future use of the Shallow Zone and Gage aquifer at or near the Site is anticipated due to high total dissolved solids and other water quality issues, as well as the restrictive controls on groundwater production associated with the adjudication of the West Basin, the following groundwater SSCGs are proposed for the Site (consistent with the RAOs):

- Remove or treat LNAPL to the extent technologically and economically feasible, and where a significant reduction in current and future risk to groundwater will result, and
- Reduce concentrations of COCs in groundwater to the extent technologically and economically feasible to achieve, at a minimum, the water quality objectives in the Basin Plan to protect the designated beneficial uses, including municipal supply.

The SSCGs are shown in **Table 3-1** (soil) and **Table 3-2** (soil vapor).

3.2.4 Cumulative Risk and Potential Leaching to Groundwater Analysis using SSCGs

To evaluate potential human health risk or potential for leaching to groundwater, the SSCGs presented above were used. These values were used to calculate cumulative incremental lifetime cancer risk (ILCR) and noncancer Hazard Indices estimates for each property and the streets for the exposure pathways and media presented above. For potential leaching to groundwater, the SSCGs were compared to the property-specific and streets soil data as well.

The results of the cumulative human health risk and noncancer evaluation as well as the evaluation of potential leaching to groundwater were combined to form an overall risk characterization of each property. Properties that did not meet the RAOs were identified for further evaluation in the FS and RAP.

3.3 Properties Requiring Remediation

The results of the HHRA are presented on **Figures 3-1, 3-2 and 3-3**. **Figure 3-1** shows soils impacted above RAOs at depths of ≤ 5 feet bgs; **Figure 3-2** shows soils impacted above RAOs at depths of >5 to ≤ 10 feet bgs; and **Figure 3-3** shows properties which will receive vapor intrusion mitigation.

Table 3-3 presents the property addresses that exceeded the lower bound of the risk management range for ILCR and a noncancer hazard index of 1 for soil and sub-slab soil vapor, respectively. In addition, soil leaching to groundwater and metals present above background are considered. These properties along with impacts in the Streets are identified as not meeting the RAOs established for the Site and are considered further in remedial planning.

The number of properties requiring remediation are as follows:

Medium	Depth	Number of Properties with Exceedances
Soil	≤ 5 ft bgs	183
Soil	≤ 5 ft bgs and >5 to ≤ 10 ft bgs combined	214
Soil Vapor	Sub-slab	27

4. IDENTIFICATION AND SCREENING OF REMEDIAL TECHNOLOGIES

4.1 Introduction

Remedial technologies that may be used to meet remedial action objectives (RAOs) presented in Section 3 of this FS Report are identified and screened in this section. Technologies in remedial actions mitigate exposure either through elimination of exposure pathways or through removal of COC mass in one or more of the affected media (i.e., soil, soil vapor, or groundwater). In Section 4.2, a range of remedial technologies is identified that have potential applicability to the Site. In Section 4.3, these technologies are screened using three criteria: effectiveness, implementability, and cost. Section 4.4 provides a list of retained remedial technologies that are assembled into preliminary remedial alternatives in Section 5.

4.2 Identification of Remedial Technologies

4.2.1 Technologies that Interrupt the Human Health Exposure Pathway

The following technologies interrupt the human health exposure pathway:

- Sub-slab vapor intrusion mitigation, which may include the installation of passive barriers, passive venting, or active sub-slab depressurization;
- Capping portions of the Site, which involves the placement of cover over the impacted media;
- Removal of all Site features; and
- Institutional controls, which restrict access to impacted media.

Each of these technologies is discussed in the following subsections.

4.2.1.1 Sub-slab Vapor Intrusion Mitigation

Sub-slab vapor intrusion mitigation can take several forms. Passive barriers are materials or structures installed below a building to physically block the entry of vapors. Passive barriers ideally cause soil vapor that would otherwise enter an overlying building under diffusion or pressure gradients to migrate laterally beyond the building footprint.

Passive venting involves placing a venting layer below a building foundation to allow soil vapor to move laterally beyond the building footprint under natural diffusion

gradients (resulting from the buildup of soil vapor below the building) or pressure (thermal or wind-created) gradients.

Sub-slab depressurization (SSD) is widely considered the most practical sub-slab vapor intrusion mitigation strategy for most existing and new structures, including those with basement slabs or slab-on-grade foundations [DTSC, 2011]. SSD systems function by creating a pressure differential across the slab that favors movement of indoor air downward into the subsurface. Vapor extraction points are placed beneath the slab and vapors are extracted. This is accomplished by pulling soil vapors from beneath the slab and venting them to the atmosphere at a height above the outdoor breathing zone and away from windows and air supply intakes.

The use of sub-slab vapor intrusion mitigation technologies can be effective at interrupting the human health exposure pathway to subsurface vapor sources. As noted above, analysis of the vapor intrusion pathway presented in the Revised SSCG Report indicated that vapor intrusion is not a significant pathway at the Site, and that observed concentrations in indoor air are likely due to background sources. However, this technology may be considered as a protective measure based on the analysis in the HHRA.

4.2.1.2 Capping Portions of the Site

Capping involves placing a protective barrier, consisting of a cover, or “cap”, over impacted material such as impacted soil. Caps do not destroy or remove contaminants. Instead, they isolate COCs and keep them in place to avoid their spread and to prevent human and ecological receptors from contacting them. Various types of caps may be employed depending on Site-specific variables. Types of Site caps may include clean soil, synthetic fibers, clay, asphalt, concrete, marker beds or layers, and chemical or other types of sprays that can solidify a Site surface. Additionally, existing covers (e.g., clean soils, concrete foundations and floor slabs of houses, sidewalks, street pavement, etc.) may provide a protective barrier to minimize the potential for exposure to impacted soil below.

4.2.1.3 Removal of All Site Features

The removal of all Site features would include the removal of all houses, landscape, hardscape, roads, and utilities through various demolition and excavation methods.

4.2.1.4 Institutional Controls

Institutional controls consist of administrative steps that may be used, in conjunction with other technologies or as a stand-alone approach, to minimize the potential for exposure and/or protect the integrity of a response action. Institutional controls are commonly utilized at sites to achieve cleanup objectives, and can take many forms [USEPA, 2012b]. At the former Kast Property, institutional controls may include reliance on existing LA County and City of Carson code provisions and permitting processes so that current and future residents are made aware of residual impacts and are restricted from exposure to residual impacts. Other land use covenants (LUC) also may be appropriate for the Site. Under certain remedial scenarios, a new LUC would be required to prohibit residential hardscape removal, but it would not be effective absent homeowner agreement and cooperation.

In their January 23, 2014 letter, RWQCB states that excavation to a depth requiring a grading permit under L.A. County Building Code “is supportive of unrestricted residential use because institutional controls are already in place...” [LARWQCB, 2014a]. RWQCB notes that in the Carousel Tract, the L.A. County Building Code is administered by the City of Carson. RWQCB states as follows: “Because the City of Carson must be notified and approve excavations below five feet, the City could readily inform residents and workers of other appropriate precautions necessary for excavations below five feet through existing administrative processes.” The L.A. County Building Code, therefore, acts as an applicable or relevant and appropriate requirement (ARAR) for excavations deeper than five feet at the Site.

While the statements above refer to the County requirement of Grading Permits for excavations 5 feet or deeper, the City of Carson has amended the L.A. County Building Code Section 7003.1 to require a Grading Permit for excavations 3 feet or deeper. City of Carson Building Code Section 8105 (amending the L.A. County Building Code) states that:

“A Grading Permit shall not be required for:

“1. An excavation which (a) is less than three (3) feet in depth below natural grade, or (b) does not create a cut slope greater than three (3) feet in height and steeper than one and one-half (1-1/2) horizontal to one (1) vertical.

“2. A fill not intended to support structures and which does not obstruct a drainage course if such fill is placed on natural grade that has a slope not steeper than three (3) horizontal to one (1) vertical and (a) is less than one (1) foot in depth at its deepest point, measured vertically upward from natural

grade to the surface of the fill, or (b) does not exceed twenty (20) cubic yards on any one (1) lot.”

Adopting RWQCB’s logic regarding notifications for excavations deeper than five feet, it is logical to conclude that because the City must be notified and approve excavations deeper than 3 feet, the City could readily inform residents and workers of other appropriate precautions necessary for excavations below 3 feet through existing administrative processes, and also notify Shell that monitoring and disposal may be required.

Because an institutional control is already in place in the City of Carson requiring grading permits in order to excavate at depths below 3 feet, these requirements would not interfere with a homeowner’s unrestricted use and enjoyment of his or her property.

Although the existing institutional controls are fully protective, Shell and other responsible parties have experience with an enhancement to an institutional controls program that Shell would be willing to discuss with RWQCB. An example of such an enhancement is in use at the Del Amo Soil and NAPL OU site.¹

¹ At the Del Amo Soil and NAPL OU site, the site remedy includes multiple layers of institutional controls (ICs) used in conjunction to protect site workers and the public from potential exposure to site contaminants. One of the layers of the ICs is called the “Permit Review IC”, which is currently active as a pilot program. For this Permit Review IC, the responsible parties (including Shell), USEPA, and DTSC worked together with the City of Los Angeles to place “flags” in the Los Angeles Department of Planning’s Zoning Information and Map Access System (ZIMAS) database for the parcels that make up the Del Amo site. Flags alert City staff and applicants of special conditions or restrictions that apply to a specific parcel. These flags provide information and instructions to City employees and permit applicants who propose development in identified locations that require grading/excavation or building permits. The flag informs the user that the parcel’s location requires contact with EPA’s project team for an environmental review. As building permit applications are reviewed by the City of Los Angeles Building and Safety Department, applicants are referred to EPA’s Environmental Review Team (ERT) to review construction plans and determine whether contaminated soil or groundwater would be encountered. The ERT is currently composed of EPA, DTSC, along with the responsible parties.

With this IC pilot program, the responsible parties serve as the point of contact for permit applicants. The responsible parties conduct an initial review by obtaining information from the applicant regarding the nature of the proposed construction project, proposed land use, and locations and depths of excavations. If the proposed project involves applicable soil penetration, EPA issues a letter to the applicant that outlines specifies actions to be taken prior to or during the construction process that are necessary to protect human health and the environment, or that states that the project can proceed without further evaluation.

4.2.2 Technologies that Remove COC Mass and Interrupt the Human Health Exposure Pathway

Technologies that remove COC mass in addition to interrupting the human health exposure pathway can operate through physical removal processes, such as excavation, as well as through chemical or biological processes. The following technologies have been evaluated for their capacity to remove COC mass from the Site, or to assist with implementation of another technology in removing COC mass from the Site.

- Excavation
 - Lifting and cribbing houses (assists in removing mass)
 - Temporarily moving houses (assists in removing mass)
 - Removal of residual concrete slabs (assists in removing mass)
- Soil vapor extraction (SVE)
- Bioventing
- In-situ chemical oxidation (ISCO)
- LNAPL/source removal
- Monitored natural attenuation (MNA)
- Supplemental groundwater remediation

Each of these technologies is discussed in the following subsections.

4.2.2.1 Excavation

Excavation involves digging up impacted soils and other buried debris for above-ground treatment or for onsite or offsite disposal. Impacted soil may be excavated using standard construction equipment such as backhoes, excavator trackhoes, and hand tools. The equipment chosen depends on the areal extent and depth of excavation, and whether access is limited by the presence of buildings or other structures that cannot feasibly be moved. Removing impacted materials reduces COC mass at the Site and interrupts the human health exposure pathway. After excavation, clean backfill materials are emplaced and the impacted areas are restored.

A number of technologies closely related to excavation are discussed below.

4.2.2.1.1 Lifting and Cribbing Houses

Houses can be detached from their foundations and floor slabs so they can be lifted and cribbed to allow implementation of other technologies (e.g., excavation, installation of a passive barrier and/or passive venting system) beneath the footprint of the house. Cribbing to temporarily support the lifted structure would take place outside of the house footprint to allow excavation below. Lifting of houses would include cutting and capping utilities; demolition of drywall, cabinets, toilets, and tub/showers from ground level to 4 feet high; demolition of fireplaces; installation of beams that attach to each wall; unbolting walls from the building foundation; and lifting the house. The structure would then be supported on cribbing to 4 feet high to allow excavation of impacted soil; backfill with clean soil; form and pour new foundation; place the house back down on new foundation and attach; remove cribbing materials; restore interior walls, cabinets, toilets, tub/showers; replace fireplace; and reconnect utilities.

4.2.2.1.2 Temporarily Moving Houses

Houses could be temporarily moved to implement other technologies (e.g., excavation, installation of a passive barrier and/or passive venting system). This involves similar challenges to lifting and cribbing a house, except that instead of cribbing the house, the house is loaded onto a trailer and moved off the lot.

Utilization of this technology would require identification of a vacant lot nearby and procuring it for temporary house storage. Houses may need to be sectioned into pieces small enough to be moved on City streets. Security would need to be obtained to protect the house until it could be replaced on a new foundation and restored.

4.2.2.1.3 Removal of Residual Concrete Slabs

Residual concrete reservoir slabs and side walls from the former oil storage reservoirs are present beneath portions of the Site. These could be removed, along with impacted soils, when encountered during excavation.

4.2.2.2 Soil Vapor Extraction (SVE)

SVE systems extract impacted vapors from below ground for treatment above ground. The vapors are removed from the unsaturated zone by applying a vacuum to soils to volatilize VOCs and volatile hydrocarbons and remove impacted vapor. SVE involves drilling one or more extraction wells into the impacted soil to a depth above the water table, which must typically be deeper than about 3 feet below the ground surface [USEPA, 2012a]. Attached to the wells is equipment (e.g., a blower or vacuum pump)

that creates a vacuum. The vacuum pulls air and vapors through the soil and into the well, then to an above-ground treatment system prior to discharge to the atmosphere.

4.2.2.3 Bioventing

Bioventing is an in-situ remediation technology that enhances the ability of existing microorganisms in soil to biodegrade organic constituents adsorbed on soils in the unsaturated zone. Bioventing enhances the activity of indigenous bacteria and stimulates the natural in-situ biodegradation of contaminants in soil by supplying oxygen into the subsurface. During bioventing, oxygen may be supplied through direct air injection into impacted soil through wells, by drawing air into soils by vapor extraction, or the process may proceed without added oxygen.

Bioventing primarily assists in the degradation of adsorbed fuel residuals, but also assists in the degradation of VOCs as vapors move slowly through biologically active soil. Bioventing can be used to treat all aerobically biodegradable constituents; however, it has proven to be particularly effective by comparison with SVE in remediating releases of petroleum products including gasoline, diesel fuel, kerosene, and jet fuel. Lighter products such as gasoline tend to volatilize readily and can be removed more rapidly using SVE. Heavier products such as lubricating oils generally take longer to biodegrade.

4.2.2.4 In-Situ Chemical Oxidation (ISCO)

ISCO involves the introduction of a chemical oxidant into the subsurface for the purpose of transforming groundwater or soil contaminants into less harmful chemical species. ISCO can be used to reduce contaminant mass and concentrations in soil and groundwater, reduce contaminant mass flux, and to reduce anticipated cleanup times required for MNA and other remedial options. ISCO is typically performed by drilling injection wells and directly injecting chemical oxidants into the affected soil or groundwater.

4.2.2.5 Light Non-Aqueous Phase Liquid (LNAPL) Removal

LNAPL removal in localized areas, such as through pumping at or beneath the surface of groundwater in monitoring wells, would likely reduce source mass/concentration gradients and shorten the time over which COC concentrations would return to background or MCL levels.

4.2.2.6 Monitored Natural Attenuation (MNA)

MNA relies on naturally-occurring processes to decrease concentrations of chemical constituents in groundwater. Natural processes include a variety of physical, chemical, or biological processes which, under favorable conditions, act without human intervention to reduce the mass, toxicity, mobility, volume, or concentration of constituents in groundwater. Monitoring is performed to assess the decrease in concentrations of COCs through time. Implementation of MNA is generally conducted once sources have been reduced or eliminated. With respect to Site groundwater, MNA would apply both to onsite and to offsite sources.

4.2.2.7 Supplemental Groundwater Remediation

There are several technologies that may be used to treat groundwater contaminants. Many of them involve pumping groundwater to the surface to treat, which increases the potential for exposure to identified receptors and requires either discharge or reinjection of treated water. To limit exposure and management of treated water, the most likely groundwater treatment remedy for these targeted source areas will involve in-situ treatment. Should supplemental groundwater treatment be warranted (i.e., concentrations of Site-related COCs are not stable or declining), a pilot test of the most appropriate in-situ technology using injection of chemical oxidants into the localized areas would be conducted and the supplemental groundwater treatment implemented.

4.3 Screening of Remedial Technologies

In this section, potential remedial technologies are screened on the basis of effectiveness, implementability, and cost. **Table 4-1** shows identified remedial technologies, screening criteria, and screening results.

4.3.1 Sub-Slab Vapor Intrusion Mitigation

Based on a multiple-lines-of-evidence evaluation, there does not appear to be a measurable contribution of COCs from sub-slab vapor to indoor air. Nevertheless, sub-slab vapor intrusion mitigation at a limited number of properties where sub-slab soil vapor concentrations exceed soil vapor RAOs is technologically implementable, effective as a protective measure, and cost-effective. It has been retained for inclusion in remedial alternatives.

4.3.2 Capping Portions of the Site

As a technology, capping can be quite effective at interrupting the human health exposure pathway. It would not reduce the mass of COCs present in Site soils, but

capping would reduce infiltration and potential migration of COCs to groundwater. Capping is technologically implementable, effective, and cost-effective. Capping has been retained for inclusion in remedial alternatives.

4.3.3 Removal of All Site Features

The removal of all Site features to facilitate the use of other remedial technologies (e.g., excavation or capping) would be effective. This alternative would be very difficult to implement. Every resident within the Site would have to agree to relocate and all 285 houses would be razed. If some homeowners declined to move, the presence of some residents would make it untenable to remove all of the surrounding houses, streets and utilities. Permits for this remedial alternative would be difficult to obtain. COC-impacted and non-impacted soil, as well as other construction debris from the razed structures (including asbestos), would be hauled to or from the Site by truck or by a newly-constructed rail spur. It is very unlikely that this alternative would be selected due to the need for complete participation from the all homeowners and residents, the anticipated public reactions from residential and commercial areas proximate to the Site, environmental effects, traffic impacts and permitting difficulties. The removal of all Site features, however, has been retained for consideration in remedial alternatives to assess feasibility associated with a potential change in end land use.

4.3.4 Institutional Controls

Institutional controls already are in place for excavations 3 feet or deeper at the Site. The City of Carson Building Code Section 8105, which amends the L.A. County Building Code Section 7003.1, is an existing institutional control that would limit, through permitting processes, contact with impacted soils beneath a depth of 3 feet. This existing institutional control support the planned 3-foot soil excavation remedy. Because of this code provision, the City must be notified and approve excavations deeper than 3 feet. The City could readily inform residents and workers of other appropriate precautions necessary for excavations below 3 feet through existing administrative processes, and also notify Shell that monitoring and disposal may be required.

Shell would coordinate with the City of Carson to establish a process through existing building and grading permit reviews, General Plan overlay or footnote, area plan, or similar process, to ensure that if a property owner were to conduct activities involving excavations greater than 3 feet deep (such as building renovation, installation of a pool or deeper landscape alterations), Shell would be notified so that the company could arrange for sampling and proper handling of impacted soils.

Because an institutional control is already in place in the City of Carson requiring grading permits in order to excavate at depths below 3 feet, these requirements would not interfere with a homeowner's unrestricted property use and enjoyment. Depending on the selected remedy, LUCs (e.g., restrictive covenants, easements), may also may be appropriate to fully implement remedial alternatives for the Site. Under certain remedial scenarios, a new LUC would be required to prohibit residential hardscape removal, but it would not be effective absent homeowner agreement and cooperation.

Additionally, Shell's contractors are, and would continue to be, set up within the Underground Service Alert (USA) one-call system to receive notification of planned excavation work in the Carousel Tract. Upon notification of planned excavations, the Shell or their contractors would coordinate with the entity that contacted USA (whether the homeowner or their representative, a homeowner's contractor, or utility company such as Cal-Water, Southern California Gas Company, or AT&T) to provide monitoring and management and handling of residual soils during excavation activities.

If excavation of soil is necessary for residential or utility service provider construction activities, it is likely that impacted soil would not suitable for reuse. If requested by the property owner or utility service provider, Shell would arrange for the removal, transportation, and offsite disposal of impacted soil by a qualified waste contractor. If potentially impacted soil is observed during urgent or emergency construction activities (e.g., a gas line repair), and an authorized representative is not onsite, Shell should be notified as early as possible to allow the material to be profiled and properly disposed. If Site soils are being excavated on an urgent basis, the property owner or contractor should ensure that potentially impacted soil is segregated and stockpiled to allow for proper soil profiling and management.

After receiving notification that potentially impacted soil could be encountered during the course of construction activities, Shell would arrange for a contractor to collect samples of the soil (either in-situ or from a segregated stockpile) for profiling purposes if an updated waste profile is needed.

To the extent possible, impacted soil would be direct-loaded into approved waste containers for transport to the appropriate recycling or disposal facility. With advance notice, Shell would provide suitable containers based on the nature of the excavation work being conducted. In the event that it is necessary to temporarily stockpile soil onsite before loading, soils should be placed upon plastic sheeting and covered with plastic until they could be loaded into approved waste containers to be provided by the responsible party.

Excavated impacted soil would be transported offsite to appropriately licensed recycling/disposal facilities by a state-licensed waste hauler for appropriate recycling or disposal. To the extent possible, soils would be pre-profiled, and approval would be obtained from the recycling/disposal facilities before excavation activities begin. Documentation pertaining to waste disposal profiles and waste disposal acceptance would be in place prior to offsite shipments of waste.

Institutional controls are technologically implementable, effective, and cost-effective. They have been retained for inclusion in remedial alternatives.

4.3.5 Excavation

Excavation of the entire Site would involve the removal of Site features, such as houses, landscape, hardscape, roads, and utilities. While that may be technologically implementable and effective in removing impacted soils, assuming that all of the homeowners and residents agreed to permanently relocate, it could be accomplished only at exceptionally high cost, and only a limited reduction of risk would be achieved by razing of the houses and removal of the streets given that the data collected indicate an incomplete pathway from soils beneath the houses and street. Moreover, any marginal improvement to groundwater resulting from Site-wide removal of structures would be greatly outweighed by the high economic and social costs involved. By contrast, selective excavation of the Site around existing structures in combination with institutional controls is effective and implementable. Selective excavation would remove most of the impacted soils for which a human exposure pathway is complete.

During selective excavation, several considerations would minimize negative impacts. Best practices would be utilized so that utilities would be safely located and avoided, efficient equipment would be employed, materials would be handled safely, and dust, vapor, and odors would be controlled. Noise impacts to the community could be managed to below maximum allowable levels per the City noise ordinance for the majority of excavation activities when conditions allow use of sound attenuation panels. Noise levels may be exceeded when it would not be feasible to use sound attenuation panels. After excavation, restoration of landscape and hardscape would be required.

Because selective excavation is potentially effective, implementable, and economically feasible, it is retained for inclusion in remedial alternatives.

4.3.5.1 Lifting and Cribbing Houses

Lifting and cribbing houses, to allow for excavation beneath, is feasible in concept. However, actual implementation would be very difficult. It would require relocating

the residents, moving contents out of the houses, and as described in Section 4.2.2.8, essentially demolishing the lower portion of the house to install beams that would be used to lift the house. Based on the age of the construction and experience with other houses in the community, this activity also would require asbestos and lead-based paint surveys and, potentially, abatement of asbestos. After completion of remediation work, a new foundation would be poured, the house would be replaced, and restoration would begin, which would typically take a minimum of 4 weeks for concrete curing and an additional 2 weeks for completion of utility restoration. The estimated cost to lift and crib a single story house would be approximately \$25,000 to \$30,000 (add an additional 20% for a two-story house), not including the estimated cost of the new foundation. The total estimated cost to restore a house would be in the range \$75,000 to \$100,000 or higher. These costs do not include the estimated costs of excavation and backfill beneath the house, which would need to be done by hand. Backfill materials alone would cost about \$21,000 per house. The hand-excavation and backfill work would be extremely hazardous to personnel performing the labor and would not be consistent with Shell's EHS guidelines/rules. This technology has not been retained for consideration in remedial alternatives due to the safety concerns, long time for completion, the extended period of resident relocation and inconvenience, and the lack of clear benefit achieved.

4.3.5.2 Temporarily Moving Houses

Temporarily moving houses, in order to perform remediation work beneath them, is technologically feasible. However, implementation would be very difficult. As with lifting and cribbing a house, moving a house would require relocating the residents, removing contents from the house, and essentially demolishing the lower portion of the house to install beams that would be used to lift the house onto a trailer, possibly in sections, and moving it to another lot. Based on the age of the construction and experience with other houses in the community, this activity would also require asbestos and lead-based paint surveys and, potentially, abatement of asbestos. After completion of remediation work, a new foundation would be poured, the house would be replaced, and restoration would begin, which would typically take a minimum of 4 weeks for concrete curing and an additional 2 weeks for completion of utility restoration. There are not existing locations within the Carousel Tract to temporarily relocate houses, and an offsite location would need to be identified and procured. The estimated costs associated with temporarily moving houses are anticipated to be similar to, or higher than, the estimated costs of lifting and cribbing houses, which are very high relative to the estimated cost of the house; however, some safety concerns could be mitigated. The time to completion and disruption to residents would be significant while the additional benefit obtained would be minimal. This technology has not been

retained for consideration in remedial alternatives due to the safety concerns, long time for completion, the extended period of resident relocation and inconvenience, and the lack of clear benefit achieved.

4.3.5.3 Removal of Residual Concrete Slabs Where Encountered in Excavations

Per requirements in the CAO, URS prepared an assessment of the environmental impact and the feasibility of removal of residual concrete reservoir slabs [URS, 2013a]. This assessment summarized historical information regarding activities of the developer during demolition of the residual concrete slabs and reservoir sidewalls, and findings from investigations that provide information on the location, depth and condition of the slabs.

The concrete reservoir slab assessment concluded that nothing about the former reservoir slabs would indicate a specific need for their removal [URS, 2013a]. During one of the excavation pilot tests, portions of the concrete reservoir slab beneath the front yard of a property were excavated, broken up and removed. Based on the need for setbacks from existing structures, it was possible to remove the concrete reservoir base only from approximately 5.3% of the yard of the residential property where the deep pilot test excavation was conducted, and the area of slabs that could be removed from most other lots would be considerably less. The report concluded that removal of slabs beneath paved areas or houses would require the demolition of City streets and houses, which would have significant social, economic and environmental impact on the residents of the Carousel Tract and the local community. URS and Geosyntec concluded that the concrete reservoir slabs do not require removal from an environmental or human health perspective and the impacts associated with their removal far outweigh the benefits of removal. Removal of residual concrete slabs where/if they are encountered during excavation, should excavation be implemented, would be feasible.

RWQCB commented on the reservoir slab assessment report in its letter dated January 8, 2014. RWQCB clarified its position and revised its comments on the reservoir slab assessment in its letter of February 10, 2014 [LARWQCB, 2014b]. The reservoir slabs are addressed in this FS based on RWQCB's clarification letter.

4.3.6 Soil Vapor Extraction (SVE)

SVE pilot tests were conducted to evaluate the potential effectiveness of using SVE to remove vapor-phase VOCs from subsurface. Details of the SVE pilot test activities and results are in the Soil Vapor Extraction Pilot Test Report [URS, 2010b] and Final Pilot Test Summary Report – Part 1 [URS, 2013b], and Final Pilot Test Summary Report –

Part 2 [URS and Geosyntec, 2013]. The SVE well configuration at the Site would be based on the average effective ROVI from the pilot test results.

SVE could be operated with a bioventing system by cycling the extraction from the SVE well field in sets of wells. Cycling of the system would promote oxygenation of the subsurface which would enhance the biodegradation of residual petroleum hydrocarbons. It is expected that recovered vapors from SVE system operation would decline through time and SVE operation could be discontinued in some wells and shifted to other parts of the Site. In this case, the wells would still need to be operated periodically to introduce oxygen to the subsurface in a bioventing mode of operation. SVE wells could be installed in City streets and on residential properties, as appropriate. The use of SVE systems is retained for consideration in remedial alternatives.

4.3.7 Bioventing

Bioventing pilot tests were conducted to evaluate the potential effectiveness of bioventing to reduce concentrations of petroleum hydrocarbon constituents at the Site. Bioventing pilot tests were conducted at six locations, four with vertical bioventing wells and two with horizontal bioventing wells installed in trenches. Results from the bioventing pilot tests are summarized in the final Bioventing Pilot Test Summary Report [Geosyntec, 2012b]. Evidence of degradation of petroleum hydrocarbons was observed during the pilot tests, indicating that bioventing is a potentially effective technology to remediate residual petroleum hydrocarbons.

Bioventing would likely work in conjunction with SVE. The most cost-effective way to implement bioventing would be to couple it with SVE and use the same wells via cyclical operation of the SVE system. Bioventing has been retained for consideration in remedial alternatives.

4.3.8 In-Situ Chemical Oxidation (ISCO)

A preliminary feasibility evaluation for ISCO was conducted at the time the Pilot Test Work Plan was prepared [URS and Geosyntec, 2011]. The preliminary feasibility evaluation concluded that sodium persulfate and ozone had greater potential for treatment of COCs than other oxidants considered. Based on this evaluation, ISCO bench-scale testing was conducted in two phases. The first phase is documented in the Technical Memorandum prepared by Geosyntec dated July 16, 2012 [Geosyntec, 2012a]. The second expanded bench-testing phase is documented in the Phase II ISCO Bench Scale Test Report [Geosyntec, 2013a].

Geosyntec concluded that effective field applications would require an excessive quantity of ozone to treat a single injection location, and that full-scale treatment would

require an excessive quantity of ozone to achieve greater than 50% reduction in hydrocarbon mass. Therefore, field pilot testing of ISCO using ozone was not recommended based on both Phase I and Phase II findings. As a result, the use of ISCO is not retained for consideration in remedial alternatives.

4.3.9 Light Non-Aqueous Phase Liquid (LNAPL) Removal

Periodic LNAPL removal where LNAPL has accumulated in monitoring wells can be effective at reducing source zone mass/concentration gradients and may reduce the time over which concentrations would return to background or MCL levels. Periodic LNAPL recovery would continue from monitoring wells MW-3 and MW-12, and, if LNAPL is detected in other wells with thicknesses greater than ½ foot in the future, LNAPL recovery may be initiated on these wells. LNAPL removal is easily implementable and has a relatively low cost at monitoring wells already in place.

LNAPL removal is retained for inclusion in remedial alternatives.

4.3.10 Groundwater Monitored Natural Attenuation (MNA)

MNA is easily implementable at a relatively low cost. It can be an effective technology on its own, or it can be paired with other technologies such as groundwater source removal and supplemental groundwater remediation.

MNA is an appropriate remedy for Site-related COCs in groundwater because:

- The benzene plume at the Site is stable or declining due to natural processes.
- Benzene and TPH are well-defined and generally limited to the Site (i.e., they do not extend significantly downgradient of the Site boundary) nor into the underlying Gage aquifer.
- Groundwater at the Site will not be used in the foreseeable future due to high total dissolved solids and other water quality issues unrelated to Site conditions.
- Significant reduction of sources of Site-related COCs could be achieved in the shallow zone (excavation), vadose zone (SVE and bioventing), and LNAPL reduction.

MNA is retained for inclusion in remedial alternatives because of its anticipated effectiveness, ease of implementation, and relatively low estimated cost.

4.3.11 Supplemental Groundwater Remediation

Supplemental groundwater remediation of certain COCs in localized Site areas (i.e., where COCs exceed 100x MCLs) is considered because of its potential effectiveness at shortening the time over which COC concentrations would return to background or MCL levels. Supplemental groundwater remediation can be implemented with relative ease in some Site areas, but may be more difficult in others due to the location of the remediation with respect to houses at the Site. The estimated costs of supplemental groundwater remediation would likely be moderate up front, with high O&M estimated costs.

It is unlikely that widespread active remediation of compounds in groundwater can be achieved effectively because significant sources of the COCs are located offsite. Even assuming active remediation could remove all COCs in Site groundwater, the groundwater would likely become “re-contaminated” in time unless upgradient sources and sources in the vadose zone were removed. Given that natural degradation of the petroleum hydrocarbon COCs is occurring and would continue to occur through time, supplemental groundwater remediation of certain Site-related COCs in localized areas of groundwater (i.e., where COCs exceed 100x MCLs) where feasible would potentially shorten the time over which the concentrations of COCs would return to background or MCL levels.

If after five years of semi-annual MNA monitoring the concentrations of Site-related COCs are not stable or decreasing based on statistical analysis, supplemental groundwater remediation would be considered. However, if the concentrations of Site-related COCs are stable or decreasing, the MNA program would continue and would be re-assessed after five additional years of annual groundwater monitoring.

Supplemental groundwater remediation is retained for consideration in remedial alternatives.

4.4 Retained Remedial Technologies

Following the screening assessment above, these technologies are retained for inclusion in preliminary remedial alternatives:

- Sub-slab vapor intrusion mitigation
- Capping
- Institutional controls
- Excavation
 - Removal of residual concrete slabs where encountered in excavations

- Removal of all Site features.
- Soil vapor extraction (SVE)
- Bioventing
- LNAPL/source removal
- Groundwater Monitored natural attenuation (MNA)
- Supplemental groundwater remediation

5. REMEDIAL ALTERNATIVES IDENTIFICATION AND SCREENING

5.1 Identification of Preliminary Alternatives

Each technology that was retained after screening would be capable of addressing a specific Site issue, but none of the technologies alone would constitute a complete approach to Site cleanup. It is necessary to combine groups of technologies to comprise a complete approach. Remedial alternatives represent such combinations of technologies. After preliminary remedial alternatives are defined, they are screened to assess which represent realistic approaches to Site cleanup.

The step of combining technologies into complete preliminary remedial alternatives, and then screening those alternatives, is conducted in this section. Following this screening step, retained remedial alternatives are subjected to detailed evaluation, which is conducted in Section 6 of this FS Report.

5.2 Depth of Excavation Considerations

Alternatives 2 and 3 include excavation to a specific depth, while Alternatives 4 and 5 each include four excavation depths: 2, 3, 5, and 10 feet bgs. **Table 5-1** focuses on various considerations associated with excavation to these four depths for Alternatives 4 and 5. Excavation to each depth presents various property management considerations that are outlined in this table.

The basic excavation protocols would be altered as excavations are conducted to address previously unknown utilities, or concrete debris or foundations unearthed. For excavations less than 5 feet in depth, depending on the depth of excavation, and as approved by the Los Angeles County Department of Public Works (LACDPW) and City of Carson, excavations would have vertical sidewalls to maximize removal of impacted soils to the depth of excavation. Excavation sidewalls likely would be back-sloped below foundation footings of structures and block wall footings. The alternate technique of slot trenching also could apply to shallower excavations. Excavations to 5 feet or deeper would use engineered shoring systems, slot trenching, or side slopes at the horizontal-to-vertical ratio recommended by the project geotechnical engineer and approved by the LACDPW and City of Carson in the Grading Permit for the particular property being excavated.

Excavation of VOC-impacted and volatile TPH-impacted soils within the geographic area encompassed by the SCAQMD must be conducted and managed in accordance with the requirements of SCAQMD Rule 1166, Volatile Organic Compound Emissions from Decontamination Soil. The Rule 1166 Plan would set notification, monitoring and enforcement requirements on the work. The Rule 1166 Mitigation Plan would be

obtained by the contractor selected to perform the excavation work. Additionally, the contractor retained to perform the excavation work shall have a valid OSHA Trenching Permit per 29 CFR 1926.650, 29 CFR 1926.651, and 29 CFR 1926.652 and Cal/OSHA Trenching Permit CCR Title 8 Section 341.

The following permits may be needed for excavation work:

- Excavation and Encroachment Permits from the City of Carson for equipment staging and operations, lane closures in public streets, and for removal of sidewalks and excavation beneath the sidewalks in City property/easements. The City Engineering Department would require a Traffic Management Plan as part of the Encroachment Permit Application. A Trash Bin/Containers Permit also would be needed along with the Excavation and Encroachment Permit for roll-off bins if they were placed on the street.
- Excavations around existing buildings would be made with side slopes at the horizontal to vertical ratio recommended by the Geotechnical Engineer and approved by the LACDPW and City of Carson in the Grading Permit for the particular property being excavated. The excavation sidewalls would be back-sloped below foundation footings of structures.
- Asbestos Notifications/Abatement Permits. For properties where a house may be altered (e.g., lifting/cribbing, SSD, SVE infrastructure added), an asbestos assessment would be needed: alterations >100 sq ft trigger this requirement.
- Plumbing and Electrical Permits would be needed if plumbing or electrical service is removed and replaced.
- A Masonry Permit may be required for construction of replacement block walls.
- A Landscaping Permit may be required for restoration of property landscaping.

5.3 Technologies Common to Each Alternative

Alternatives 2 through 7 include some of the same technologies and one or more technologies unique to that alternative. Technologies below common to many alternatives are described once, rather than describing them within each alternative:

- Institutional Controls
- Sub-slab Vapor Intrusion Mitigation (not used in Alternatives 2, 3, or 6)
- SVE/Bioventing

- LNAPL Removal
- Groundwater MNA
- Supplemental Groundwater Remediation

5.3.1 Institutional Controls

Alternatives 3 through 7 would employ institutional controls as described in Section 4.2.1.3 to restrict contact with untreated soils.

Remedial alternatives include a Surface Containment and Soil Management Plan to address notifications, management, and handling of residual soils below the depth of excavation which are impacted by COCs at concentrations greater than risk-based levels or soils beneath covered areas that are not excavated. This plan is included as an appendix to the RAP [URS and Geosyntec, 2014].

5.3.2 Sub-slab Vapor Intrusion Mitigation

Alternatives 4, 5 and 7 employ sub-slab vapor intrusion (VI) mitigation. Sub-slab mitigation would be implemented at properties where sub-slab soil vapor risk exceeds the corresponding RAO as identified in the HHRA.

Sub-slab depressurization (SSD) systems would be used to mitigate potential vapor intrusion at the Site. A SSD system creates a negative pressure beneath the slab of the building using a fan or similar device to remove vapor beneath the slab and exhausting the vapor above the building. This process keeps vapors emanating from soil beneath a building from entering the building.

5.3.3 SVE/Bioventing

Alternatives 3 through 7 include the addition of a combination of SVE and bioventing technologies, as described in Sections 4.2.2.2 and 4.2.2.3, to address impacted areas beneath existing hardscape, below the depth of excavation, and/or under concrete foundations of houses.

Based on the estimated quantity of extraction wells (63 nested wells), it would be impractical to construct a SVE system to extract simultaneously from all of the proposed wells. As a result, multiple systems would be planned. Cyclic use of these systems would be the most cost-effective way of implementing bioventing. SVE/bioventing could address petroleum hydrocarbons, VOCs, and methane in soil vapor. The technology would be used where appropriate based on Site investigation data to promote degradation of residual hydrocarbon concentrations where RAOs are

not met. SVE/bioventing infrastructure would be installed on an estimated 214 properties.

Bioventing, in concert with SVE, would be used to increase oxygen levels in subsurface soils and to promote microbial activity and degradation of longer-chain petroleum hydrocarbons. Bioventing would be integral with SVE via cyclical operation of SVE wells. During periods of vapor extraction from a subset of wells, the SVE system would not only remove hydrocarbon vapors, but would also draw oxygen into the subsurface to enhance the biodegradation of residual petroleum hydrocarbons in soil. During periods when no extraction is occurring for this set of wells, remediation would be achieved through biodegradation alone (i.e., bioventing). The system would be designed to use the same infrastructure (i.e., extraction wells) for both SVE and bioventing, and the cyclic operating conditions would be used to implement both remedial actions. The SVE/bioventing system would be operated in manner to achieve the soil oxygen demand estimated from the bioventing pilot tests [Geosyntec, 2012b].

The potential operating time for the SVE/bioventing system has been estimated based on data collected during the SVE and bioventing pilot tests [URS, 2010b; Geosyntec, 2012b]:

- **SVE:** The estimated SVE operating time is approximately 5 years. Note, however, that areas of the Site with higher VOC concentrations may require longer SVE system operation than areas of average or lower concentrations.
- **Bioventing:** The bioventing pilot test found that relatively low air flow rates (i.e., less than 1 SCFM) would be necessary to deliver sufficient oxygen to meet the bioventing oxygen demand. Sufficient oxygen to remediate soils with TPHd concentrations of 10,000 mg/kg would be delivered by the bioventing system within approximately 30 years.

These times should be considered preliminary. Operation of the SVE/bioventing system would be optimized during implementation of the remedial action as monitoring data are collected (e.g., increase cycle time for areas with higher concentrations). Improved estimates of the potential operating time for the SVE/bioventing system could be made after analysis of these monitoring data.

The SVE/bioventing infrastructure would consist of a system of extraction/inlet wells, belowground conveyance piping, aboveground manifolds treatment compound(s), vapor treatment system(s), and various system controls and instrumentation. Shallow zone wells would be installed at properties requiring remediation of the shallow zone soil to meet RAOs by SVE/bioventing.

The addition of SVE would add some short-term disruption to the community during system installation due to well drilling and trenching for pipe installation. Potential noise impacts from SVE operation would need to be addressed. A permit from SCAQMD would be required to install SVE/bioventing systems.

The addition of SVE and bioventing would add moderate cost to Alternatives 3 through 7.

5.3.4 LNAPL Removal

For Alternatives 2 through 7, LNAPL removal would occur where LNAPL has accumulated in monitoring wells and from areas where a significant reduction in current and future risk to groundwater would result. Monitoring wells MW-3 and MW-12 are examples of wells in which LNAPL accumulation has occurred. LNAPL would take place to the extent technologically and economically feasible.

5.3.5 Groundwater MNA

For Alternatives 2 through 7, COCs in groundwater would be reduced to the extent technologically and economically feasible using source reduction in the shallow soils and/or vadose zone, LNAPL removal (as discussed above), and MNA.

5.3.6 Supplemental Groundwater Remediation

The annual MNA program will commence during implementation of the RAP, specifically startup of the SVE system. If warranted by the results of the statistical analyses conducted on the initial five years of annual MNA data, supplemental remediation of certain Site-related COCs in localized areas of groundwater (i.e., where COCs exceed 100x MCLs) may be implemented. The purpose of this supplemental remediation would be to further shorten the time over which the concentrations of COCs will return to background or MCL levels if SVE/bioventing and natural processes are insufficient.

There are several technologies that may be used to treat the groundwater contaminants. Many of them involve pumping the groundwater to the surface to treat, which increases the potential for exposure and requires either discharge or reinjection of treated water. To limit exposure and management of treated water, the most likely groundwater treatment remedy for these targeted source areas will involve in-situ treatment. Should such supplemental groundwater treatment be warranted (concentrations of Site-related COCs are not stable or declining), a pilot test of the most appropriate in-situ technology using injection of chemical oxidants into the localized areas will be conducted and the supplemental groundwater treatment implemented.

5.4 Assembly of Preliminary Remedial Alternatives

Technologies retained from the screening process in Section 4 were combined into preliminary remedial alternatives, as shown in **Table 5-2**. Based on the preceding evaluation of technologies that are retained for application to the Site, the following preliminary remedial alternatives are assembled.

5.4.1 Alternative 1 – No Action Alternative

A no-action alternative would consist of no remedial actions, no institutional controls, no engineering controls, and no further monitoring of the Site. None of the technologies identified in Section 4 would be included in Alternative 1. This alternative (essentially current conditions) is included for baseline comparison against alternatives that include remedial actions.

5.4.2 Alternative 2 – Entire Site Excavation of Impacted Soils

Alternative 2 includes the removal of all Site features and the excavation of impacted soils over the entire Site. **Figure 5-1** depicts the remedial actions and technologies that would be applied on a given property for Alternative 2. The term “Site features” includes houses, residential hardscape, sidewalks and roads. “Residential hardscape” includes walkways, driveways, uncovered patio areas, and hardscape associated with landscaping. Alternative 2 would require all of the residents within the Carousel Tract to relocate.

Prior to demolition of the houses, asbestos surveys and asbestos abatement would be conducted. After the Site has been razed, impacted soils would be removed from the Site. Impacted soils are identified based on the RAOs for protection of groundwater. The previous soil samples taken at all depths would be used to identify properties where RAOs are not met and therefore require excavation, although additional sampling may be required to more thoroughly classify the Site and to determine where to excavate. Excavation likely would proceed to or near groundwater over some portions of the Site, but to at least 10 feet bgs over the entire Site. Depth of excavation would be dependent upon an assessment of remaining potential impacts to groundwater. Excavated soil, residual reservoir slabs, and materials from the demolition of the houses and hardscape would be removed from the Site using either trucks or a newly-constructed rail spur. Excavated soil could not be treated onsite, because treatment of soils would significantly impact residents in properties proximate to the Site. Additionally, it would be difficult to achieve proper recompaction of soils, once treated, for reuse as Site fill.

Hardscape demolition materials would be recycled offsite, and excavated soil and debris would be disposed of off site or treated off site and recycled.

Approximately 250,000 truckloads of COC-impacted and non-impacted soil, as well as other construction debris from the razed structures (including asbestos), would be hauled to or from the Site.

Alternative 2 also includes each of the technologies below:

- Removal of Reservoir Slabs if encountered in the excavation
- LNAPL Removal
- Groundwater MNA
- Supplemental Groundwater Remediation

The permits required for any excavation depth, identified in Section 5.2, would be required for this work. The provisions discussed in Section 4.3.3 regarding the USA one-call system would be applicable to this alternative.

5.4.3 Alternative 3 – Entire Site Excavation of Impacted Soils to 10 Feet

Alternative 3 includes the removal of all Site features and the excavation to a depth of 10 feet bgs over the entire Site. As a result of this action, RAOs would be met in the upper 10 feet of Site soils. **Figure 5-2** depicts the remedial actions and technologies that would be applied on a given property for Alternative 3. Site features includes houses, residential hardscape, sidewalks and roads. Alternative 3 would require all of the residents within the Carousel Tract to relocate.

After the Site has been razed, the Site would be excavated to a depth of 10 feet bgs. Excavated soil, residual reservoir slabs, and materials from the demolition of the houses and hardscape would be removed from the Site using either trucks or a newly-constructed rail spur. Excavated soil could not be treated onsite, because treatment of soils would significantly impact residents in properties proximate to the Site. Additionally, it would be difficult to achieve proper recompaction of soils, once treated, for reuse as Site fill. Hardscape demolition materials would be recycled offsite, and excavated soil and debris would be disposed offsite or treated offsite and recycled.

Approximately 120,000 truckloads of COC-impacted and non-impacted soil, as well as other construction debris from the razed structures (including asbestos), would be hauled to or from the Site. Institutional controls would still be required for post-remediation excavations beneath 10 feet.

Alternative 3 also includes each of the technologies below:

- Institutional Controls
- Removal of Reservoir Slabs if encountered in the excavation
- LNAPL Removal
- Groundwater MNA
- Supplemental Groundwater Remediation

The permits required for any excavation depth, identified in Section 5.2, would be required for this work. The provisions discussed in Section 4.3.3 regarding the USA one-call system would be applicable to this alternative.

5.4.4 Alternative 4 – Excavation beneath Landscape and Hardscape

Alternative 4 consists of four sub-alternatives and includes excavation under both landscaped and residential hardscape areas as the key remedial element. **Figure 5-3** depicts the remedial actions and technologies that would be applied on a given property. The sub-alternatives include soil excavation to a depth of 2, 3, 5 or 10 feet below existing grade (Alternatives 4A, 4B, 4C, and 4D, respectively) at residential properties where RAOs are not met. **Table 5-1** portrays differences in excavation details for the various excavation depths.

Removal of fences and block walls also may be necessary because the depth of excavation likely would exceed fencepost and footing depths. Exceptions to excavation beneath hardscape include patios covered by structures and roofs and pool decking surrounding swimming pools to avoid structural demolition and potential damage to swimming pools and appurtenant equipment. No excavation would occur beneath City streets, City sidewalks, or beneath houses. City sidewalks have been eliminated from the definition of residential hardscape because, among other issues, a separate permit would be required from the City to remove these features, and because AT&T has cable vaults beneath the City sidewalks; disrupting the vaults could disrupt telecommunication in the neighborhood. In addition, because residents may not remove sidewalks without City approval, sidewalks serve as an institutional control that prevents exposure to sidewalk-covered soils.

Hardscape and landscape would be removed during the initial stage of excavation and restored to like conditions following completion of excavation. Hardscape and landscape restoration expectations would be discussed and agreed upon with the homeowner and documented before demolition takes place. Excavated soil, residual concrete slabs (where encountered during excavation), and materials from the demolition of hardscape would be removed from the Site using dump trucks.

Hardscape demolition materials would be recycled offsite, and excavated soil and debris would be disposed offsite or treated offsite and recycled. As part of remedial design, an individual remediation plan would be prepared for each property.

During the Site investigation, soil samples were collected at 0.5, 2, 5 and 10 feet bgs or the depth of boring refusal. Samples were collected at other depths only if field observations indicated the presence of staining or odors in a specific boring. Analytical data from these samples would be used to identify which properties do not meet RAOs and the number of properties that would require excavation.

Alternative 4 also includes each of the technologies below, common to each alternative:

- Institutional Controls
- Removal of Reservoir Slabs if encountered in the excavation
- Sub-slab Vapor Intrusion Mitigation
- SVE/Bioventing
- LNAPL Removal
- Groundwater MNA
- Supplemental Groundwater Remediation

The permits that are identified in Section 5.2 that are required for any excavation depth and for selective excavation would be required for this work. A permit from SCAQMD would be required to install SVE/bioventing systems. The provisions discussed in Section 4.3.3 regarding the USA one-call system would be applicable to this alternative.

The general information discussed within Alternative 4 applies to Alternatives 4A, 4B, 4C and 4D; the differences among these alternatives is associated with the depth of excavation, which is addressed in the following sections.

5.4.4.1 Alternative 4A – Excavation to 2 Feet bgs

Alternative 4A consists of an excavation of shallow soils to a depth of 2 feet bgs from both landscaped areas and areas covered by residential hardscape where human health or groundwater goals are exceeded. Data from samples collected at depths of <5 feet bgs would be used to identify properties for excavation. The technologies common to Alternative 4 shown in Section 5.4.4 would be included in this alternative.

Table 5-1 summarizes issues that may arise based on depth of excavation and highlights differences among the effect on utilities, permitting, shoring and excavated volume. Excavating to 2 feet would require the smallest volume of soil to be removed from the Site, which would decrease the volume of soil excavated, recycled, disposed,

and the amount of clean soil replaced on the Site. Shoring of the excavation would not be required for Alternative 4A.

Excavating to 2 feet also would decrease the likelihood of coming into contact with utilities such as gas service lines and telecommunications lines. California Water Service Company (Cal-Water) mains are located 3 to 3.5 feet below ground surface, so Alternative 4A would not disturb water lines. For each property, the utilities would be mapped and may require capping, removal and/or replacement, depending on the depth of excavation and the type of utility. Decreasing the amount of soil excavated and the number of utilities affected would decrease estimated cost and increase implementability compared to Alternatives 4B, 4C and 4D. However, excavating to a depth of 2 feet may be less effective at protection of human health and the environment. A resident who excavated below 2 feet could potentially come into contact with residual impacted soils. Given that the City of Carson Building Code requires a permit for excavations below 3 feet, an additional LUC or a notification system would be required to ensure notification to Shell for residential excavations between 2 and 3 feet, but it would not be effective absent homeowner agreement and cooperation.

5.4.4.2 Alternative 4B – Excavation to 3 Feet bgs

Alternative 4B consists of an excavation of shallow soils to a depth of 3 feet bgs from landscaped areas and from areas covered by residential hardscape where human health or groundwater goals are exceeded. The technologies common to Alternative 4 shown in Section 5.4.4 would be included in this alternative.

Data from samples collected at ≤ 5 feet bgs would be used to identify properties for excavation. This is a conservative approach, as it may include properties that currently meet RAOs at 3 feet bgs.

For properties that would meet RAOs based on data collected at 0.5 and 2 feet bgs but are identified for excavation based on ≤ 5 -foot bgs data, with homeowner concurrence, additional samples may be collected at 3 feet bgs as part of remedial design to identify whether remedial excavation of these properties is needed.

Table 5-1 summarizes issues that may arise based on depth of excavation and highlights differences between the effect on utilities, permitting, shoring and volume. At a depth of 3 feet, it is likely that setbacks would need to be maintained from Cal-Water service mains. These water mains would be located through potholing, then they would be protected in an excavation. Suitable setbacks would need to be established in consultation with Cal-Water. It is likely that excavation would avoid the water mains 2 feet laterally and 1 foot vertically. Track/wheel loads would have to avoid damaging

the pipe. As excavation becomes deeper, there is a higher likelihood of coming into contact with utilities such as gas service lines, and telecommunications lines. For each property, the utilities would be mapped and may require capping, removal and/or replacement, depending on the depth of excavation and the type of utility. Shoring of the excavation would not be required for Alternative 4B.

Existing institutional controls would provide protection to residents against exposures to soils below the 3-foot depth of excavation. As described in Section 4.2.1.3, the City of Carson Building Code Section 8105, which amends the L.A. County Building Code Section 7003.1, is an existing institutional control that would limit, through permitting processes, contact with impacted soils beneath a depth of 3 feet.

5.4.4.3 Alternative 4C – Excavation to 5 Feet bgs

Alternative 4C consists of an excavation of shallow soils to a depth of 5 feet bgs from both landscaped areas and areas covered by residential hardscape where human health or groundwater goals are exceeded. Data from the samples collected at ≤ 5 feet bgs would be used to identify properties for excavation. If sample data indicate that RAOs are not met at that depth, the residential hardscape of the property would be removed and excavation would occur on the exposed soils to a depth of 5 feet. The technologies common to alternatives shown in Section 5.3 would be included in this alternative.

Table 5-1 summarizes issues that may arise based on depth of excavation and highlights differences between the effect on utilities, permitting, shoring and volume. The same utility protection issues would apply as for Alternative 4B. This adds a level of cost as well as risk to the project. As the depth increases, so does the estimated cost associated with excavation, disposal of the impacted soil and replacement with new soil. Even with careful planning and execution, work in soils where utility lines are located increases the chance that an unintentional interruption of utilities may occur, which could temporarily impact multiple properties. Excavation to 5 feet bgs would also require removal and replacement of fences and block walls between properties, adding to estimated cost and complexity.

Shoring, slot trenching, or sloped excavation sidewalls would be required for the 5-foot excavation depth of Alternative 4C. If sidewalls are sloped, residual impacted soil within the 5-foot excavation depth interval but outside the lower footprint of the excavation would need to be left in place.

Existing institutional controls would provide protection to residents against exposures to soils below the 3-foot depth of excavation. As described in Section 4.2.1.3, the City of Carson Building Code Section 8105, which amends the L.A. County Building Code

Section 7003.1, is an existing institutional control that would limit, through permitting processes, contact with impacted soils beneath a depth of 3 feet.

5.4.4.4 Alternative 4D – Excavation to 10 Feet bgs

Alternative 4D consists of an excavation of shallow soils to a depth of 10 feet bgs from both landscaped areas and areas covered by hardscape where human health or groundwater goals are exceeded.² Data from the sampling that occurred at ≤ 10 feet bgs would be used to identify properties for excavation. If sample data indicate that soils on a given property do not meet RAOs, the residential hardscape of the property would be removed and excavation would occur to remove exposed soils to the depth where the deepest detection took place. The technologies common to alternatives shown in Section 5.3 would be included in this alternative. SVE and bioventing infrastructure may be modified for a 10-foot excavation depth.

Table 5-1 summarizes issues that may arise based on depth of excavation and highlights differences between the effect on utilities, permitting, shoring and volume. Excavations to 10 feet bgs would require geotechnical investigations to support excavation design and establishment of necessary setbacks from buildings. Depending on required setback distances, it may not be possible to achieve the intended 10-foot excavation depth throughout the area of planned excavations. For instance, during one of the excavation pilot tests, the excavation to 10 feet bgs represented only 40-45% of the surface area of the yard due primarily to the need for setbacks, and it is likely that the percentage would be less at most other properties. Also, at an excavation depth of 10 feet, utilities on each property would have to be capped or removed and replaced after excavation. This adds a very significant level of estimated cost as well as risk to the project, and disruption to the residents of the community. As the depth increases, so does the estimated cost associated with excavation, recycle, and disposal of the impacted soil and replacement with new soil.

Excavations either could be shored or done by slot trenches with vertical sidewalls. The shoring requirements would be very complex and expensive for an excavation depth of 10 feet. It is possible that vertical sidewalls would not be permitted at 10 feet. For the excavation pilot test, the County required backfill the same day, which would greatly complicate logistics of excavation. Excavation to 10 feet bgs could be accomplished only with sufficiently large equipment. The width of side yards would not provide

² Alternative 4D in this FS Report is equivalent to Alternative 3B in the Revised SSCG Screening FS, which RWQCB directed that Shell evaluate [LARWQCB, 2014a].

sufficient access for larger excavators that would be needed, and small excavating equipment capable of getting into back yards would not be feasible for excavation to 10 feet and remove the residual concrete reservoir slabs.

Existing institutional controls would provide protection to residents against exposures to soils below the 3-foot depth of excavation. As described in Section 4.2.1.3, the City of Carson Building Code Section 8105, which amends the L.A. County Building Code Section 7003.1, is an existing institutional control that would limit, through permitting processes, contact with impacted soils beneath a depth of 3 feet.

5.4.5 Alternative 5 – Excavation beneath Landscape

Alternative 5 includes excavation beneath residential landscaped areas as the key remedial element. **Figure 5-4** depicts the remedial actions and technologies that would be applied on a given property for Alternative 5. There would be no excavation under residential hardscape, which differentiates Alternative 5 from Alternative 4. The possibility of residential exposure to impacted soils therefore is greater for Alternative 5 than Alternative 4 in instances where a resident removes the hardscape and excavates potentially impacted soil. Soils would be excavated to a depth of 2, 3, 5 or 10 feet below existing grade at residential properties (Alternatives 5A, 5B, 5C, and 5D³, respectively) where RAOs are not met. **Table 5-1** portrays differences in excavation details for the various excavation depths. Excavated soil and residual concrete slabs (where encountered during excavation) would be removed from the Site using dump trucks and recycled or disposed offsite. The technologies common to alternatives shown in Section 5.3 would be included in this alternative. As part of remedial design, an individual remediation plan would be prepared for each property.

For properties that would meet RAOs based on data collected at 0.5 and 2 feet bgs but are identified for excavation based on ≤ 5 -foot bgs data, with homeowner concurrence, additional samples may be collected at 3 feet bgs as part of remedy design to identify whether remedial excavation of these properties is needed.

The permits identified in Section 5.2 that are required for any excavation depth and for selective excavation would be required for this work. However, unlike Alternatives 4A-4D, a resident who removes hardscape at their property after completion of the remedial action could potentially come into contact with impacted soils. Given that the

³ Alternative 5D in this FS Report is equivalent to Alternative 4B in the Revised SSCG Screening FS, which RWQCB directed that Shell evaluate [LARWQCB, 2014a].

City of Carson Building Code requires a permit for excavations below 3 feet, an additional LUC or a notification system would be required to ensure notification to Shell for residential excavations between 2 and 3 feet, but it would not be effective absent homeowner agreement and cooperation. The provisions discussed in Section 4.3.3 regarding the USA one-call system would be applicable to this alternative.

The general information discussed within Alternative 5 would apply to Alternatives 5A – 5D; the difference between these four alternatives is the depth of excavation. The issues discussed for the different depths of excavation for Alternatives 4A – 4D also would apply to Alternatives 5A – 5D, respectively, and so the discussion regarding Alternatives 5A – 5D is not repeated.

5.4.6 Alternative 6 – Cap Site

Alternative 6 would involve the removal of all Site features, including houses, roads, and utilities, in order to cap the entire Site. **Figure 5-5** depicts the remedial actions and technologies that would be applied on a given property for Alternative 6. This alternative would meet RAOs by limiting contact with soil, but would not achieve the other soil goals. However, the exposure pathway would be eliminated because residents would be removed. Assuming sources of COCs are successfully addressed through LNAPL removal and groundwater remediation, LNAPL goals would be achieved. Groundwater goals (MCLs) would be met in the long term, and background levels for groundwater would be achieved in the longer term, both through MNA. Supplemental groundwater remediation (i.e., where COCs exceed 100x MCLs) would reduce the time to achieve the cleanup goals.

Alternative 6 also includes each of the technologies below:

- Institutional Controls
- SVE/Bioventing
- LNAPL Removal
- Groundwater MNA
- Supplemental Groundwater Remediation

In addition to the permits required for any excavation depth, identified in Section 5.2, the following permits would be required for this work:

- SCAQMD permit to install the SVE/bioventing system
- Asbestos Notifications/Abatement Permits

5.4.7 Alternative 7 – Cap Exposed Soils

Alternative 7 would involve the capping of exposed soils and landscaped areas of the Site with hardscape or equivalent to prevent access to impacted soils. Capping approaches could include concrete or other impervious materials. **Figure 5-6** depicts the remedial actions and technologies that would be applied on a given property for Alternative 7. The soil vapor goals would be addressed by installation of a sub-slab depressurization system for houses where RAOs are not met for sub-slab soil vapor. Assuming sources of COCs are successfully addressed through LNAPL removal, LNAPL goals would be achieved. Groundwater goals (MCLs) would be met in the long term, and background levels for groundwater would be achieved in the longer term, both through MNA. Supplemental groundwater remediation (i.e., where concentrations exceed 100x MCLs) would reduce the time to achieve the cleanup goals.

The intent of this alternative would be to allow residents to remain at the Site in the long-term (following capping). The cap would be intended to prevent residential exposure to soils at the Site. Hardscape, roads and houses would remain in place during and following the capping process.

Alternative 7 also includes each of the technologies below, common to each alternative:

- Institutional Controls
- Sub-slab Vapor Intrusion Mitigation
- SVE / Bioventing
- LNAPL Removal
- Groundwater MNA
- Supplemental Groundwater Remediation

Due to the nature of the proposed work, the same permits outlined for Alternative 6 would be necessary for Alternative 7.

5.5 Screening of Preliminary Remedial Alternatives

Preliminary remedial alternatives assembled in Section 5.4 are screened in this section. Three screening criteria are used. Both the short- and long-term aspects of these criteria are used to screen alternatives to determine which should continue to the detailed evaluation in Section 6:

- a) Implementability
- b) Effectiveness
- c) Estimated cost

Implementability includes both the technical and administrative feasibility of an alternative. Technical feasibility indicates that an alternative can be designed, constructed, operated and maintained. Administrative feasibility indicates that the alternative can obtain the necessary permits, staff, storage and disposal services, and equipment. Alternatives will be classified as easy, moderate, difficult or very difficult to implement based on their technical and administrative feasibility.

Effectiveness will be evaluated based on the relative ability of an alternative to protect human health and the environment and to meet the RAOs. An alternative is considered effective if it is able to reduce the toxicity, mobility or volume of the COCs, or to mitigate exposure by eliminating a pathway. Effectiveness will be considered both during the construction/implementation phase and after remedial action is complete, which shall be termed the short-term and long-term, respectively. Alternatives would be classified as having low, moderate or high effectiveness based on their ability to protect human health and the environment and ability to meet the RAOs.

Estimated cost would be identified as none, low, moderate, high, or very high, based on a relative comparison between the alternatives. Both operation and maintenance (O&M) and capital costs would be considered. The costs are estimated based on past projects, vendor information, cost guides and other available information.

The considerations associated with the various screening criteria for each of the alternatives are summarized in **Table 5-3**, which also indicates the areas and depths for which each cleanup goal is achieved. Conceptual costs for each alternative were roughly estimated for the purposes of comparison between the alternatives and are provided in **Table 5-3**. Proposed remedial actions and estimated costs for alternatives which remain after this screening step are evaluated in more detail in Section 6.

5.5.1 Alternative 1

Alternative 1 is the no-action alternative which includes no remedial actions, no institutional controls, no engineering controls, and no further monitoring of the Site.

Alternative 1 would be very easy to implement. There would be no engineering involved, no permits to obtain, and residents would not be disturbed. The no action alternative would not take any time to implement. Alternative 1 would not be effective at achieving any of the RAOs. Without source reduction in shallow soils, RAOs would not be met. No monitoring would be conducted to assess whether MNA was progressing. In the short-term, human health and the environment would not be protected from the COCs. The no-action approach would be ineffective and would not

result in risk reduction for residents. It also would not be in compliance with the CAO. There is no cost associated with Alternative 1.

Although this alternative does not achieve the RAOs, it is nevertheless retained for detailed evaluation to provide a baseline for comparison against other remedial approaches, which is consistent with the National Contingency Plan (NCP).

5.5.2 Screening of Alternative 2

Alternative 2 would involve the removal of all Site features, including houses, hardscape, roads, and utilities in order to remove impacted soils through excavation. Soil would not be excavated in areas where soil concentrations are below background levels and where human health risk criteria or groundwater protection RAOs are not met.

Implementability – very difficult. Every resident would have to agree to relocate and all 285 houses would be razed. If some homeowners declined to move, the presence of some residents would make it untenable to remove all of the surrounding houses, streets and utilities. Residents in the surrounding neighborhoods would also experience the disruption of the community. Approximately 250,000 truckloads of COC-impacted and non-impacted soil, construction debris from the razed structures (including asbestos), and clean backfill to fill the excavation, would be hauled to or from the Site by truck or by a new rail spur. The volume of soil and debris removed from the Site would consume a large amount of available landfill resources in the local region. It is very unlikely that this alternative could be implemented due to the need for complete participation from the all homeowners and residents, the anticipated public reactions from residential and commercial areas proximate to the Site, environmental effects, traffic impacts and permitting difficulties. In the short term, significant and possibly unmitigatable air quality, noise, and traffic impacts would occur. It is very unlikely that this remedial action would be permitted by SCAQMD or under CEQA.

Effectiveness – low. The active remedial action is estimated to take approximately 4-½ years. Alternative 2 would achieve soil goals, soil vapor goals, and nuisance goals. Groundwater impacts would be addressed through LNAPL removal, MNA, and possibly supplemental groundwater remediation. If warranted by the results of the statistical analyses conducted on the initial five years of annual MNA data, supplemental remediation of certain Site-related COCs in localized areas of groundwater (i.e., where COCs exceed 100x MCLs) may be implemented. However, if the concentrations of Site-related COCs are stable or decreasing, the MNA program will continue and will be re-assessed after five additional years of annual groundwater monitoring.

The removal of the Carousel Tract and razing houses also would have significant long-term impacts to the City of Carson, including the loss of an established neighborhood community and a loss of tax revenue. Typically, a decrease in population leads to a decrease in tax revenues within a city; this can either be countered by increasing the tax burden placed on the remaining residents using increased tax rates, or by decreasing the quality of services provided to the community. Either of these solutions makes the City a less attractive place to live and could create a financial burden on the City of Carson. The loss of 285 households also will adversely impact nearby businesses and schools.

Estimated Cost – very high. This alternative would be the most costly of the remedial alternatives.

Conclusion – not retained. Alternative 2 is not considered technologically and economically feasible due to impractical implementability issues, and very high social, environmental, and economic costs. The decrease in risks and potential additional groundwater protection benefits from the reduction of COC mass in soils are strongly outweighed by the extremely high social, environmental, and economic costs of this alternative. Consequently, Alternative 2 is not retained for detailed evaluation.

5.5.3 Screening of Alternative 3

Alternative 3 would involve the removal of all Site features, including houses, hardscape, roads, and utilities, in order to excavate the upper 10 feet of Site soils. Unlike in Alternative 2, in Alternative 3 excavation is restricted to 10 feet across the entire Site. Soil would not be excavated in areas where soil concentrations are below background levels and where human health risk criteria or groundwater protection RAOs are not met.

Implementability – very difficult. The same considerations as for Alternative 2 apply to Alternative 3. Approximately 120,000 truckloads of COC-impacted and non-impacted soil, as well as other construction debris from the razed structures (including asbestos), would be hauled to or from the Site by truck or by a newly-constructed rail spur.

Effectiveness – low. The same considerations as for Alternative 2 apply here. The active remedial action is estimated to take approximately 2.5 years.

Estimated Cost – very high. Alternative 3 estimated costs are anticipated to be very high; it is the second most expensive alternative.

Conclusion – not retained. Like Alternative 2, Alternative 3 is not considered technologically and economically feasible due to impractical implementability issues, and very high social, environmental, and economic costs. The decrease in risks and

potential additional groundwater protection benefits from the reduction of COC mass in soils are strongly outweighed by the extremely high social, environmental, and economic costs of this alternative. Consequently, Alternative 3 is not retained for detailed evaluation.

5.5.4 Screening of Alternative 4A

Alternative 4A would involve excavation of exposed soils and areas beneath residential hardscape to 2 feet bgs at properties where RAOs are not met. Excavated areas and residential hardscape would be replaced to like conditions with clean soils and new hardscape.

Implementability – high. Although this alternative would not displace the existing community, it would result in short-term inconvenience to the affected residents to excavate landscape and hardscape areas. Permission from property owners and tenants would have to be obtained to excavate all or parts of their property. Approximately 7,000 truckloads of impacted and non-impacted soil would be hauled to or from the Site. Other construction debris from the residential hardscape would also be hauled to and/or from the Site by truck. Each of the other common technologies identified in Section 5.3 would be included in this alternative.

Effectiveness – low (long term); high (short term). Alternative 4A would remove a high volume of COCs from the upper 2 feet of soils. Excavation activities may have a short-term impact on the affected residents, as their landscaping, driveways, and other hardscape would be removed. Because those features would be replaced to like conditions following excavation and fill placement, those impacts would not be long term. Air quality, noise, and traffic impacts would be anticipated during excavation and restoration activity. Based on pilot testing, these impacts would be expected to be mitigated. The surrounding area would be impacted to a lesser extent by heavy truck traffic.

Excavation to 2 feet bgs is generally considered by the USEPA to be adequate to protect residents, as noted by the UCLA expert panel [UCLA Expert Panel, 2014]. However, currently there are no existing institutional controls to address residual COCs beneath houses, and to limit access to soils between 2 feet and 3 feet bgs. Soil cleanup levels for groundwater protection (leaching to groundwater) would be met through implementation of SVE/bioventing.

The soil vapor goals would be addressed in the short-term by installation of a sub-slab depressurization system for houses where RAOs are not met for sub-slab soil vapor and in the long-term through the use of a SVE/bioventing system. There would be a

moderate to high reduction in the mobility of soil vapor, with VI potential reduced through sub-slab mitigation (although the data collected do not indicate a measurable impact to indoor air from sub-slab soil vapor).

Groundwater impacts would be addressed through LNAPL removal, MNA, and possibly supplemental groundwater remediation. If warranted by the results of the statistical analyses conducted on the initial five years of annual MNA data, supplemental remediation of certain Site-related COCs in localized areas of groundwater (i.e., where COCs exceed 100x MCLs) may be implemented. However, if the concentrations of Site-related COCs are stable or decreasing, the MNA program will continue and will be re-assessed after five additional years of annual groundwater monitoring. In the long term, the RAOs for groundwater would be met for the Site.

The residential remedial construction activities including excavation, on-property SVE/bioventing well and piping installation, backfill, sub-slab vapor mitigation, and Site restoration is estimated to take approximately 1.5 years to complete. Based on preliminary estimates of the duration of remediation system operation to achieve cleanup goals, the SVE system may operate for a period of approximately 5 years; the bioventing system may operate for a period of approximately 30 years.

Estimated Cost – moderate. Alternative 4A estimated costs are anticipated to be relatively moderate.

Conclusion – not retained. Alternative 4A is considered potentially technologically and economically feasible due to the moderate degree of implementability, and moderate (primarily short term) social, environmental, and economic costs. However, residents would not be protected against potential exposure to impacted soils in the 2-to-3-foot depth zone unless homeowners agreed to additional LUCs (such as the recording of an environmental covenant). Consequently, Alternative 4A is not retained for detailed evaluation.

5.5.5 Screening of Alternative 4B

Alternative 4B would involve excavation to 3 feet bgs of exposed soils and beneath residential hardscape at properties where RAOs are not met. The excavation will also remove residual concrete slabs if encountered in excavations. Excavated areas and residential hardscape would be replaced to like conditions with clean soils and new hardscape. Each of the other common technologies identified in Section 5.3 would be included in this alternative.

Implementability – relatively high. Considerations are similar to Alternative 4A; differences are discussed below. Alternative 4B has the added difficulty of excavating

an additional foot. Permission from property owners and residents at 183 residences would have to be obtained. On the order of 10,000 truckloads of impacted and non-impacted soil would be hauled to or from the Site. Other construction debris from the residential hardscape would also be hauled from the Site by truck. Sub-slab mitigation would be installed at approximately 27 houses.

Effectiveness – relatively high. Considerations are similar to Alternative 4A; differences are discussed below. Impacts to the community would be higher for this alternative than for Alternative 4A because a larger soil volume would be excavated and the remedy would take longer to implement.

Alternative 4B, which includes excavation of soil to 3 feet bgs, is fully protective because of the current institutional controls in the City of Carson building code which require permits for excavation beneath 3 feet bgs. Alternative 4A, by comparison, lacks protectiveness because while excavation to 2 feet bgs is generally considered by the USEPA to be adequate to protect residents, as noted by the UCLA expert panel [UCLA Expert Panel, 2014], there are currently no existing institutional controls to address residual COCs beneath houses, and to limit access to soils between 2 feet and 3 feet bgs.

The residential remedial construction activities including excavation, on-property SVE/bioventing well and piping installation, backfill, sub-slab vapor mitigation, and site restoration is estimated to take approximately two years to complete. Based on preliminary estimates of the duration of remediation system operation to achieve cleanup goals, the SVE system may operate for a period of approximately 5 years; the bioventing system may operate for a period of approximately 30 years.

Estimated Cost – moderate to high. Alternative 4B estimated costs are anticipated to be moderate to high, relative to other alternatives.

Conclusion – retained. Alternative 4B is considered potentially technologically and economically feasible due to the moderately difficult degree of implementability, high effectiveness, and moderate (primarily short term) social and environmental considerations, and moderately high economic costs. Consequently, Alternative 4B is retained for detailed evaluation.

5.5.6 Screening of Alternative 4C

Alternative 4C would involve excavation to 5 feet bgs of exposed soils and under residential hardscape at properties where RAOs are not met. Excavated areas and residential hardscape would be replaced to like conditions with clean soils and new hardscape. Each of the other common technologies identified in Section 5.3 would be included in this alternative.

Implementability – moderate. Considerations are similar to Alternatives 4A and 4B; differences are discussed below. Alternative 4C has the added difficulty of excavating an additional two feet compared with Alternative 4B. Permission from property owners and residents at 183 residences would have to be obtained. On the order of 17,000 truckloads of impacted and non-impacted soil would be hauled to or from the Site. Other construction debris from the residential hardscape would also be hauled to and/or from the Site by truck. Sub-slab mitigation would be installed at approximately 27 houses.

Not all soils would be removed to 5 feet bgs due to shoring, setback and sloping requirements, and the need to avoid and protect in place certain utilities (water mains). Excavation would be conducted around public water supply lines which are located about 3 to 3½ feet from the sidewalks in the front yards of approximately one-half of the properties in the Carousel Tract. These water pipes are of asbestos-cement (transite) construction. Implementation of excavation to depths of 5 feet or greater in the vicinity of the transite water main piping would be very difficult to achieve without damaging the pipes, potentially resulting in interruption of water supply to the community.

Effectiveness – high (long term); moderate (short term). Considerations are similar to Alternatives 4A and 4B; differences are discussed below. Impacts to the community would be higher for Alternative 4C than for Alternatives 4A and 4B because a larger soil volume would be excavated and the remedy would take longer to implement.

Alternative 4C, which includes excavation of soil to 3 feet bgs, is fully protective because of the current institutional controls in the City of Carson building code which require permits for excavation beneath 3 feet bgs.

The residential remedial construction activities including excavation, on-property SVE/bioventing well and piping installation, backfill, sub-slab vapor mitigation, and site restoration is estimated to take approximately 2.8 years to complete. Based on preliminary estimates of the duration of remediation system operation to achieve cleanup goals, the SVE system may operate for a period of approximately 5 years; the bioventing system may operate for a period of approximately 30 years.

Estimated Cost – high. Alternative 4C estimated costs are anticipated to be high by comparison with other alternatives.

Conclusion – retained. Alternative 4C is considered potentially technologically and economically feasible, even with the difficult degree of implementability. It has a high level of effectiveness (although not significantly greater than Alternative 4B), and

moderate (primarily short term) social and environmental costs, but has high economic costs. Alternative 4C is retained for detailed evaluation.

5.5.7 Screening of Alternative 4D

Alternative 4D would involve the excavation to 10 feet bgs of exposed soils and from beneath residential hardscape in areas where RAOs are not met. Excavated areas and residential hardscape would be replaced to like conditions with clean soils and new hardscape. Each of the other common technologies identified in Section 5.3 would be included in this alternative.

Implementability – infeasible. Alternative 4D would not be technically feasible. Excavation to 10 feet would require larger setbacks to protect structures than shallower excavations, resulting in a significantly smaller area of each property being available for excavation. As demonstrated in the pilot test excavation to 10 feet, excavation to 10 feet could be accomplished over less than 40% of the front yard area of the property due to required setbacks, and only about 5% of the total area of the property. It requires a larger excavator to reach the depth of 10 feet. The excavator that is required would be too large to access a property backyard via the side yard, limiting that area that could be excavated to 10 feet to front yards of most properties. In addition, the very significant shoring, setback and other protections required would limit the ability to reach a depth of 10 feet throughout the Site. On the order of 38,000 truckloads of impacted and non-impacted soil would be hauled to or from the Site.

Effectiveness – high (long term); very low (short term). Impacts to the community would be much higher for this alternative than for Alternative 4A, 4B and 4C because a much larger soil volume would be excavated, the remedy would be quite onerous, and it would take significantly longer to implement at each property and throughout the neighborhood. Excavation would need to be conducted around public water supply lines, which are located about 3 to 3½ feet inside the sidewalks in the front yards of approximately one-half of the properties in the Carousel Tract. These water pipes are of asbestos-cement (transite) construction. Implementation of excavation to depths of 5 feet or greater in the vicinity of the transite water main piping would be very difficult to achieve without damaging the pipes, potentially resulting in interruption of water supply to the community.

The residential remedial construction activities including excavation, on-property SVE/bioventing well and piping installation, backfill, sub-slab vapor mitigation, and site restoration is estimated to take approximately 6.7 years to complete. Based on preliminary estimates of the duration of remediation system operation to achieve

cleanup goals the SVE system may operate for a period of approximately 5 years; the bioventing system may operate for a period of approximately 30 years.

Alternative 4D, which includes excavation of soil to 3 feet bgs, is fully protective because of the current institutional controls in the City of Carson building code which require permits for excavation beneath 3 feet bgs.

Estimated Cost – very high Alternative 4D estimated costs are anticipated to be very high relative to the estimated costs of other alternatives.

Conclusion – retained. Although the alternative is infeasible to implement and has significant effectiveness drawbacks, Alternative 4D will be retained for detailed evaluation, as directed by RWQCB because it includes an excavation to a depth of 10 feet.

5.5.8 Screening of Alternative 5A

Alternative 5A screening would mirror Alternative 4A screening, except that residential hardscape would not be removed, nor would excavation take place beneath it. Below are other differences between Alternative 4A and 5A screening.

Implementability – high. Under Alternative 5A, on the order of 2,900 truckloads of impacted and non-impacted soil would be hauled to or from the Site. Compared with Alternative 4A, there would be less disruption to the community, less time required for implementation, less coordination on issues associated with excavation, backfill and restoration of the property.

Effectiveness – low (long term); relatively high (short term). Under Alternative 5A, there are no administrative or institutional controls restricting removal of residential hardscape after remedial action is complete. The City of Carson does not require that homeowners obtain a permit or notify the City prior to removing residential hardscape from their property. Because of the lack of a permitting or notification requirement, Alternative 5A, which does not include excavation of impacted soils beneath residential hardscape, is not expected to be as protective as Alternative 4A, which includes excavation beneath residential hardscape to 2 feet. For Alternative 5A to be protective, an additional LUC or a notification system would be required to ensure notification to Shell for residential hardscape removal or digging in the 2-to-3-foot depth zone, but it would not be effective absent homeowner agreement and cooperation.

There are, however, short-term benefits to Alternative 5A compared with Alternative 4A. Alternative 5A would pose less disruption to the residents, less time to implement, lower impacts associated with trucks and other equipment. There would be less

noise/vibration without breaking up hardscape, and reduced traffic due to volume reductions without hardscape debris. It is estimated that this alternative could be implemented over approximately 1.2 years, followed by an estimated 30-year O&M period. Based on preliminary estimates of the duration of remediation system operation to achieve cleanup goals the SVE system may operate for a period of approximately 5 years; the bioventing system may operate for a period of approximately 30 years.

Estimated Cost – moderate. Alternative 5A estimated costs are anticipated to be moderate relative to the estimated costs of other alternatives.

Conclusion – retained. Alternative 5A is considered potentially technologically and economically feasible due to the moderate degree of implementability, and moderate (primarily short term) social, environmental, and economic costs. However, residents would not be protected against potential exposure to impacted soils in the 2-to-3-foot depth zone, nor from exposure to impacted soils beneath residential hardscape. Consequently, Alternative 5A is not retained for detailed evaluation.

5.5.9 Screening of Alternative 5B

Alternative 5B screening would mirror Alternative 4B screening, except that residential hardscape would not be removed, nor would excavation take place beneath it. Below are other differences between Alternative 4B and 5B screening.

Implementability – relatively high. Under Alternative 5B, on the order of 4,300 truckloads of impacted and non-impacted soil would be hauled to or from the Site. Compared with Alternative 4B, there would be less disruption to the community, less time required for implementation, less coordination required on issues associated with excavation, backfill and restoration of the property.

Effectiveness – moderate. Alternative 5B would not be as protective as Alternative 4B, which includes excavation beneath residential hardscape to 3 feet. As with other alternatives in the Alternative 5 group, additional LUC or a notification system would be required to ensure notification to Shell regarding cautions against residential hardscape removal, but it would not be effective absent homeowner agreement and cooperation.

The residential remedial construction activities including excavation, on-property SVE/bioventing well and piping installation, backfill, sub-slab vapor mitigation, and site restoration is estimated to take approximately 1.5 years to complete. Based on preliminary estimates of the duration of remediation system operation to achieve cleanup goals the SVE system may operate for a period of approximately 5 years; the bioventing system may operate for a period of approximately 30 years.

Estimated Cost – moderate. Alternative 5A estimated costs are anticipated to be moderate relative to the estimated costs of other alternatives.

Conclusion – retained. Alternative 5B is considered potentially technologically and economically feasible due to the moderately difficult degree of implementability, high effectiveness, and moderate (primarily short term) social and environmental costs and moderate economic costs. Residents would not be protected from exposure to impacted soils beneath residential hardscape. However, Alternative 5B is retained for detailed evaluation.

5.5.10 Screening of Alternative 5C

Alternative 5C screening would mirror Alternative 4C screening, except that residential hardscape would not be removed, nor would excavation take place beneath it. Below are other differences between Alternative 4C and 5C screening.

Implementability – moderate. Under Alternative 5C, on the order of 6,900 truckloads of impacted and non-impacted soil would be hauled to or from the Site. Compared with Alternative 4C, there would be less disruption to the community, less time required for implementation, less coordination on issues associated with excavation, backfill and restoration of the property. Like Alternative 4C, not all soils would be removed to 5 feet bgs due to shoring, setback and sloping requirements and the need to avoid and protect in place certain underground utilities (water mains). Excavation would be conducted around public water supply lines which are located about 3 to 3½ feet from the sidewalks in the front yards of approximately one-half of the properties in the Carousel Tract. These water pipes are of asbestos-cement (transite) construction. Implementation of excavation to depths of 5 feet or greater in the vicinity of the transite water main piping would be very difficult to achieve without damaging the pipes, potentially resulting in interruption of water supply to the community.

Effectiveness – moderate long term, very low short term. Alternative 5C would not be as protective as Alternative 4C, which includes excavation beneath residential hardscape to 3 feet. Because of the lack of a permitting or notification requirement, Alternative 5C, which does not include excavation of impacted soils beneath residential hardscape, is not expected to be as protective as Alternative 4C, which includes excavation beneath residential hardscape to 5 feet. As with other alternatives in the Alternative 5 group, an additional LUC or a notification system would be required to ensure notification to Shell regarding cautions against residential hardscape removal, but it would not be effective absent homeowner agreement and cooperation.

The residential remedial construction activities including excavation, on-property SVE/bioventing well and piping installation, backfill, sub-slab vapor mitigation, and site restoration is estimated to take approximately 2.8 years to complete. Based on preliminary estimates of the duration of remediation system operation to achieve cleanup goals the SVE system may operate for a period of approximately 5 years; the bioventing system may operate for a period of approximately 30 years.

Estimated Cost – high. Alternative 5C estimated costs are anticipated to be high relative to the estimated costs of other alternatives.

Conclusion – retained. Alternative 5C is considered potentially technologically and economically feasible, even with the difficult degree of implementability. Residents would not be protected from exposure to impacted soils beneath residential hardscape. Alternative 5C has a low level of effectiveness, and moderate (primarily short term) social and environmental costs, but has high economic costs. Alternative 5C is retained for detailed evaluation.

5.5.11 Screening of Alternative 5D

Alternative 5D screening would mirror Alternative 4D screening, except that residential hardscape would not be removed, nor would excavation take place beneath it. Below are other differences between Alternative 4D and 5D screening.

Implementability – infeasible. Implementation of Alternative 5D would not be technically feasible. Excavation to 10 feet would require larger setbacks to protect structures than shallower excavations, resulting in less area of each property being available for excavation. As demonstrated in the pilot test excavation to 10 feet, excavation to 10 feet could be accomplished over less than 40% of the front yard area of the property due to the required setbacks, and only about 5% of the total area of the property. It requires a larger excavator to reach the depth of 10 feet. The excavator that is required would be too large to access a property backyard via the side yard in most instances, limiting the area that could be excavated to 10 feet to front yards of most properties. In addition, very significant shoring, setback and other protections required would limit the ability to reach a depth of 10 feet throughout the Site. On the order of 16,000 truckloads of impacted and non-impacted soil would be hauled to or from the Site.

Effectiveness – moderate (long term); very low (short term). Impacts to the community would be much higher for this alternative than for Alternative 5A, 5B and 5C because a much larger soil volume would be excavated, the remedy would be quite onerous, and it

would take significantly longer to implement at each property and throughout the neighborhood. Excavation would need to be conducted around public water supply lines, which are located about 3 to 3½ feet inside the sidewalks in the front yards of approximately one-half of the properties in the Carousel Tract. These water pipes are of asbestos-cement (transite) construction. Implementation of excavation to depths of 5 feet or greater in the vicinity of the transite water main piping would be very difficult to achieve without damaging the pipes, potentially resulting in interruption of water supply to the community.

The residential remedial construction activities including excavation, on-property SVE/bioventing well and piping installation, backfill, sub-slab vapor mitigation, and site restoration is estimated to take approximately 4.5 years to complete. Based on preliminary estimates of the duration of remediation system operation to achieve cleanup goals the SVE system may operate for a period of approximately 5 years; the bioventing system may operate for a period of approximately 30 years.

Estimated Cost – high. Alternative 5D estimated costs are anticipated to be high relative to the estimated costs of other alternatives.

Conclusion – retained. Although the alternative is infeasible to implement and has significant effectiveness drawbacks, Alternative 5D will be retained for detailed evaluation, as directed by RWQCB because it includes an excavation to a depth of 10 feet.

5.5.12 Screening of Alternative 6

Alternative 6 would involve the removal of all Site features, and a cap over the entire Site with hardscape or equivalent. Each of the other common technologies identified in Section 5.3 would be included in this alternative, except for sub-slab vapor intrusion mitigation (not necessary because houses are removed).

Implementability – very difficult. This alternative would be very difficult to implement. Every resident would have to agree to relocate; all 285 houses would be razed. All current Site residents would be displaced. If some homeowners declined to move, the presence of some residents would make it untenable to remove all of the surrounding houses, streets and utilities. Residents in the surrounding neighborhoods would also experience the disruption of the community. Permits for this remedial action would be difficult to obtain, given the need for complete cooperation from homeowners. Approximately 12,500 truckloads of import fill and construction debris from the razed structures (including asbestos) would be hauled to or from the Site by truck or newly-constructed rail spur. This alternative also would result in generation of large quantities

of stormwater that would need to be managed. The County may require stormwater captured to be percolated, which would exacerbate groundwater contamination issues.

It is very unlikely that this alternative would be allowed to proceed due to anticipated public reactions, reactions from residential and commercial areas proximate to the Site, environmental effects, traffic impacts and permitting difficulties. In the short term, significant and possibly unmitigatable air quality, noise, and traffic impacts would occur. It is very unlikely that this remedial action would be permitted by SCAQMD and under CEQA.

Effectiveness – low. Alternative 6 would result in removal of COCs from the Site through SVE/bioventing, LNAPL removal, groundwater MNA and supplemental groundwater remediation. COCs would be less likely to leach into groundwater due to the large reduction in stormwater and irrigation water passing through the soil. The limited additional reduction in risk and minimal impact to groundwater quality when compared with other alternatives is substantially outweighed by the very high additional economic and social (including environmental) costs it would impose on the City, the surrounding residents and business owners, schools and others, as well as the difficulties associated with implementation and the substantial costs required for implementation.

The removal of the Carousel Tract and razing houses also would have significant long-term impacts to the City of Carson, including the loss of an established neighborhood community and a loss of tax revenue. Typically, a decrease in population leads to a decrease in tax revenues within a city; this can either be countered by increasing the tax burden placed on the remaining residents using increased tax rates, or by decreasing the quality of services provided to the community. Either of these solutions makes the City a less attractive place to live and could create a financial burden on the City of Carson. The loss of 285 households also would adversely impact nearby businesses and schools.

Estimated Cost – very high. The estimated cost of Alternative 6 would be very high relative to the other alternatives.

Conclusion – not retained. Alternative 6 is not considered technologically and economically feasible due to a very difficult degree of implementability, very high social and economic costs, and moderate environmental costs. Consequently, this remedial alternative is not retained for additional evaluation.

5.5.13 Screening of Alternative 7

Alternative 7 would involve the capping of exposed soils and landscaped areas of the Site with hardscape or equivalent. Each of the other common technologies identified in Section 5.3 would be included in this alternative.

Implementability – moderate. Implementation of Alternative 7 would be moderately difficult. The remedial activities may have a significant impact on the community in the short term during landscape removal and hardscape placement. Residents would lose existing landscaping, and future landscaping would have to be done above the cap in planter boxes. It is expected that this requirement may not be agreeable to many (or most) residents due to the permanent loss of landscaping and open yards. During construction, air quality, noise, and traffic impacts would be anticipated.

Effectiveness – high. Alternative 7 would result in removal of COCs from the Site through SVE/bioventing, LNAPL removal, groundwater MNA, and supplemental groundwater remediation. COCs would be less likely to leach into groundwater due to the large reduction in stormwater and irrigation water passing through the soil. In the long term, RAOs would be met for the Site. A new LUC would be required to prohibit residential hardscape removal, but it would not be effective absent homeowner agreement and cooperation. This alternative would also result in generation of large quantities of stormwater that would need to be managed. The County may require stormwater captured to be percolated, which would exacerbate groundwater contamination issues. This alternative is estimated to take approximately 1.4 years to implement, followed by an estimated 30-year O&M period. Based on preliminary estimates of the duration of remediation system operation to achieve cleanup goals the SVE system may operate for a period of approximately 5 years; the bioventing system may operate for a period of approximately 30 years.

Estimated Cost – moderate. Alternative 7 estimated costs are anticipated to be low relative to the estimated costs of other alternatives.

Conclusion – retained. Alternative 7 is considered potentially technologically and economically feasible due to the moderately difficult degree of implementability and moderate social, environmental, and economic costs. Consequently, Alternative 7 is retained for additional evaluation.

5.6 Retained Alternatives

The following alternatives were retained based on evaluation of effectiveness, implementability and cost:

- Alternative 1
- Alternative 4B
- Alternative 4C
- Alternative 4D
- Alternative 5B
- Alternative 5C
- Alternative 5D
- Alternative 7

The retained alternatives, shown in **Table 5-4**, will undergo detailed evaluation in Section 6.

6. DETAILED EVALUATION OF ALTERNATIVES

6.1 General

This section includes a detailed evaluation of the retained remedial alternatives for the Site. An overview of the criteria used for the detailed evaluation is presented below.

6.2 Detailed Evaluation Criteria

For the detailed evaluation, this FS uses as guidance the nine criteria that are identified in the *Guidance for Conducting Remedial Investigations and Feasibility Studies Under CERCLA* [USEPA, 1988]. In addition, this FS uses three criteria that address key Site-specific issues of importance to alternative evaluation: Consistency with Resolution 92-49, Social Considerations, and Sustainability.

The first two CERCLA criteria relate directly to findings that must be made in the remedy decision for the Site. These are categorized as threshold criteria that a selected remedy must meet. Each of these criteria is outlined below.

- 1) **Overall Protection of Human Health and the Environment** – This criterion requires evaluation of how the alternative achieves and maintains protection of human health and the environment. The overall assessment of protectiveness draws on the assessments conducted under other evaluation criteria, especially long-term effectiveness and permanence, short-term effectiveness, and compliance with ARARs. Evaluation of the overall protectiveness of an alternative focuses on whether an alternative achieves adequate protection and describes how risks posed through each pathway are eliminated, reduced, or controlled through treatment and institutional controls. This evaluation also considers whether an alternative poses any unacceptable short-term or cross-media impacts.
- 2) **Compliance with ARARs** – This criterion requires an evaluation of how the alternative complies with identified ARARs and applicable advisories or guidance that are “to be considered.” ARARs are generally categorized as action-specific, location-specific, or chemical-specific Federal or state-promulgated requirements. A list of potential Federal and state action-specific, location-specific, or chemical-specific ARARs have been identified for the Site and are included in Tables 6-1 and 6-2, respectively.

The following five CERCLA criteria are “balancing” criteria. They represent the primary criteria upon which the detailed evaluation is based and that are used to distinguish among alternatives that meet the threshold requirements above. The

alternative that strikes the best balance among these five criteria and that meets the threshold criteria generally is the preferred alternative.

- 3) **Long-term Effectiveness and Permanence** – Requires evaluation of the long-term effectiveness of the remedial alternative in maintaining protection of human health and the environment following implementation of the alternative.
- 4) **Reduction of Toxicity, Mobility, and Volume through Treatment** – The assessment against this criterion evaluates the anticipated performance of the treatment technologies that the alternative comprises, and assesses their ability to reduce the toxicity, mobility and volume of impacted materials through the use of treatment.
- 5) **Short-term Effectiveness** – Requires an assessment of the protection of human health and the environment during construction and implementation of the remedial alternative until RAOs are met. The following factors are addressed as appropriate for each alternative: protection of the community during remedial actions; protection of workers during remedial actions; environmental impacts; and time until remedial response objectives are achieved.
- 6) **Implementability** – This criterion requires an assessment of the technical and administrative feasibility of an alternative, including the availability of required services and materials to execute the alternative.
- 7) **Estimated cost** – Requires evaluation of the anticipated capital costs and operation and maintenance (O&M) costs of an alternative. For this FS Report, O&M costs are presented in 2014 dollars without a discount rate being applied.

The following two CERCLA criteria will be considered following comment on this FS Report and on the RAP. They are not further considered in this FS Report:

- 8) **State Acceptance** – Allows for consideration of preferences or apparent concerns by RWQCB.
- 9) **Community Acceptance** – Allows for consideration of the community's preferences or concerns regarding remedial alternatives. RWQCB will consider the community's preferences or concerns after this FS Report and RAP are prepared.

The three additional criteria that are important for Site-specific concerns are discussed below:

- 10) **Consistency with Resolution 92-49** – The RWQCB letter of January 23, 2014 places particular emphasis on the provisions of State Water Resources Control Board Resolution 92-49. In part, Resolution 92-49 requires that RWQCB assure that the cleanup promotes attainment of background water quality or the best water quality that is reasonable. An alternative cleanup level, other than background, must take into account the criteria set forth in Section 2550.4 of Title 23, CCR, which include, among other factors, criteria to protect human health and the environment; must address nuisance conditions, and must be consistent with the maximum benefit to the people of the state.

The focus in Resolution No. 92-49 with respect to remedial activity is on water quality and not on all media. Waste in non-water media (such as soil) should be addressed through remediation to promote the attainment of background water quality (not, for example, background levels in soil) or the best water quality that is reasonably feasible given the considerations listed.

Resolution 92-49 also includes the concept of technical and economic feasibility, in a manner that is distinct from the criteria of implementability or cost. Technological feasibility is determined by assessing available technologies which have shown to be effective under similar hydrogeologic conditions in reducing the concentration of the constituents of concern.

Economic feasibility is an objective balancing of the incremental benefit of attaining further reductions in the concentrations of constituents of concern as compared with the incremental cost of achieving those reductions. The evaluation of economic feasibility will include consideration of current, planned, or future land use, social, and economic impacts to the surrounding community including property owners other than the discharger. As per Resolution 92-49, economic feasibility does not refer to the discharger's ability to finance cleanup. Availability of financial resources should be considered in the establishment of reasonable compliance schedules.

- 11) **Social Considerations** – For this FS Report, an especially important evaluation criterion is the social impact of the remedial action on the community. Considerations associated with social impact include disruption of the ability of individual homeowners to enjoy the use of their property, community disruption during and after remediation, environmental factors

such as traffic, dust and noise, and effects on the integrity and preservation of the neighborhood.

- 12) **Sustainability** – Sustainability, or green remediation, involves employing technologies and cleanup approaches to reduce a project’s environmental footprint. The environmental footprint of a remediation activity exceeds the Site physical boundary because the materials used and the energy consumed create impacts elsewhere. Typically, these offsite impacts have not been fully incorporated into the decision-making process, but their cost ultimately affects all of society. Sustainability assessments identify potential impacts that may have been discounted, or not included, in traditional assessments. These assessments can illustrate impacts that occur on local, regional, and global scales, including the direct and indirect releases of contaminants; the consumption of raw materials; and the production, collection, and disposal of wastes. Sustainability concepts recognize a holistic assessment in a broader scope and time horizon. In addition to looking beyond project Site physical boundaries, sustainability includes the social and economic impacts of remedial decisions. Sustainability integrates many different and sometimes competing factors in planning for the future and incorporates consideration of factors that may be intangible and unquantifiable.

6.3 Retained Remedial Alternatives – Detailed Evaluation

6.3.1 General

This section includes the detailed evaluation of the retained remedial alternatives presented in **Table 5-4**. Each alternative is evaluated separately according to the criteria listed above. The common elements of the final remedial alternatives are not evaluated as they are the same for each alternative. A summary of the detailed evaluation of the final remedial alternatives is shown in **Table 6-10**.

6.3.2 Detailed Evaluation of Remedial Alternative 1

6.3.2.1 Overall Protection of Human Health and the Environment

The no action alternative does not effectively mitigate potential future risks associated with the exposure pathways of ingestion, inhalation, or direct contact with Site soils, soil vapor, or leaching to groundwater. It does not provide any means for source zone mass removal and would not be protective of human health and protection of groundwater under the hypothetical future scenario use. It does not meet RAOs. It is included as required by the NCP, and for a baseline against which other alternatives are compared.

6.3.2.2 No Further Evaluation

Because the no action alternative does not meet the threshold requirement of providing overall protection of human health and the environment, no further evaluation of this alternative is performed.

6.3.3 Detailed Evaluation of Alternative 4B

Alt	Existing ICs	Sub-slab Vapor Intrusion Mitigation	Excavate to 3 ft	Excavate Beneath Residential Hardscape	Groundwater MNA and Supplemental Groundwater Remediation	Remove LNAPL as Feasible	SVE / Bioventing
4B	X	X	X	X	X	X	X

6.3.3.1 Overall Protection of Human Health and the Environment

Alternative 4B would effectively mitigate potential future risks associated with the ingestion, inhalation, or direct contact with Site soils, soil vapor, or groundwater.

Excavation of the upper 3 feet of soil and residential hardscape and replacement with clean soil beneath landscaped areas and residential hardscape areas would mitigate incidental contact with impacted soils. This alternative would therefore meet RAOs for exposure to soils in the upper 3 feet. Contact with underlying impacted soils below 3 feet bgs would be limited by the permitting process associated with the City of Carson Building Code Section 8105, which amends the L.A. County Building Code Section 7003.1. This is an existing institutional control that would limit exposure to soils below 3 feet, and through a notification system that will be developed and established following approval of the RAP.

Vapor intrusion mitigation through sub-slab depressurization (SSD) would mitigate the potential vapor intrusion pathway at properties where sub-slab soil vapor RAOs are not met.

SVE/bioventing would address remaining impacted areas not addressed through excavation beneath landscape and residential hardscape, under concrete foundations of houses, and soils deeper in the vadose zone. The technologies would be used where appropriate, based on Site investigation data, to promote degradation of residual hydrocarbon concentrations that do not meet RAOs. The addition of SVE would decrease the concentrations of VOCs and more volatile fractions of TPH in soil vapor and soil in the areas where it is applied. SVE/bioventing, combined with MNA, will

achieve cleanup goals for COCs in the long term. The mass reduction of VOCs and TPH through SVE and bioventing would likely reduce the time required for groundwater restoration.

LNAPL removal would occur where LNAPL has accumulated in monitoring wells and from areas where a significant reduction in current and future risk to groundwater would result. LNAPL removal would take place to the extent technologically and economically feasible.

The shallow Bellflower aquitard, in which the uppermost groundwater occurs beneath the Site, and the underlying Gage aquifer are not known sources of drinking water in the Site area, so there is not currently a known groundwater ingestion pathway. As a result of this remedial action, however, groundwater would be protected for designated future beneficial uses such as municipal supply. In addition, COCs in groundwater would be reduced using source reduction and MNA. The annual MNA program would commence during implementation of the remedy, specifically startup of the SVE system. If after five years of semi-annual MNA monitoring the concentrations of Site-related COCs are not stable or decreasing based on statistical analysis, supplemental groundwater remediation would be considered. However, if the concentrations of Site-related COCs are stable or decreasing, the MNA program would continue and would be re-assessed after five additional years of annual groundwater monitoring.

6.3.3.2 Compliance with ARARs

Alternative 4B would meet the identified ARARs. The ARARs that may be applicable for one or more of the technologies that this alternative comprises are identified in **Tables 6-1** and **6-2**. A separate assessment of this alternative's consistency with State Water Resources Control Board Resolution 92-49 is set forth in Section 6.3.3.8.

6.3.3.3 Long-term Effectiveness and Permanence

The combination of technologies used for Alternative 4B is anticipated to be highly effective at reducing the toxicity, mobility and volume of the COCs in the long-term. It would be a permanent, effective, long-term remedy.

Removal of soils to a depth of 3 feet would remove the impacted soils for which a human exposure pathway potentially is complete, and replace them with clean soils.

SVE/bioventing is anticipated to be effective at the long-term remediation of VOCs and more volatile fractions of TPH. Sub-slab mitigation is an effective measure for vapor intrusion mitigation until no longer needed.

Groundwater goals would be achieved in the long term through the combination of LNAPL removal, MNA, and supplemental groundwater remediation.

6.3.3.4 Reduction of Toxicity, Mobility and Volume through Treatment

The following technologies included in this alternative involve treatment of impacted media: SVE/bioventing, LNAPL removal, groundwater MNA, and supplemental groundwater remediation. These treatment technologies would result in a high degree of reduction of toxicity, mobility, and volume of COCs from the Site.

6.3.3.5 Short-term Effectiveness

The implementation of Alternative 4B would be effective at removing COCs in the short term. Excavation beneath residential hardscape and landscape would remove impacted soils in the top 3 feet of soil, and do so relatively quickly, while at the same time temporarily increasing the possibility of negative impacts for the community and for Site workers. During excavation, several mitigation measures would be implemented to minimize negative impacts. Best practices would be utilized so that utilities would be identified and provisions made to protect them in place or remove and reinstall, efficient equipment would be employed for implementing the remediation, materials would be handled safely, and dust, vapor, and odors would be controlled.

As described in the Draft Relocation Plan (an Appendix to the RAP), residents of properties where remedial excavations are being conducted would be relocated for the duration of the remedial excavation, backfill, and hardscape restoration operations. Following backfill and utility and hardscape restoration, residents would move back into their homes during landscape restoration and fence/block wall construction, or, at their option, wait to return until after the landscape restoration work is completed. For properties on the perimeter of the tract where excavation work is being conducted, residents of adjacent properties would be offered relocation as necessary.

Sub-slab vapor intrusion mitigation at a limited number of properties where sub-slab soil vapor concentrations do not meet RAOs is a short-term measure to mitigate potential indoor exposure to vapor. Additionally, SVE/bioventing would be effective in the short term at removal of volatile COCs from the subsurface. The degradation of volatile fractions of TPH through bioventing would take somewhat longer to complete.

Based on the short-term benefits and risks, short-term effectiveness through careful planning and execution is relatively high.

6.3.3.6 Implementability

Implementability of Alternative 4B would be relatively high.

Alternative 4B would be more easily implemented than alternatives that involve deeper excavations because of the lower number of properties affected, decreased volume of soils, the lack of shoring requirements, and the lack of a need to remove and replace utility lines. Alternative 4B would require the excavation of an estimated 183 properties, the same number of properties as Alternatives 4C, 5B and 5C. Alternative 4D and 5D require the excavation of 214 properties.

Alternative 4B requires a smaller volume of soil removed than Alternatives 4C, 4D, 5C and 5D. Excavation to 3 feet is more implementable than excavation to 5 or 10 feet because the excavation can be accomplished more easily with potentially no shoring, sloping or setback of the excavation. In addition, some utility lines are likely to be below 3 feet and those that are within the upper 3 feet can be more readily protected than with deeper excavation. The water mains are located at 3 to 3.5 feet, so Alternatives 4B and 5B would present lower risk of damaging the water mains, whereas Alternatives 4C, 4D, 5C and 5D may require the capping, excavation and replacement of water mains, as well as gas pipes, and telecommunication lines, which would be disruptive to a very large part of the community. Alternative 4B would pose less of a disturbance to utilities than Alternative 7 because capping the entire Site may require removal or re-routing of utilities to retain access.

Alternatives 4B, 4C, and 4D are more difficult to implement than Alternatives 5B, 5C, 5D or Alternative 7 because of the additional technical, administrative and design considerations associated with removal and replacement of residential hardscape. Residents would be relocated for a longer period of time to allow for hardscape restoration. There would be greater community disruption due to the greater number of truck trips. Removal of the hardscape significantly increases the amount of waste that must be transported and disposed or recycled. Administrative feasibility is more complex for the Alternative 4 set because the contractor must discuss hardscape restoration in addition to landscape restoration. Alternative hardscape and landscaping may be considered if requested by the owner and if it does not result in significant schedule or cost impacts.

These added implementability issues make Alternative 4B somewhat more difficult to implement compared with Alternative 5B.

6.3.3.7 Estimated Cost

The cost estimate for Alternative 4B is contained in **Table 6-4** and summarized below. Alternative 4B is less costly than Alternatives 4C, 4D, and 5D, but more costly than Alternatives 5B, 5C and 7. A cost estimate summary follows:

Alternative 4B Remedial Cost Estimate	
Category	Estimated Cost (\$ millions)
Demolition	\$1.4
Excavate, Backfill, and Associated Costs	\$33.9
Other Direct Costs	\$19.6
Post-Excavation Construction and Long-Term O&M	\$24.1
TOTAL ESTIMATED COST	\$79
COST ESTIMATE RANGE (-20%/+30%)	\$63 – \$103

6.3.3.8 Consistency with Resolution 92-49

Resolution 92-49 requires RWQCB to assure that the cleanup promotes attainment of background water quality or the best water quality that is reasonable. In addition, any alternative cleanup level must take into account criteria to protect human health, must address nuisance conditions, and must be consistent with the maximum benefit to the people of the state. Resolution 92-49 also requires that RAOs must be based, in part, on technological and economic feasibility.

In its January 23, 2014 letter, RWQCB commented that in the Revised SSCG Report, Shell had not provided a basis for estimating remedial costs, and that cleanup metrics such as mass of wastes removed or risks abated was not provided. Further, RWQCB stated that the range of accuracy of estimated costs in the Revised SSCG Report was overly broad. To address this statement, the accuracy of cost estimates, which normally is expected to be -30%/+50% at the FS-level of project development, is now estimated to be -20%/+30% at the current level of project development. RWQCB also commented that Shell asserted that certain alternatives might affect the tax basis of the City of Carson; those are the alternatives that included permanent destruction of houses as part of the remedy (Alternatives 2, 3, and 6). Each of these alternatives has been eliminated in the alternatives screening step as set forth in Section 5.

In Resolution 92-49, economic feasibility is defined as follows:

“Economic feasibility is an objective balancing of the incremental benefit of attaining further reductions in the concentrations of contaminants of concern

as compared with the incremental cost of achieving those reductions. The evaluation of economic feasibility would include consideration of current, planned, or future land use, social, and economic impacts to the surrounding community including property owners other than the discharger. Economic feasibility, in this Policy, does not refer to the discharger's ability to finance cleanup. Availability of financial resources should be considered in the establishment of reasonable compliance schedules.”

Alternative 4B proposes a cleanup of impacted soils on residential properties to a depth of 3 feet. Existing institutional controls, combined with notification procedures and the Surface Containment and Soil Management Plan, provide adequate protection of homeowners against exposure to deeper impacted soils. Other remedial elements of Alternative 4B include additional protections against exposures to Site contaminants, and these other elements also result in RAOs being met for groundwater beneath the Site.

An objective balancing of incremental benefits shows that Alternative 4B meets the threshold criterion of protectiveness of human health and the environment, and it also complies with ARARs. Alternative 4B also results in the safe continued use of the Site for its current residential purpose, and it minimizes social impacts – and therefore economic impacts – associated with Site COCs by removing those COCs and achieving the RAOs while preserving the neighborhood and resulting primarily in only short-term inconvenience to the residents. By balancing the other evaluation criteria against added cost, Shell finds no incremental benefit associated with excavation beyond that contemplated under Alternative 4B that would justify the incremental social, environmental and economic costs of such excavation. Alternative 4B therefore, is fully compliant with Resolution 92-49.

6.3.3.9 Social Considerations

Alternative 4B would have a relatively low-to-moderate social impact. An estimated 183 properties would be affected. Excavation and backfill would take approximately 3 weeks per property, plus an additional approximately 3 to 4 weeks for restoration, for Alternative 4B. This is a shorter duration than it would take to implement Alternatives 4C, 4D, 5C and 5D.

The removal and replacement of landscape and hardscape to like conditions may slightly alter the property of the homeowner. During construction, potentially significant air quality, noise, and traffic impacts would be anticipated. Because of the disruption, residents of properties where remedial excavations are being conducted would be relocated for the duration of the remedial excavation, backfill, and hardscape

restoration operations. Surrounding areas would be impacted by heavy truck traffic. Similar impacts are anticipated for any of the excavation Alternatives (4C, 4D, 5B, 5C, and 5D) but would occur over a lesser duration for Alternative 4B than for any others but 5B. In addition, based on the results of the excavation pilot testing, the construction impacts associated with traffic, noise, dust, odors can be mitigated.

6.3.3.10 Sustainability

Alternative 4B would require the use of excavation equipment and trucks that would create emissions affecting air quality. As the time for remediation, the number of properties and the number of truckloads increases, so would the emissions and effect on air quality. Alternative 4B would have less of an impact on air quality than Alternatives 4C, 4D, 5C and 5D, but it is not as sustainable as Alternatives 5B or 7.

Each alternative requires the disposal of some impacted materials in landfills, along with recycle of most soils. Landfill space is finite and an increased volume of materials being disposed of in landfills reduces the availability of a valuable resource. Alternative 4B is more sustainable in this regard than Alternatives 4C, 4D, 5C, and 5D but not as sustainable as Alternatives 5B or 7.

Alternatives 4B, 4C, and 4D create additional waste as opposed to Alternatives 5B, 5C, and 5D because of the removal of residential hardscape.

During construction, removal of landscaping could impact water quality should a storm event occur. Removal of hardscape for Alternatives 4B, 4C and 4D would expose a larger area of soil to potential short-term erosion and water quality issues, although these effects would be mitigated through use of a stormwater pollution protection plan (SWPPP).

6.3.4 Detailed Evaluation of Alternative 4C

Alt	Existing ICs	Sub-slab Vapor Intrusion Mitigation	Excavate to 5 ft	Excavate Beneath Residential Hardscape	Groundwater MNA and Supplemental Groundwater Remediation	Remove LNAPL as Feasible	SVE / Bioventing
4C	X	X	X	X	X	X	X

6.3.4.1 Overall Protection of Human Health and the Environment

Similar to Alternative 4B, Alternative 4C would effectively mitigate potential future risks associated with the ingestion, inhalation, or direct contact of Site soils, soil vapor, or groundwater.

Excavation of the upper 5 feet of soil and replacement with clean soil would prevent most contact with impacted soils, with the possible exception of excavation for swimming pool installation. The City of Carson Building Code Section 8105, which amends the L.A. County Building Code Section 7003.1, is an existing institutional control that would limit exposure to soils below 3 feet.

Mitigation of vapor intrusion pathways, SVE/bioventing use, LNAPL removal, and groundwater remediation would be the same as for Alternative 4B, and so would be equally protective.

6.3.4.2 Compliance with ARARs

Alternative 4C would meet the identified ARARs. The ARARs that may be applicable for one or more of the technologies that this alternative comprises are identified in **Tables 6-1** and **6-2**. A separate assessment of this alternative's consistency with State Water Resources Control Board Resolution 92-49 is set forth in Section 6.3.4.8.

6.3.4.3 Long-term Effectiveness and Permanence

This alternative would be highly effective in the long-term based on the same considerations as Alternative 4B.

6.3.4.4 Reduction of Toxicity, Mobility and Volume through Treatment

The following technologies included in this alternative involve treatment of the media: SVE/bioventing, groundwater treatment through supplemental groundwater remediation, and LNAPL removal. These treatment technologies would result in the same degree of reduction of toxicity, mobility, and volume through treatment as Alternative 4B.

6.3.4.5 Short-term Effectiveness

In Alternative 4C, excavating an additional 2 feet of soil relative to Alternative 4B would result in a longer period of exposure to potentially impacted soil, and therefore would pose potentially greater negative impacts to the community and workers than for

Alternative 4B. The short-term effectiveness of sub-slab vapor intrusion mitigation, SVE/bioventing, and LNAPL removal and supplemental groundwater remediation would be similar to Alternative 4B.

Based on the short-term benefits and risks, short-term effectiveness through careful planning and execution is moderate.

6.3.4.6 Implementability

Alternative 4C is less implementable than Alternatives 4B, 5B, and 5C, and more implementable than 4D and 5D because of the volume of soils, the number of properties affected, the necessity for shoring or slot trenching, the need to protect water mains, and the potential impacts on utility lines. Alternative 4C would require the excavation of 183 properties. This is the same number of properties as Alternatives 4B, 5B and 5C. Alternative 4D and 5D require the excavation of 214 properties.

Alternative 4C requires a smaller volume of soil removed than Alternatives 4D and 5D, but a larger volume than Alternatives 4B, 5B and 5C. Deeper excavation increases the soil excavated and recycled or disposed, and the amount of clean soil brought back to the Site. Alternative 4C has increased permitting requirements from Alternatives 4B and 5B since shoring or slot trenching would be required by OSHA for trenching at or below 5 feet in depth, and greater setbacks from structures would be required for stability.

Excavation to 5 feet for Alternative 4C has low implementability because utility lines would be encountered at this depth. Alternative 4C requires the protection of water mains and avoiding removal of some impacted soil around them, addressing gas pipes, and telecommunication lines. Alternative 4C is less implementable than Alternatives 4B and 5B, for which utility impacts would be more readily addressed due to the lesser depth of excavation.

Alternative 4C would rely upon existing institutional controls to prevent contact with soils below the depth of excavation.

The set of Alternatives 4B, 4C, and 4D is more difficult to implement than the set of Alternatives 5B, 5C, and 5D or Alternative 7 because of the additional technical, administrative and design considerations associated with removal and replacement of residential hardscape. Removal of the hardscape increases the amount of waste that must be transported and disposed or recycled. Administrative feasibility is more complex for the Alternative 4 set because Shell's contractor must also meet with property owners and address hardscape and landscape restoration. Alternative

hardscape and landscaping may be considered if requested by the owner and if it does not result in significant schedule or cost impacts.

These added implementability issues make Alternative 4C more difficult to implement than Alternatives 4B, 5B and 5C.

6.3.4.7 Estimated Cost

The cost estimate for Alternative 4C is contained in **Table 6-5**. A cost estimate summary follows:

Alternative 4C Remedial Cost Estimate	
Category	Estimated Cost (\$ millions)
Demolition	\$1.4
Excavate, Backfill, and Associated Costs	\$49.3
Other Direct Costs	\$28.8
Post-Excavation Construction and Long-Term O&M	\$24.1
TOTAL ESTIMATED COST	\$104
COST ESTIMATE RANGE (-20%/+30%)	\$83 – \$135

6.3.4.8 Consistency with Resolution 92-49

The discussion in Section 6.3.3.8 explains how Alternative 4B complies with Resolution 92-49. Because Alternative 4B provides adequate human health and environmental protection, meets ARARs, and objectively balances the incremental benefit of attaining further reductions in the concentrations of contaminants of concern compared with the incremental cost of achieving those reductions, then by logical extension Alternative 4C, which is more costly without adding protectiveness to human health and groundwater protection, cannot be judged to be as compliant with Resolution 92-49 as is Alternative 4B.

6.3.4.9 Social Considerations

The range of social impacts and disruption for Alternative 4C would be similar as for Alternative 4B, but the duration of the alternative would be about a year longer, so that Alternative 4C would have a moderately high social impact. Residents would be relocated for a longer period of time than in Alternative 4B due to the additional time and difficulty involved with the deeper excavations.

6.3.4.10 Sustainability

Alternative 4C has the same sustainability issues as discussed for 4B. Alternative 4C would create more greenhouse gas emissions from equipment since more soil would need to be transported and excavated, and there would be greater greenhouse gas emissions associated with the larger volume of impacted soil excavated. Alternative 4C would also use more landfill space because of the larger volume of soil excavated. There may also be increased waste when due to excavating and replacing utilities.

6.3.5 Detailed Evaluation of Alternative 4D

Alt	Existing ICs	Sub-slab Vapor Intrusion Mitigation	Excavate to 10 ft	Excavate Beneath Residential Hardscape	Groundwater MNA and Supplemental Groundwater Remediation	Remove LNAPL as Feasible	SVE / Bioventing
4D	X	X	X	X	X	X	X

Alternative 4D is not capable of being implemented as contemplated. Although there is a discussion of each evaluation criterion below, the basic lack of implementability overshadows the evaluation and the conclusions that may be reached regarding each criterion.

6.3.5.1 Overall Protection of Human Health and the Environment

Similar to Alternatives 4B and 4C, Alternative 4D would effectively mitigate potential future risks associated with the ingestion, inhalation, or direct contact of Site soils, soil vapor, or groundwater.

Excavation of the upper 10 feet of soil and replacement with clean soil would prevent contact with impacted soils for all but extensive construction. However, due to setback and shoring requirements, and also due to the presence of the transite water mains, some impacted soil beneath landscaping and hardscape in the upper 10 feet would be left in place. Also, at properties where it is impractical for the necessary equipment to be brought into back yards, those yards would not be excavated to 10 feet. The City of Carson Building Code Section 8105, which amends the L.A. County Building Code Section 7003.1, is an existing institutional control that would limit exposure to soils below 3 feet. Mitigation of vapor intrusion pathways and groundwater remediation would be the same as for Alternative 4B, and so would be equally protective.

6.3.5.2 Compliance with ARARs

If it were implementable, Alternative 4D would meet the identified ARARs. The ARARs that may be applicable for one or more of the technologies that comprise this alternative are described in **Tables 6-1 and 6-2**. A separate assessment of this alternative's consistency with State Water Resources Control Board Resolution 92-49 is set forth in Section 6.3.5.8.

6.3.5.3 Long-term Effectiveness and Permanence

Alternative 4D would be highly effective in the long-term based on the same considerations as Alternative 4B. Due to the additional volume of soil that would be excavated, the RAOs would be met in soil faster than in Alternative 4B and 4C.

6.3.5.4 Reduction of Toxicity, Mobility and Volume through Treatment

The following technologies involved in this alternative involve treatment of the media: SVE/bioventing, groundwater treatment through supplemental groundwater remediation, and LNAPL removal. These treatment technologies would result in a high degree of reduction of toxicity, mobility, and volume from the Site.

6.3.5.5 Short-term Effectiveness

For Alternative 4D, excavating an additional 5 feet of depth relative to Alternative 4C would result in significantly more days when impacted soil would be exposed, much more disruption of the community, and therefore pose much greater negative impacts to the community and workers than for Alternative 4C. The short-term effectiveness of sub-slab vapor intrusion mitigation, SVE/bioventing, and LNAPL removal and supplemental groundwater remediation of groundwater would be similar to Alternative 4B and 4C. A larger number of houses would be affected by excavation: 214 for Alternative 4D as compared with 183 for Alternatives 4B and 4C. Because there would be additional very significant negative impacts without significant additional benefits, short-term effectiveness is very low.

6.3.5.6 Implementability

Alternative 4D is not implementable. Excavation to 10 feet would require larger setbacks and more shoring to protect structures than shallower excavations, resulting in less area of each property being available for excavation. As demonstrated in the pilot test excavation to 10 feet, excavation to 10 feet could be accomplished over less than 40% of the front yard area of a property due to the required setbacks, and only about 5%

of the total area of the property. The excavator that would be required to reach a depth of 10 feet would be too large to access most, if not all, backyards via the side yard, limiting the area that could be excavated to 10 feet to parts of the front yards of most properties. Also, excavation to 10 feet would require extensive shoring or slot trenching to protect structures. For the pilot test excavation, the County Department of Public Works required that excavation slots be backfilled the same day as they were excavated. For full-scale implementation, there would not be sufficient time in a given work day to excavate a slot, load and transport excavated soils, particularly for back yards which would require transferring soils to the street for loading, and backfill the slot. This onerous constraint would further reduce the feasibility of Alternatives 4D and 5D.

When compared with Alternatives 4B, 4C, 5B, 5C and 5D, Alternative 4D involves the greatest volume of soils, the greatest number of properties affected, the longest period of remediation per property, the greatest amount of shoring, increased equipment requirements, and the greatest difficulty posed by the presence of utility lines. Alternative 4D would require the excavation of 214 properties, whereas Alternatives 4B and 4C require the excavation of 183 properties.

Alternative 4D requires the largest volume of soil to be excavated and disposed and the largest amount of clean soil brought back the Site. Alternative 4D has increased permitting requirements compared with Alternatives 4B and 5B since shoring or slot trenching is required by OSHA for trenching at or below 5 feet in depth and greater setbacks from structures would be required for stability

Where it is possible to excavate to 10 feet in back yards, a further complication arises because of the presence of overhead utility lines. Worker protection from electrocution hazard due to the excavator encountering overhead power lines likely would require removal of power lines during excavation and restoration, which would have further impacts to the resident's property and possibly to other properties. Alternative 4D would require removal and replacement of utility lines on each property, and either protection of water mains gas pipes, and telecommunication lines in place, which would leave impacted soil in place, or manual excavation around pipes. Either approach would be very difficult. Accordingly Alternative 4D is less implementable than Alternatives 4B and 5B for which utility work is more manageable.

Alternative 4D is able to rely on existing institutional controls to prevent contact with significant impacted soils which would remain below 3 feet bgs, due to setback requirements and potential utility protection.

6.3.5.7 Estimated Cost

The cost estimate for Alternative 4D is contained in **Table 6-5**. Alternative 4D has an extraordinarily high cost. It is the highest cost alternative of the final remedial alternatives. A cost summary follows:

Alternative 4D Remedial Cost Estimate	
Category	Estimated Cost (\$ millions)
Demolition	\$1.7
Excavate, Backfill, and Associated Costs	\$104.5
Other Direct Costs	\$56.2
Post-Excavation Construction and Long-Term O&M	\$24.1
TOTAL ESTIMATED COST	\$187
COST ESTIMATE RANGE (-20%/+30%)	\$150 – \$243

6.3.5.8 Consistency with Resolution 92-49

The discussion in Section 6.3.3.8 explains how Alternative 4B complies with Resolution 92-49. Because Alternative 4B provides adequate human health and environmental protection, meets ARARs, and objectively balances the incremental benefit of attaining further reductions in the concentrations of contaminants of concern compared with the incremental cost of achieving those reductions, then by logical extension Alternative 4D, which is more costly without adding protectiveness to human health and groundwater protection, along with not being implementable, cannot be judged to be as compliant with Resolution 92-49 as is Alternative 4B.

6.3.5.9 Social Considerations

Apart from being non-implementable, Alternative 4D would have a high level of social impact.

Alternative 4D has the same impacts that were discussed in 4C and 4B. 4D has an added social impact because the excavation and soil replacement, were it implementable, would take many days longer than Alternatives 4B or 4C because of additional soil, shoring, and work with utilities. There would be increased truck traffic from Alternative 4D due to more soil and hardscape being removed from a greater number of properties than for any other alternative, and due to the extensive lengthy disruption of the community.

6.3.5.10 Sustainability

Alternative 4D has more significant negative sustainability effects than discussed for 4B or 4C. Alternative 4D would create more greenhouse gas emissions from equipment since more soil would need to be transported and excavated. Alternative 4D would release more methane to the atmosphere. While fire and explosion hazards have not been identified at any residence due to methane concentrations from degradation of hydrocarbons in soil vapor, this would be considered a greenhouse gas emission and therefore a detrimental impact to air quality. The amount of greenhouse gases released would be far less with excavation to 3 feet under Alternative 4B than to 5 feet or especially 10 feet.

Each alternative requires the treatment and recycling or disposal of some impacted soil in landfills, along with some recycled materials. Landfill space and recycling capacity are finite and an increased volume of soil being disposed of in landfills reduces the availability of these valuable resources. Alternative 4D would use more landfill space or recycling capacity because of the larger volume of soil excavated.

6.3.6 Detailed Evaluation of Alternative 5B

Alt	Existing ICs	Sub-slab Vapor Intrusion Mitigation	Excavate to 3 ft	Excavate Beneath Residential Hardscape	Groundwater MNA and supplemental groundwater Remediation	Remove LNAPL as Feasible	SVE / Bioventing
5B	X	X	X	N/A	X	X	X

6.3.6.1 Overall Protection of Human Health and the Environment

Alternative 5B would effectively mitigate potential future risks associated with the ingestion, inhalation, or direct contact of Site soils, soil vapor, or groundwater, except that future risks for soil exposure beneath residential hardscape would not be mitigated. Excavation of the upper 3 feet of soil in landscaped areas and replacement with clean soil would mitigate incidental contact with impacted soils. Alternative 4B differs from Alternative 5B in the approach to residential hardscape. In Alternative 4B, residential hardscape is removed and impacted soils are excavated to a depth of 3 feet prior to backfilling the excavation and replacing the hardscape. In Alternative 5B, no removal of residential hardscape occurs and no excavation is conducted beneath residential hardscape. The City of Carson does not require that homeowners obtain a permit or notify the City prior to removing residential hardscape from their property. Because of the lack of a permitting or notification requirement, Alternative 5B, which does not include excavation of impacted soils beneath residential hardscape, is not expected to be

as protective as Alternative 4B which include excavation beneath residential hardscape to 3 feet. For Alternative 5B to be protective, an additional LUC or a notification system would be required to ensure notification to Shell for removal of residential hardscape or digging beneath residential hardscape in the 2-to-3-foot depth zone, but it would not be effective absent homeowner agreement and cooperation. Mitigation of vapor intrusion pathways, SVE/bioventing, LNAPL removal, and groundwater remediation would be the same as for Alternative 4B, and so Alternative 5B would be equally protective in those respects.

6.3.6.2 Compliance with ARARs

Alternative 5B would meet the identified ARARs. The ARARs that may be applicable for one or more of the technologies that this alternative comprises are identified in **Tables 6-1** and **6-2**. A separate assessment of this alternative's consistency with State Water Resources Control Board Resolution 92-49 is set forth in Section 6.3.6.8.

6.3.6.3 Long-term Effectiveness and Permanence

Without an additional LUC or a notification system required to ensure notification to Shell for removal of residential hardscape or digging beneath landscape in the 2-to-3-foot depth zone, Alternative 5B would not be as effective or permanent in the long term as Alternative 4B.

6.3.6.4 Reduction of Toxicity, Mobility and Volume through Treatment

The following technologies included in this alternative involve treatment of the media: SVE/bioventing, groundwater treatment through supplemental groundwater remediation, and LNAPL removal. These treatment technologies would result in a high degree of reduction of toxicity, mobility, and volume from the Site, similar to Alternatives 4B, 4C and 4D.

6.3.6.5 Short-term Effectiveness

Alternative 5B would have somewhat fewer short-term effectiveness considerations relative to Alternative 4B (e.g., less material to remove from the Site), so the short-term effectiveness is relatively high.

6.3.6.6 Implementability

Implementability of Alternative 5B is relatively high.

Alternative 5B would be more easily implemented than alternatives that excavate deeper because of the decreased volume of soils, number of properties affected, and lack of shoring or setbacks to protect houses or utility lines. It would also be easier to implement than Alternative 4B, which would require excavation of residential hardscape. Alternative 5B would require the excavation of a maximum of 183 properties. This is the same number of properties as Alternatives 4B, 4C and 5C. Alternatives 4D and 5D require the excavation of 214 properties.

Other implementability considerations are similar to Alternative 4B, except that no residential hardscape is removed in Alternative 5B.

6.3.6.7 Estimated Cost

The cost estimate for Alternative 5B is contained in **Table 6-6**. Alternative 5B is moderately costly, but it is the least expensive of the excavation alternatives (4B-D and 5B-D). A cost estimate summary follows:

Alternative 5B Remedial Cost Estimate	
Category	Estimated Cost (\$ millions)
Demolition	---
Excavate, Backfill, and Associated Costs	\$22.8
Other Direct Costs	\$16.8
Post-Excavation Construction and Long-Term O&M	\$24.1
TOTAL ESTIMATED COST	\$64
COST ESTIMATE RANGE (-20%/+30%)	\$51 – \$83

6.3.6.8 Consistency with Resolution 92-49

The discussion in Section 6.3.3.8 explains how Alternative 4B complies with Resolution 92-49. Alternative 5B would be as protective of water quality as Alternative 4B through SVE/bioventing, LNAPL removal, groundwater MNA and supplemental groundwater remediation. Alternative 5B, which is less costly than Alternative 4B, would be as compliant with Resolution 92-49 as Alternative 4B.

6.3.6.9 Social Considerations

Alternative 5B would have a relatively low-to-moderate social impact. An estimated 183 properties would be affected by excavation and 214 by SVE/bioventing.

Excavation and backfill would take less time than for Alternative 4B due to elimination of removal, excavation beneath, and replacement of residential hardscape.

6.3.6.10 Sustainability

Alternative 5B would create fewer greenhouse gas emissions from equipment than 4B since less soil and hardscape would need to be transported and excavated. Alternative 5B would also use less landfill space than 4B because of the smaller volume of soil excavated.

6.3.7 Detailed Evaluation of Alternative 5C

Alt	Existing ICs	Sub-slab Vapor Intrusion Mitigation	Excavate to 5 ft	Excavate Beneath Residential Hardscape	Groundwater MNA and supplemental groundwater	Remove LNAPL as Feasible	SVE / Bioventing
5C	X	X	X	N/A	X	X	X

6.3.7.1 Overall Protection of Human Health and the Environment

Alternative 5C would have similar issues as Alternative 5B. No removal of residential hardscape would occur and no excavation would be conducted beneath residential hardscape in either alternative. The City of Carson does not require that homeowners obtain a permit or notify the City prior to removing residential hardscape from their property. Because of the lack of a permitting or notification requirement, Alternative 5C, which does not include excavation of impacted soils beneath residential hardscape, is not expected to be as protective as alternatives which includes excavation beneath residential hardscape to 2 feet. For Alternative 5C to be protective, an additional LUC or a notification system would be required to ensure notification to Shell for residential hardscape removal or digging in the 2-to-3-foot depth zone, but it would not be effective absent homeowner agreement and cooperation.

Excavation of the upper 5 feet of soil and replacement with clean soil would prevent most contact with impacted soils, with the possible exception of excavation for swimming pool installation. The institutional controls discussed previously would also apply to this alternative.

Mitigation of vapor intrusion pathways, SVE/bioventing use, and groundwater remediation would be the same as for Alternative 5B, and so would be equally protective.

6.3.7.2 Compliance with ARARs

Alternative 5C would meet the identified ARARs. The ARARs that may be applicable for one or more of the technologies that this alternative comprises are identified in **Tables 6-1 and 6-2**. A separate assessment of this alternative's consistency with State Water Resources Control Board Resolution 92-49 is set forth in Section 6.3.7.8.

6.3.7.3 Long-term Effectiveness and Permanence

Because of the lack of a permitting or notification requirement, Alternative 5C, which does not include excavation of impacted soils beneath residential hardscape, is not expected to be as effective or permanent in the long term as alternatives which include excavation of impacted soil beneath residential hardscape.

6.3.7.4 Reduction of Toxicity, Mobility and Volume through Treatment

The following technologies included in this alternative involve treatment of the media: SVE, bioventing, groundwater treatment through supplemental groundwater remediation, and LNAPL removal. These treatment technologies would result in a moderate-to-high degree of reduction of toxicity, mobility, and volume from the Site.

6.3.7.5 Short-term Effectiveness

Excavating an additional 2 feet of soil relative to Alternative 5B would result in a longer period of potential soil exposure impacted, and therefore greater exposure to the community and workers than for Alternative 5B. The short-term effectiveness of sub-slab vapor intrusion mitigation, SVE/bioventing, and LNAPL removal and supplemental groundwater remediation would be similar to Alternative 5B.

Based on the short-term benefits and risks, short-term effectiveness through careful planning and execution is moderate.

6.3.7.6 Implementability

Implementability of Alternative 5C is moderate. The same implementability issues that were discussed for Alternative 4C apply to Alternative 5C.

6.3.7.7 Estimated Cost

The cost estimate for Alternative 5C is contained in **Table 6-7**. Alternative 5C has a moderately high cost. A cost estimate summary follows:

Alternative 5C Remedial Cost Estimate	
Category	Estimated Cost (\$ millions)
Demolition	---
Excavate, Backfill, and Associated Costs	\$32.5
Other Direct Costs	\$27.1
Post-Excavation Construction and Long-Term O&M	\$24.1
TOTAL ESTIMATED COST	\$84
COST ESTIMATE RANGE (-20%/+30%)	\$67 – \$109

6.3.7.8 Consistency with Resolution 92-49

The discussion in Section 6.3.3.8 explains how Alternative 4B complies with Resolution 92-49. Alternative 5C would be as protective of water quality as Alternative 4B through SVE/bioventing, LNAPL removal, groundwater MNA and supplemental groundwater remediation. Alternative 5C would likely be as compliant with Resolution 92-49 as Alternative 4B.

6.3.7.9 Social Considerations

Alternative 5C would have the same social impacts as Alternative 4C, except there would be none of the issues associated with the removal of residential hardscape. Not removing residential hardscape decreases the number of truck trips and the inconvenience of not having a driveway or walkways, and the residents could return to their homes sooner. An estimated 183 properties would be affected by excavation and 214 by SVE/bioventing.

6.3.7.10 Sustainability

Alternative 5C would have the sustainability considerations as Alternative 4C. Alternative 5C would not require the removal or disposal of residential hardscape or the soil below residential hardscape and there would be fewer greenhouse gas emissions associated with the larger volume of impacted soil excavated. Alternative 5C would require less than half the number of truckloads compared with Alternative 4C.

6.3.8 Detailed Evaluation of Alternative 5D

Alt	Existing ICs	Sub-slab Vapor Intrusion Mitigation	Excavate to 10 ft	Excavate Beneath Residential Hardscape	Groundwater MNA and Supplemental Groundwater Remediation	Remove LNAPL as Feasible	SVE / Bioventing
5D	X	X	X	N/A	X	X	X

Like Alternative 4D, Alternative 5D is not capable of being implemented as contemplated. Although there is a discussion of each evaluation criterion below, the basic lack of implementability overshadows the evaluation and the conclusions that may be reached regarding each criterion.

6.3.8.1 Overall Protection of Human Health and the Environment

Alternative 5D would have similar protectiveness considerations as Alternatives 5B and 5C. No removal of residential hardscape would occur and no excavation would be conducted beneath residential hardscape in either alternative. The City of Carson does not require that homeowners obtain a permit or notify the City prior to removing residential hardscape from their property. Because of the lack of a permitting or notification requirement, Alternative 5D, which does not include excavation of impacted soils beneath residential hardscape, is not expected to be as protective as alternatives which includes excavation beneath residential hardscape to 2 feet. For Alternative 5D to be protective, an additional LUC or a notification system would be required to ensure notification to Shell for residential hardscape removal or digging in the 2-to-3-foot depth zone, but it would not be effective absent homeowner agreement and cooperation.

Excavation of the upper 10 feet of soil and replacement with clean soil would mitigate contact with impacted soils in exposed areas. The institutional controls discussed under Alternative 5B and 5C would also apply to this alternative.

Mitigation of vapor intrusion pathways, SVE/bioventing use, and groundwater remediation would be the same as for Alternative 4D, and so would be equally protective.

6.3.8.2 Compliance with ARARs

If it were implementable, Alternative 5D would meet the identified ARARs. The ARARs that may be applicable for one or more of the technologies that this alternative comprises are identified in **Tables 6-1** and **6-2**. A separate assessment of this

alternative's consistency with State Water Resources Control Board Resolution 92-49 is set forth in Section 6.3.8.8.

6.3.8.3 Long-term Effectiveness and Permanence

Because of the lack of a permitting or notification requirement, Alternative 5D, which does not include excavation of impacted soils beneath residential hardscape, is not expected to be as effective or permanent in the long term as alternatives which include excavation of impacted soil beneath residential hardscape.

6.3.8.4 Reduction of Toxicity, Mobility and Volume through Treatment

The following technologies included in this alternative involve treatment of the media: SVE/bioventing, groundwater treatment, and LNAPL removal. These treatment technologies would result in a high degree of reduction of toxicity, mobility, and volume from the Site.

6.3.8.5 Short-term Effectiveness

Based on the short-term benefits and risks, which are similar to Alternative 4D, the short-term effectiveness is very low.

6.3.8.6 Implementability

Alternative 5D is not implementable, for the same reasons discussed under Alternative 4D.

6.3.8.7 Cost

The cost estimate for Alternative 5D is contained in **Table 6-8**. Alternative 5D has an extraordinarily high cost. It is the second highest cost alternative. A cost estimate summary follows:

Alternative 5D Remedial Cost Estimate	
Category	Estimated Cost (\$ millions)
Demolition	---
Excavate, Backfill, and Associated Costs	\$66.1
Other Direct Costs	\$41.7
Post-Excavation Construction and Long-Term O&M	\$24.1
TOTAL ESTIMATED COST	\$132
COST ESTIMATE RANGE (-20%/+30%)	\$106 – \$172

6.3.8.8 Consistency with Resolution 92-49

The discussion in Section 6.3.3.8 explains how Alternative 4B complies with Resolution 92-49. Because Alternative 4B provides adequate human health and environmental protection, meets ARARs, and objectively balances the incremental benefit of attaining further reductions in the concentrations of contaminants of concern compared with the incremental cost of achieving those reductions, then by logical extension Alternative 5D, which is more costly without adding commensurate increments of protectiveness to human health and groundwater quality, along with not being implementable, cannot be judged to be as compliant with Resolution 92-49 as is Alternative 4B.

6.3.8.9 Social Considerations

Apart from being non-implementable, Alternative 5D would have a high level of social impact.

Alternative 5D has the same impacts that were discussed for Alternatives 5B and 5C. Alternative 5D has an added social impact because the excavation and soil replacement, were it implementable, would take many days longer than Alternatives 5B or 5C because of additional soil, shoring, and work with utilities. There would be increased truck traffic from Alternative 5D due to more soil and hardscape being removed from a greater number of properties than for any other alternative, and due to the extensive lengthy disruption of the community.

6.3.8.10 Sustainability

Alternative 5D would release more greenhouse gases to the atmosphere than Alternatives 5B or 5C. While fire and explosion hazards have not been identified at any residence due to methane concentrations from degradation of hydrocarbons in soil vapor, this would be considered a greenhouse gas emission and therefore a detrimental impact to air quality. Such emissions would be far less with excavation to 3 feet under Alternative 5B than to 5 feet or especially 10 feet.

Each alternative requires the treatment and recycling or disposal of some impacted soil in landfills, along with some recycled materials. Landfill space and treatment capacity are finite and an increased volume of soil being disposed of in landfills or recycled reduces the availability of these valuable resources. Alternative 5D would use more landfill space or recycling capacity because of the larger volume of soil excavated.

6.3.9 Detailed Evaluation of Alternative 7

Alt	Existing ICs	Sub-slab Vapor Intrusion Mitigation	Cap Site	Excavate	Groundwater MNA and supplemental groundwater	Remove LNAPL as Feasible	SVE / Bioventing
7	X	X	X	N/A	X	X	X

6.3.9.1 Overall Protection of Human Health and the Environment

Alternative 7 would achieve the human health goal for infrequent exposure to deep soils and for nuisance, but would not achieve the other soil goals in the short-term. Implementation of this alternative would take longer to meet groundwater RAOs, as less impacted soils would be removed by excavation than any other alternatives considered.

Sub-slab depressurization would mitigate the potential vapor intrusion pathway at properties where sub-slab soil vapor does not meet the RAO as developed in the HHRA. A SSD system would keep soil vapors beneath a building from entering the building.

COCs would be less likely to leach into groundwater due to the large reduction in stormwater and irrigation water passing through the soil. In order to protect groundwater for designated beneficial uses, such as municipal supply, COCs in soil and groundwater would be reduced through SVE/bioventing, LNAPL removal, groundwater MNA, and supplemental groundwater remediation.

6.3.9.2 Compliance with ARARs

Alternative 7 would meet the identified ARARs. The ARARs that may be applicable for one or more of the technologies that this alternative comprises are identified in **Tables 6-1** and **6-2**. A separate assessment of this alternative's consistency with State Water Resources Control Board Resolution 92-49 is set forth in Section 6.3.9.8.

6.3.9.3 Long-term Effectiveness and Permanence

The combination of technologies used for Alternative 7 are anticipated to be highly effective at reducing exposure to COCs in the long-term. The difference compared to the excavation alternatives (4B-D and 5B-D) is the method of exposure reduction. Excavation alternatives remove COCs directly from the Site, while for Alternative 7 those COCs would be removed through longer-term SVE/bioventing. Additionally,

COCs would be less likely to leach into groundwater in this alternative than in Alternative 4B due to the reduction in stormwater and irrigation water passing through the soil. In the long term, RAOs would be met for the Site.

6.3.9.4 Reduction of Toxicity, Mobility and Volume through Treatment

The following technologies included in this alternative involve treatment of the media: SVE/bioventing, groundwater treatment, and LNAPL removal. These treatment technologies would result in a significant degree of reduction of toxicity, mobility, and volume from the Site over the long term.

6.3.9.5 Short-term Effectiveness

Alternative 7 would interrupt the exposure pathway for Site soils through capping exposed soils. It would remove COCs in the upper 6 inches of soil to prepare for Site capping, which is less excavation than for the other retained alternatives. As a result, this alternative would cause less of the short-term effects associated with excavating 3 or more feet impacted soil.

The short-term effectiveness of sub-slab vapor intrusion mitigation, SVE/bioventing, LNAPL removal and supplemental groundwater remediation is relatively high.

6.3.9.6 Implementability

Implementability of Alternative 7 is moderate.

Alternative 7 would involve capping exposed soil on all 285 properties, whereas Alternative 4D and 5D would require excavation on 214 and Alternatives 4B, 4C, 5B and 5C would include excavation on 183 properties. SVE/bioventing would be conducted on 214 properties.

Excavation would be minimal for Alternative 7, primarily for clearing and grubbing. Utility lines would be below the excavation depth.

Alternative 7 also would require an institutional control so that the residents do not come into contact with the COCs contained below the cap. Adoption of new institutional controls would increase the administrative requirements, and implementation would depend upon homeowner agreement to record a restrictive covenant at each property. A SWPPP would be required for Alternative 7 due to the increase in runoff caused by the impermeable cap.

6.3.9.7 Estimated Cost

The cost estimate for Alternative 7 is contained in **Table 6-9**. Alternative 7 has the lowest cost of the final alternatives. A cost estimate summary is shown below:

Alternative 7 Remedial Cost Estimate	
Category	Estimated Cost (\$ millions)
Demolition	---
Excavate, Backfill, and Associated Costs	\$21.5
Other Direct Costs	\$5.9
Post-Excavation Construction and Long-Term O&M	\$24.1
TOTAL ESTIMATED COST	\$51
COST ESTIMATE RANGE (-20%/+30%)	\$41 – \$66

6.3.9.8 Consistency with Resolution 92-49

Alternative 7 would be judged to be less consistent with Resolution 92-49 than Alternative 4B due to the longer period of time to achieve remedial objectives, and due to the modification in land use, which could not accommodate normal residential landscape.

6.3.9.9 Social Considerations

Alternative 7 would have a very high social impact. A cap over all Site landscaped areas would impact the residents' enjoyment of their homes. All planting would need to be done above ground such as in planter boxes. No landscaped areas would remain after implementation. This would have a more long-term effect on the community than any of the alternatives involving excavation.

During construction, significant air quality, noise, and traffic impacts would be anticipated. These impacts are expected to be able to be mitigated. Surrounding neighborhoods would be impacted to a lesser extent by heavy truck traffic. It is anticipated that installation of a cap would take about 1.4 years for implementation on the entire Site.

6.3.9.10 Sustainability

Because it involves only minimal excavation, Alternative 7 would be the most green remediation alternative as compared to Alternatives 4 and Alternatives 5. Alternative 7 requires less use of trucks, excavators or landfill space than other alternatives.

Alternative 7 may affect stormwater quality or runoff in the long term, which would also reduce groundwater recharge, due to the inability for stormwater to infiltrate into the cap. This sustainability issue is unique to Alternative 7.

7. COMPARATIVE EVALUATION OF ALTERNATIVES

In this section, the retained remedial alternatives are compared by using the detailed analysis criteria. The purpose of this comparative analysis is to identify the relative advantages and disadvantages of each final remedial alternative (Alternatives 4B-D, 5B-D and 7) and to provide a basis for recommending a preferred remedial alternative.

In Table 7-1, each final remedial alternative is assigned a ranking for each detailed analysis criterion, except that the two threshold criteria of Overall Protection of Human Health and the Environment and Compliance with ARARs are not provided with a numeric ranking because the threshold of protectiveness or compliance must be met, and is met, by each remaining alternative (except for the no action alternative).

Rankings range from “low” to “high” and are accompanied with a numeric ranking from 1 to 5⁴. At the conclusion of the comparative analysis, the recommended remedial alternative is identified.

7.1 Overall Protection of Human Health and the Environment

Alternative 1, No Action, does not provide adequate protection of human health and the environment. No further assessment or comparison with this alternative is provided.

With respect to overall protection of human health and the environment, comparison points for retained alternatives follow:

- Alternatives 4B, 4C and 7 protect human health and the environment through impacted soil removal, treatment, and existing institutional controls. The majority of these benefits occur under Alternative 4B; Alternatives 4C and 7 provide essentially negligible additional protection. RAOs are met equally in the long term.
- Alternatives 4D and 5D are not implementable, and therefore would not provide adequate protection.
- Alternatives 4B and 4C are more protective than Alternatives 5B and 5C, which leave impacted soil beneath residential hardscape without controls on hardscape removal by a homeowner to access to such soils.

⁴ A numeric ranking of “1” is lowest, or worst; “5” is highest, or best. With respect to cost, “1” is most expensive; “5” is least expensive.

- Since SVE/bioventing, LNAPL removal, groundwater MNA and supplemental groundwater treatment all are part of Alternatives 4B and 4C, the removal of more impacted soil under Alternative 4C would not be more protective of groundwater in the long term. Groundwater RAOs would be met by either alternative.

7.2 Compliance with ARARs

Each alternative is capable of complying with ARARs. The excavation alternatives perform equally well with respect to compliance, although as noted Alternatives 4D and 5D are not implementable. Alternative 7 would pose significant issues associated with capping of the entire Site, but ARARs could be met.

7.3 Long-term Effectiveness and Permanence

Each alternative would be effective and permanent in the long-term. Comparison points follow:

- Alternatives 4B and 4C remove more impacted soil than Alternatives 5B and 5C, which leave impacted soil beneath residential hardscape.
- Alternatives 5B and 5C would not be effective in preventing residential contact with impacted soils beneath residential hardscape. With supplemental institutional controls, which could be difficult to implement, Alternatives 5B and 5C would not be as effective in the long term.
- Alternative 7 removes the least amount of impacted soil initially but also will eventually meet remedial goals.
- Although Alternatives 4D and 5D would appear to provide for a greater degree of initial reduction in impacted soil through excavation, neither is implementable. Also, due to shoring and setback requirements, utility protection requirements, and the infeasibility of excavating back yards to 10 feet, Alternatives 4D and 5D, were they implementable, would still leave a substantial amount of impacted soil in place.

7.4 Reduction of Toxicity, Mobility, and Volume through Treatment

Each alternative would provide for significant reduction of toxicity, mobility and volume through treatment. Each alternative would employ the following technologies in treatment of the media: SVE/bioventing, LNAPL removal, groundwater MNA, and supplemental groundwater remediation. Comparison points follow:

- In the short term, Alternatives 4C and 5C would provide for a slightly greater degree of reduction in impacted soil because of the extra 2 feet of excavation compared with Alternatives 4B and 5B.
- Alternatives 4B, 5B and 7 would provide for the same degree of reduction in toxicity, mobility and volume through treatment as Alternatives 4C and 5C in the long term.

7.5 Short-term Effectiveness

Alternatives 4 and 5 would perform equally well with respect to short-term effectiveness and present few short-term effectiveness issues. Both alternatives are rated “High” for this category and assigned a numeric rating of 5. Specific comparative points follow:

- Alternatives 4B and 5B would require excavation of 3 feet of soil from affected residential properties.
- Alternatives 4C and 5C would require excavation of 5 feet of soil from affected residential properties, but would require shoring of the excavation, setbacks from structures, sloped excavation sidewalls, and/or slot trenching in accordance with geotechnical requirements. These would reduce the area of excavations and reduce the effectiveness of the alternative, as would the need to avoid excavating near the water mains and other utilities that are located in the front yards at approximately 50% of the properties.
- The excavation of an additional 2 feet of soil in Alternatives 4C and 5C would result in more days when impacted soil would be exposed, and therefore a greater potential exposure to the community and workers and overall longer period of implementation than for Alternatives 4B or 5B.
- Alternatives 4B and 5B can be implemented in much less time than Alternatives 4C and 5C; Alternative 7 could be implemented in the least amount of time, although similar to 5B:⁵
 - Alternative 4B: 1.9 years
 - Alternative 4C: 2.8 years

⁵ The timeframes presented include the active excavation and backfill portion of the remedy. Additional time would be required up-front for preparation and approval of remedial design, permitting, and other pre-construction activities. Additional time would be required after active remedial action is complete for SVE installation and startup.

- Alternative 5B: 1.5 years
 - Alternative 5C: 2.8 years
 - Alternative 7: 1.4 years
- Alternatives 4B and 4C require removal and disposal of residential hardscape, whereas Alternatives 5B and 5C do not require removal of hardscape. Alternatives 4B and 4C would therefore be more disruptive and take longer to implement.
 - Alternative 7 would remove COCs in the upper 6 inches of soil to prepare for Site capping. As a result, this alternative would cause less of the short-term effects associated with excavating 3 feet or 5 feet, and the capping would provide immediate disruption of exposure pathways.
 - As noted, Alternatives 4D and 5D would require the most time to complete, would result in the most disruption of the Site and of the community, and are not implementable.

7.6 Implementability

There are significant differences in implementability of the alternatives. Comparison points follow:

- Alternatives 4B, 4C, 5B and 5C would include excavation at 183 properties. Alternative 4D and 5D would require excavation at 214 properties, and Alternative 7 would involve excavation and capping at all 285 properties. Each alternative would require SVE/bioventing at 214 properties
- Alternatives 4B and 5B, with excavation to 3 feet, would not be expected to encounter water mains and other utilities, as opposed to deeper excavations which would encounter these utilities.
- Excavation would be minimal for Alternative 7. Utility lines would likely not be affected.
- Alternatives 4C and 5C would require shoring, slot trenching, or other means to excavate to a depth of 5 feet. Excavation to 5 feet would involve significant utility disruption, potentially including disruption of water supply to large parts of the community due to the presence of asbestos-cement (transite) water main pipelines at a depth of approximately 3 to 3½ feet in yards of approximately half of the properties in the tract.
- Alternative 7 would also require additional institutional controls including the recording of restrictive covenants so that the residents do not come into contact with the COCs contained below the impervious cap. Adoption of new

institutional controls would increase the administrative infeasibility compared with the excavation alternatives. Special runoff measures, including a SWPPP, would likely be required for Alternative 7 due to the increase in runoff and potential degradation in stormwater quality caused by the impermeable cap.

- For all the reasons stated in Section 6.3.5.6, Alternatives 4D and 5D are not implementable.
- Comparatively, Alternative 4D involves the longest overall time to implement, greatest volume of soils excavated, the largest amount of clean soil brought back the Site, the greatest number of properties affected, the longest period of remediation per property, the greatest amount of shoring, increased equipment requirements, and the most likely chance of significantly affecting utility lines.

7.7 Estimated Cost

The estimated costs of the alternatives are presented in Table 6-4 through 6-9 with capital and 30-year O&M costs identified. A summary of estimated costs follows:

- Alternative 4B: \$63 million - \$103 million
- Alternative 4C: \$83 million - \$135 million
- Alternative 4D: \$150 million - \$243 million
- Alternative 5B: \$51 million - \$83 million
- Alternative 5C: \$67 million - \$109 million
- Alternative 5D: \$106 million - \$172 million
- Alternative 7: \$41 million - \$66 million

Estimated costs are calculated for Alternatives 4D and 5D even though these alternatives are not implementable.

7.8 Consistency with Resolution 92-49

The discussion in Section 6 explains how Alternative 4B complies with Resolution 92-49. If Alternative 4B provides adequate human health and environmental protection, meets ARARs, and objectively balances the incremental benefit of attaining further reductions in the concentrations of contaminants of concern compared with the incremental cost of achieving those reductions, then by logical extension Alternatives 4C, 4D, 5C and 5D which are more costly without adding a significant increment of protectiveness, cannot be judged to be as compliant with Resolution 92-49 as is Alternative 4B. Alternative 5B, although less expensive than Alternative 4B, does not offer the same degree of protectiveness as Alternative 4B absent homeowner agreement to a restrictive covenant being recorded that would ensure notification prior to hardscape removal.

Alternative 7 would be judged to be less consistent with Resolution 92-49 than Alternative 4B due to the much longer period of time to achieve remedial objectives, and due to the change in land use, which could not accommodate normal residential landscape activities.

7.9 Social Considerations

There are significant differences in social considerations associated with the various alternatives. Comparison points follow:

- Alternative 4B and 5B would have the lowest (low-to-moderate) social impact. An estimated 183 properties would be affected by soil excavation, and an estimated 214 properties would be affected by SVE/bioventing. Excavation and backfill would take approximately 1.9 years and 1.5 years, respectively, for Alternative 4B and 5B.
- Alternative 4C and 5C would have a higher (moderately high) social impact compared with 4B and 5B. The same 183 properties would be affected by excavation, and the same 214 properties would be affected by SVE/bioventing. Excavation, shoring and backfill would take approximately 2.8 years for each of Alternatives 4C and 5C.
- Alternative 7 would have a very high social impact. A cap over all Site landscaped areas would likely decrease the aesthetic appeal of the community. All planting would need to be done above ground (such as in planters). This would likely have a more long-term effect on the community than any of the alternatives involving excavation.
- Alternatives 4D and 5D would have a very high social impact, but neither is implementable.

7.10 Sustainability

There are significant differences in sustainability associated with the various alternatives. Comparison points follow:

- Excavation alternatives require the use of excavation equipment and trucks that would create greenhouse gas emissions affecting air quality. As the time for remediation, the number of properties, and the number of truckloads increase, so do the greenhouse gas emissions and effects on air quality. Alternative 4B would have less of an impact on air quality than Alternatives 4C, 4D, 5C and 5D, but it is not as sustainable as Alternatives 5B or 7.

- Each alternative requires the treatment and recycling of impacted soil and some disposal of materials in landfills. Landfill space is finite and an increased volume of soil being disposed of in landfills reduces the availability of a valuable resource. Alternative 4B is more sustainable in this regard than Alternatives 4C, 4D, and 5D but not as sustainable as Alternatives 5B, 5C, or 7.
- Alternatives 4B – 4D create additional waste, much of it recyclable, as opposed to Alternatives 5B – 5D because of the removal of residential hardscape.
- Alternative 7 would be the most green remediation alternative as compared to Alternatives 4 and Alternatives 5. Alternative 7 requires minimal use of equipment, the least time to implement, and the lowest potential use of landfill space or recycling capacity.
- Alternative 7 may affect stormwater quality, groundwater recharge, or runoff in the long term due to the inability for stormwater to infiltrate into the cap. This sustainability issue is unique to Alternative 7.

7.11 State Acceptance

In accordance with RI/FS Guidance, this criterion will be addressed when RWQCB makes its remedial decision after public comment is received on the RAP.

7.12 Community Acceptance

In accordance with RI/FS Guidance, this criterion will be addressed when RWQCB makes its remedial decision after public comment is received on the RAP.

8. PREFERRED REMEDIAL ALTERNATIVE

Based on the comparative evaluation of the remedial alternatives presented in Section 7, there is a clear difference between Alternatives 4B and 5B, which both are superior to Alternatives 4C, 5C and 7. Alternatives 4D and 5D are not implementable and are not considered further.

Alternative 4B differs from Alternative 5B in the approach to residential hardscape. In Alternative 4B, residential hardscape is removed and impacted soils are excavated to a depth of 3 feet prior to backfilling the excavation and replacing the hardscape. In Alternative 5B, no removal of residential hardscape occurs and no excavation is conducted beneath residential hardscape. It is the practice of the City of Carson that homeowners may remove residential hardscape from their property without first obtaining a permit or notifying the City. Because of the lack of a permitting or notification requirement, Alternative 5B, which does not include excavation of impacted soils beneath residential hardscape, is not assumed to be as protective to homeowners absent homeowner agreement to the recording of a restrictive covenant that would ensure notification prior to hardscape removal.

As a result of the evaluation conducted in this FS Report, and the specific considerations above, Alternative 4B is the alternative recommended for inclusion in the RAP.

A recapitulation of Alternative 4B follows. Alternative 4B includes these elements:

- Excavation to 3 feet bgs beneath landscaped areas and beneath residential hardscape in areas where RAOs for the direct contact pathway or protection of groundwater are not met. Soil would not be excavated in areas where soil concentrations meet RAOs. Excavations would be made with vertical walls with no side slopes at the horizontal to vertical ratio recommended by the Geotechnical Engineer and approved by the LACDPW and City of Carson in the Grading Permit for the particular property being excavated. The excavation sidewalls would be back-sloped below foundation footings of structures.
- Excavated areas and residential hardscape would be replaced to like conditions with clean imported soils, new hardscape, and new landscape.
- Reservoir slabs would be removed if they are encountered during excavations to 3 feet bgs. They would not be removed if they lie outside the boundaries of an excavation or below the depth of excavation, because they do not require removal to meet RAOs.

- Sub-slab mitigation through a sub-slab depressurization (SSD) system would be used to mitigate the potential vapor intrusion pathway at the Site. A SSD system creates a negative pressure below the slab of the building using a fan or similar device to remove vapor from beneath the slab and exhausting the vapor above the building. This process keeps vapors emanating from soil beneath a building from entering the building.
- SVE/bioventing would be included to address volatile petroleum hydrocarbons, VOCs and methane in soil vapor where appropriate and to promote degradation of residual hydrocarbons in the vadose zone soils. SVE wells would be installed in City streets and on residential properties, as appropriate. Bioventing would work in conjunction with SVE and would use the same wells via cyclical operation of the SVE/bioventing system.
- LNAPL recovery would continue from monitoring wells MW-3 and MW-12 on a periodic basis, and, if LNAPL is detected in other wells with thicknesses greater than 0.5 foot in the future, monthly LNAPL recovery may be initiated on these wells.
- Monitored natural attenuation (MNA) would be implemented to meet RAOs for groundwater. MNA could be paired with supplemental groundwater remediation (i.e., where COCs exceed 100x MCL) if, after a five-year review following start of SVE/bioventing operations, the groundwater plume is not stable or decreasing. In addition, upgradient sources would need to be addressed by Shell.
- Institutional controls may include reliance on existing LA County and City of Carson code provisions and permitting processes such that current and future residents are made aware of residual impacts and are restricted from exposure to residual impacts below a depth of 3 feet. The City of Carson has amended L.A. County Building Code Section 7003.1 (City of Carson Building Code §8105) to require a Grading Permit for excavations 3 feet or deeper. Because the City would be notified and approve excavations deeper than 3 feet via the permitting process, the City could readily inform residents and workers of other appropriate precautions necessary for excavations below 3 feet through this existing administrative processes, and also notify Shell that monitoring and disposal may be required.

- A number of permits would be required. Significant permits are as follows:
 - Grading Permit for each property excavated.
 - Excavation and Encroachment Permits from the City of Carson for equipment staging and operations, lane closures in public streets and sidewalks.
 - Traffic Management Plan as part of the Encroachment Permit Application.
 - Rule 1166 Permit from South Coast Air Quality Management District (SCAQMD) for excavation of VOC-impacted soils.
 - Permit to Construct/Operate for the SVE/bioventing system from SCAQMD.
 - Permit(s) for the Sub-slab Depressurization Systems from SCAQMD.
 - Plumbing and Electrical Permits would be needed if plumbing or electrical service is removed and replaced.
 - Permits for reconstruction of property features.

Alternative 4B will be carried forward into the RAP, where more detail associated with its implementation is included.

REFERENCES

- California Department of Water Resources (DWR), 1961. Planned Utilization of the Groundwater Basins on the Coastal Plain of Los Angeles County, Bulletin # 104. June.
- Department of Toxic Substances Control, California Environmental Protection Agency (DTSC), 2005. Methane Assessment and Common Remedies at School Sites. June 16.
- Department of Toxic Substances Control, California Environmental Protection Agency (DTSC), 2011. Vapor Intrusion Advisory Final Revision 1, October.
- Equilon Enterprises, LLC, 2001. Revised Soil and Groundwater Quality Management Program - Equilon Los Angeles Refining Company, Former Texaco Refinery, 2101 Pacific Coast Highway, Wilmington, CA (Cleanup and Abatement Order No. 88-070, SLIC No.230). June 29.
- Geosyntec Consultants, 2010. Site Conceptual Model, Former Kast Property, Carson, California, Site Cleanup No. 1230, Site ID. 2030330, September.
- Geosyntec Consultants, 2012a. Revised In-situ Chemical Oxidation Pilot Test – Bench-Scale Evaluation, Former Kast Property, Carson, California, July 16.
- Geosyntec Consultants, 2012b. Bioventing Pilot Test Summary Report, Former Kast Property, Carson, California, December 6.
- Geosyntec Consultants, 2013a. Phase II ISCO Bench Scale Test Report, Former Kast Property, Carson, California, August 30.
- October 2011 Geosyntec Consultants, 2013b. Revised Site Specific Cleanup Goals Report, Former Kast Property, Carson California. October 21, 2013.
- Geosyntec Consultants, 2014. Human Health Risk Assessment Report, Former Kast Property, Carson, California. March 10.
- Los Angeles Regional Water Quality Control Board [LARWQCB], 1996. Interim Site Assessment & Cleanup Guidebook, May 1996.

- Los Angeles Regional Water Quality Control Board [LARWQCB], 2014a. Review of Revised Site-Specific Cleanup Goal Report and Directive to Submit Remedial Action Plan, Human Health Risk Analyses, and Environmental Analyses for Cleanup of the Carousel Tract Pursuant to California Water Code Section 13304. January 23.
- Los Angeles Regional Water Quality Control Board [LARWQCB], 2014b. Clarification and Revision of Regional Board's January 13, 2014 Review of Assessment of Environmental Impact and Feasibility of Removal of Residual Concrete Reservoir Slabs Pursuant to Water Code Section 13304, Former Kast Property Tank Farm Located Southeast of the Intersection of Marbella Avenue and East 244th Street, Carson, California (SCP No. 1230, Site ID No. 2040330, CAO No. R4-2011-0046). February 10.
- San Francisco Bay Regional Water Quality Control Board (SFBRWQCB), 2013. User's Guide: Derivation and Application of Environmental Screening Levels, Interim Final. December 23, 2013.
- UCLA Expert Panel, 2013. Comments from the Expert Panel on the Revised Site-Specific Cleanup Goal Report. December 18.
- UCLA Expert Panel, 2014. Soil Depth Intervals Used to Calculate the Site Specific Cleanup Goals. January 14.
- URS Corporation (URS), 2008. Phase I Environmental Site Assessment Report, Former Kast Property, Carson, California, July.
- URS, 2010a. Plume Delineation Report, Former Kast Property, Carson, California . September 29.
- URS, 2010b. Soil Vapor Extraction Pilot Test Report, Former Kast Property, Carson, California, Site Cleanup No. 1230, Site ID 2030330.
- URS, 2013a. Assessment of Environmental Impact and Feasibility of Removal of Residual Concrete Reservoir Slabs, Former Kast Property, Carson, California. June 28, 2013.
- URS, 2013b. Final Pilot Test Summary Report – Part 1, Former Kast Property, Carson, CA, Site Cleanup No. 1230, Site ID No. 2040330, CAO No. R4-2011-0046, May 30.
- URS, 2014. Fourth Quarter 2013 Groundwater Monitoring Report, October through December 2013, Former Kast Property, Carson, California, January 15.

URS and Geosyntec Consultants, 2011. Pilot Test Work Plan, Remedial Excavation and In-Situ Treatment Pilot Testing, Former Kast Property, Carson, California, May 10.

URS and Geosyntec Consultants, 2013. Final Pilot Test Summary Report – Part 2, Former Kast Property, Carson, CA, Site Cleanup No. 1230, Site ID No. 2040330, CAO No. R4-2011-0046, August 30.

URS and Geosyntec Consultants, 2014. Remedial Action Plan, Former Kast Property Carson, California. March 10.

USEPA, 1988. Guidance for Conducting Remedial Investigations and Feasibility Studies Under CERCLA. Interim Final. EPA/540/G-89/004. OSWER Directive 9355.3-01. October.

USEPA, 1991. Risk Assessment Guidance for Superfund. Volume I: Human Health Evaluation Manual (Part C: Risk Evaluation of Remedial Alternatives). Office of Emergency and Remedial Response. Publication 9285.7-01C. October.

USEPA, 2012a. A Citizen's Guide to Soil Vapor Extraction and Air Sparging. Office of Solid Waste and Emergency Response. EPA 542-F-12-018. September.

USEPA, 2012b. Institutional Controls: A Guide to Planning, Implementing, Maintaining, and Enforcing Institutional Controls at Contaminated Sites, Office of Solid Waste and Emergency Response, Office of Enforcement and Compliance Assurance, OSWER 9355.0-89, EPA-540-R-03-001, December.

TABLES

**Table 2-1
Summary of Constituents of Concern**

CAS Number	Chemical ¹	Soil		Soil Vapor, Sub-Slab		Soil Vapor, Non-Sub-Slab	
		COC	Site-Related COC ¹	COC	Site-Related COC ¹	COC	Site-Related COC ¹
Metals							
7440-36-0	Antimony	Yes	No	--	--	--	--
7440-38-2	Arsenic	Yes	Yes	--	--	--	--
7440-43-9	Cadmium	No ²	No	--	--	--	--
18540-29-9	Chromium, Hexavalent	Yes ³	No	--	--	--	--
7440-48-4	Cobalt	No ²	No	--	--	--	--
7440-50-8	Copper	No ²	No	--	--	--	--
7439-92-1	Lead	Yes	Yes	--	--	--	--
7440-28-0	Thallium	Yes	No	--	--	--	--
7440-62-2	Vanadium	No ²	No	--	--	--	--
7440-66-6	Zinc	No ²	No	--	--	--	--
PAHs							
56-55-3	Benzo (a) Anthracene	Yes	Yes	--	--	--	--
50-32-8	Benzo (a) Pyrene	Yes	Yes	--	--	--	--
205-99-2	Benzo (b) Fluoranthene	Yes	Yes	--	--	--	--
207-08-9	Benzo (k) Fluoranthene	Yes	Yes	--	--	--	--
218-01-9	Chrysene	Yes	Yes	--	--	--	--
53-70-3	Dibenz (a,h) Anthracene	Yes	Yes	--	--	--	--
193-39-5	Indeno (1,2,3-c,d) Pyrene	Yes	Yes	--	--	--	--
90-12-0	1-Methylnaphthalene	Yes	Yes	--	--	--	--
91-57-6	2-Methylnaphthalene	Yes	Yes	--	--	--	--
129-00-0	Pyrene	Yes	Yes	--	--	--	--
SVOCs							
121-14-2	2,4-Dinitrotoluene	Yes	No	--	--	--	--
117-81-7	Bis(2-Ethylhexyl) Phthalate	Yes	No	--	--	--	--
TPH							
68334-30-5	TPH as Diesel	Yes	Yes	--	--	--	--
PHCG	TPH as Gasoline	Yes	Yes	--	--	--	--
TPHMOIL	TPH as Motor Oil	Yes	Yes	--	--	--	--
VOCs							
79-34-5	1,1,2,2-Tetrachloroethane	Yes	No	--	--	Yes	No
79-00-5	1,1,2-Trichloroethane	No	No	--	--	Yes	No
75-34-3	1,1-Dichloroethane	--	--	--	--	Yes	No
96-18-4	1,2,3-Trichloropropane	Yes	No	--	--	--	--
120-82-1	1,2,4-Trichlorobenzene	No	No	Yes	No	--	--
95-63-6	1,2,4-Trimethylbenzene	Yes	Yes	Yes	Yes	Yes	Yes
107-06-2	1,2-Dichloroethane	Yes	No	Yes	No	Yes	No
78-87-5	1,2-Dichloropropane	Yes	No	Yes	No	--	--
108-67-8	1,3,5-Trimethylbenzene	Yes	Yes	Yes	Yes	Yes	Yes
106-99-0	1,3-Butadiene	--	--	Yes	No	--	--
106-46-7	1,4-Dichlorobenzene	Yes	No	Yes	No	Yes	No
123-91-1	1,4-Dioxane	--	--	Yes	No	--	--

**Table 2-1
Summary of Constituents of Concern**

CAS Number	Chemical ¹	Soil		Soil Vapor, Sub-Slab		Soil Vapor, Non-Sub-Slab	
		COC	Site-Related COC ¹	COC	Site-Related COC ¹	COC	Site-Related COC ¹
540-84-1	2,2,4-Trimethylpentane	--	--	Yes	No	No	No
78-93-3	2-Butanone (Methyl Ethyl Ketone)	No	No	No	No	Yes	No
591-78-6	2-Hexanone	No	No	Yes	No	Yes	No
622-96-8	4-Ethyltoluene	--	--	No	Yes	Yes	Yes
71-43-2	Benzene	Yes	Yes	Yes	Yes	Yes	Yes
75-27-4	Bromodichloromethane	Yes	No	Yes	No	Yes	No
74-83-9	Bromomethane	Yes	No	Yes	No	No	No
75-15-0	Carbon Disulfide	No	No	No	No	Yes	No
56-23-5	Carbon Tetrachloride	--	--	Yes	No	--	--
67-66-3	Chloroform	No	No	Yes	No	Yes	No
110-82-7	Cyclohexane	--	--	No	Yes	Yes	Yes
124-48-1	Dibromochloromethane	No	No	Yes	No	--	--
156-59-2	Dichloroethene, cis-1,2-	Yes	No	No	No	Yes	No
156-60-5	Dichloroethene, trans-1,2-	--	--	No	No	Yes	No
10061-02-6	Dichloropropene, trans-1,3-	--	--	Yes	No	Yes	No
64-17-5	Ethanol	No	No	No	No	Yes	No
100-41-4	Ethylbenzene	Yes	Yes	Yes	Yes	Yes	Yes
142-82-5	Heptane	--	--	No	Yes	Yes	Yes
87-68-3	Hexachloro-1,3-Butadiene	--	--	--	--	Yes	No
110-54-3	Hexane	--	--	No	Yes	Yes	Yes
67-63-0	Isopropanol	--	--	No	No	Yes	No
98-82-8	Isopropylbenzene (cumene)	No	No	No	Yes	Yes	Yes
75-09-2	Methylene Chloride	Yes	No	Yes	No	Yes	No
1634-04-4	Methyl-tert-Butyl Ether	No	No	Yes	No	Yes	No
91-20-3	Naphthalene	Yes	Yes	Yes	Yes	Yes	Yes
103-65-1	Propylbenzene	No	No	No	Yes	Yes	Yes
75-65-0	tert-Butyl Alcohol (TBA)	Yes	No	--	--	Yes	No
127-18-4	Tetrachloroethene	Yes	No	Yes	No	Yes	No
109-99-9	Tetrahydrofuran	--	--	Yes	No	No	No
108-88-3	Toluene	Yes ⁴	Yes	Yes ⁴	Yes	Yes ⁴	Yes
79-01-6	Trichloroethene	Yes	No	Yes	No	Yes	No
75-01-4	Vinyl Chloride	Yes	No	Yes	No	Yes	No
95-47-6	o-Xylene	Yes ⁴	Yes	Yes ⁴	Yes	Yes ⁴	Yes
1330-20-7-1	p/m-Xylene	Yes ⁴	Yes	Yes ⁴	Yes	Yes ⁴	Yes
1330-20-7	Xylenes, Total	Yes ⁴	Yes	Yes ⁴	Yes	Yes ⁴	Yes

Notes:

-- not available or not applicable

COC: Constituent of Concern

¹ Site-Related COCs may be related to Site activities associated with crude oil storage prior to redevelopment.

² Additional background analysis (one-sample proportion test) indicated this metal to be within background for all properties.

³ Due to change in oral cancer assessment not reflected in RBSLs from HHSRE Work Plan, hexavalent chromium included as a COC.

⁴ Although not selected as COCs through the screening process, the RWQCB has requested these VOCs to be evaluated as COCs.

**Table 3-1
Site-Specific Cleanup Goals for Soil**

CAS Number	Constituents of Concern	SSCG _{soil-GW} ¹ (mg/kg)	(BTV) ² (mg/kg)	Soil Site-Specific Cleanup Goals (mg/kg)					
				Onsite Resident				Construction and Utility Maintenance Worker	
				EF = 350 d/y		EF = 4 d/y			
				SSCG (mg/kg)	Basis	SSCG (mg/kg)	Basis	SSCG (mg/kg)	Basis
Inorganics									
7440-36-0	Antimony	2.7E-01	7.4E-01	3.1E+01	nc	2.7E+03	nc	3.1E+03	nc
7440-38-2	Arsenic	2.9E-01	1.2E+01	6.1E-02	c	5.4E+00	c	1.5E+01	c
7440-43-9	Cadmium	--	3.8E+00	7.0E+01	nc	6.2E+03	nc	2.4E+02	c
18540-29-9	Chromium VI	--	--	1.3E+00	c	1.1E+02	c	6.7E+00	c
7440-48-4	Cobalt	--	1.1E+01	2.3E+01	nc	2.1E+03	nc	1.1E+02	c
7440-50-8	Copper	--	5.9E+01	3.1E+03	nc	2.7E+05	nc*	3.1E+05	nc*
7439-92-1	Lead	--	6.1E+01	8.0E+01 ³	--	8.2E+02 ⁴	--	8.2E+02 ⁵	--
7440-28-0	Thallium	1.4E-01	2.3E-01	7.8E-01	nc	6.8E+01	nc	7.7E+01	nc
7440-62-2	Vanadium	--	4.6E+01	3.9E+02	nc	3.4E+04	nc	3.3E+03	nc
7440-66-6	Zinc	--	2.9E+02	2.3E+04	nc	2.1E+06	nc*	2.3E+06	nc*
PAHs									
56-55-3	Benz[a]anthracene	--	--	1.6E+00	c	1.4E+02	c	2.6E+02	c
50-32-8	Benzo[a]pyrene	--	9.0E-01	1.6E-01	c	1.4E+01	c	2.6E+01	c
205-99-2	Benzo[b]fluoranthene	--	--	1.6E+00	c	1.4E+02	c	2.6E+02	c
207-08-9	Benzo[k]fluoranthene	--	--	1.6E+00	c	1.4E+02	c	2.6E+02	c
218-01-9	Chrysene	--	--	1.6E+01	c	1.4E+03	c	2.6E+03	c
53-70-3	Dibenz[a,h]anthracene	--	--	1.1E-01	c	9.7E+00	c	1.9E+01	c
193-39-5	Indeno[1,2,3-cd]pyrene	--	--	1.6E+00	c	1.4E+02	c	2.6E+02	c
90-12-0	Methylnaphthalene, 1-	--	--	1.6E+01	c	1.4E+03	c	2.7E+03	c
91-57-6	Methylnaphthalene, 2-	--	--	2.3E+02	nc	2.0E+04	nc	1.1E+04	nc
91-20-3	Naphthalene	5.2E-01	--	4.0E+00	c	3.5E+02	c	3.9E+01	c
129-00-0	Pyrene	--	--	1.7E+03	nc	1.5E+05	nc*	6.7E+04	nc
TPH⁶									
	TPHg	5.0E+02	--	7.6E+02	nc	6.6E+04	nc*	8.6E+02	nc
	TPHd	1.0E+03	--	1.3E+03	nc	1.1E+05	nc*	1.9E+03	nc
	TPHmo	1.0E+04	--	3.3E+03	nc	2.9E+05	nc*	1.6E+05	nc*
SVOCs									
121-14-2	2,4-Dinitrotoluene	--	--	1.6E+00	c	1.4E+02	c	2.8E+02	c
117-81-7	Bis(2-Ethylhexyl) Phthalate	--	--	3.5E+01	c	3.0E+03	c	6.4E+03	c
VOCs									
79-34-5	1,1,2,2-Tetrachloroethane	--	--	4.7E-01	c	4.1E+01	c	5.7E+00	c
96-18-4	1,2,3-Trichloropropane	1.2E-05	--	2.1E-02	c	1.9E+00	c	2.0E+00	nc
95-63-6	1,2,4-Trimethylbenzene	--	--	8.3E+01	nc	7.2E+03	nc	7.5E+01	nc
107-06-2	1,2-Dichloroethane	5.0E-04	--	--	--	--	--	--	--
156-59-2	cis-1,2-Dichloroethene	7.3E-03	--	--	--	--	--	--	--
78-87-5	1,2-Dichloropropane	--	--	8.3E-01	c	7.2E+01	c	8.5E+00	c

**Table 3-1
Site-Specific Cleanup Goals for Soil**

CAS Number	Constituents of Concern	SSCG _{soil-GW} ¹ (mg/kg)	(BTV) ² (mg/kg)	Soil Site-Specific Cleanup Goals (mg/kg)					
				Onsite Resident				Construction and Utility Maintenance Worker	
				EF = 350 d/y		EF = 4 d/y			
				SSCG (mg/kg)	Basis	SSCG (mg/kg)	Basis	SSCG (mg/kg)	Basis
108-67-8	1,3,5-Trimethylbenzene	--	--	8.5E+01	nc	7.4E+03	nc	7.7E+01	nc
106-46-7	1,4-Dichlorobenzene	3.8E-02	--	2.8E+00	c	2.4E+02	c	2.8E+01	c
71-43-2	Benzene	1.5E-02	--	2.2E-01	c	1.9E+01	c	2.2E+00	c
75-27-4	Bromodichloromethane	--	--	4.9E-01	c	4.2E+01	c	5.3E+00	c
74-83-9	Bromomethane	--	--	8.8E+00	nc	7.7E+02	nc	7.8E+00	nc
100-41-4	Ethylbenzene	--	--	4.8E+00	c	4.2E+02	c	5.1E+01	c
75-09-2	Methylene chloride	--	--	5.3E+00	c	4.7E+02	c	5.9E+01	c
75-65-0	tert-Butyl Alcohol	1.2E-02	--	--		--		--	
127-18-4	Tetrachloroethene	6.6E-02	--	5.5E-01	c	4.9E+01	c	1.0E+01	c
108-88-3	Toluene	--	--	4.8E+03	nc	4.2E+05	nc*	1.6E+04	nc
79-01-6	Trichloroethene	1.3E-02	--	1.2E+00	c	1.0E+02	c	5.5E+00	nc
75-01-4	Vinyl chloride	1.5E-03	--	3.2E-02	c	2.8E+00	c	3.1E-01	c
1330-20-7	Xylene, total	--	--	5.6E+02	nc	4.9E+04	nc	4.7E+02	nc

Notes:

" -- " not applicable or not available

EF = exposure frequency; d/y = days per year

TPHg = Total Petroleum Hydrocarbons- gasoline range

TPHd = Total Petroleum Hydrocarbons- diesel range

TPHmo = Total Petroleum Hydrocarbons- motor oil range

nc = SSCG based on noncancer effects; c = SSCG based on cancer effects

* Values are above Csat, 1E+05 or Cres

¹ A SSCG_{soil-GW} value was only listed for those COCs identified for potential soil leaching to groundwater. These SSCG_{soil-GW} were modified from the January 23, 2014 letter from the Regional Board on the Revised SSCG Report to be consistent with the Regional Board's 1996 Interim Site Assessment & Cleanup Guidebook (RWQCB, 1996).

² To evaluate potential human health exposures, the higher value between the health-based SSCG and Background Threshold Value (BTV) will be selected as the cleanup goal. To evaluate potential leaching to groundwater, the higher between SSCG_{soil-GW} and BTV will be selected as the cleanup goal.

³ Cal-EPA 2009b. Revised California Human Health Screening Levels for Lead. September 2009.

⁴ Based on USEPA adult lead model, similar parameters used for the residential CHHSL, and a lower exposure frequency.

⁵ Based on USEPA adult lead model, similar parameters used for the industrial worker CHHSL, and a lower exposure frequency.

⁶ The SSCG_{soil-GW} for TPH is based on Regional Board's 1996 Interim Site Assessment & Cleanup Guidebook (LARWQCB, 1996).

**Table 3-2
Site-Specific Cleanup Goals for Soil Vapor**

CAS Number	Constituents of Concern	Odor-Based SSCG ¹ (µg/m ³)	Sub-Slab Soil Vapor ²		Soil Vapor	
			Onsite Resident		Construction and Utility Maintenance Worker	
			SSCG (µg/m ³)	Basis	SSCG (µg/m ³)	Basis
79-34-5	1,1,2,2-Tetrachloroethane	5.2E+06	2.1E+01	c	1.2E+05	c
79-00-5	1,1,2-Trichloroethane	--	7.5E+01	c	1.0E+05	nc
75-34-3	1,1-Dichloroethane	6.3E+07	7.6E+02	c	2.5E+07	c
120-82-1	1,2,4-Trichlorobenzene	1.1E+07	1.0E+03	nc	3.9E+05	nc
95-63-6	1,2,4-Trimethylbenzene	--	3.7E+03	nc	2.3E+06	nc
107-06-2	1,2-Dichloroethane	1.2E+06	5.9E+01	c	8.5E+05	c
78-87-5	1,2-Dichloropropane	6.0E+05	1.2E+02	c	2.5E+06	c
108-67-8	1,3,5-Trimethylbenzene	--	3.7E+03	nc	2.3E+06	nc
106-99-0	1,3-Butadiene	--	7.2E+00	c	3.0E+05	c
106-46-7	1,4-Dichlorobenzene	5.5E+05	1.1E+02	c	7.2E+05	c
123-91-1	1,4-Dioxane	3.1E+08	1.6E+02	c	1.6E+05	c
540-84-1	2,2,4-Trimethylpentane	--	5.2E+05	nc	6.5E+08	nc
591-78-6	2-Hexanone	--	1.6E+04	nc	7.9E+06	nc
622-96-8	4-Ethyltoluene	--	5.2E+04	nc	2.5E+07	nc
71-43-2	Benzene	2.4E+06	4.2E+01	c	1.0E+06	c
75-27-4	Bromodichloromethane	5.5E+09	3.3E+01	c	7.8E+05	c
74-83-9	Bromomethane	4.0E+07	2.6E+03	nc	9.5E+06	nc
75-15-0	Carbon disulfide	--	3.7E+05	nc	1.4E+09	nc
56-23-5	Carbon tetrachloride	3.2E+07	2.9E+01	c	1.1E+06	c
67-66-3	Chloroform	2.1E+08	2.3E+02	c	4.9E+06	c
110-82-7	Cyclohexane	--	3.1E+06	nc	1.8E+10	nc
124-48-1	Dibromochloromethane	--	4.5E+01	c	8.8E+05	c
156-59-2	Dichloroethene, cis-1,2-	3.4E+07	3.7E+03	nc	8.3E+06	nc
156-60-5	Dichloroethene, trans-1,2-	3.4E+07	3.1E+04	nc	9.3E+07	nc
10061-02-6	Dichloropropene, trans-1,3-	2.1E+06	7.6E+01	c	3.9E+06	c
64-17-5	Ethanol	--	2.1E+06	nc	1.9E+08	nc
100-41-4	Ethylbenzene	1.0E+06	4.9E+02	c	7.0E+06	c
142-82-5	Heptane	--	3.7E+05	nc	2.3E+09	nc
87-68-3	Hexachloro-1,3-butadiene	6.0E+06	5.5E+01	c	8.0E+04	c
110-54-3	Hexane	--	3.7E+05	nc	1.7E+09	nc
67-63-0	Isopropanol	--	3.7E+06	nc	5.7E+08	nc
98-82-8	Isopropylbenzene (cumene)	--	2.1E+05	nc	1.5E+09	nc
78-93-3	Methyl ethyl ketone (2-butanone)	1.6E+07	2.6E+06	nc	1.1E+09	nc
75-09-2	Methylene chloride	2.8E+08	1.2E+03	c	2.8E+07	c
1634-04-4	Methyl-tert-butyl ether	2.7E+05	4.7E+03	c	6.5E+07	c
91-20-3	Naphthalene	2.2E+05	3.6E+01	c	6.3E+04	c
103-65-1	Propylbenzene	--	5.2E+05	nc	6.6E+08	nc

**Table 3-2
Site-Specific Cleanup Goals for Soil Vapor**

CAS Number	Constituents of Concern	Odor-Based SSCG ¹ (µg/m ³)	Sub-Slab Soil Vapor ²		Soil Vapor	
			Onsite Resident		Construction and Utility Maintenance Worker	
			SSCG (µg/m ³)	Basis	SSCG (µg/m ³)	Basis
75-65-0	tert-Butyl Alcohol (TBA)	--	5.5E+05	nc	2.6E+08	nc
127-18-4	Tetrachloroethene	1.6E+07	2.1E+02	c	6.6E+06	c
109-99-9	Tetrahydrofuran	--	1.0E+06	nc	4.9E+08	nc
108-88-3	Toluene	1.5E+07	2.6E+06	nc	3.7E+09	nc
79-01-6	Trichloroethene	6.8E+08	2.2E+02	c	2.0E+06	nc
75-01-4	Vinyl chloride	3.9E+08	1.6E+01	c	8.3E+05	c
1330-20-7	Xylene, total	2.2E+05	5.2E+04	nc	5.9E+07	nc
	TPH					
	Aliphatic: C5-C8	--	3.7E+05	nc	1.2E+09	nc
	Aliphatic: C9-C18	--	1.6E+05	nc	1.2E+08	nc
	Aliphatic: C19-C32	--	--	--	--	--
	Aromatic: C6-C8	--	--	--	--	--
	Aromatic: C9-C16	--	2.6E+04	nc	6.7E+06	nc
	Aromatic: C17-C32	--	--	--	--	--
	TPHg	5.0E+04	7.2E+04	nc	2.2E+07	nc
	TPHd	5.0E+05	8.1E+04	nc	2.3E+07	nc
	TPHmo	--	--	--	--	--

Notes:

" -- " not applicable or not available

¹ Odor-based SSCGs for soil vapor based on SFRWCQB 2013 ESL as directed by RWQCB (RWQCB, 2014)

² As directed by the RWQCB (RWQCB, 2014), a vapor intrusion attenuation factor of 0.002 was used to derive sub-slab soil vapor SSCGs.

nc = SSCG based on noncancer effects; c = SSCG based on cancer effects

**Table 3-3
Property Addresses for Consideration in Remedial Planning**

Address	Soil Excavation	Sub-Slab Soil Vapor Mitigation	SVE/Bioventing
	≤3 ft bgs		>3 to ≤10 ft bgs
24401 MARBELLA AVE			
24402 NEPTUNE AVE			X
24402 PANAMA AVE			
24402 RAVENNA AVE	X		X
24403 NEPTUNE AVE	X		X
24403 RAVENNA AVE			X
24405 MARBELLA AVE			
24406 MARBELLA AVE	X		X
24406 NEPTUNE AVE		X	X
24406 PANAMA AVE	X		X
24406 RAVENNA AVE	X		X
24409 NEPTUNE AVE	X		X
24409 RAVENNA AVE			X
24410 PANAMA AVE			
24411 MARBELLA AVE	X		X
24411 PANAMA AVE	X		X
24412 MARBELLA AVE	X	X	X
24412 RAVENNA AVE	X		X
24413 NEPTUNE AVE	X		X
24413 RAVENNA AVE			X
24416 MARBELLA AVE	X		X
24416 NEPTUNE AVE	X		X
24416 PANAMA AVE			
24416 RAVENNA AVE	X	X	X
24417 MARBELLA AVE			
24417 PANAMA AVE			X
24419 NEPTUNE AVE	X		X
24419 RAVENNA AVE			X
24420 PANAMA AVE	X		X
24421 PANAMA AVE	X		X
24422 MARBELLA AVE	X		X
24422 NEPTUNE AVE			X
24422 RAVENNA AVE	X		X
24423 MARBELLA AVE			
24423 NEPTUNE AVE	X	X	X
24423 RAVENNA AVE	X		X
24426 MARBELLA AVE	X		X
24426 NEPTUNE AVE			X
24426 PANAMA AVE	X		X
24426 RAVENNA AVE	X		X
24427 MARBELLA AVE			
24427 PANAMA AVE			X

**Table 3-3
Property Addresses for Consideration in Remedial Planning**

Address	Soil Excavation	Sub-Slab Soil Vapor Mitigation	SVE/Bioventing
	≤3 ft bgs		>3 to ≤10 ft bgs
24429 NEPTUNE AVE	X	X	X
24429 RAVENNA AVE			X
24430 PANAMA AVE			
24431 PANAMA AVE	X		X
24432 MARBELLA AVE	X		X
24433 MARBELLA AVE	X	X	X
24436 PANAMA AVE	X		X
24502 MARBELLA AVE	X		X
24502 NEPTUNE AVE			X
24502 PANAMA AVE			
24502 RAVENNA AVE	X		X
24503 MARBELLA AVE			
24503 NEPTUNE AVE	X		X
24503 PANAMA AVE	X		X
24503 RAVENNA AVE			X
24506 MARBELLA AVE	X	X	X
24507 MARBELLA AVE			
24508 NEPTUNE AVE	X		X
24508 PANAMA AVE		X	
24508 RAVENNA AVE	X		X
24509 NEPTUNE AVE	X		X
24509 PANAMA AVE	X		X
24509 RAVENNA AVE	X		X
24512 MARBELLA AVE	X		X
24512 NEPTUNE AVE	X		X
24512 PANAMA AVE			
24512 RAVENNA AVE	X		X
24513 NEPTUNE AVE			X
24513 PANAMA AVE	X		X
24513 RAVENNA AVE		X	X
24516 MARBELLA AVE	X		X
24517 MARBELLA AVE	X		X
24518 NEPTUNE AVE	X		X
24518 PANAMA AVE			
24518 RAVENNA AVE	X		X
24519 NEPTUNE AVE	X		X
24519 PANAMA AVE	X		X
24522 MARBELLA AVE	X		X
24522 NEPTUNE AVE	X		X
24522 PANAMA AVE			
24522 RAVENNA AVE	X		X
24523 MARBELLA AVE			

**Table 3-3
Property Addresses for Consideration in Remedial Planning**

Address	Soil Excavation	Sub-Slab Soil Vapor Mitigation	SVE/Bioventing
	≤3 ft bgs		>3 to ≤10 ft bgs
24523 NEPTUNE AVE	X		X
24523 RAVENNA AVE	X		X
24526 MARBELLA AVE	X		X
24528 NEPTUNE AVE	X		X
24528 PANAMA AVE			
24529 NEPTUNE AVE	X		X
24529 PANAMA AVE			
24529 RAVENNA AVE	X		X
24532 MARBELLA AVE	X		X
24532 NEPTUNE AVE			
24532 PANAMA AVE			X
24532 RAVENNA AVE			
24533 MARBELLA AVE			
24533 PANAMA AVE			
24533 RAVENNA AVE			
24602 MARBELLA AVE			X
24602 NEPTUNE AVE			
24602 PANAMA AVE			X
24602 RAVENNA AVE			
24603 MARBELLA AVE	X	X	X
24603 NEPTUNE AVE	X		X
24603 PANAMA AVE	X		X
24603 RAVENNA AVE	X		X
24606 MARBELLA AVE	X		X
24607 MARBELLA AVE			X
24608 NEPTUNE AVE	X		X
24608 PANAMA AVE	X		X
24608 RAVENNA AVE	X		X
24609 NEPTUNE AVE	X		X
24609 PANAMA AVE	X	X	X
24609 RAVENNA AVE			
24612 MARBELLA AVE	X		X
24612 NEPTUNE AVE	X		X
24612 PANAMA AVE	X		X
24612 RAVENNA AVE	X		X
24613 MARBELLA AVE	X		X
24613 NEPTUNE AVE	X		X
24613 PANAMA AVE	X	X	X
24613 RAVENNA AVE	X		X
24616 MARBELLA AVE	X		X
24617 MARBELLA AVE	X		X
24618 NEPTUNE AVE	X		X

**Table 3-3
Property Addresses for Consideration in Remedial Planning**

Address	Soil Excavation	Sub-Slab Soil Vapor Mitigation	SVE/Bioventing
	≤3 ft bgs		>3 to ≤10 ft bgs
24618 PANAMA AVE	X		X
24618 RAVENNA AVE			
24619 NEPTUNE AVE	X		X
24619 PANAMA AVE	X		X
24619 RAVENNA AVE			X
24622 MARBELLA AVE	X		X
24622 NEPTUNE AVE	X		X
24623 MARBELLA AVE	X	X	X
24623 NEPTUNE AVE	X		X
24627 MARBELLA AVE	X		X
24628 MARBELLA AVE	X		X
24628 NEPTUNE AVE			X
24629 NEPTUNE AVE	X	X	X
24632 NEPTUNE AVE*	X	X	X
24633 MARBELLA AVE	X		X
24700 MARBELLA AVE	X		X
24700 RAVENNA AVE			
24702 NEPTUNE AVE	X		X
24702 PANAMA AVE	X		X
24703 MARBELLA AVE	X		X
24703 NEPTUNE AVE	X		X
24703 RAVENNA AVE	X		X
24706 MARBELLA AVE	X		X
24706 RAVENNA AVE	X		X
24707 MARBELLA AVE			
24708 PANAMA AVE	X		X
24709 NEPTUNE AVE	X	X	X
24709 PANAMA AVE	X		X
24709 RAVENNA AVE	X		X
24710 MARBELLA AVE	X		X
24712 NEPTUNE AVE	X	X	X
24712 PANAMA AVE	X		X
24712 RAVENNA AVE	X		X
24713 MARBELLA AVE	X		X
24713 PANAMA AVE	X		X
24713 RAVENNA AVE	X		X
24715 NEPTUNE AVE	X		X
24716 MARBELLA AVE	X		X
24716 RAVENNA AVE	X		X
24717 MARBELLA AVE	X		X
24718 NEPTUNE AVE	X		X
24718 PANAMA AVE	X		X

**Table 3-3
Property Addresses for Consideration in Remedial Planning**

Address	Soil Excavation	Sub-Slab Soil Vapor Mitigation	SVE/Bioventing
	≤3 ft bgs		>3 to ≤10 ft bgs
24719 NEPTUNE AVE	X		X
24719 PANAMA AVE	X		X
24719 RAVENNA AVE	X		X
24722 MARBELLA AVE	X		X
24722 NEPTUNE AVE		X	
24722 PANAMA AVE	X		X
24722 RAVENNA AVE	X		X
24723 MARBELLA AVE	X	X	X
24723 RAVENNA AVE	X		X
24725 NEPTUNE AVE			
24726 MARBELLA AVE			
24726 RAVENNA AVE			
24727 MARBELLA AVE	X		X
24728 NEPTUNE AVE	X		X
24728 PANAMA AVE	X		X
24729 NEPTUNE AVE			
24729 PANAMA AVE			
24729 RAVENNA AVE			
24732 MARBELLA AVE	X		X
24732 NEPTUNE AVE	X		X
24732 PANAMA AVE			
24732 RAVENNA AVE	X		X
24733 MARBELLA AVE	X		X
24733 PANAMA AVE			
24733 RAVENNA AVE	X		X
24735 NEPTUNE AVE	X		X
24736 MARBELLA AVE			
24736 RAVENNA AVE	X		X
24737 MARBELLA AVE	X		X
24738 NEPTUNE AVE	X	X	X
24738 PANAMA AVE	X		X
24739 NEPTUNE AVE	X		X
24739 PANAMA AVE	X		X
24739 RAVENNA AVE	X		X
24740 MARBELLA AVE	X		X
24741 MARBELLA AVE		X	
24743 RAVENNA AVE	X		X
24744 MARBELLA AVE	X	X	X
24748 RAVENNA AVE	X		X
24749 RAVENNA AVE	X	X	X
24752 RAVENNA AVE	X		X
24802 PANAMA AVE	X		X

**Table 3-3
Property Addresses for Consideration in Remedial Planning**

Address	Soil Excavation	Sub-Slab Soil Vapor Mitigation	SVE/Bioventing
	≤3 ft bgs		>3 to ≤10 ft bgs
24803 NEPTUNE AVE	X		X
24803 PANAMA AVE	X		X
24809 NEPTUNE AVE	X		X
24809 PANAMA AVE	X		X
24812 PANAMA AVE			
24813 PANAMA AVE	X		X
24815 NEPTUNE AVE	X		X
24818 PANAMA AVE	X		X
24819 PANAMA AVE	X		X
24822 PANAMA AVE	X		X
24823 PANAMA AVE	X		X
24825 NEPTUNE AVE			
24828 PANAMA AVE	X		X
24829 PANAMA AVE			X
24832 PANAMA AVE			
24833 PANAMA AVE			X
24838 PANAMA AVE	X		X
24904 NEPTUNE AVE			X
24912 NEPTUNE AVE			X
301 244TH ST			
305 244TH ST	X		X
311 244TH ST	X		X
317 244TH ST	X		X
321 244TH ST	X		X
327 244TH ST			
331 244TH ST	X		X
337 244TH ST			
341 244TH ST			
344 249TH ST	X		X
345 249TH ST			X
347 244TH ST			
348 248TH ST	X	X	X
348 249TH ST			X
351 244TH ST	X		X
352 249TH ST		X	X
353 249TH ST	X		X
354 248TH ST	X		X
357 244TH ST			
357 249TH ST			X
358 249TH ST	X		X
360 248TH ST	X		X
361 244TH ST			

**Table 3-3
Property Addresses for Consideration in Remedial Planning**

Address	Soil Excavation	Sub-Slab Soil Vapor Mitigation	SVE/Bioventing
	≤3 ft bgs		>3 to ≤10 ft bgs
362 249TH ST			
363 249TH ST			X
364 248TH ST	X		X
367 244TH ST	X		X
367 249TH ST			X
368 249TH ST	X		X
373 249TH ST	X		X
374 248TH ST	X		X
374 249TH ST	X		X
377 244TH ST			
377 249TH ST	X		X
378 249TH ST	X	X	X
383 249TH ST	X	X	X
402 249TH ST	X		X
408 249TH ST			
412 249TH ST	X		X

TABLE 4-1

SCREENING OF REMEDIAL TECHNOLOGIES

TECHNOLOGY	DESCRIPTION	SCREENING CRITERIA			COMMENTS
		EFFECTIVENESS	IMPLEMENTABILITY	COST	
Sub-Slab Vapor Intrusion Mitigation	Install subsurface barriers and/or vapor control systems to mitigate soil vapor migration into buildings.	Effective for VOCs.	Sub-slab depressurization systems are implementable at existing building locations.	Low-to-moderate capital to install sub-slab depressurization system; low-to-moderate O&M.	Installation of sub-slab depressurization systems is retained for consideration in remedial alternatives.
Capping Portions of the Site	Mitigate contact with impacted soils; mitigate rainwater infiltration; reduce vapor migration to surface by constructing a low permeability cover or "cap" over the areas of impacted soils.	Effective for all COCs.	Implementable over portions of the Site. May require restriction on future land use.	Moderate capital, low O&M cost.	Retained for consideration in remedial alternatives. Could possibly be used in conjunction with excavation.
Removal of All Site Features	The removal of all site features would include the removal of all houses, landscape, hardscape, roads, and utilities.	The removal of all site features in order to facilitate the use of other remedial technologies (e.g., excavation or capping) could be effective at the Site.	Very difficult to implement. Every resident within the Site would have to agree to relocate and all 285 houses would be razed. If some homeowners declined to move, the presence of some residents would make it untenable to remove all of the surrounding homes, streets and utilities. Permitting would be very difficult to allow this work to move forward.	Very high cost.	Retained for consideration in remedial alternatives.
Institutional Controls	Rely upon City of Carson Building Code provisions requiring permitting for excavations 3 feet bgs or deeper. Establish a process whereby Shell is notified if a resident applies for a permit to excavate so that arrangements can be made for sampling and proper handling of impacted soils that may be present.	Effective for all COCs.	Implementable; building code provisions already are in place. May be implemented in combination with other technologies.	Minimal cost.	Retained for consideration in remedial alternatives.
Excavation	Excavate impacted soils. Backfill excavation with imported clean soil. A wide range of excavation options is available, including different areas of excavation and different depths.	Effective for all COCs.	Implementability dependent on depth. Volume of excavated soil, disruption to community, loss of residential tax base, sustainability concerns all factor into implementability. Potential major difficulties due to traffic and dust. Major difficulties due to VOC emissions if excavation is performed prior to remediation of VOCs. Excavation to 2 or 3 feet would be implementable; concerns and difficulties rise significantly with deeper excavations.	Moderate-to-exceptionally high capital, depending upon depth. Minimal O&M.	Retained for consideration in remedial alternatives because of effectiveness in removing impacted materials and interrupting the human health exposure pathway.
Excavation: <i>Lifting and Cribbing of Houses to Assist in Excavation</i>	Cribbing would take place outside of the house footprint to allow excavation below. It would include cutting and capping utilities; demolition of drywall, cabinets, toilets, and tub/showers from ground level to 4 feet high; demolition of fireplaces; installation of beams that attach to every wall; unbolting walls from foundation; lifting house and cribbing to 4 feet high; excavating impacted soils; backfilling with clean soil; forming and pouring a new foundation; placing the house back down on new foundation and attaching to foundation; removing cribbing materials; restoring interior walls, cabinets, toilets, tub/showers; replacing fireplaces; and reconnecting utilities.	Ineffective because of lack of clear benefit.	Very difficult to implement. Would require relocating residents for a significant period of time and result in considerable disruption to households. Shell's Environmental Health and Safety guidelines/rules would not allow workers to implement other technologies (i.e., excavation) beneath a cribbed house.	Very high capital cost.	Not retained for consideration in remedial alternatives due to ineffectiveness, difficulty of implementation, and cost.

TABLE 4-1

SCREENING OF REMEDIAL TECHNOLOGIES

TECHNOLOGY	DESCRIPTION	SCREENING CRITERIA			COMMENTS
		EFFECTIVENESS	IMPLEMENTABILITY	COST	
Excavation: <i>Temporarily Moving Houses to Assist in Excavation</i>	This technology would require similar processes as lifting and cribbing a house, except the house would be loaded onto a trailer and moved to another location instead of being cribbed.	Ineffective because of lack of clear benefit.	Very difficult to implement. Would require relocating residents for a significant period of time and result in extensive disruption to houses.	Very high capital cost.	Not retained for consideration in remedial alternatives due to ineffectiveness, difficulty of implementation, and cost.
Excavation: <i>Removal of Residual Concrete Slabs to Assist in Excavation</i>	Residual concrete slabs, which are former tank farm reservoir side walls and/or floors, are present beneath portions of the Site. Removal would involve excavation. Removal of slabs beneath buildings, hardscape, or streets would require the removal of those Site features and excavation.	The concrete reservoir slab assessment concluded that nothing about the former reservoir slabs would indicate a specific need for their removal. Therefore, removal of all residual concrete slabs is considered unnecessary.	Implementability dependent on scope of removal. Removal of residual concrete slabs when encountered within the boundaries of excavations is relatively easily implemented. Removal beneath paved areas or houses would be very difficult to implement.	Moderate cost to remove slabs when encountered within excavation boundaries.	Removal of residual concrete slabs when encountered within excavation boundaries is retained for consideration in remedial alternatives.
Soil Vapor Extraction (SVE)	Vadose zone vacuum wells are used to remove volatile COCs from soil. Extracted vapors are treated and discharged.	Effective for methane, VOCs, and lighter-range petroleum hydrocarbons. Not effective for non-volatile COCs.	Implementable. SVE wells could be installed in City streets and on residential properties, as appropriate.	Moderate-to-high capital; moderate O&M.	Retained for consideration in remedial alternatives.
Bioventing	Enhances the activity of indigenous bacteria and stimulates the natural in-situ biodegradation of organic COCs in soil by inducing air and oxygen flow into the unsaturated zone.	Potentially more effective than SVE for mid-weight petroleum products on a reasonable timescale.	Implementable. Can be used in conjunction with SVE systems.	Moderate capital, moderate O&M.	Retained for consideration in remedial alternatives. Could be used in conjunction with SVE system/wells.
In-Situ Chemical Oxidation (ISCO)	Introduction of a chemical oxidant into the subsurface for the purpose of transforming groundwater or soil COCs into less harmful chemical species.	Bench-scale pilot testing using representative Site soils indicated that sodium persulfate was not effective and that an excessive quantity of ozone would be required for treatment.	Implementable for saturated zone and groundwater.	Moderate capital, moderate O&M.	Not retained for consideration in remedial alternatives due to demonstrated lack of effectiveness.
Light Non-Aqueous Phase Liquid (LNAPL) Source Removal	Direct LNAPL source removal, likely through pumping, as is currently done at Site monitoring wells that accumulate 1/2 foot or more LNAPL on top of groundwater.	Effective for reducing source zone mass/concentration gradients and may reduce time over which concentrations will return to background or MCL levels.	Currently implemented at Site wells MW-3 and MW-12; can be implemented in other monitoring wells if LNAPL is discovered on top of groundwater with a depth of 1/2 foot or greater.	Low capital, moderate O&M.	Retained for consideration in remedial alternatives.
Groundwater Monitored Natural Attenuation (MNA)	Naturally occurring processes decrease concentrations of COCs in soil and groundwater. Monitoring is performed to confirm that COC concentrations are decreasing.	Potentially effective for reduction of COC concentrations. Does not mitigate the immediate potential for exposure to impacted materials.	Easily implementable with minimal disruption to current residents.	Minimal cost, associated mainly with monitoring.	Retained. Can be used in conjunction with other remedial technologies.
Supplemental Groundwater Remediation	Supplemental groundwater remediation of certain COCs in localized Site areas with relatively high concentrations would likely be through pump and treat systems (removed water is then treated ex-situ) or through in-situ methods.	Potentially effective for reducing groundwater COCs and may reduce time over which groundwater will return to background or MCL levels.	Differing degrees of difficulty in implementation depending on location of impacted materials with respect to existing infrastructure and method selected. In-situ methods may be preferred to avoid exposure to impacted materials at the surface.	Moderate-to-high capital depending on method; high O&M.	Retained for consideration in remedial alternatives.

**Table 5-1
Depth of Excavation Considerations**

Issue	Excavation to 2 Feet	Excavation to 3 Feet	Excavation to 5 Feet	Excavation to 10 Feet
Utilities Encountered	<ul style="list-style-type: none"> • None 	<ul style="list-style-type: none"> • None 	<ul style="list-style-type: none"> • Gas service laterals • Telecommunication lines • Landscape irrigation systems • California Water Service Company water mains • Sewer laterals 	<ul style="list-style-type: none"> • Gas service laterals • Telecommunication lines • Landscape irrigation systems • California Water Service Company water mains • Sewer laterals
Residential Hardscape	Removal for Alternative 4A. No removal for Alternative 5A.	Removal for Alternative 4B. No removal for Alternative 5B.	Removal for Alternative 4C. No removal for Alternative 5C.	Removal for Alternative 4D. No removal for Alternative 5D.
Permitting	<ul style="list-style-type: none"> • Grading permit required for removal > 50 CY. • SCAQMD Rule 1166, VOC Emissions from Decontamination Soil • Excavation and Encroachment Permits • Asbestos Notifications/ Abatement Permits • OSHA Trenching Permit per 29 CFR 1926.650 • Plumbing and Electrical Permits • Masonry Permit • Landscaping Permit 	<ul style="list-style-type: none"> • Post-excavation, grading permit required for excavation to ≥3 feet. • SCAQMD Rule 1166, VOC Emissions from Decontamination Soil • Excavation and Encroachment Permits • Asbestos Notifications/ Abatement Permits • OSHA Trenching Permit per 29 CFR 1926.650 • Plumbing and Electrical Permits • Masonry Permit • Landscaping Permit 	<ul style="list-style-type: none"> • Post-excavation, grading permit required for excavation to ≥3 feet. • SCAQMD Rule 1166, VOC Emissions from Decontamination Soil • Excavation and Encroachment Permits • Asbestos Notifications/ Abatement Permits • OSHA Trenching Permit per 29 CFR 1926.650 • Plumbing and Electrical Permits • Masonry Permit • Landscaping Permit 	<ul style="list-style-type: none"> • Post-excavation, grading permit required for excavation to ≥3 feet. • SCAQMD Rule 1166, VOC Emissions from Decontamination Soil • Excavation and Encroachment Permits • Asbestos Notification/ Abatement Permits • OSHA Trenching Permit per 29 CFR 1926.650 • Plumbing and Electrical Permits • Masonry Permit • Landscaping Permit
Shoring	<ul style="list-style-type: none"> • None 	<ul style="list-style-type: none"> • None 	<ul style="list-style-type: none"> • Shoring systems; • Slot trenching; • Sidewalls back-sloped below foundation footings of structures 	<ul style="list-style-type: none"> • Shoring systems; • Slot trenching; • Sidewalls back-sloped below foundation footings of structures
Properties Requiring Remediation	91 Properties Excavated; SVE/Bioventing on 214 Properties	183 Properties Excavated; SVE/Bioventing on 214 Properties	183 Properties Excavated; SVE/Bioventing on 214 Properties	214 Properties Excavated; SVE/Bioventing on 214 Properties
Volume per property (vertical sidewalls)	Alternative 4A: 7,600 ft ³ (281 CY) Alternative 5A: 2,950 ft ³ (109 CY)	Alternative 4B: 10,800 ft ³ (401 CY) Alternative 5B: 4,430 ft ³ (164 CY)	Alternative 4C: 17,400 ft ³ (646 CY) Alternative 5C: 7,150 ft ³ (265 CY)	Alternative 4D: 33,900 ft ³ (1,260 CY) Alternative 5D: 14,300 ft ³ (530 CY)

**TABLE 5-2
Preliminary Remedial Alternatives**

Alt	Existing ICs	ECs (Sub-Slab Mitigation)	Remove Site Features	Cap Site	Excavate to 2 ft	Excavate to 3 ft	Excavate to 5 ft	Excavate to 10 ft	Excavate Beneath Residential Hardscape	Excavate Entire Site	SVE / Bioventing	Groundwater MNA and Supplemental Groundwater Remediation	LNAPL Removal
1*													
2	X		X							X		X	X
3	X		X							X	X	X	X
4A	X	X			X				X		X	X	X
4B	X	X			X				X		X	X	X
4C	X	X					X		X		X	X	X
4D	X	X						X	X		X	X	X
5A	X	X			X						X	X	X
5B	X	X				X					X	X	X
5C	X	X					X				X	X	X
5D	X	X						X			X	X	X
6	X		X	X							X	X	X
7	X	X		X							X	X	X

*Alt 1: No Action Alternative

**TABLE 5-3
SCREENING OF REMEDIAL ALTERNATIVES**

ALT	DESCRIPTION	SCREENING CRITERIA			STATUS
		EFFECTIVENESS	IMPLEMENTABILITY	COST	
1	No Action No remedial actions, no institutional controls, no engineering controls, and no further monitoring of the site.	Not effective at achieving RAOs.	Easy to implement.	No cost in short or long term.	Retained as a baseline to compare to the remaining alternatives.
2	Removal of all site features and the excavation of impacted soils over the entire Site.	Low effectiveness. Effectively meets RAOs in the long term. Soil, soil vapor and nuisance goals met. LNAPL effectively addressed through LNAPL removal. Groundwater goals achieved in long term through MNA. Relocation would have long-term negative impacts on the community.	Very difficult. Relocate all residents. 285 homes and all roads/utilities removed. ~250,000 truckloads of soil, exported and imported to the Site Possibly not be permitted under CEQA. 4 ½ years active remediation	Very High. Highest of all alternatives.	Not retained due to very difficult implementability, very high cost, and long lasting effects on the community.
3	Removal of all site features and the excavation to a depth of 10 feet bgs over the entire Site.	Low effectiveness. Effectively meets RAOs in the long term. Soil goals met in upper 10 feet. Remaining soils meet health goals for infrequent exposure. Soil vapor and nuisance goals met. LNAPL effectively addressed through LNAPL removal. Groundwater goals achieved in long term through MNA. Relocation would have long-term negative impacts on the community.	Very difficult. Relocate all residents. 285 homes and all roads/utilities removed. ~120,000 truckloads of soil Possibly not be permitted under CEQA. 2 ½ years active remediation	Very High. Second highest of all alternatives.	Not retained due to very difficult implementability, very high cost, and long lasting effects on the community.
4A	Excavation of shallow soils to a depth of 2 feet bgs from both landscaped areas and areas covered by hardscape at properties where human health or groundwater goals are exceeded.	High short-term effectiveness, low long-term effectiveness. Effectively meets RAOs in the long term. Soil goals met in upper 2 feet, but not in 2-to-3-foot zone. No existing institutional controls preventing contact with soil from below 2 feet to 3 feet. Soil vapor and nuisance goals met. LNAPL effectively addressed through LNAPL removal. Groundwater goals achieved in long term through MNA.	High. 106 properties require excavation. 27 homes would have sub-slab mitigation installed. ~7,000 truckloads of soil Removal of hardscape is inconvenient for residents. Short-term disturbances of community including air quality, noise, and traffic impacts. 1 ½ years active remediation	Moderate.	Not retained due to lack of protectiveness.

**TABLE 5-3
SCREENING OF REMEDIAL ALTERNATIVES**

ALT	DESCRIPTION	SCREENING CRITERIA			STATUS
		EFFECTIVENESS	IMPLEMENTABILITY	COST	
4B	Excavation of shallow soils to a depth of 3 feet bgs from both landscaped areas and areas covered by hardscape at properties where human health or groundwater goals are exceeded.	Effectively meets RAOs in the long term. Relatively high effectiveness in the short term. Soil goals met in upper 3 feet. Remaining soils meet health goals for infrequent exposure. Soil vapor and nuisance goals met. LNAPL effectively addressed through LNAPL removal. Groundwater goals achieved in long term through MNA.	Relatively high. 183 properties require excavation. 27 homes would have sub-slab mitigation installed. 214 properties would have SVE/bioventing infrastructure. ~10,000 truckloads of soil Removal of hardscape is inconvenient for residents. Short-term disturbances of community including air quality, noise, and traffic impacts. 1.9 years active remediation	Moderate-High.	Retained as technically and economically feasible.
4C	Excavation of shallow soils to a depth of 5 feet bgs from both landscaped areas and areas covered by hardscape at properties where human health or groundwater goals are exceeded.	Effectively meets RAOs in the long term. Moderate effectiveness in the short term. Soil goals met in upper 5 feet. Remaining soils meet health goals for infrequent exposure. Soil vapor and nuisance goals met. LNAPL effectively addressed through LNAPL removal. Groundwater goals achieved in long term through MNA.	Moderate. 183 properties require excavation. 27 homes would have sub-slab mitigation installed. 214 properties would have SVE/bioventing infrastructure. ~17,000 truckloads of soil Utilities capped, removed and replaced. Removal of hardscape is inconvenient for residents. Short-term disturbances of community including air quality, noise, and traffic impacts. 2.8 years active remediation	High.	Retained as technically and economically feasible.
4D	Excavation of shallow soils to a maximum depth of 10 feet bgs from both landscaped areas and areas covered by hardscape at properties where human health or groundwater goals are exceeded.	Effectively meets RAOs in the long term. Very low effectiveness in the short term. Soil goals met in upper 10 feet. Remaining soils meet health goals for infrequent exposure. Soil vapor and nuisance goals met. LNAPL effectively addressed through LNAPL removal. Groundwater goals achieved in long term through MNA.	Infeasible. 214 properties require excavation. 27 homes would have sub-slab mitigation installed. 214 properties would have SVE/bioventing infrastructure. ~38,000 truckloads of soil Utilities capped, removed and replaced. May come in contact with reservoir slabs. Removal of hardscape is inconvenient for residents. Short-term disturbances of community including air quality, noise, and traffic impacts. 6.7 years active remediation	Very high.	Retained as directed by RWQCB.

**TABLE 5-3
SCREENING OF REMEDIAL ALTERNATIVES**

ALT	DESCRIPTION	SCREENING CRITERIA			STATUS
		EFFECTIVENESS	IMPLEMENTABILITY	COST	
5A	Excavation of shallow soils to a depth of 2 feet bgs from landscaped areas at properties where human health or groundwater goals are exceeded.	Low effectiveness at meeting RAOs in the long term. Relatively high effectiveness in the short term. Soil goals met in upper 2 feet, but not in 2-to-3-foot zone. No existing institutional controls preventing contact with soil from below 2 feet to 3 feet. Soil vapor and nuisance goals met. LNAPL effectively addressed through LNAPL removal. Groundwater goals achieved in long term through MNA.	High. 106 properties require excavation. 27 homes would have sub-slab mitigation installed. 214 properties would have SVE/bioventing infrastructure. ~2,900 truckloads of soil Short-term disturbances of community including air quality, noise, and traffic impacts. 1.2 years active remediation	Moderate.	Not retained due to lack of protectiveness.
5B	Excavation of shallow soils to a depth of 3 feet bgs from landscaped areas at properties where human health or groundwater goals are exceeded.	Moderately effective at meeting RAOs in the long term. Moderate effectiveness in the short term. Soil goals met in upper 3 feet. Remaining soils meet health goals for infrequent exposure. Soil vapor and nuisance goals met. LNAPL effectively addressed through LNAPL removal. Groundwater goals achieved in long term through MNA.	Relatively high. 183 properties require excavation. 27 homes would have sub-slab mitigation installed. 214 properties would have SVE/bioventing infrastructure. ~4,300 truckloads of soil Short-term disturbances of community including air quality, noise, and traffic impacts. 1.5 years active remediation	Moderate.	Retained as technically and economically feasible.
5C	Excavation of shallow soils to a depth of 5 feet bgs from landscaped areas at properties where human health or groundwater goals are exceeded.	Moderately effective at meeting RAOs in the long term. Moderate effectiveness in the short term. Soil goals met in upper 5 feet. Remaining soils meet health goals for infrequent exposure. Soil vapor and nuisance goals met. LNAPL effectively addressed through LNAPL removal. Groundwater goals achieved in long term through MNA.	Moderate 183 properties require excavation. 27 homes would have sub-slab mitigation installed. 214 properties would have SVE/bioventing infrastructure. ~6,900 truckloads of soil Utilities capped, removed and replaced. Short-term disturbances of community including air quality, noise, and traffic impacts. 2.8 years active remediation	High.	Retained as technically and economically feasible.

**TABLE 5-3
SCREENING OF REMEDIAL ALTERNATIVES**

ALT	DESCRIPTION	SCREENING CRITERIA			STATUS
		EFFECTIVENESS	IMPLEMENTABILITY	COST	
5D	Excavation of shallow soils to a maximum depth of 10 feet bgs from landscaped areas at properties where human health or groundwater goals are exceeded.	Effectively meets RAOs in the long term. Very low effectiveness in the short term. Soil goals met in upper 10 feet. Remaining soils meet health goals for infrequent exposure. Soil vapor and nuisance goals met. LNAPL effectively addressed through LNAPL removal. Groundwater goals achieved in long term through MNA.	Infeasible. 214 properties require excavation. 27 homes would have sub-slab mitigation installed. 214 properties would have SVE/bioventing infrastructure. ~16,000 truckloads of soil Utilities capped, removed and replaced. May come in contact with reservoir slabs. Short-term disturbances of community including air quality, noise, and traffic impacts. 4.5 years active remediation	High.	Retained as directed by RWQCB.
6	Removal of all site features and cap entire site.	Effectively meets RAOs in the long term. Low effectiveness in the short term. Meet human health goal for infrequent exposure to soils Meet nuisance goals by limiting contact with soil and soil vapor Limited removal of COCs from soils. Soil vapor goals for methane and vapor intrusion may not be met in some areas but no receptors. LNAPL effectively addressed through LNAPL removal. Groundwater goals achieved in long term through MNA.	Very Difficult Relocate all residents. 285 homes and all roads/utilities removed. ~12,500 truckloads of import fill and construction debris Possibly not be permitted under CEQA. 4.5 years at minimum active remediation	Very high.	Not retained due to very difficult implementability and very high cost.
7	Cap all exposed soils on-site.	Effectively meets RAOs in the long term. High effectiveness in the short term. Meet human health goal for infrequent exposure to soils Meet nuisance goals by limiting contact with soil and soil vapor Limited removal of COCs from soils. Soil vapor goals for methane and vapor intrusion addressed using sub-slab mitigation LNAPL effectively addressed through LNAPL removal. Groundwater goals achieved in long term through MNA.	Moderate 285 properties require capping 27 homes require sub-slab mitigation. 214 properties would have SVE/bioventing infrastructure. Short-term disturbances of community including air quality, noise, and traffic impacts. All landscaping above cap in long-term Potentially significant increases in stormwater runoff could occur 1.4 years	Moderate.	Retained as technically and economically feasible.

**TABLE 5-4
Retained Remedial Alternatives**

Alt	Existing ICs	ECs (Sub-slab Mitigation)	Cap Site	Excavate to 3 ft	Excavate to 5 ft	Excavate to 10 ft	Excavate Beneath Residential Hardscape	Groundwater Hot Spot Remediation and MNA	Remove LNAPL as Feasible	SVE / Bioventing
1*										
4B	X	X		X			X	X	X	X
4C	X	X			X		X	X	X	X
4D	X	X				X	X	X	X	X
5B	X	X		X				X	X	X
5C	X	X			X			X	X	X
5D	X	X				X		X	X	X
7	X	X	X					X	X	X

*Alt 1: No Action Alternative

**TABLE 6-1
FEDERAL ARARs**

Citation	Standard or Requirement	Description	Potentially Applicable or Relevant and Appropriate	Comment
Safe Drinking Water Act (40 USC Section 300)				
40 CFR Part 141 Subpart B	National Primary Drinking Water Standards	<p>Establishes maximum contaminant levels (MCLs) which are health based standards for public water systems. EPA has promulgated MCLs for inorganic chemicals (41 CFR 141.11), organic chemicals (41 CFR 141.12), turbidity (41 CFR 141.13) and radioactivity (41 CFR 141.15).</p> <p>The SDWA also establishes secondary standards for sources of public drinking water. These Maximum Contaminant Level Goals (MCLGs) are non-promulgated and generally non-enforceable standards. They are, however, intended to provide guidance as to levels of contamination that are protective of human health; and pursuant to CERCLA § 121(d)(2)(A) remedial actions selected at CERCLA sites must require a level or standard of control which at least attains MCLGs established under the SDWA and water quality criteria established under sections 304 or 303 of the Clean Water Act, where such goals or criteria are relevant and appropriate under the circumstances of the release or threatened release.</p>	Yes	Applicable if affected groundwater is a drinking water source.
		<p>In determining the relevance and appropriateness of MCLGs, the most important factors to consider are the designated uses of the water and the purpose for which the potential requirements are intended. Regulations promulgated by EPA require that MCLGs that are set at non-zero levels "shall be attained by remedial actions for groundwater or surface water that are current or potential sources of drinking water, where the MCLGs are relevant and appropriate to the circumstances of the release based on the factors in [40 CFR] § 300.400(g)(2). If an MCLG is determined not to be relevant and appropriate, the corresponding MCL shall be attained where relevant and appropriate to the circumstances of the release." 40 CFR § 300.430(e)(2)(B). Thus, MCLGs are potential ARARs even though not generally enforceable.</p>		

**TABLE 6-1 (Cont.)
FEDERAL ARARS**

Citation	Standard or Requirement	Description	Potentially Applicable or Relevant and Appropriate	Comment
Safe Drinking Water Act (40 USC Section 300) (Cont.)				
40 CFR Part 143	National Secondary Drinking Water Standards	The SDWA established National Secondary Drinking Water Regulations consisting of Secondary Maximum Contaminant Levels (SMCLs). These standards are set to regulate aesthetic qualities of drinking water (e.g., odor, color). SMCLs are non-enforceable guidance and are therefore TBCs for the Site.	Yes	Applicable if affected groundwater is a drinking water source.
40 CFR Part 144	Underground Injection Control (UIC) Program	<p>UIC provides substantial requirements and permit requirements for construction and operation of underground injection wells. The technical and procedural requirements vary according to the class of well installed. These include construction, operating, monitoring, and closure requirements.</p> <p>Since reinjection of extracted groundwater is not within 1/4 mile of an underground drinking water source, the injection wells would be classified as either a Class IV well or a Class V well depending on the nature of the material injected. Class IV wells allow injection of nonhazardous wastewater into an aquifer as part of a CERCLA remedial action (40 CFR 144.13). No construction, operation, monitoring or closure criteria are established for Class IV wells (40 CFR 146, Subpart E). Class V wells inject non-hazardous materials.</p> <p>SDWA also authorized the UIC permit program (40 CFR 144). This program requires owners and operators of certain classes of underground injection wells to obtain permits in order to operate the wells. The permit applicant must show that the underground injection will not endanger drinking water sources.</p> <p>Any wells constructed off Site would be required to be permitted by the appropriate state agency or EPA and to comply with the UIC permit program. All Class I, III, IV, and V wells under the UIC program are administered by EPA. 40 CFR § 147.251. Only Class II wells are administered by the State of California.</p>	Yes	If reinjection takes place in wells that are installed entirely on Site, no UIC permits would be required, but the substantive provisions of the program would be applicable. Alternatively, if some reinjection wells discharge into areas of groundwater units that are not part of the Site, both the substantive and administrative portions of the UIC would be applicable.

**TABLE 6-1 (Cont.)
FEDERAL ARARS**

Citation	Standard or Requirement	Description	Potentially Applicable or Relevant and Appropriate	Comment
Safe Drinking Water Act (40 USC Section 300) (Cont.)				
40 CFR Part 131	Ambient Water Quality Criteria (WQC)	<p>The permitting provisions of 40 CFR Part 144 contain only a few specific requirements for Class IV wells (which are otherwise generally prohibited but are granted an exception for CERCLA corrective actions). These provisions would not be fully applicable for off-site wells if the wells are determined to be Class V wells. Other permit conditions that relate to all classes of injection wells under the UIC would be applicable for injection wells located off-site. See e.g., 40 CFR Subpart E.</p>	Yes	Ambient WQC for some of the organic and inorganic contaminants in the groundwater at the Site have been developed. Substantive requirements would apply if contaminated or treated groundwater is discharged to surface water during a remedial action.
40 CFR Parts 122 and 125	National Pollutant Discharge Elimination System Permit Regulations	<p>CERCLA § 121 requires that a remedial action attain Water Quality Criteria (WQC) where such releases are relevant and appropriate under the circumstances. WQC are non-enforceable guidance developed under the CWA and are used by the state, in conjunction with a designated use of a surface water segment, to establish water quality standards under CWA § 303. WQC established under Section 304 of CWA (51 FR 43665), are non-promulgated guidance values based on effects on human health and aquatic life that do not reflect technological or economic considerations.</p> <p>CWA WQCs would pertain to water discharged to, or site runoff directed to, a water body (including a storm drain or flood channel) and surface water containing contaminated sediments from the Site with or without treatment.</p>	Yes	A permit is not required for on-site CERCLA response actions, but the substantive requirements would apply if treated groundwater is discharged to surface water during a remedial action.
Safe Drinking Water Act (40 USC Section 300) (Cont.)				
40 CFR Parts	National	Standards control the introduction of pollutants which pass through or interfere	Yes	If an alternative involves

**TABLE 6-1 (Cont.)
FEDERAL ARARs**

Citation	Standard or Requirement	Description	Potentially Applicable or Relevant and Appropriate	Comment
403 and 414	Pretreatment Standards	with treatment processes in publicly owned treatment works (POTWs). This prevents interference with the operation of a POTW, prevents pass through of pollutants through the treatment works, and improves opportunities to recycle and reclaim municipal and industrial wastewater and sludges.		discharge to publicly owned treatment works, these substantive standards would be applicable.
CWA § 402 (a)(1)	Water Quality Standards	Effluent limitations are required to achieve all appropriate state water quality standards. EPA "Policy for the Development of Water Quality-Based Permit Limitations for Toxic Pollutants" (49 FR 9016, March 9, 1984) states that toxic pollutants contained in direct discharges will be controlled beyond Best Available Technology (BCT/BAT) equivalents in order to meet applicable state water quality standards. Section 303 of the CWA requires states to promulgate water quality standards. Discharges to the storm drain pertain here, such as site rainwater runoff. TBC for reinjection of groundwater in absence of direct discharge.	Yes	To be considered for reinjection of groundwater in absence of other ARARs.
CWA 402(p)	Storm Water Discharge Requirements	The Water Quality Act of 1987 added Section 402(p) to the CWA. See 33 U.S.C. § 1342(p). Section 402(p) establishes a framework for regulating industrial storm water discharges under the NPDES program. Of the five types of stormwater discharges required to have permits under Section 402(p), only one is relevant to the Site -- Section 402(p) prohibits any discharge that EPA or the state determines "contributes to a violation of a water quality standard or is a significant contributor of pollutants to the waters of the United States." CWA § 402(p)(2)(E). California has been authorized to implement the NPDES program for the state and the State Water Resources Control Board (SWRCB) has issued regulations governing storm water permitting under the CWA. See 40 CFR § 122.26(b)(14) (industries covered by the SWRCB's general permit requirements are coextensive with those covered by the federal permit program). A discussion of the substantive requirements of the SWRCB's storm water discharge requirements are discussed below under the state ARARs.	No	Remedial activities that result in a surface water discharge are expected to be conducted entirely on-site; it will not be required to meet the administrative or permitting requirements of this provision.
Clean Air Act (CCA)				
40 CFR Part 50	National Ambient	National primary and secondary ambient air quality standards are defined under	Yes	These specific requirements are

**TABLE 6-1 (Cont.)
FEDERAL ARARs**

Citation	Standard or Requirement	Description	Potentially Applicable or Relevant and Appropriate	Comment
40 CFR Part 61	Air Quality Standards (NAAQS)	<p>Section 109 of the CAA and are listed in 40 CFR 50.</p> <p>CERCLA sites are not considered major sources under the CAA unless emissions equal or exceed 100 tons per year of the pollutants for which the area is designated non-attainment. State implementation plans contain the specific regulations which govern the emission rates for such areas.</p>	No	<p>discussed in the table below relating to State and Local ARARs.</p>
	<p>National Emission Standards for Hazardous Air Pollutants (NESHAPs)</p>	<p>NESHAPs are process and industry specific. The NESHAP standards were promulgated to protect public health and the environment but are specific to industrial emissions. NESHAP standards are currently limited to very few chemicals for specific sources of those contaminants (40 CFR 61). The standard for benzene, the only chemical found at the Site for which a NESHAP standard exists varies depending upon the industrial process.</p> <p>The Fugitive Emission Source regulations of 40 CFR Subpart V (§ 61.240 to § 61.247) apply to equipment that is used in volatile hazardous air pollutant (VHAP) service. The VHAPs regulated under this subpart are benzene and vinyl chloride. This subpart only applies if VHAP equipment comes into contact with a VHAP in excess of 10% by weight.</p> <p>The overall concentration of benzene in extracted groundwater from the Site would be present at only a small fraction of the level of contamination intended to be regulated by this subpart. Consequently, these fugitive emission regulations are not appropriate for the major processes</p>		<p>Since benzene is not anticipated to be present at levels regulated under NESHAPs, these standards are not applicable. Nor are NESHAPs relevant and appropriate for the remedial activities anticipated since the "fugitive leaks" regulations apply to equipment contacting benzene at concentrations greater than 10% by weight.</p>

**TABLE 6-1 (Cont.)
FEDERAL ARARs**

Citation	Standard or Requirement	Description	Potentially Applicable or Relevant and Appropriate	Comment
Other Applicable Acts				
19 CFR 1910	Occupational Safety and Health Act (OSHA)	<p>The application of OSHA is controlled by the National Contingency Plan (NCP) 40 CFR § 300.150. OSHA requirements under 19 CFR 1910.120 are applicable to worker exposures during response actions at CERCLA sites, except in states that enforce equivalent or more stringent requirements. Response actions under the NCP must comply with the provisions for response action worker safety and health in 29 CFR 1910.120. Federal OSHA requirements include: Construction Standards (29 CFR Part 1926), General Industry Standards (29 CFR Part 1926), General Industry Standards (29 CFR Part 1910), and the general duty requirements of OSHA § 5(a)(1) (29 USC § 654(2)(1)).</p> <p>OSHA exposure limits are developed for 8-hour worker exposures; these standards however could be considered in the protection of people in their homes. Exceeding OSHA standards in a home is likely to be more hazardous than on-site worker exposures.</p>	Yes	Is relevant and appropriate in order to maintain worker safety and health while working on the Site.
40 CFR 204, 205, 211	Noise Control Act of 1972 as amended by the Quiet Communities Act of 1978	<p>Construction and Transportation equipment noise levels (e.g., portable air compressors, and medium and heavy trucks), process equipment noise levels and noise levels at the property boundaries of the project are regulated under this act State or local agencies typically enforce these levels.</p>	Yes	Applicable to process equipment noise levels and noise levels at the properties boundaries.

**TABLE 6-2
STATE AND LOCAL ARARS**

Citation	Standard or Requirement	Description	Potentially Applicable or Relevant and Appropriate	Comment
Hazardous Waste Control Act under the California Code of Regulations Title 22				
H&SC §§ 25100-25395 under 22 CCR 66300	Standards for Management of Hazardous Wastes	<p>The HWCA has many elements that are intended to control hazardous wastes from their point of generation through accumulation, transportation, treatment, storage, and ultimate disposal. It is implemented largely through regulations under the California Code of Regulations (CCR), Title 22, Section 66300 <i>et seq.</i></p> <p>All surface impoundments, waste piles, and land treatment facilities must be designed, constructed, and maintained to withstand the maximum credible earthquake. The level of public health and environmental protection incorporated in the original design should not be decreased (67108(a) and (b)).</p>	Yes	Since there are no landfills in any groundwater remedial alternative, these regulations will only be TBC.
22 CCR §§ 66261.21 to 66261.24	Criteria for Identifying Hazardous Wastes	<p>If a chemical is either listed or tested and found to possess characteristics that are hazardous, then remedial actions must comply with the hazardous waste requirements under Title 22.</p> <p>Total Threshold Limit Concentrations (TTLCS) and Soluble Threshold Limit Concentrations (STLCS) have been established for selected toxics to be used in establishing whether waste is hazardous.</p>	Yes	If a chemical is either listed or tested and found hazardous, then remedial actions must comply with the hazardous waste requirements under Title 22.
22 CCR §§ 66262.10-66262.70	Standards Applicable to Generators of Hazardous Waste	<p>An owner or operator who initiates a shipment of hazardous waste from a Transport, Storage, or Disposal (TSD) facility must comply with the generator standards established under Title 22, Chapter 12. These standards include keeping of manifests (66262.20), pre-transport requirements (66262.30), record keeping and reporting requirements (66262.00). This regulation is applicable to hazardous waste resulting from treatment of groundwater that accumulates on-site and is shipped off-site for disposal. This regulation is TBC for site activities which do not result in generation or disposal of hazardous waste.</p>	Yes	This regulation is applicable to hazardous waste resulting from treatment of groundwater that accumulates on-site and is shipped off-site for disposal.

**TABLE 6-2 (cont.)
STATE AND LOCAL ARARS**

Citation	Standard or Requirement	Description	Potentially Applicable or Relevant and Appropriate	Comment
Hazardous Waste Control Act under the California Code of Regulations Title 22 (Cont.)				
22 CCR §§ 66263.10 to 66263.18	Standards Applicable to Transporters of Hazardous Waste	If hazardous wastes are generated through the treatment process and then must be transported off-site the substantive portions of these regulations would be applicable. The regulations require that transporters of hazardous waste; be registered, have the appropriate kinds of containers, adhere to mandated monitoring procedures, meet record keeping requirements, and take appropriate action in the event of a discharge.	Yes	Only transportation of hazardous waste off-site is required to meet these requirements.
22 CCR §§ 66264.10-66264.708	Standards For Owners and Operators of Hazardous Waste Transfer, Treatment, Storage, and Disposal Facilities	General facility standards (Article 2), Preparedness and Prevention Requirements (Article 3), Contingency Plan and Emergency Procedures (Article 4), and Manifest System (Article 5) are generally applicable for those treatment processes involved in soil remediation. Reinjection could be considered "disposal" if the "contained-in" rule is not applicable.	No	These provisions are not applicable to the Site itself, since it is not a TSD, but would apply to those processes that treat, store or dispose of hazardous wastes.
22 CCR §§ 66264.110-66264.120	Closure and Post-Closure	Requires closure plans and general closure requirements for disposal and decontamination of equipment at closure.	Yes	Relevant and appropriate for decontamination of equipment at the Site.
22 CCR §§ 66264.170-66264.199	Use and Management of Containers and Tank Systems	Containers used to transfer or store hazardous wastes must be compatible with wastes stored, managed appropriately, inspected, and designed and operated appropriately. Tank systems must meet design standards and provide for: containment and detection/monitoring of leaks, monitoring and inspection, and proper closure procedures.	Yes	Applicable for those alternatives which contemplate the usage of tanks and/or containers as part of the remedial alternative.

**TABLE 6-2 (cont.)
STATE AND LOCAL ARARS**

Citation	Standard or Requirement	Description	Potentially Applicable or Relevant and Appropriate	Comment
Hazardous Waste Control Act under the California Code of Regulations Title 22 (Cont.)				
22 CCR §§ 66266.1 - 66266.120	Recyclable Materials	The substantive provisions of Chapter 16 of Title 22 pertain to recycling materials that are both economically and technologically feasible to be recycled. It is not expected that any waste streams from the remedial alternatives at the Site will be capable of being recycled as described in the regulations. The waste streams are expected to produce materials that are insufficient purity for resale or recycling. Consequently, this Chapter is not applicable. The intent of this Chapter is to utilize recycling to minimize the amount of hazardous waste that must ultimately be disposed. These regulations are also intended generally to apply to ongoing manufacturing operations and processes that are capable of recycling or reusing materials in the manufacturing process. The intent is to either destroy or safely dispose of these waste streams. The substantive provisions of this chapter are TBCs.	No	These regulations while relevant to minimization of disposal or waste products from ongoing plant operations are not appropriate to the Site remedial activities since facilities associated with the remedial action are generally not capable of reusing the waste stream from the process.
22 CCR §§ 66268.1 - 66268.124	Land Disposal Restrictions	Specifies the restrictions that apply to the land disposal of certain kinds of wastes. The soil or debris variance from the land ban restrictions of Chapter 18 of Title 22 CCR § 66268.30 to § 66268.35 (exception for CERCLA corrective actions) expired in November 1990. The land disposal restrictions generally will apply as follows to groundwater or treatment residuals: <ul style="list-style-type: none"> • If the groundwater is itself and F002 RCRA-listed waste -- then the groundwater is banned from land disposal. 22 CCR § 66268.30(a). • If the groundwater itself is not a RCRA-listed waste -- then the groundwater is banned from land disposal if it contains greater than 100 mg/kg HOCs. 22 CCR § 66268.32. 	Yes	Compounds prohibiting land disposal were detected in groundwater at the Site. The provisions of Chapter 18 will be applicable for remedial alternatives that anticipate the treatment and disposal of wastes containing contaminants in concentrations in excess of those allowed under this chapter

**TABLE 6-2 (cont.)
STATE AND LOCAL ARARS**

Citation	Standard or Requirement	Description	Potentially Applicable or Relevant and Appropriate	Comment
Hazardous Waste Control Act under the California Code of Regulations Title 22 (Cont.)				
		<p>Chapter 18 specifies treatment requirements for HOCs that are present in concentrations greater than or equal to 1,000 mg/kg. 22 CCR § 66268.42. These treatment requirements will apply if the groundwater contains such concentrations of HOCs. Liquid wastes containing such concentration are required to be incinerated. Chapter 18 also specifies the residual concentration of a contaminant that can be contained in a liquid waste in order for that liquid to be land disposed.</p> <ul style="list-style-type: none"> • If the groundwater contains (or is itself) the RCRA-listed waste "F002" then the maximum allowable concentration for land disposal of the waste or treatment residual is 0.15 mg/l (22 CCR § 66268.41(a)) (Table CCWE) (wastewater concentration). • Liquid wastes containing less than 1,000 mg/kg of HOCs (which are not otherwise RCRA-listed) may be land disposed. 22 CCR § 66238.32(e). 	Yes	Applicable to disposal of hazardous materials resulting from treatment processes.
19 CCR Ch. 3, Subch. 3	Hazardous Materials Release Response Plans and Inventory	Requires businesses that handle hazardous materials to establish a plan for emergency response to a release or threatened release of hazardous material. A handler would be required to report certain releases or threatened releases.	Yes	Applicable to disposal of hazardous materials resulting from treatment processes.

**TABLE 6-2 (cont.)
STATE AND LOCAL ARARS**

Citation	Standard or Requirement	Description	Potentially Applicable or Relevant and Appropriate	Comment
Porter-Cologne Water Quality Control Act				
23 CCR 2200 to 2714	Water Code (WC)	<p>Porter-Cologne delegates standard-setting authority to the RWQCBs. RWQCB will not dictate specific treatment alternatives but will require that the alternative meet minimum actions levels and perform at a level near the Best Available Technology (BAT) for the chosen alternative. RWQCB emission standards are set on a case-by-case basis and apply to treated wastewater and stormwater runoff.</p> <p>Regulations pertain to land disposal unit design and construction standards that minimize dangers to the waters of the State. Wastes are classified as hazardous, designated, non-hazardous, or inert and must be disposed of accordingly. Regulations regarding water quality protection standards are left to the Regional Water Quality Control Boards (2552). Standards are determined by the RWQCBs on a case-by-case basis based on federal Water Quality Standards and state action levels. Actions taken by public agencies to clean up pollution are exempt from the requirements of Title 23, provided that redisposal and containment meet applicable standards.</p>	Yes	If met, these standards are not considered applicable but will remain relevant.
	Los Angeles RWQCB	<p>Regional Boards may prescribe individual or general waste discharge requirements for discharges of site-specific, contaminant-specific, or inert wastes. The RWQCB often references and uses the DTSC action level (AL) standards when the RWQCB determines wastewater discharge standards for site-specific discharges. The RWQCB does not have their own list of ALs. The DTSC ALs is guidance and therefore to be considered (TBC).</p>	Yes	Although the RWQCB applies and enforces the DTSC ALs, the discharge standards are still guidance and are not promulgated so are considered to be TBC.