
WATER QUALITY CONTROL PLAN

OCEAN WATERS OF CALIFORNIA



CALIFORNIA OCEAN PLAN

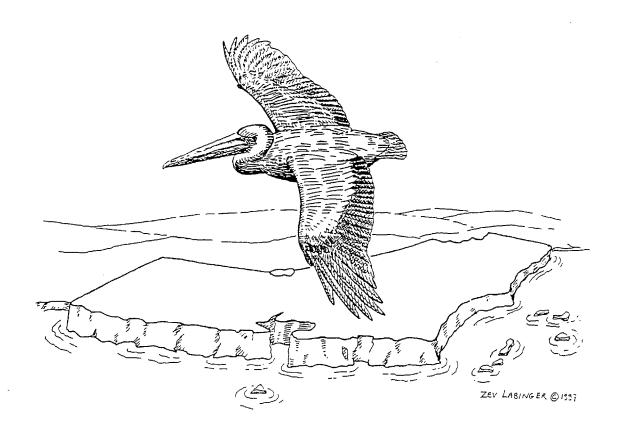

1997

STATE WATER RESOURCES CONTROL BOARD CALIFORNIA ENVIRONMENTAL PROTECTION AGENCY

•	•		•	•
				•
		g.		

State of California STATE WATER RESOURCES CONTROL BOARD

1997

CALIFORNIA OCEAN PLAN

WATER QUALITY CONTROL PLAN

OCEAN WATERS OF CALIFORNIA

Effective July 23, 1997

		•	,	·	
	,				

STATE WATER RESOURCES CONTROL BOARD RESOLUTION NO. 97-026

ADOPTION OF AN AMENDMENT TO THE WATER QUALITY CONTROL PLAN FOR OCEAN WATERS OF CALIFORNIA

WHEREAS:

- 1. The Water Quality Control Plan for Ocean Waters of California (Ocean Plan) was adopted by the State Water Resources Control Board (SWRCB) in 1972 and amended in 1978, 1983, 1988 and 1990.
- 2. The SWRCB is responsible for reviewing Ocean Plan water quality standards and for modifying and adopting standards in accordance with Section 303(c)(1) of the Federal Clean Water Act and Section 13170.2 of the California Water Code (CWC).
- 3. The SWRCB initiated a public review of the Ocean Plan in 1991, including a public hearing, and adopted a workplan in 1992 for considering issues identified in the comments received.
- 4. The SWRCB staff reviewed the higher priority issues, selected several for analysis in accordance with the workplan, and is now proposing amendments to the Ocean Plan based on two of these selected issues.
- 5. The proposed amendments consist of:
 - a. Revision of the current Ocean Plan list of critical life stage protocols used in testing the toxicity of waste discharges.
 - b. Minor changes in terminology to make the Ocean Plan easier to understand and implement.
- 6. The SWRCB prepared and circulated a draft Functional Equivalent Document in accordance with provisions of the California Environmental Quality Act and Title 14, California Code of Regulations 15251(g).
- 7. The SWRCB held a public hearing in Sacramento, California on August 23, 1995 and has carefully considered all testimony and comments received on this matter and has determined that the adoption of the proposed Ocean Plan amendments will not have a significant adverse effect on the environment.
- 8. The SWRCB staff has prepared a final draft of the Functional Equivalent Document, Attachment "A" to this resolution, which includes the specific proposed amendments to the Ocean Plan, responses to the comments received, and a progress report on the other issues identified in the 1992 workplan.
- 9. The SWRCB has considered relevant management agency agreements in accordance with CWC Section 13170.1.

- 10. The SWRCB consulted with the Department of Fish and Game (DFG) on the potential impacts of the amendments on fish and wildlife resources, including threatened or endangered species. The DFG found that the proposed amendments will not jeopardize the continued existence of any endangered or threatened species or result in the destruction or adverse modification of habitat essential to the continued existence of such species.
- 11. Amendments to SWRCB Water Quality Control Plans do not become effective until regulatory provisions are approved by the Office of Administrative Law (OAL).

THEREFORE BE IT RESOLVED THAT: The SWRCB:

- 1. Approves the proposed amendments to the Ocean Plan, as described in Attachment "A", which will:
 - a. Revise the current Ocean Plan list of critical life stage protocols used in testing the toxicity of waste discharges.
 - b. Make minor changes in terminology to make the Ocean Plan easier to understand and implement.
- 2. Approves the draft final Functional Equivalent Document, identified as Attachment "A" to this resolution, which includes the responses to comments received and a progress report on other issues related to the Ocean Plan.
- 3. Agrees that within three years after DFG notifies the SWRCB that specific water bodies support threatened or endangered species and that scientific evidence indicates that certain existing water quality objectives for these water bodies do not adequately protect such species, the SWRCB shall determine whether these objectives are adequately protective. In cases where such existing objectives do not provide adequate protection for threatened and endangered species, the SWRCB shall develop and adopt adequately protective site-specific objectives for these constituents.
- 4. Authorizes the SWRCB Executive Director to sign the Certificate of Fee Exemption identified as Attachment "B" to this resolution.
- 5. Authorizes the SWRCB staff to submit the approved amended Ocean Plan to the U.S. Environmental Protection Agency and the OAL for their approval.

CERTIFICATION

The undersigned, Administrative Assistant to the Board, does hereby certify that the foregoing is a full, true, and correct copy of a resolution duly and regularly adopted at a meeting of the State Water Resources Control Board held on March 20, 1997.

Maureen Marché Administrative Assistant to the Board

Table of Contents

Introduction	1
Chapter I: Beneficial Uses	1
Chapter II: Water Quality Objectives	. 2
1. Water-Contact Standards	2
Shellfish* Harvesting Standards Bacterial Assessment and Remedial Action Requirements	3
C. <u>Physical Characteristics</u>	4
D. <u>Chemical Characteristics</u> E. <u>Biological Characteristics</u>	
F. <u>Radioactivity</u>	
Chapter III: General Requirements for Management of	_
Waste* Discharge to the Ocean*	5
Chapter IV: Quality Requirements for Waste* Discharges (Effluent Limitations)	6
TABLE A: Effluent Limitations	
TABLE B: Water Quality Objectives TABLE C: Background Seawater Concentrations	
Chapter V: Discharge Prohibitions	14
A. <u>Hazardous Substances</u>	14
B. Areas of Special Biological Significance	14 14
C. <u>Sludge</u> D. <u>By-Passing</u>	14
Chapter VI: General Provisions	14
A. Effective Date	14
B. Waste Discharge Requirements.	15
TABLE D: Conservative Estimates of Chronic Toxicity	15
C. Revision of Waste* Discharge Requirements	16
D. Monitoring Program	
E. Areas of Special Biological Significance F. State Board Exceptions to Plan Requirements	
Appendix I: Definition of Terms	18
Appendix II: Standard Monitoring Procedures	22

•		and the second			
•			•		
e de la companya de	. ~				
e de la companya de l					
				-	

CALIFORNIA OCEAN PLAN

WATER QUALITY CONTROL PLAN FOR OCEAN WATERS OF CALIFORNIA

INTRODUCTION

In furtherance of legislative policy set forth in Section 13000 of Division 7 of the California Water Code (Stats. 1969, Chap. 482) pursuant to the authority contained in Section 13170 and 13170.2 (Stats. 1971, Chap. 1288) the State Water Resources Control Board hereby finds and declares that protection of the quality of the ocean* waters for use and enjoyment by the people of the State requires control of the discharge of waste* to ocean* waters in accordance with the provisions contained herein. The Board finds further that this plan shall be reviewed at least every three years to guarantee that the current standards are adequate and are not allowing degradation* to marine species or posing a threat to public health.

This plan is applicable, in its entirety, to point source discharges to the ocean*. Nonpoint sources of waste* discharges to the ocean* are subject to Chapter I - Beneficial Uses, Chapter II - Water Quality Objectives, Chapter III - General Requirements, Chapter IV - Table B (wherein compliance with water quality objectives shall, in all cases, be determined by direct measurements in the receiving waters) and Chapter V - Discharge Prohibitions.

This plan is not applicable to discharges to enclosed* bays and estuaries* or inland waters nor is it applicable to vessel wastes, or the control of dredging spoil.

Provisions regulating the thermal aspects of waste* discharged to the ocean* are set forth in the Water Quality Control Plan for the Control of Temperature in the Coastal and Interstate Waters and Enclosed* Bays and Estuaries* of California.

Chapter I BENEFICIAL USES

The beneficial uses of the ocean* waters of the State that shall be protected include industrial water supply, water contact and non-contact recreation, including aesthetic enjoyment, navigation, commercial and sport fishing, mariculture, preservation and enhancement of Areas of Special Biological Significance, rare and endangered species, marine habitat, fish migration, fish spawning and shellfish* harvesting.

^{*} See Appendix I for definition of terms.

Chapter II WATER QUALITY OBJECTIVES

This chapter sets forth limits or levels of water quality characteristics for ocean* waters to ensure the reasonable protection of beneficial uses and the prevention of nuisance. The discharge of waste* shall not cause violation of these objectives.

The Water Quality Objectives and Effluent Limitations are defined by a statistical distribution when appropriate. This method recognizes the normally occurring variations in treatment efficiency and sampling and analytical techniques and does not condone poor operating practices.

Compliance with the water quality objectives of this chapter shall be determined from samples collected at stations representative of the area within the waste field where initial* dilution is completed.

A. Bacterial Characteristics

1. Water-Contact Standards

Within a zone bounded by the shoreline and a distance of 1,000 feet from the shoreline or the 30-foot depth contour, whichever is further from the shoreline, and in areas outside this zone used for water contact sports, as determined by the Regional Board, but including all kelp* beds, the following bacterial objectives shall be maintained throughout the water column:

- a. Samples of water from each sampling station shall have a density of total coliform organisms less than 1,000 per 100 ml (10 per ml); provided that not more than 20 percent of the samples at any sampling station, in any 30-day period, may exceed 1,000 per 100 ml (10 per ml), and provided further that no single sample when verified by a repeat sample taken within 48 hours shall exceed 10,000 per 100 ml (100 per ml).
- b. The fecal coliform density based on a minimum of not less than five samples for any 30-day period, shall not exceed a geometric mean of 200 per 100 ml nor shall more than 10 percent of the total samples during any 60-day period exceed 400 per 100 ml.

The "Initial* Dilution Zone" of wastewater outfalls shall be excluded from designation as "kelp* beds" for purposes of bacterial standards, and Regional Boards should recommend extension of such exclusion zone where warranted to the SWRCB (for consideration under Chapter VI.F.). Adventitious assemblages of kelp plants on waste discharge structures (e.g., outfall pipes and diffusers) do not constitute kelp* beds for purposes of bacterial standards.

^{*} See Appendix I for definition of terms.

2. Shellfish* Harvesting Standards

At all areas where shellfish* may be harvested for human consumption, as determined by the Regional Board, the following bacterial objectives shall be maintained throughout the water column:

The median total coliform density shall not exceed 70 per 100 ml, and not more than 10 percent of the samples shall exceed 230 per 100 ml.

B. Bacterial Assessment and Remedial Action Requirements

The requirements listed below shall be used to 1) determine the occurrence and extent of any impairment of a beneficial use due to bacterial contamination; 2) generate information which can be used in the development of an enterococcus standard; and 3) provide the basis for remedial actions necessary to minimize or eliminate any impairment of a beneficial use.

Measurement of enterococcus density shall be conducted at all stations where measurement of total and fecal coliforms are required. In addition to the requirements of Section II.A.1., if a shore station consistently exceeds a coliform objective or exceeds a geometric mean enterococcus density of 24 organisms per 100 ml for a 30-day period or 12 organisms per 100 ml for a six-month period, the Regional Board shall require the appropriate agency to conduct a survey to determine if that agency's discharge is the source of the contamination. The geometric mean shall be a moving average based on no less than five samples per month, spaced evenly over the time interval. When a sanitary survey identifies a controllable source of indicator organisms associated with a discharge of sewage, the Regional Board shall take action to control the source.

Waste discharge requirements shall require the discharger to conduct sanitary surveys when so directed by the Regional Board. Waste discharge requirements shall contain provisions requiring the discharger to control any controllable discharges identified in a sanitary survey.

^{*} See Appendix I for definition of terms.

C. Physical Characteristics

- 1. Floating particulates and grease and oil shall not be visible.
- 2. The discharge of waste* shall not cause aesthetically undesirable discoloration of the ocean* surface.
- Natural* light shall not be significantly* reduced at any point outside the initial* dilution zone as the result of the discharge of waste*.
- 4. The rate of deposition of inert solids and the characteristics of inert solids in ocean* sediments shall not be changed such that benthic communities are degraded*.

D. Chemical Characteristics

- The dissolved oxygen concentration shall not at any time be depressed more than 10 percent from that which occurs naturally, as the result of the discharge of oxygen demanding waste* materials.
- 2. The pH shall not be changed at any time more than 0.2 units from that which occurs naturally.
- 3. The dissolved sulfide concentration of waters in and near sediments shall not be significantly* increased above that present under natural conditions.
- 4. The concentration of substances set forth in Chapter IV, Table B, in marine sediments shall not be increased to levels which would degrade* indigenous biota.
- 5. The concentration of organic materials in marine sediments shall not be increased to levels which would degrade* marine life.
- Nutrient materials shall not cause objectionable aquatic growths or degrade* indigenous biota.

E. Biological Characteristics

- 1. Marine communities, including vertebrate, invertebrate, and plant species, shall not be degraded*.
- 2. The natural taste, odor, and color of fish, shellfish*, or other marine resources used for human consumption shall not be altered.
- 3. The concentration of organic materials in fish, shellfish* or other marine resources used for human consumption shall not bioaccumulate to levels that are harmful to human health.

^{*} See Appendix I for definition of terms.

F. Radioactivity

1. Discharge of radioactive waste* shall not degrade* marine life.

Chapter III GENERAL REQUIREMENTS FOR MANAGEMENT OF WASTE* DISCHARGE TO THE OCEAN*

- A. Waste* management systems that discharge to the ocean* must be designed and operated in a manner that will maintain the indigenous marine life and a healthy and diverse marine community.
- B. Waste discharged* to the ocean* must be essentially free of:
 - 1. Material that is floatable or will become floatable upon discharge.
 - 2. Settleable material or substances that may form sediments which will degrade* benthic communities or other aquatic life.
 - 3. Substances which will accumulate to toxic levels in marine waters, sediments or biota.
 - 4. Substances that significantly* decrease the natural* light to benthic communities and other marine life.
 - 5. Materials that result in aesthetically undesirable discoloration of the ocean* surface.
- C. Waste* effluents shall be discharged in a manner which provides sufficient initial* dilution to minimize the concentrations of substances not removed in the treatment.
- D. Location of waste* discharges must be determined after a detailed assessment of the oceanographic characteristics and current patterns to assure that:
 - 1. Pathogenic organisms and viruses are not present in areas where shellfish* are harvested for human consumption or in areas used for swimming or other body-contact sports.
 - 2. Natural water quality conditions are not altered in areas designated as being of special biological significance or areas that existing marine laboratories use as a source of seawater.
 - 3. Maximum protection is provided to the marine environment.

^{*} See Appendix I for definition of terms.

Waste* that contains pathogenic organisms or viruses should be discharged a sufficient distance from shellfishing* and water-contact sports areas to maintain applicable bacterial standards without disinfection. Where conditions are such that an adequate distance cannot be attained, reliable disinfection in conjunction with a reasonable separation of the discharge point from the area of use must be provided. Disinfection procedures that do not increase effluent toxicity and that constitute the least environmental and human hazard should be used.

Chapter IV
QUALITY REQUIREMENTS
FOR WASTE* DISCHARGES
(EFFLUENT LIMITATIONS)

This chapter sets forth the quality requirements for waste* discharge to the ocean*.

Table A effluent limitations apply only to publicly owned treatment works and industrial discharges for which Effluent Limitations Guidelines have not been established pursuant to Sections 301, 302, 304, or 306 of the Federal Clean Water Act.

Table B water quality objectives apply to all discharges within the jurisdiction of this plan.

Table A effluent limitations, and effluent concentrations calculated from Table B water quality objectives, shall apply to a discharger's total effluent, of whatever origin (i.e., gross, not net, discharge), except where otherwise specified in this Plan.

The SWRCB is authorized to administer and enforce effluent limitations established pursuant to the Federal Clean Water Act. Effluent limitations established under Sections 301, 302, 306, 307, 316, 403, and 405 of the aforementioned Federal Act and administrative procedures pertaining thereto, are included in this plan by reference. Compliance with Table A effluent limitations, or Environmental Protection Agency Effluent Limitations Guidelines for industrial discharges, based on Best Practicable Control Technology, shall be the minimum level of treatment acceptable under this plan, and shall define reasonable treatment and waste control technology.

^{*} See Appendix I for definition of terms:

TABLE A EFFLUENT LIMITATIONS

Limiting Concentrations

	Unit of <u>Measurement</u>	Monthly (30-day Average)	Weekly (7-day Average)	Maximum at any time
Grease and Oil Suspended Solids	mg/l	25	40 see below+	75
Settleable Solids	ml/l	1.0	1.5	3.0
Turbidity	NTU	75	100	225
pΗ	units		within limits	
			of 6.0 to 9.0	
			at all times	
Acute* Toxicity	TUa	1.5	2.0	2.5

+Suspended Solids: Dischargers shall, as a 30-day average, remove 75% of suspended solids from the influent stream before discharging wastewaters to the ocean*, except that the effluent limitation to be met shall not be lower than 60 mg/l. Regional Boards may recommend that the SWRCB (Chapter VI.F.), with the concurrence of the Environmental Protection Agency, adjust the lower effluent concentration limit (the 60 mg/l above) to suit the environmental and effluent characteristics of the discharge. As a further consideration in making such recommendation for adjustment, Regional Boards should evaluate effects on existing and potential water* reclamation projects.

If the lower effluent concentration limit is adjusted, the discharger shall remove 75% of suspended solids from the influent stream at any time the influent concentration exceeds four times such adjusted effluent limit.

Effluent limitations shall be imposed in a manner prescribed by the SWRCB such that the concentrations set forth below as water quality objectives shall not be exceeded in the receiving water upon completion of initial* dilution, except that objectives indicated for radioactivity shall apply directly to the undiluted waste* effluent.

^{*} See Appendix I for definition of terms.

TABLE B
WATER QUALITY OBJECTIVES

		Limiting Concentrations			
	Units of	6-Month	Daily	Instantaneous	
	Measurement	Median	<u>Maximum</u>	<u>Maximum</u>	
OBJECTIVES FOR PROTEC	TION OF MARIN	E AQUATIC LIFI	Ε		
Arsenic	μg/l	8	32	80	
Cadmium	μg/l	1	4	10	
Chromium (Hexavalent) (see below, a)	μg/l	2	8	20	
Copper	μg/l	3	12	30	
Lead	μg/l	2	8	20	
Mercury	μg/l	0.04	0.16	0.4	
Nickel	μg/l	5	20	50	
Selenium	μ g /l	15	60	150	
Silver	μg/l	0.7	2.8	7	
Zinc	μg/l	20	80	200	
Cyanide	μg/l	1	4	10	
(see below, b)	r o -				
Total Chlorine Residual	μg/l	2	8	60	
(For intermittent chlorine	r s -				
sources, see below, c)	_		2400	COOO	
Ammonia	μg/l	600	2400	6000	
(expressed as nitrogen)			1		
Chronic* Toxicity	TUc		1	200	
Phenolic Compounds (non-chlorinated)	μg/l	30	120	300	
Chlorinated Phenolics	μg/l	1	4	10	
Endosulfan	μg/l	0.009	0.018	0.027	
Endrin	μg/l	0.002	0.004	0.006	
HCH*	μg/l	0.004	0.008	0.012	
Radioactivity					

Not to exceed limits specified in Title 17, Division 1, Chapter 5, Subchapter 4, Group 3, Article 3, Section 30269 of the California Code of Regulations.

^{*} See Appendix I for definition of terms.

Table B Continued

	30-day Average (µg/l)				
Chemical	Decimal Notation	Scientific Notation			
OBJECTIVES FOR PROTECTION OF I	HUMAN HEALTH NONCAR	CINOGENS			
acrolein	220	2.2×10^{2}			
antimony	1,200	1.2×10^3			
bis(2-chloroethoxy) methane	4.4	4.4×10^{0}			
bis(2-chloroisopropyl) ether	1,200	1.2×10^3			
chlorobenzene	570	5.7×10^2			
chromium (III)	190,000	1.9×10^{5}			
di-n-butyl phthalate	3,500	3.5×10^3			
dichlorobenzenes*	5,100	5.1×10^3			
1,1-dichloroethylene	7,100	7.1×10^3			
diethyl phthalate	33,000	3.3×10^4			
dimethyl phthalate	820,000	8.2×10^{5}			
4,6-dinitro-2-methylphenol	220	2.2×10^{2}			
2,4-dinitrophenol	4.0	4.0×10^{0}			
ethylbenzene	4,100	4.1×10^3			
fluoranthene	15	1.5×10^{1}			
hexachlorocyclopentadiene	58	5.8×10^{1}			
isophorone	150,000	1.5×10^{5}			
nitrobenzene	4.9	4.9×10^{0}			
thallium	14	1.4×10^{1}			
toluene	85,000	8.5×10^4			
1,1,2,2-tetrachloroethane	1,200	1.2×10^3			
tributyltin	0.0014	1.4×10^{-3}			
1,1,1-trichloroethane	540,000	5.4×10^{5}			
1,1,2-trichloroethane	43,000	4.3×10^4			
OBJECTIVES FOR PROTECTION OF I	,	OGENS			
acrylonitrile	0.10	1.0×10^{-1}			
aldrin	0.000022	2.2×10^{-5}			
benzene	5.9	5.9×10^{0}			
benzidine	0.000069	6.9×10^{-5}			
beryllium	0.033	3.3×10^{-2}			
bis(2-chloroethyl) ether	0.045	4.5×10^{-2}			
bis(2-ethylhexyl) phthalate	3.5	3.5×10^{0}			
carbon tetrachloride	0,90	9.0×10^{-1}			
chlordane*	0.000023	2.3×10^{-5}			
chloroform	130	1.3×10^2			
DDT*	0.00017	1.7×10^{-4}			
1,4-dichlorobenzene	18	1.8×10^{1}			
3,3'-dichlorobenzidine	0.0081	8.1×10^{-3}			
2,5 dichiolochadule	1,000,0	0.1 /1 10			

^{*} See Appendix I for definition of terms.

30-day Average (µg/I)

Table B Continued

vinyl chloride

Chemical	Decimal Notation	Scientific Notation
1,2-dichloroethane	130	1.3×10^{2}
dichloromethane	450	4.5×10^{2}
1,3-dichloropropene	8.9	$8.9 \times 10^{\circ}$
dieldrin	0.00004	4.0×10^{-5}
2,4-dinitrotoluene	2.6	$2.6 \times 10^{\circ}$
1,2-diphenylhydrazine	0.16	1.6×10^{-1}
halomethanes*	130	1.3×10^{2}
heptachlor*	0.00072	7.2×10^{-4}
hexachlorobenzene	0.00021	2.1×10^{-4}
hexachlorobutadiene	14	1.4×10^{1}
hexachloroethane	2.5	2.5×10^{0}
N-nitrosodimethylamine	7.3	7.3×10^{0}
N-nitrosodiphenylamine	2.5	2.5×10^{0}
PAHs*	0.0088	8.8×10^{-3}
PCBs*	0.000019	1.9×10^{-5}
TCDD equivalents*	0.000000039	3.9×10^{-9}
tetrachloroethylene	99	9.9×10^{1}
toxaphene	0.00021	2.1×10^{-4}
· •	27	2.7×10^{1}
trichloroethylene 2,4,6-trichlorophenol	0.29	2.9×10^{-1}
vinyl chloride	36	3.6×10^{1}
VIIIVI CIIIONIGE	20	

- a) Dischargers may at their option meet this objective as a total chromium objective.
- b) If a discharger can demonstrate to the satisfaction of the Regional Board (subject to EPA approval) that an analytical method is available to reliably distinguish between strongly and weakly complexed cyanide, effluent limitations for cyanide may be met by the combined measurement of free cyanide, simple alkali metal cyanides, and weakly complexed organometallic cyanide complexes. In order for the analytical method to be acceptable, the recovery of free cyanide from metal complexes must be comparable to that achieved by Standard Methods 412F, G, and H (Standard Methods for the Examination of Water and Wastewater. Joint Editorial Board, American Public Health Association, American Water Works Association, and Water Pollution Control Federation. Most recent edition.).
- c) Water quality objectives for total chlorine residual applying to intermittent discharges not exceeding two hours, shall be determined through the use of the following equation:

$$\log y = -0.43 (\log x) + 1.8$$

where: y = the water quality objective (in $\mu g/l$) to apply when chlorine is being discharged; x = the duration of uninterrupted chlorine discharge in minutes.

^{*} See Appendix I for definition of terms.

Implementation Provisions for Table B

A. Calculation of Effluent Limitations

Effluent limitations for water quality objectives listed in Table B, with the exception of radioactivity, shall be determined through the use of the following equation:

$$Ce = Co + Dm (Co - Cs) (1)$$

where:

Ce = the effluent concentration limit,

Co = the concentration (water quality objective) to be met at the completion of initial* dilution,

Cs = background seawater concentration (see Table C below),

Dm = minimum probable initial* dilution expressed as parts seawater per part wastewater.

For the purpose of this Plan, minimum initial dilution is the lowest average initial dilution within any single month of the year. Dilution estimates shall be based on observed waste flow characteristics, observed receiving water density structure, and the assumption that no currents, of sufficient strength to influence the initial dilution process, flow across the discharge structure.

The Executive Director of the SWRCB shall identify standard dilution models for use in determining Dm, and shall assist the Regional Board in evaluating Dm for specific waste discharger. Dischargers may propose alternative methods of calculating Dm, and the Regional Board may accept such method upon verification of its accuracy and applicability.

TABLE C
BACKGROUND SEAWATER CONCENTRATIONS (Cs)

Waste Constituent	<u>Cs (μg/l)</u>
Arsenic	3
Copper	2
Mercury	0.0005
Silver	0.16
Zinc	8

For all other Table B parameters, Cs = 0.

The six-month median shall apply as a moving median of daily values for any 180 day period in which daily values represent flow weighted average concentrations within a

^{*} See Appendix I for definition of terms.

24-hour period. For intermittent discharges, the daily value shall be considered to equal zero for days on which no discharge occurred.

The daily maximum shall apply to flow weighted 24 hour composite samples.

The instantaneous maximum shall apply to grab sample determinations.

If only one sample is collected during the time period associated with the water quality objective (e.g., 30-day average or 6-month median), the single measurement shall be used to determine compliance with the effluent limitation for the entire time period.

Discharge requirements shall also specify effluent limitations in terms of mass emission rate limits utilizing the general formula:

$$lbs/day = 8.34 \times Ce \times Q$$
 (2)

The six-month median limit on daily mass emissions shall be determined using the six-month median effluent concentration as Ce and the observed flow rate Q in millions of gallons per day. The daily maximum mass emission shall be determined using the daily maximum effluent concentration limit as Ce and the observed flow rate Q in millions of gallons per day.

Any significant change in waste* flow shall be cause for reevaluating effluent limitations.

B. Compliance Determination

All analytical data shall be reported uncensored with detection limits and quantitation limits identified. For any effluent limitation, compliance shall be determined using appropriate statistical methods to evaluate multiple samples. Compliance based on a single sample analysis should be determined where appropriate as described below.

When a calculated effluent limitation is greater than or equal to the PQL*, compliance shall be determined based on the calculated effluent limitation and either single or multiple sample analyses.

When the calculated effluent limitation is below the PQL*, compliance determinations based on analysis of a single sample shall only be undertaken if the concentration of the constituent of concern in the sample is greater than or equal to the PQL*.

When the calculated effluent limitation is below the PQL*, and recurrent analytical responses between the PQL* and the calculated limit occur, compliance shall be determined by statistical analysis of multiple samples. Sufficient sampling and analysis shall be required to determine compliance.

^{*} See Appendix I for definition of terms.

Published values for MDL*s and PQL*s should be used except where revised MDL*s and PQL*s are available from recent laboratory performance evaluations, in which case the revised MDL*s and PQL*s should be used. Where published values are not available the Regional Boards should determine appropriate values based on available information.

If a discharger believes the sample matrix under consideration in the waste discharge requirements is sufficiently different from that used for an established MDL* value, the discharger may demonstrate to the satisfaction of the Regional Board what the appropriate MDL* should be for the discharger's matrix. In this case the PQL* shall be established at the limit of quantitation (equal to 10 standard deviations above the average measured blank used for development of the MDL* in the discharger's matrix).

When determining compliance based on a single sample, with a single effluent limitation which applies to a group of chemicals (e.g., PCBs) concentrations of individual members of the group may be considered to be zero if the analytical response for individual chemicals falls below the MDL* for that parameter.

Due to the large total volume of powerplant and other heat exchange discharges, special procedures must be applied for determining compliance with Table B objectives on a routine basis. Effluent concentration values (Ce) shall be determined through the use of equation 1 considering the minimal probable initial* dilution of the combined effluent (in-plant waste streams plus cooling water flow). These concentration values shall then be converted to mass emission limitations as indicated in equation 2. The mass emission limits will then serve as requirements applied to all inplant waste* streams taken together which discharge into the cooling water flow, except that limits for total chlorine residual, chronic* toxicity and instantaneous maximum concentrations in Table B shall apply to, and be measured in, the combined final effluent, as adjusted for dilution with ocean water. The Table B objective for radioactivity shall apply to the undiluted combined final effluent.

C. Toxicity Reduction Requirements

If a discharge consistently exceeds an effluent limitation based on a toxicity objective in Table B, a toxicity reduction evaluation (TRE) is required. The TRE shall include all reasonable steps to identify the source of toxicity. Once the source(s) of toxicity is identified, the discharger shall take all reasonable steps necessary to reduce toxicity to the required level.

The following shall be incorporated into waste discharge requirements: (1) a requirement to conduct a TRE if the discharge consistently exceeds its toxicity effluent limitation, and (2) a provision requiring a discharger to take all reasonable steps to reduce toxicity once the source of toxicity is identified.

^{*} See Appendix Lfor definition of terms.

Chapter V DISCHARGE PROHIBITIONS

A. Hazardous Substances

The discharge of any radiological, chemical, or biological warfare agent or high-level radioactive waste* into the ocean* is prohibited.

B. Areas of Special Biological Significance

Waste* shall not be discharged to areas designated as being of special biological significance. Discharges shall be located a sufficient distance from such designated areas to assure maintenance of natural water quality conditions in these areas.

C. Sludge

Pipeline discharge of sludge to the ocean* is prohibited by federal law; the discharge of municipal and industrial waste* sludge directly to the ocean*, or into a waste* stream that discharges to the ocean*, is prohibited by this Plan. The discharge of sludge digester supernatant directly to the ocean*, or to a waste* stream that discharges to the ocean* without further treatment, is prohibited.

It is the policy of the SWRCB that the treatment, use and disposal of sewage sludge shall be carried out in the manner found to have the least adverse impact on the total natural and human environment. Therefore, if federal law is amended to permit such discharge, which could affect California waters, the SWRCB may consider requests for exceptions to this section under Chapter VI, F. of this Plan, provided further that an Environmental Impact Report on the proposed project shows clearly that any available alternative disposal method will have a greater adverse environmental impact than the proposed project.

D. By-Passing

The by-passing of untreated wastes* containing concentrations of pollutants in excess of those of Table A or Table B to the ocean* is prohibited.

Chapter VI GENERAL PROVISIONS

A. <u>Effective Date</u>

This Plan is in effect as of the date of approval by the Office of Administrative Law (OAL).

^{*} See Appendix I for definition of terms.

B. Waste Discharge Requirements

The Regional Boards may establish more restrictive water quality objectives and effluent limitations than those set forth in this Plan as necessary for the protection of beneficial uses of ocean* waters.

Regional Boards may impose alternative less restrictive provisions than those contained within Table B of the Plan, provided an applicant can demonstrate that:

Reasonable control technologies (including source control, material substitution, treatment and dispersion) will not provide for complete compliance; or

Any less stringent provisions would encourage water* reclamation;

Provided further that:

- a) Any alternative water quality objectives shall be below the conservative estimate of chronic toxicity, as given in Table D below, and such alternative will provide for adequate protection of the marine environment;
- b) A receiving water quality toxicity* objective of 1 TUc is not exceeded; and
- c) The State Board grants an exception (Chapter VI.F.) to the Table B limits as established in the Regional Board findings and alternative limits.

TABLE D
CONSERVATIVE ESTIMATES OF CHRONIC TOXICITY

	Estimate of
	Chronic Toxicity
Constituent	<u>(μg/l)</u>
Arsenic	19
Cadmium	8
Hexavalent Chromium	18
Copper	5
Lead	22
Mercury	0.4
Nickel	48
Silver	3
Zinc	51
Cyanide	10
Total Chlorine Residual	10.0
Ammonia	4000.0
Phenolic Compounds (non-chlorinated)	a) (see below)
Chlorinated Phenolics	a)
Chlorinated Pesticides and PCB's	b)

^{*} See Appendix I for definition of terms.

- a. There is insufficient data for phenolics to estimate chronic toxicity levels. Requests for modification of water quality objectives for these waste* constituents must be supported by chronic toxicity data for representative sensitive species. In such cases, applicants seeking modification of water quality objectives should consult the Regional Water Quality Control Board to determine the species and test conditions necessary to evaluate chronic effects.
- b. Limitations on chlorinated pesticides and PCB's shall not be modified so that the total of these compounds is increased above the objectives in Table B.

C. Revision of Waste* Discharge Requirements

The Regional Board shall revise the waste* discharge requirements for existing discharges as necessary to achieve compliance with this Plan and shall also establish a time schedule for such compliance.

D. Monitoring Program

The Regional Boards shall require dischargers to conduct self-monitoring programs and submit reports necessary to determine compliance with the waste* discharge requirements, and may require dischargers to contract with agencies or persons acceptable to the Regional Board to provide monitoring reports. Monitoring provisions contained in waste discharge requirements shall be in accordance with the Monitoring Procedures provided in Appendix II.

Where the Regional Board is satisfied that any substance(s) of Table B will not significantly occur in a discharger's effluent, the Regional Board may elect not to require monitoring for such substance(s), provided the discharger submits periodic certification that such substance(s) are not added to the waste* stream, and that no change has occurred in activities that could cause such substance(s) to be present in the waste* stream. Such election does not relieve the discharger from the requirement to meet the objectives of Table B.

The Regional Board may require monitoring of bioaccumulation of toxicants in the discharge zone. Organisms and techniques for such monitoring shall be chosen by the Regional Board on the basis of demonstrated value in waste* discharge monitoring.

E. Areas of Special Biological Significance

Areas of special biological significance shall be designated by the SWRCB after a public hearing by the Regional Board and review of its recommendations.

^{*} See Appendix I for definition of terms.

F. State Board Exceptions to Plan Requirements

The State Board may, in compliance with the California Environmental Quality Act, subsequent to a public hearing, and with the concurrence of the Environmental Protection Agency, grant exceptions where the Board determines:

- 1. The exception will not compromise protection of ocean* waters for beneficial uses, and
- 2. The public interest will be served.

^{*} See Appendix I for definition of terms.

APPENDIX I

DEFINITION OF TERMS

ACUTE TOXICITY

a. Acute Toxicity (TUa)

Expressed in Toxic Units Acute (TUa)

TUa = 100/96-hr LC 50%

b. Lethal Concentration 50% (LC 50)

LC 50 (percent waste giving 50% survival of test organisms) shall be determined by static or continuous flow bioassay techniques using standard test species. If specific identifiable substances in wastewater can be demonstrated by the discharger as being rapidly rendered harmless upon discharge to the marine environment, but not as a result of dilution, the LC 50 may be determined after the test samples are adjusted to remove the influence of those substances.

When it is not possible to measure the 96-hour LC 50 due to greater than 50 percent survival of the test species in 100 percent waste, the toxicity concentration shall be calculated by the expression:

TUa =
$$log (100 - S)$$

S = percentage survival in 100% waste. If S > 99, TUa shall be reported as zero.

<u>CHLORDANE</u> shall mean the sum of chlordane-alpha, chlordane-gamma, chlordene-alpha, chlordene-gamma, nonachlor-alpha, nonachlor-gamma, and oxychlordane.

<u>CHRONIC TOXICITY</u>: This parameter shall be used to measure the acceptability of waters for supporting a healthy marine biota until improved methods are developed to evaluate biological response.

a. Chronic Toxicity (TUc)

Expressed as Toxic Units Chronic (TUc)

TUc = 100/NOEL

b. No Observed Effect Level (NOEL)

^{*} See Appendix I for definition of terms.

The NOEL is expressed as the maximum percent effluent or receiving water that causes no observable effect on a test organism, as determined by the result of a critical life stage toxicity test listed in Appendix II.

DDT shall mean the sum of 4,4'DDT, 2,4'DDT, 4,4'DDE, 2,4'DDE, 4,4'DDD, and 2,4'DDD.

<u>DEGRADE</u>: Degradation shall be determined by comparison of the waste field and reference site(s) for characteristics species diversity, population density, contamination, growth anomalies, debility, or supplanting of normal species by undesirable plant and animal species. Degradation occurs if there are significant differences in any of three major biotic groups, namely, demersal fish, benthic invertebrates, or attached algae. Other groups may be evaluated where benthic species are not affected, or are not the only ones affected.

<u>DICHLOROBENZENES</u> shall mean the sum of 1,2- and 1,3-dichlorobenzene.

ENCLOSED BAYS are indentations along the coast which enclose an area of oceanic water within distinct headlands or harbor works. Enclosed bays include all bays where the narrowest distance between headlands or outermost harbor works is less than 75 percent of the greatest dimension of the enclosed portion of the bay. This definition includes but is not limited to: Humboldt Bay, Bodega Harbor, Tomales Bay, Drakes Estero, San Francisco Bay, Morro Bay, Los Angeles Harbor, Upper and Lower Newport Bay, Mission Bay, and San Diego Bay.

<u>ENDOSULFAN</u> shall mean the sum of endosulfan-alpha and -beta and endosulfan sulfate.

ESTUARIES AND COASTAL LAGOONS are waters at the mouths of streams which serve as mixing zones for fresh and ocean waters during a major portion of the year. Mouths of streams which are temporarily separated from the ocean by sandbars shall be considered as estuaries. Estuarine waters will generally be considered to extend from a bay or the open ocean to the upstream limit of tidal action but may be considered to extend seaward if significant mixing of fresh and salt water occurs in the open coastal waters. The waters described by this definition include but are not limited to the Sacramento-San Joaquin Delta as defined by Section 12220 of the California Water Code, Suisun Bay, Carquinez Strait downstream to Carquinez Bridge, and appropriate areas of the Smith, Klamath, Mad, Eel, Noyo, and Russian Rivers.

<u>HALOMETHANES</u> shall mean the sum of bromoform, bromomethane (methyl bromide),chloromethane (methyl chloride), chlorodibromomethane, and dichlorobromomethane.

HEPTACHLOR shall mean the sum of heptachlor and heptachlor epoxide.

<u>HCH</u> shall mean the sum of the alpha, beta, gamma (lindane) and delta isomers of hexachlorocyclohexane.

^{*} See Appendix I for definition of terms.

<u>INITIAL DILUTION</u> is the process which results in the rapid and irreversible turbulent mixing of wastewater with ocean water around the point of discharge.

For a submerged buoyant discharge, characteristic of most municipal and industrial wastes that are released from the submarine outfalls, the momentum of the discharge and its initial buoyancy act together to produce turbulent mixing. Initial dilution in this case is completed when the diluting wastewater ceases to rise in the water column and first begins to spread horizontally.

For shallow water submerged discharges, surface discharges, and nonbuoyant discharges, characteristic of cooling water wastes and some individual discharges, turbulent mixing results primarily from the momentum of discharge. Initial dilution, in these cases, is considered to be completed when the momentum induced velocity of the discharge ceases to produce significant mixing of the waste, or the diluting plume reaches a fixed distance from the discharge to be specified by the Regional Board, whichever results in the lower estimate for initial dilution.

- KELP BEDS, for purposes of the bacteriological standards of this plan, are significant aggregations of marine algae of the genera <u>Macrocystis</u> and <u>Nereocystis</u>. Kelp beds include the total foliage canopy of <u>Macrocystis</u> and <u>Nereocystis</u> plants throughout the water column.
- MARICULTURE is the culture of plants and animals in marine waters independent of any pollution source.
- MDL (Method Detection Limit) is the minimum concentration of a substance that can be measured and reported with 99% confidence that the analyte concentration is greater than zero, as defined in 40 CFR 136 Appendix B.
- NATURAL LIGHT: Reduction of natural light may be determined by the Regional Board by measurement of light transmissivity or total irradiance, or both, according to the monitoring needs of the Regional Board.
- OCEAN WATERS are the territorial marine waters of the State as defined by California law to the extent these waters are outside of enclosed bays, estuaries, and coastal lagoons. If a discharge outside the territorial waters of the State could affect the quality of the waters of the State, the discharge may be regulated to assure no violation of the Ocean Plan will occur in ocean waters.
- PAHs (polynuclear aromatic hydrocarbons) shall mean the sum of acenaphthylene, anthracene, 1,2-benzanthracene, 3,4-benzofluoranthene, benzo[k]fluoranthene, 1,12-benzoperylene, benzo[a]pyrene, chrysene, dibenzo[ah]anthracene, fluorene, indeno[1,2,3-cd]pyrene, phenanthrene and pyrene.

^{*} See Appendix I for definition of terms.

- PCBs (polychlorinated biphenyls) shall mean the sum of chlorinated biphenyls whose analytical characteristics resemble those of Aroclor-1016, Aroclor-1221, Aroclor-1232, Aroclor-1248, Aroclor-1254 and Aroclor-1260.
- PQL (Practical Quantitation Level) is the lowest concentration of a substance which can be consistently determined within +/- 20% of the true concentration by 75% of the labs tested in a performance evaluation study. Alternatively, if performance data are not available, the PQL* for carcinogens is the MDL* x 5, and for noncarcinogens is the MDL* x 10.
- <u>SHELLFISH</u> are organisms identified by the California Department of Health Services as shellfish for public health purposes (i.e., mussels, clams and oysters).
- <u>SIGNIFICANT</u> difference is defined as a statistically significant difference in the means of two distributions of sampling results at the 95 percent confidence level.
- TCDD EQUIVALENTS shall mean the sum of the concentrations of chlorinated dibenzodioxins (2,3,7,8-CDDs) and chlorinated dibenzofurans (2,3,7,8-CDFs) multiplied by their respective toxicity factors, as shown in the table below.

Isomer Group	Toxicity Equivalence Factor
2,3,7,8-tetra CDD	1.0
2,3,7,8-penta CDD	0.5
2,3,7,8-hexa CDDs	0.1
2,3,7,8-hepta CDD	0.01
octa CDD	0.001
2,3,7,8 tetra CDF	0.1
1,2,3,7,8 penta CDF	0.05
2,3,4,7,8 penta CDF	0.5
2,3,7,8 hexa CDFs	0.1
2,3,7,8 hepta CDFs	0.01
octa CDF	0.001

<u>WASTE</u>: As used in this Plan, waste includes a discharger's total discharge, of whatever origin, <u>i.e.</u>, gross, not net, discharge.

<u>WATER RECLAMATION</u>: The treatment of wastewater to render it suitable for reuse, the transportation of treated wastewater to the place of use, and the actual use of treated wastewater for a direct beneficial use or controlled use that would not otherwise occur.

^{*} See Appendix I for definition of terms.

APPENDIX II

STANDARD MONITORING PROCEDURES

The purpose of this appendix is to provide direction to the Regional Boards on the implementation of the California Ocean Plan and to ensure the reporting of useful information. It is not feasible to cover all circumstances and conditions that could be encountered by all dischargers. Therefore, this appendix should be considered as the basic components of any discharger monitoring program. Regional Boards can deviate from the procedures required in the appendix only with the approval of the State Water Resources Control Board unless the Ocean Plan allows for the selection of alternate protocols by the Regional Boards. If no direction is given in this appendix for a specific provision of the Ocean Plan, it is within the discretion of the Regional Board to establish the monitoring requirements for the provision.

The appendix is organized in the same manner as the Ocean Plan.

Chapter II. A. Bacterial Standards:

For all bacterial analyses, sample dilutions should be performed so the range of values extends from 2 to 16,000. The detection methods used for each analysis shall be reported with the results of the analysis.

Detection methods used for coliforms (total and fecal) shall be those presented in the most recent edition of <u>Standard Methods for the Examination of Water and Wastewater</u> or any improved method determined by the Regional Board (and approved by EPA) to be appropriate.

Detection methods used for enterococcus shall be those presented in EPA publication EPA 600/4-85/076, <u>Test Methods for Escherichia coli and Enterococci in Water By Membrane Filter Procedure</u> or any improved method determined by the Regional Board to be appropriate.

Chapter IV. Table B. Compliance with Table B Objectives:

Procedures, calibration techniques, and instrument/reagent specifications used to determine compliance with Table B shall conform to the requirements of federal regulations (40 CFR 136). All methods shall be specified in the monitoring requirement section of waste discharge requirements.

Where methods are not available in 40 CFR 136, the Regional Boards shall specify suitable analytical methods in waste discharge requirements. Acceptance of data should be predicated on demonstrated laboratory performance.

^{*} See Appendix I for definition of terms.

The State or Regional Board may, subject to EPA approval, specify test methods which are more sensitive than those specified in 40 CFR 136. Total chlorine residual is likely to be a method detection limit effluent limitation in many cases. The limit of detection of total chlorine residual in standard test methods is less than or equal to 20 $\mu g/l$.

Monitoring for the substances in Table B shall be required periodically. For discharges less than 1 MGD (million gallons per day), the monitoring of all the Table B parameters should consist of at least one complete scan of the Table B constituents one time in the life of the waste discharge requirements. For discharges between 1 and 10 MGD, the monitoring frequency shall be at least one complete scan of the Table B substances annually. Discharges greater than 10 MGD shall be required to monitor at least semiannually.

Chapter IV. Compliance with Toxicity Limitations and Objectives:

Compliance with the acute toxicity limitation (TUa) in Table A shall be determined using an established protocol, <u>e.g.</u>, American Society for Testing Materials (ASTM), EPA, American Public Health Association, or State Board.

The Regional Board shall require the use of critical life stage toxicity tests specified in this Appendix to measure TUc. Other species or protocols will be added to the list after SWRCB review and approval. A minimum of three test species with approved test protocols shall be used to measure compliance with the toxicity objective. If possible, the test species shall include a fish, an invertebrate, and an aquatic plant. After a screening period, monitoring can be reduced to the most sensitive species. Dilution and control water should be obtained from an unaffected area of the receiving waters. The sensitivity of the test organisms to a reference toxicant shall be determined concurrently with each bioassay test and reported with the test results.

Use of critical life stage bioassay testing shall be included in waste discharge requirements as a monitoring requirement for all discharges greater than 100 MGD by January 1, 1991 at the latest. For other major dischargers, critical life stage bioassay testing shall be included as a monitoring requirement one year before the waste discharge requirement is scheduled for renewal. For major dischargers scheduled for waste discharge requirements renewal less than one year after the adoption of the toxicity objective, critical life stage bioassay testing shall be included as a monitoring requirement at the same time as the chronic toxicity effluent limits is established in the waste discharge requirements.

^{*} See Appendix I for definition of terms.

The following tests shall be used to measure TUc. Other tests may be added to the list when approved by the State Board.

<u>Species</u>	<u>Effect</u>	<u>Tier</u>	Reference
giant kelp, <i>Macrocystis</i> pyrifera	percent germination; germ tube length	1	1,3
red abalone, <i>Haliotis</i> rufescens	abnormal shell development	1	1,3
oyster, <i>Crassostrea gigas;</i> mussels, <i>Mytilus spp.</i>	abnormal shell development; percent survival	1	1,3
urchin, Strongylocentrotus purpuratus; sand dollar, Dendraster excentricus	percent normal development	1	1,3
urchin, Strongylocentrotus purpuratus; sand dollar, Dendraster excentricus	percent fertilization	1	1,3
shrimp, <i>Holmesimysis</i> costata	percent survival; growth	1	1,3
shrimp, <i>Mysidopsis bahia</i>	percent survival; growth; fecundity	2	2,4
topsmelt, Atherinops affinis	larval growth rate; percent survival	1	1,3
silversides, <i>Menidia</i> beryllina	larval growth rate; percent survival	2	2,4

The first tier test methods are the preferred toxicity tests for compliance monitoring. A Regional Board can approve the use of a second tier test method for waste discharges if first tier organisms are not available.

^{*} See Appendix I for definition of terms.

Protocol References

- Chapman, G.A., D.L. Denton, and J.M. Lazorchak. 1995. Short-term methods for estimating the chronic toxicity of effluents and receiving waters to west coast marine and estuarine organisms. U.S. EPA Report No. EPA/600/R-95/136.
- 2. Klemm, D.J., G.E. Morrison, T.J. Norberg-King, W.J. Peltier, and M.A. Heber. 1994. Short-term methods for estimating the chronic toxicity of effluents and receiving water to marine and estuarine organisms. U.S. EPA Report No. EPA-600-4-91-003.
- 3. SWRCB 1996. Procedures Manual for Conducting Toxicity Tests Developed by the Marine Bioassay Project. 96-1WQ.
- Weber, C.I., W.B. Horning, I.I., D.J. Klemm, T.W. Nieheisel, P.A. Lewis, E.L. Robinson, J. Menkedick and F. Kessler (eds). 1988. Short-term Methods for Estimating the Chronic Toxicity of Effluents and Receiving Waters to Marine and Estuarine Organisms. EPA/600/4-87/028. National Information Service, Springfield, VA.

^{*} See Appendix I for definition of terms.

		•	
·			
	_		