

Attachment 6

Technical Justification for Vapor Intrusion Media-Specific Criteria

11/22/11

1 EXECUTIVE SUMMARY

For petroleum-related volatile organic compounds (VOCs), current risk-based screening levels (such as the California Human Health Screening Levels [CHHSLs]) for evaluating risk from vapor intrusion at underground storage tank (UST) sites are extremely conservative. This conservatism is caused by not considering biodegradation in site screening which generally drives further unnecessary site evaluation. Recent models and field studies show that bioattenuation of petroleum hydrocarbons at retail sites is significant (Abreu et al., 2009; API, 2009; Davis, 2009; Lahvis, 2011). Petroleum hydrocarbon VOCs (such as, benzene, toluene, ethylbenzene and xylenes -BTEX) concentrations have been shown to attenuate by several orders of magnitude within short vertical distances (e.g., < 2-3 m) in the unsaturated zone due to biodegradation. The hydrocarbon VOC attenuation generally increases by an additional order of magnitude (or more) when transport across a building foundation to indoor air is also considered (U.S. EPA, 2008). The characteristic occurrence of rapid hydrocarbon attenuation in the unsaturated zone is amenable to a site-screening methodology for vapor intrusion based on exclusion distances. Exclusion distances are defined as VOC source-receptor (building) separation distances beyond which the risk of vapor intrusion is assumed negligible. Note the source may be located in soil and/or groundwater. Exclusion distances can be broadly defined for two types of sources: low-concentration (e.g., dissolved-phase) and high-concentration (e.g., light non-aqueous-phase liquid – LNAPL) sources as described below.

Recent modeling studies and evaluations of field (soil-gas) data from numerous UST sites and sampling locations demonstrate that biodegradation is sufficient to limit the potential for vapor intrusion at sites with “low-concentration” (dissolved-phase) hydrocarbon sources (Abreu et al., 2009; Davis, 2009; Davis, 2010; Lahvis, 2011). For example, there is less than a 5% probability that benzene concentrations in soil gas would exceed a low screening-level for vapor intrusion (50 ug/m^3) at distances of 5 ft (~2 m) or more above a dissolved-phase benzene concentration in groundwater < 1,000 ug/L. (Note, for comparison, the CHHSL for benzene in soil gas is 83 ug/m^3 for buildings on engineered fill.) Additional attenuation (i.e., a shorter exclusion distance) is predicted to occur by transport modeling for dissolved-phase sources displaced laterally from the building foundation (Abreu and Johnson, 2005). Vapor intrusion risks are thus expected to be rare to non-existent at sites with low-concentration sources.

At sites with “high concentration” hydrocarbon sources (unweathered residual light non-aqueous phase liquid (LNAPL) in soil and/or unweathered free-phase LNAPL on groundwater), transport modeling shows that hydrocarbon VOCs will attenuate below levels of concern in the unsaturated zone within a

distance of approximately 20 ft (~7 m) of the source. The transport modeling is based on assuming reasonable approximations of source concentration and transport within the unsaturated zone (including biodegradation rate). Soil-gas data collected at numerous retail, terminal, and manufacturing sites with LNAPL sources would suggest that the model predicted attenuation above LNAPL sources is conservative. Analysis of the field data at these types of sites shows that hydrocarbon VOCs are attenuated below screening-level concentrations within 8 – 13 ft (~3 - 4 m). Biodegradation accounts for more than 1,000x additional attenuation within 5 ft vertical distances of benzene sources in soil-gas up to 10,000,000 ug/m³. Again, the attenuation is predicted to increase further for high (e.g., LNAPL) sources displaced laterally from building foundations (i.e. the soil gas concentrations would attenuate in even shorter distances).

The purpose of this document is to provide a technical justification for the proposed low-threat vapor intrusion scenarios. The justification is based on current, state-of-the-art science on separation distances between source and receptor that are human-health protective. A few of the most recent studies cited below are awaiting publication (but are available for review). All cited studies should be considered in the development of a rational, technically defensible approach to vapor intrusion screening.

The four scenarios presented in the *Low-Threat UST Closure Policy* are:

Scenario 1: Unweathered LNAPL on groundwater

30 ft vertical source/building separation (exclusion) distance for unweathered (residual or free-phase) LNAPL on groundwater

Scenario 2: Unweathered LNAPL in soil

30 ft lateral and vertical separation (exclusion) distance between a building foundation and an unweathered LNAPL (residual or free-phase) source in soil.

Scenario 3: Dissolved phase benzene concentrations in groundwater

- 5 ft. vertical separation distance between a dissolved-phase source < 100 ug/L benzene and a building foundation (no oxygen (O₂) measurement)
- 10 ft. vertical exclusion distance for a dissolved-phase source < 1,000 ug/L benzene (no O₂ measurement)
- 5 ft. vertical separation distance between a dissolved-phase source < 1,000 ug/L and a building foundation (measured O₂ in soil gas ≥ 4%)

Scenario 4: Direct measurement of soil gas concentrations

Application of an additional attenuation factor of 1000x to risk-based soil-gas criteria (i.e. vapor sources) located 5 ft. from a building foundation

For each of these scenarios, screening criteria have been proposed that if met will identify the site as posing a low human health threat resulting from the vapor intrusion pathway. The screening criteria and low-risk scenarios are based on the science presented in this document; additional safety factors were incorporated as a policy decision. For the two unweathered LNAPL scenarios (Scenarios 1 and 2), the current science indicates that soil vapors above an LNAPL source will attenuate within a distance of 20 feet or less. However the two LNAPL scenarios include an additional safety factor of 10 feet so that

the exclusion criteria for these cases are set to 30 feet. Likewise, in Scenario 3, the scientific studies and field data indicate that the risk of vapor intrusion is negligible for building foundations located more than 5 feet above plumes with much higher benzene concentrations (up to 15,000 ug/L in groundwater). Again, the proposed screening criteria incorporate additional safety factors. In Scenario 4, research indicates that soil gas concentrations will attenuate by more than 3 orders of magnitude within a vertical distance of 5 feet. However, the “bioattenuation factor” applied in Scenario 4 is conservatively defined at 3 orders of magnitude (1000-fold attenuation). The proposed bioattenuation factor (in Scenarios 3 and 4) also requires that measured O₂ concentrations in soil gas are greater than or equal to 4%. Biodegradation has been shown to be significant at concentrations well below this O₂ threshold (Borden and Bedient, 1996; Roggemans et al. 2001). In conclusion, each of the scenarios, by design, had safety factors included and therefore the exclusion criteria will appear to be more conservative than would be otherwise indicated if only basing the results on the modeling results and field data presented in this document.

2 INTRODUCTION

It is well recognized that petroleum hydrocarbons rapidly biodegrade in the presence of O₂ (i.e., when conditions in the unsaturated zone are aerobic¹). The degree of biodegradation depends largely on O₂ availability of and the O₂ demand created by the biodegradation reaction. One of the critical factors affecting O₂ demand is source strength/type (e.g., LNAPL or dissolved phase).

Various researchers (Fischer et al., 1996; Lahvis et al., 1999; DeVauil, 2007; Davis, 2009; and Hartman, (2010) have shown that conditions in the unsaturated zone are aerobic, and that for “low-concentration” sources (weathered residual in soil and/or dissolved concentrations in groundwater), the degree of biodegradation is significant. . At these sites, the demand for O₂ resulting from biodegradation generally exceeds O₂ availability. The hydrocarbon concentrations (mainly BTEX) decrease by several orders of magnitude over relatively short (e.g. <2 m) vertical distances. For low concentration hydrocarbon sources, the attenuation will tend to be significant very near the water table (i.e., capillary zone). These assertions are supported both by theory (modeling) (DeVauil, 2007, Abreu et. al. 2009, API, 2009) and by field observation (Lahvis and Baehr, 1996; API, 2009; Davis, 2009). Work by Abreu and Johnson (2005) predicts a greater degree of vapor attenuation at sites where the source is displaced laterally from the building foundation.

Researchers have also documented rapid biodegradation of petroleum vapors at sites underlain by LNAPL sources. At such UST sites, exclusion distances determined by analyzing benzene concentrations in soil gas have been estimated to be in the range of 8 to 15 feet (Davis, 2009; Hartman, 2010; Lahvis, 2011). The greater exclusion distance for LNAPL sources compared to dissolved-phase sources is largely related to the additional demand for O₂ (noted above) created by LNAPL sources and the tendency for LNAPL sources to be distributed above the capillary zone. Lahvis and Baehr (1996) showed the capillary zone to be an active zone of biodegradation and hydrocarbon attenuation). The presence of residual-phase LNAPL can, however, be difficult to identify because LNAPL may not readily appear in

¹ Borden and Bedient (1986) and Roggemans et al. (2001) define minimum thresholds for aerobic biodegradation of 100 ug/L-water (0.24%) and 2%, respectively.

groundwater monitoring wells. In such cases, one may rely on general LNAPL indicator “rules of thumb”, including:

Presence of LNAPL

Direct evidence:

- current or historical evidence of LNAPL in soil (known release area) or at the water table (visible/reported in nearby groundwater monitoring wells)

Indirect evidence:

- hydrocarbon VOC concentrations in groundwater approaching (> 0.2) effective solubilities (Bruce et al., 1991) (e.g., benzene > 3 mg/L; BTEX or TPH gasoline range organics (GRO) > 20 mg/L; TPH diesel range organics (DRO) > 5 mg/L)
- total hydrocarbon VOC concentrations in soil of TPH GRO > 100 - 200 mg/kg⁽²⁾; TPH DRO > 10 - 50 mg/kg) (see ASTM, 2006, Alaska DEC, 2011)³
- TPH vapor readings from a photo-ionization detector (PID) of > 1,000 ppm (recent gasoline releases), > 100 ppm (recent diesel/historic gasoline releases), and > 10 ppm (historic diesel releases) (Alaska DEC, 2011). Note that weathered LNAPL typically has a significantly reduced VOC content and therefore represents a lesser vapor intrusion risk than unweathered NAPL.
- proximity (e.g., < 20 ft to a known release area)

It is important to note that although hydrocarbon VOC concentrations approaching effective solubility limits in groundwater can be used as an indirect indicator of residual-phase LNAPL, dissolved-phase hydrocarbon concentrations are not necessarily good metrics for the development of screening criteria (i.e., separation distances) or assessing the vapor intrusion risk potential. Benzene concentrations in soil-gas have shown to be poorly correlated with benzene concentrations in shallow groundwater (Lahvis, 2011). The poor correlation can be attributed to 1) the inability to accurately measure water-table concentrations using monitoring wells screened across the water table and 2) bioattenuation of hydrocarbon vapors in the capillary zone. Hydrocarbon VOC concentrations in soil gas are also expected to be poorly correlated with VOC concentrations in groundwater in cases where residual-phase LNAPL sources are present above the water table. Screening (exclusion) distances should therefore be defined on the basis of source type (LNAPL and groundwater) rather than source (groundwater) concentration.

Lastly, the exclusion criteria defined for benzene are assumed to be conservative for naphthalene, which is currently considered a carcinogen via the inhalation exposure route and, in certain cases, a potential risk driver. This assertion is based on fact that naphthalene is relatively less volatile than benzene (i.e., has a much lower solubility value and Henry’s Law coefficient than benzene) and is also highly

² TPH (GRO) between 100 to 200 mg/kg may indicate the presence of LNAPL. TPH (GRO) less than 100 mg/kg is a good indication that there is no LNAPL present.

³ The primary driver for vapor intrusion is benzene. For petroleum-based fuels other than gasoline, benzene is not found at levels that would cause a vapor intrusion problem.

susceptible to biodegradation (Anderson et al., 2008; GSI, 2010). The screening criteria described here, while developed for benzene, are therefore assumed to be protective of naphthalene vapor intrusion.

3 TECHNICAL BACKGROUND – Discussion of Biodegradation Effects

This section presents the results of model studies and field data that support the proposed vapor intrusion exclusion criteria. The results are discussed first for “low-concentration” source cases followed by “high-concentration” sources cases.

3.1 Low-Concentration Sources (*weathered residual in soil and/or dissolved concentrations in groundwater*)

For purposes of this technical justification, low concentration sources at petroleum UST sites are defined as dissolved-phase hydrocarbon concentrations. Low concentration sources are therefore composed primarily of the more soluble (aromatic) VOC LNAPL constituents, benzene, toluene, ethylbenzene, xylenes, and naphthalene. Of these constituents, benzene is the primary risk driver for vapor intrusion because of its relatively higher toxicity and vapor migration potential. Note: weathered LNAPL is analogous to low-concentration sources in cases where the LNAPL is depleted of VOCs.

3.1.1 Model Studies

Results from numerical (3-dimensional) models (see Figures 3, 4 and 10 below [Abreu et al., 2009]) indicate essentially complete attenuation of benzene soil gas concentrations (between 7 and 14 orders of magnitude – expressed as attenuation factors $\alpha < 1E-07$) within 2 m to 3 m away from a relatively low (< 10 mg/L) benzene source concentration in an unsaturated sand.⁴ The simulations also assumed biodegradation occurred only in the aerobic portion of the unsaturated zone (i.e., where O₂ concentrations exceed 1%). This threshold for aerobic biodegradation contrasts with the 0.24% O₂ threshold defined by Borden and Bedient (1996). An aerobic biodegradation rate of 0.79 hr⁻¹ was assumed for benzene, which is consistent with the mean of published rates defined by DeVaul (2007). Note that while this degradation rate may seem high, the model only simulates biodegradation in the portion of the unsaturated zone where there is sufficient O₂ (> 1 %) to support biodegradation. The modeled hydrocarbon vapor source concentration, < 10 mg/L, is assumed to be consistent with a dissolved-phase source (see Abreu et al. [2009] – Figure 10). Lastly, the attenuation is expected to increase for a similar range of source concentrations and degradation rates in lower permeability soils (e.g., silty clay) (see Figure 19 from API, 2009) and for sources displaced laterally from building foundations (see Figure 9 from Abreu and Johnson, 2005). The attenuation increases for the latter scenario because hydrocarbon transport tends to be vertically upwards (toward the soil surface) rather than laterally towards the receptor. Hence, there is little potential for vapor intrusion to occur at sites where the dissolved-phase source is separated laterally from a building foundation.

⁴ A 10 mg/L hydrocarbon soil gas source would equate to a ~40 mg/L source of BTEX in groundwater assuming a vapor/aqueous phase partition coefficient of around 0.25 (Morrison, 1999) assuming the source were dissolved.

The following figures show the results of the modeling studies:

- The figures from Abreu et al. (2009) (Figures 3 and 4) show benzene and O₂ profiles predicted by transport modeling for low-concentration vapor sources and two different foundation configurations (basement and slab, respectively) in a sand unsaturated zone for a reasonable approximation of the hydrocarbon biodegradation rate ($\lambda = 0.79 \text{ hr}^{-1}$).

Figure 3 from Abreu et al (2009).

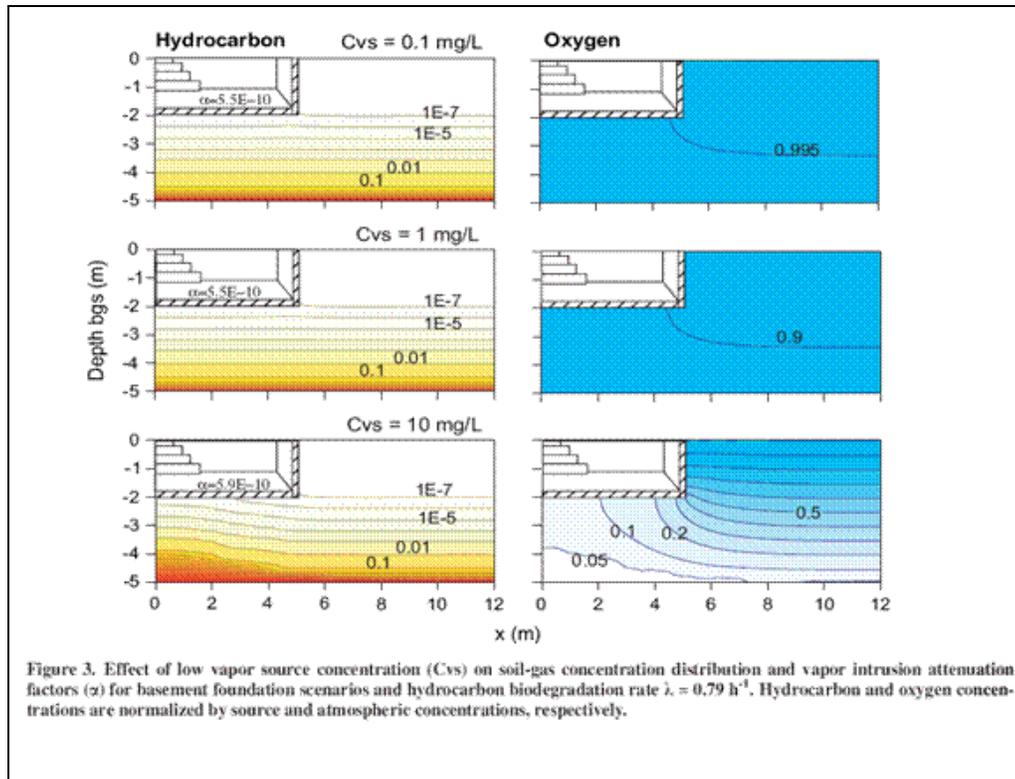


Figure 4 (Abreu et al., 2009)

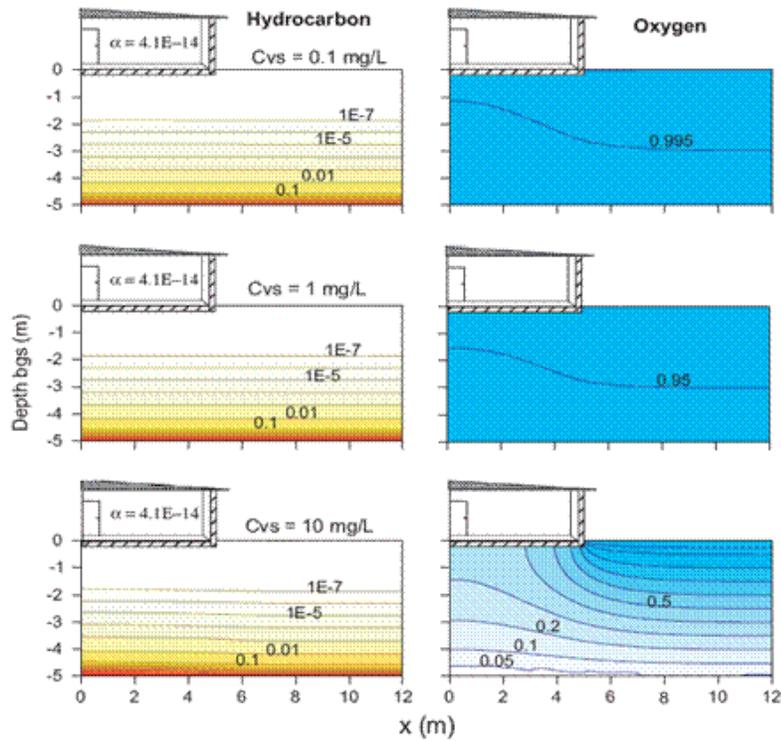


Figure 4. Effect of low vapor source concentration (C_{vs}) on soil-gas concentration distribution and vapor intrusion attenuation factors (α) for slab-on-grade foundation scenarios and hydrocarbon biodegradation rate $\lambda = 0.79 \text{ h}^{-1}$. Hydrocarbon and oxygen concentrations are normalized by source and atmospheric concentrations, respectively.

- Figure 10 from Abreu et al. (2009) is a plot of the hydrocarbon (benzene) attenuation factor in the unsaturated zone versus source vapor concentration for a range of source/building foundation separation distances assuming a representative biodegradation rate ($\lambda = 0.79 \text{ hr}^{-1}$) and a sand unsaturated zone:

Figure 10 from Abreu et al. (2009)

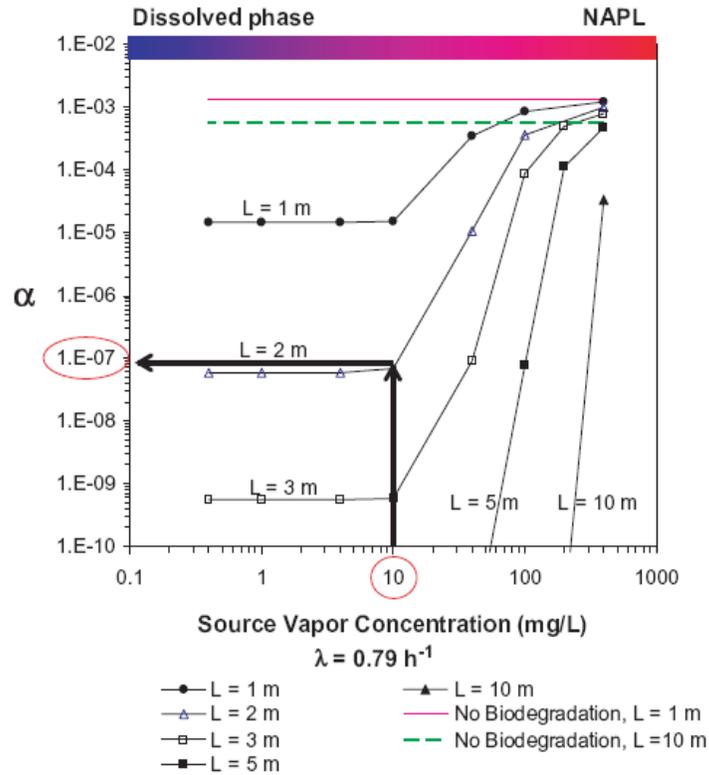


Figure 10. Use of the chart to select a semi-site-specific attenuation factor. For a source concentration of 10,000 $\mu\text{g/L}$ and a source-building separation of 2 m, the attenuation factor would be about $1E-7$.

- Figure 19 from API (2009) is a plot of the hydrocarbon (TPH-gasoline) attenuation factor in the unsaturated zone versus source vapor concentration for a range of source/building foundation separation distances assuming a representative biodegradation rate and two soil types, a sand and a silty-clay:

Figure 19 from API (2009)

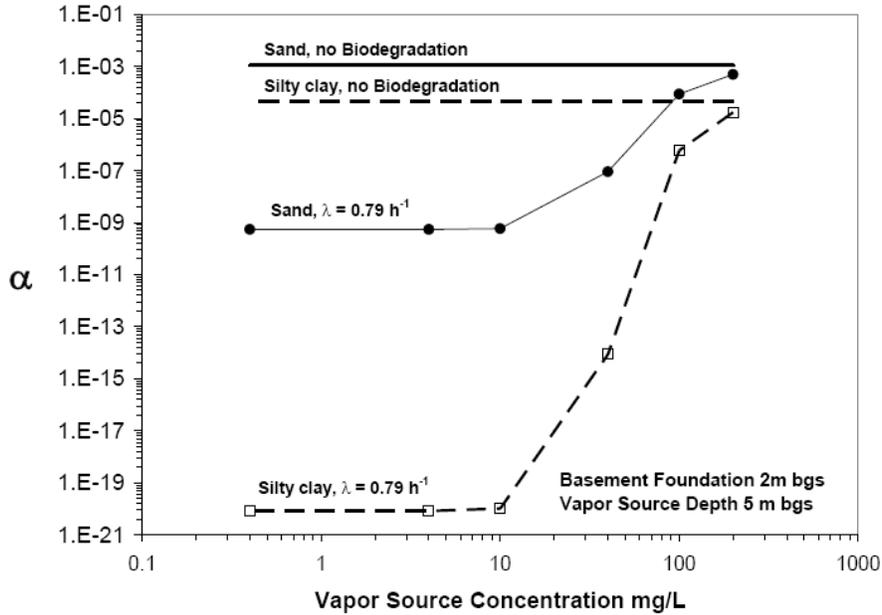


Figure 19—Attenuation factors as a function of soil type and vapor source concentration for a source located at 5 m bgs (3 m below a basement foundation). The graph present results for no biodegradation scenarios and biodegradation scenarios with a first-order biodegradation rate $\lambda = 0.79 \text{ h}^{-1}$. Q_s (sand) = 3.7 L/min and Q_s (silty clay) = 0.05 L/min.

- Figure 9 from Abreu and Johnson (2005) is a plot of the attenuation factor in the unsaturated zone versus source edge–building separation distance predicted in a sand unsaturated zone for a slab-on-grade building foundation. Biodegradation was not considered in the model analysis.

Figure 9 from Abreu and Johnson (2005)


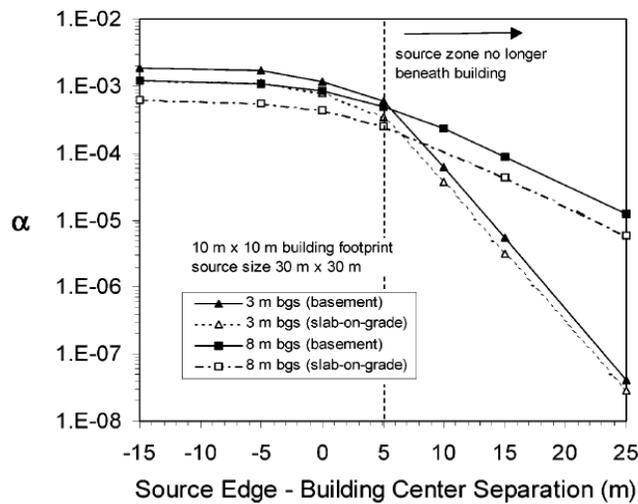


FIGURE 9. Changes in vapor attenuation coefficient (α) with vapor source–building separation and vapor source depth for basement and slab-on-grade foundation scenarios.

3.1.2 Field Data

Two hydrocarbon soil-gas databases were used to support the development of exclusion distance criteria. One was compiled by Robin Davis (Davis, 2009) and the other by Jackie Wright (Wright, 2011). The Davis (2009) database is being used to support the development of new state (see http://www.swrcb.ca.gov/ust/luft_manual.shtml) and federal (US EPA OUST) vapor intrusion guidance. The cited databases are publically available. Davis (2009) compiled the database from measurements at 58 retail, distribution, and manufacturing sites across several states, including California. Wright's 2011 database includes soil-gas data collected from 124 additional retail, distribution, and manufacturing sites in Australia. Both databases include soil-gas data collected from on and off-site locations. Approximately 16% of the soil-gas data are measurements taken directly below building foundations (i.e., sub-slab). The field data support the model results discussed in the previous section. An analysis by Davis (2009) indicates that benzene concentrations in soil gas are completely attenuated within 5 feet or less of groundwater containing up to 6 mg/L (or ~1,500,000 ug/m³ vapor phase equivalent⁵) benzene (see Figure 5 below from Davis, 2009). The analysis includes data from "non-retail" locations.

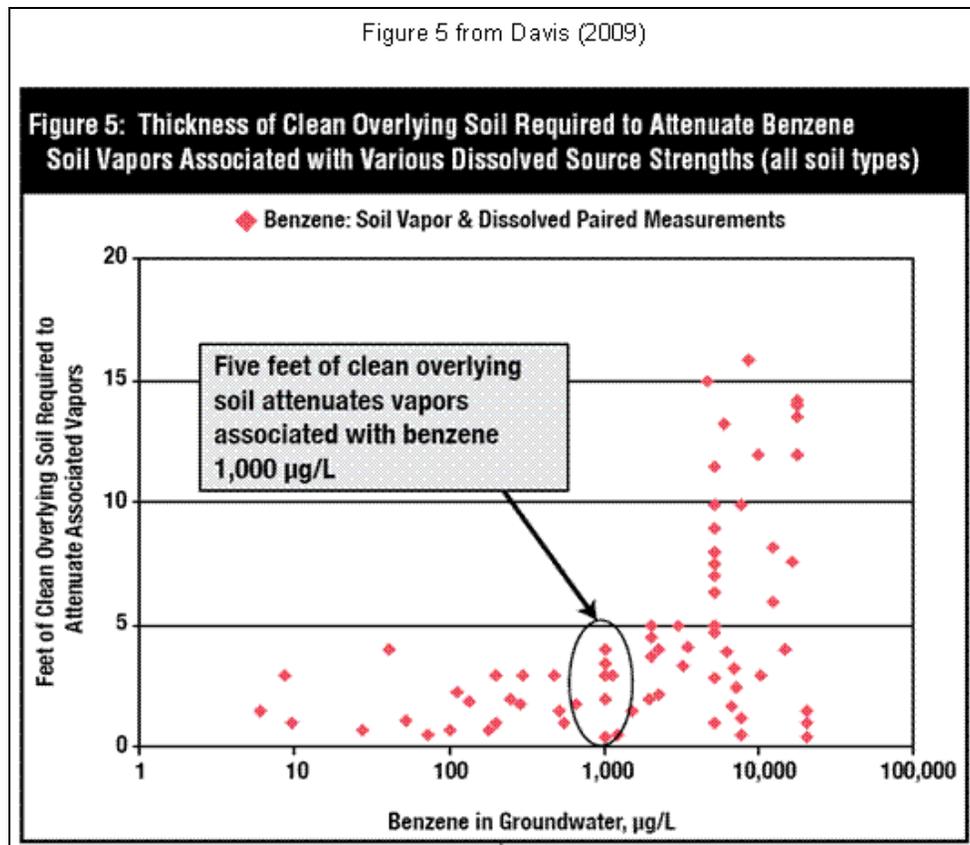

It is important to note in Figure 5, that the exclusion distance (and vapor intrusion risk potential) is relatively independent of the benzene source concentration over the approximate range of dissolved


⁵ Assuming equilibrium partitioning between soil-gas and groundwater and a Henry's Law coefficient of 0.25 m³/m³ for benzene.

phase concentrations up to 6,000 ug/L. The development of more conservative groundwater concentration-based exclusion distances (e.g., specific exclusion distance criteria for 100 ug/L and 1,000 ug/L sources) was a policy decision.

Davis (2009) did not screen out sites with potential residual LNAPL sources above the water table (i.e. LNAPL in soil). Note that residual LNAPL in soil and free-phase LNAPL on groundwater will pose similar vapor-intrusion risks. The latter are sites where LNAPL is observed in groundwater monitoring wells located in the source area. However, Davis (2009) found that the thickness of “clean” soil required to fully attenuate vapors to health-protective concentrations (i.e., the exclusion distance) decreased from ~15 feet (Figure 5) to 8 feet when considering LNAPL sources in soil in the absence of free-phase LNAPL on groundwater (Davis 2010 – see Figure from Davis in Section 3.2.2).


Lahvis (2011) analyzed soil-gas data collected above dissolved-phase sources where efforts were taken to identify and screen out sites with LNAPL above the water table (i.e LNAPL in soil). The analysis filtered out sites with either direct evidence of LNAPL (current, historical) or indirect evidence of LNAPL (soil-gas measurements collected near potential sources (i.e., locations within 25 ft of USTs and dispensers). . The analysis did, however, include soil-gas data from sites with dissolved-phase (source) concentrations up to 15 mg/L benzene and 75 mg/L BTEX. Lahvis (2011) included these additional data to assess an “upper bound” on exclusion distances for dissolved-phase sources, realizing that dissolved-phase concentrations greater than 3 mg/L benzene and 20 mg/L BTEX may potentially indicate the presence of a residual-phase LNAPL source (Bruce et al. , 1991). In other words, Lahvis (2011) included soil-gas data from sites with potential LNAPL sources to be conservative in estimating the exclusion distances for dissolved-phase sources. The Lahvis study included soil-gas data from both Davis (2009) and Wright (2011). This study shows that benzene in soil vapor is attenuated below a relatively conservative soil-gas screening level of 50 ug/m³ when the dissolved benzene source is 5 vertical feet or greater from the receptor. Note that more than half of the soil-gas measurements were taken from sites with source concentrations of benzene dissolved in groundwater ranging from 1 to 15 mg/L.

Figure from Lahvis (2011)

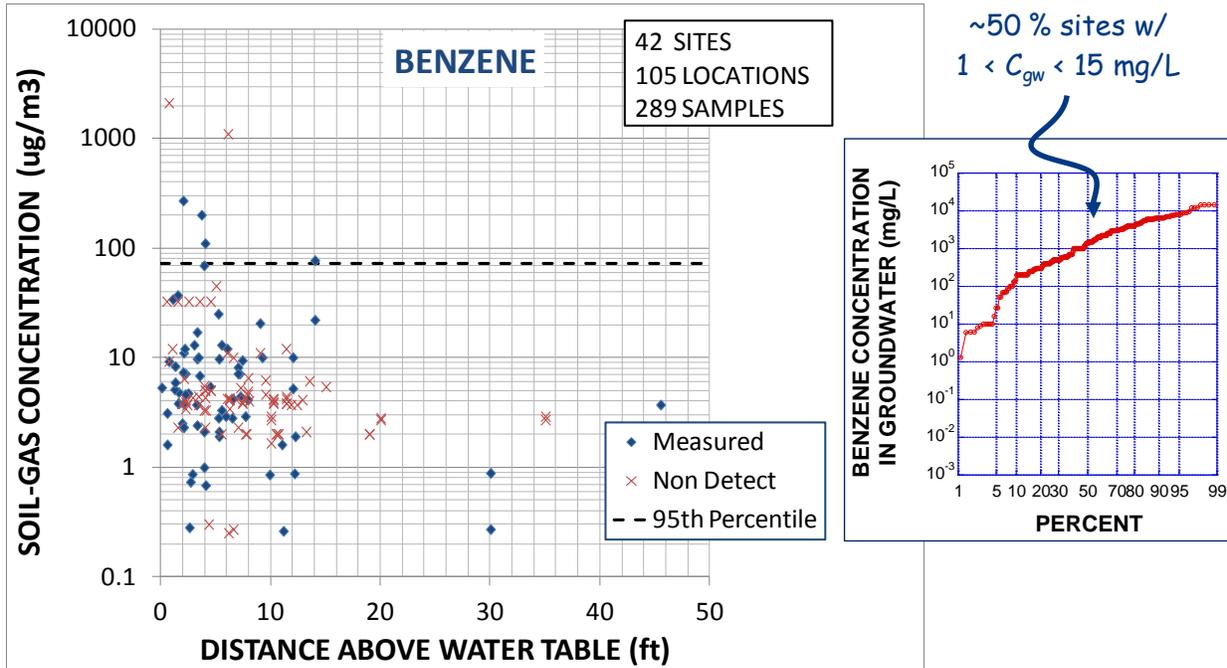

The results shown in the figure from Lahvis (2011) were then used by to define exclusion distance criteria based on a conditional probability assessment as shown in the following figure:

Figure from Lahvis (2011)

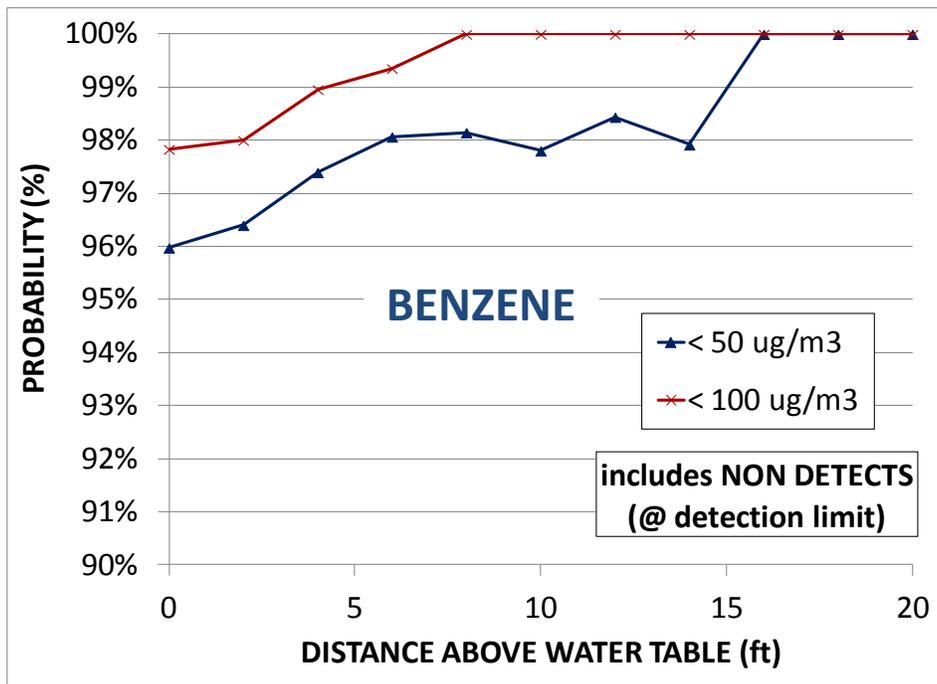

The results indicate that the probability of observing benzene vapor concentrations in excess of a conservative screening level (i.e. 100 ug/m³) at distances greater than 5 ft above the dissolved phase source at retail sites is less than 5%. The water table would have to be essentially in contact with a building foundation for there to be a potential concern for vapor intrusion for this class of low concentration sites.

3.1.3 Summary of Low Concentration Sources

In summary, field data from UST petroleum release sites shows minimal vapor-intrusion-to-indoor air risk above dissolved-phase only hydrocarbon sources. At low-concentration sites, benzene, the primary risk driver for vapor intrusion, will be attenuated below conservative soil-gas screening limits within 5 feet above the water table.

3.2 High-Concentration Sources (*unweathered residual in soil and/or free-phase LNAPL on groundwater*)

3.2.1 Model Studies

As shown in the attached figures (Figures 5 and 7 from Abreu et al. [2009]), benzene is predicted to completely attenuate in the unsaturated zone above an LNAPL source within ~ 7m (20 ft) of the source⁶. Abreu et al (2009) used benzene to represent the greatest potential risk posed by soil vapor from an unweathered LNAPL vapor source. This LNAPL source will primarily consist of aliphatic hydrocarbons. The model is assumed to be conservative when considering benzene biodegradation assumptions (see note 7 below.).

⁶ Note Figures 5 and 7 from Abreu et al. (2009) were slightly modified to highlight the technical justification.

Figure 5 (modified) from Abreu et al. (2009)

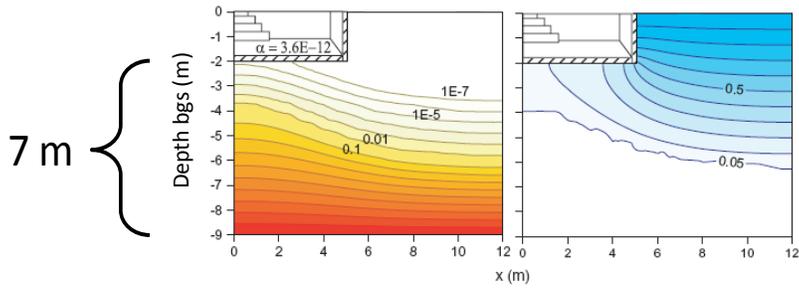


Figure 5. Effect of source depth on the soil-gas concentration distribution and vapor intrusion attenuation factors (α) for basement scenarios with a high vapor source concentration of 100,000 $\mu\text{g/L}$ and biodegradation rate $\lambda = 0.79 \text{ h}^{-1}$. Hydrocarbon and oxygen concentrations are normalized by source and atmospheric concentrations, respectively.

Figure 7 (modified) from Abreu et al. (2009)

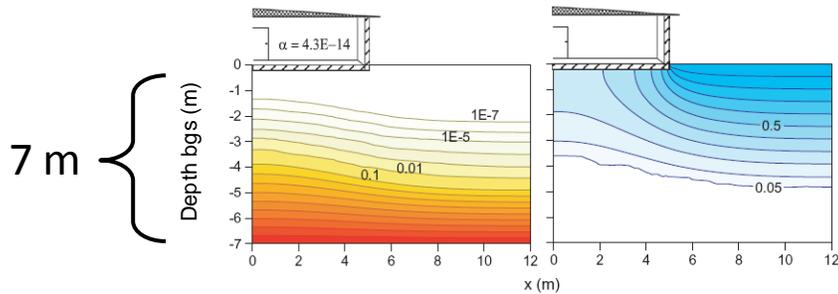


Figure 7. Effect of building type on soil-gas concentration distribution for high vapor source concentration (100,000 $\mu\text{g/L}$) and biodegradation rate $\lambda = 0.79 \text{ h}^{-1}$. Hydrocarbon and oxygen concentrations are normalized by source and atmospheric concentrations, respectively.

Vapor attenuation is predicted to increase for LNAPL sources displaced laterally from the basement foundation (Abreu and Johnson, 2005).

3.2.2 Field Data

A recent analysis of a soil-gas database by Davis (2010) indicates that the model-predicted attenuation cited above is conservative. Davis (2010) found source-receptor separation distances of only 8 ft. attenuated soil-gas vapors associated with benzene and TPH from LNAPL sources to below health-risk screening criteria(see the following figure from Davis [2010]). The Davis (2010) analysis includes residual LNAPL sources in the unsaturated zone.

Figure from Davis (2010)



LNAPL & Soil Sources

**Benzene: 48 exterior/near-slab +
22 sub-slab = 70 total**

**TPH: 17 exterior/near-slab +
18 sub-slab = 35 total**

■ Benzene SV Sample Event over LNAPL & Soil Sources


■ TPH SV Sample Event over LNAPL & Soil Sources

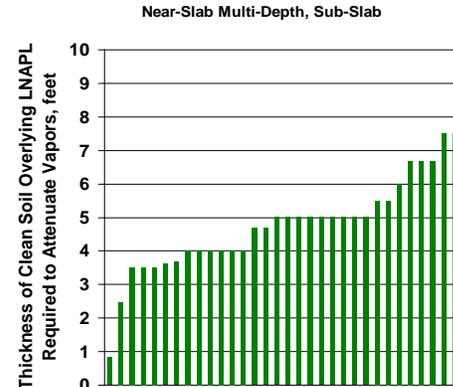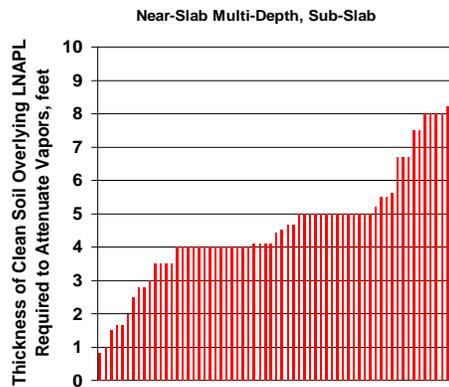

**~8 ft CLEAN overlying soil attenuates vapors
associated with LNAPL/Soil Sources**


In addition, Lahvis (2011) demonstrates in the following figure that benzene concentrations in soil gas generally decrease by more than 4 orders of magnitude at source-receptor separation distances of > 13 feet at LNAPL sites:

Figure from Lahvis (2011)

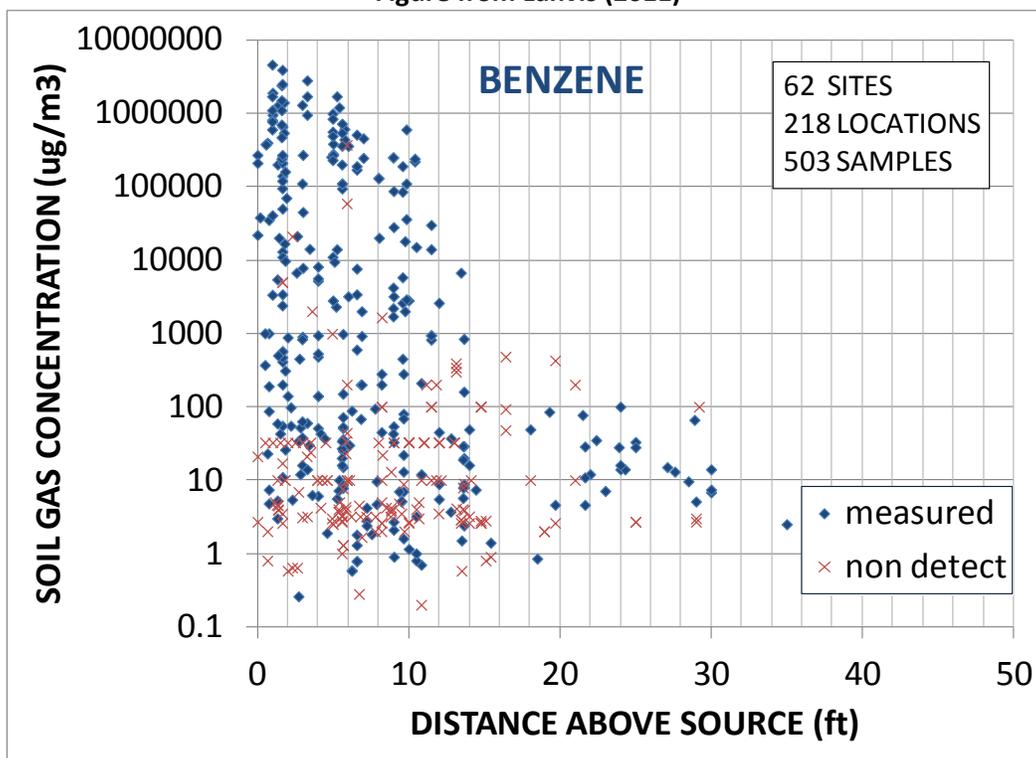

From a conditional probability standpoint, benzene concentrations in soil gas will attenuate below 50 and 100 ug/m³ at distances of > ~25 ft and >~ 13 ft above the source in greater than 95% of cases, respectively.

Figure from Lahvis (2011)

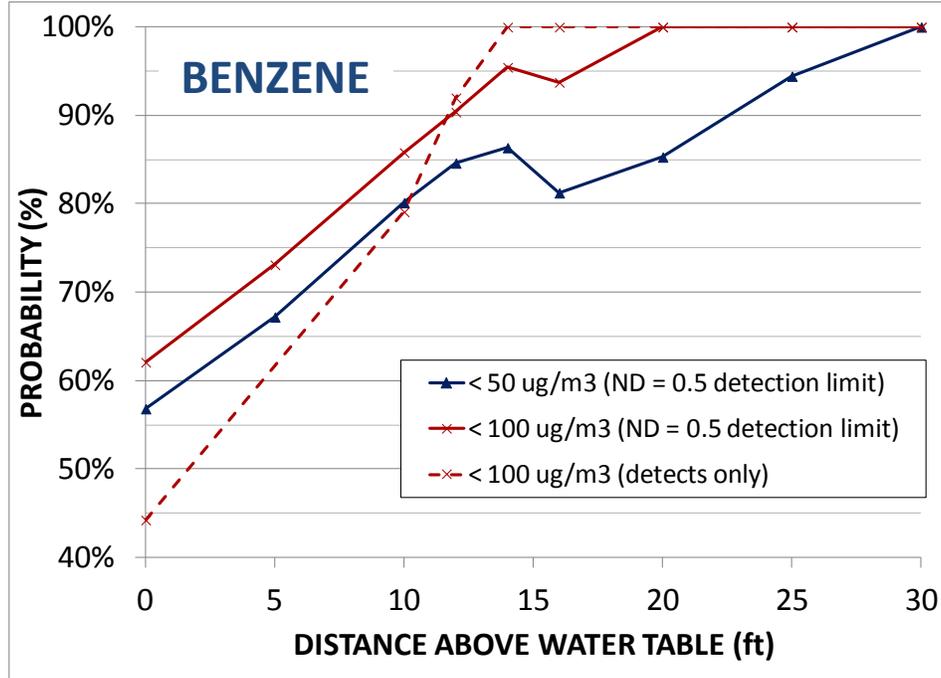

Again, lateral separation exclusion distances would be expected to be less than the vertical exclusion distances for the reasons previously presented.

3.2.2 Summary

Most recent field data analyses indicate that 8 to 13 feet of clean soil (soil with no LNAPL present) between source and receptor is sufficient to reduce soil-vapor concentrations to below health-protective levels for the vapor-intrusion-to-indoor air pathway at sites with LNAPL sources in either soil or groundwater.

3.3 Technical Background Conclusions

Researchers have demonstrated that soil-vapor benzene concentrations above low-concentration sources attenuate up to 6 orders of magnitude in the unsaturated zone within short vertical distances (e.g., < 5 ft) due to biodegradation. Biodegradation is sufficient to essentially eliminate these sites from further vapor intrusion consideration.

At sites with high concentration sources (e.g., unweathered LNAPL sources), 8 to 13 feet of clean soil (i.e. TPH <100 mg/kg) are required to fully attenuate hydrocarbon vapors to health-protective concentrations for the vapor-intrusion-to-indoor air pathway. The attenuation due to biodegradation would be equally or more significant for LNAPL sources separated laterally from building foundations (i.e. a shorter distance would be required for attenuation to health-protective concentrations). Some of the referenced studies have been accepted for publication, but are awaiting the respective Journal publication dates. They are available for review. It is important to consider these “state of the science”

results in the development of rational, technically defensible, approaches to vapor intrusion risk assessment.

Please note that the Stakeholder Group that developed the Low-Threat UST Policy Petroleum considered the cited technical sources when developing the vapor-intrusion scenarios and associated risk criteria presented in the Low-Threat Policy. In addition, *as a statewide policy consideration*, the Stakeholder Group applied source-to-receptor separation distance and source concentration safety factors that make the proposed vapor-intrusion-to-indoor-air screening criteria *more conservative* than they would otherwise be if considering the scientific literature alone. These safety factors include greater separation distances and lower threshold concentrations than those found by researchers to be health protective.

4 THE FOUR LOW-THREAT VAPOR INTRUSION SCREENING SCENARIOS

The Stakeholder Group convened by the SWRCB considered the available current and relevant scientific studies when developing the following low-threat vapor-intrusion-to-indoor air criteria. The four basic vapor-intrusion scenarios are:

Scenario 1: Unweathered LNAPL on groundwater

30 ft vertical source/building separation (exclusion) distance for unweathered (residual or free-phase) LNAPL on groundwater

Scenario 2: Unweathered LNAPL in soil

30 ft lateral and vertical source/building separation (exclusion) distance for an unweathered LNAPL (residual or free-phase) LNAPL source in soil and a building foundation

Scenario 3: Dissolved phase benzene concentrations in groundwater

- 5 feet vertical separation distance between a dissolved-phase source < 100 ug/L benzene and a building foundation (no oxygen [O₂] measurement)
- 10 feet vertical exclusion distance for a dissolved-phase source < 1,000 ug/L benzene (no O₂ measurement)
- 5 ft. vertical separation distance between a dissolved-phase source < 1,000 ug/L and a building foundation (measured O₂ in soil gas > 4%)


Scenario 4: Direct measurement of soil gas concentrations

Application of an additional thousand-fold biodegradation attenuation factor to risk-based soil-gas concentration criteria (CHHSLs) when the source is located more than 5 feet from a building foundation

Scenarios 1 and 2 are will usually be associated with “high”-concentration sources. Scenario 3 is associated with a “low” concentration source, and Scenario 4 may be associated with either “low” or “high” concentration sources. The following section details the technical justification(s) for each of the sets of low-threat exclusion criteria expressed in the four scenarios. Benzene is assumed to be the primary risk driver for vapor intrusion at petroleum hydrocarbon sites. The vapor-intrusion exclusion distance criteria determined for benzene are assumed to be health-protective for other potential hydrocarbon VOCs such as ethylbenzene and naphthalene. For ethylbenzene, this assumption is based on 1) ethylbenzene is expected to have similar source concentrations and fate and transport properties

as benzene (Abreu et al., 2009), and 2) soil-gas concentrations from UST petroleum release sites show a strong correlation between benzene and ethylbenzene concentrations in soil-gas measured concurrently from the same soil-gas probe (see following figure from Lahvis [written communication]):

Figure from Lahvis (written communication)

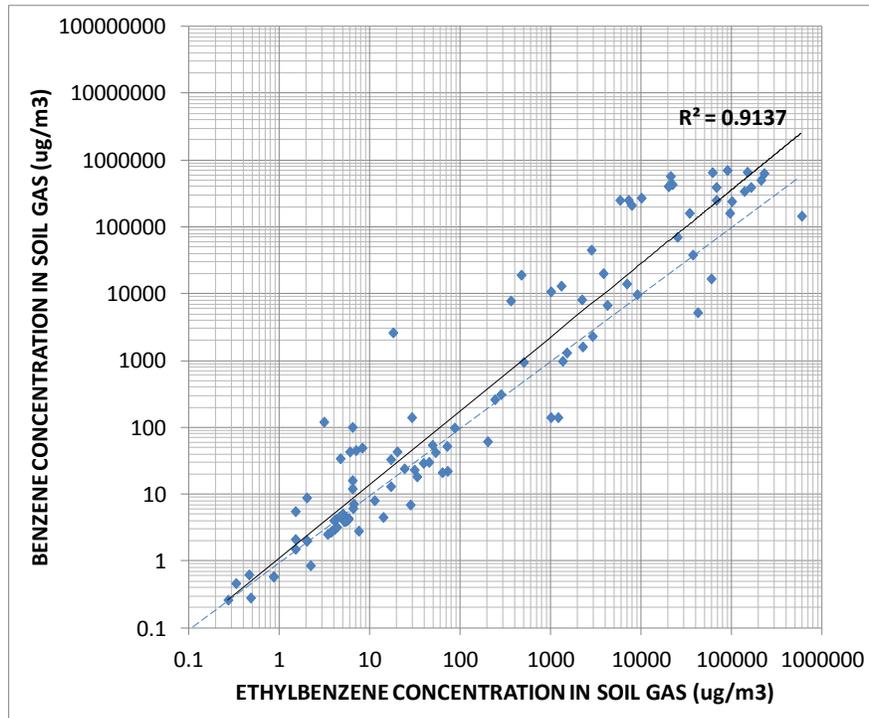

The exclusion distance criteria determined for benzene are assumed to be conservative for naphthalene because 1) naphthalene is typically present in gasoline at lower fractions as benzene, 2) naphthalene is likely present at very low concentrations (mass fraction of 0.0026) in diesel (Potter and Simmons, 1998), and 3) naphthalene is less volatile, and has similar (if not, higher) degradation rates as benzene (GSI, 2010).

4.1 Scenario 1: Unweathered LNAPL on Groundwater

30 ft vertical source/building separation (exclusion) distance for unweathered (residual or free-phase) LNAPL on groundwater

The proposed 30 feet exclusion distance⁷ is conservative based on:

- Model theory shows full attenuation within 7 m (~ 20 ft) of a high concentration LNAPL source assuming reasonable approximations of the biodegradation rate (see Figures 5 and 7 below from Abreu et al., 2009)⁸. The use of benzene to represent an unweathered LNAPL vapor source (which will primarily consist of aliphatic hydrocarbons) is assumed to be conservative with respect to benzene biodegradation assumptions (linked to O₂ availability)⁹.

⁷ The top of the residual-phase source can generally be assumed to be consistent with the historic high water-table elevation.

⁸ Note Figures 5 and 7 from Abreu et al. (2009) were slightly modified to highlight the technical justification

⁹ In this model, biodegradation is linked to O₂ availability. Biodegradation is not simulated when O₂ concentrations in the unsaturated zone fall below 1%. Relative to benzene, aliphatic hydrocarbons are less susceptible to biodegradation because they partition less to the aqueous phase (pore water) where biodegradation takes place. Simulating LNAPL with a single benzene source will thus be conservative with respect to O₂ demand (and benzene biodegradation) compared to simulating LNAPL using a primarily aliphatic hydrocarbons.

Figure 5 (modified) from Abreu et al. (2009)

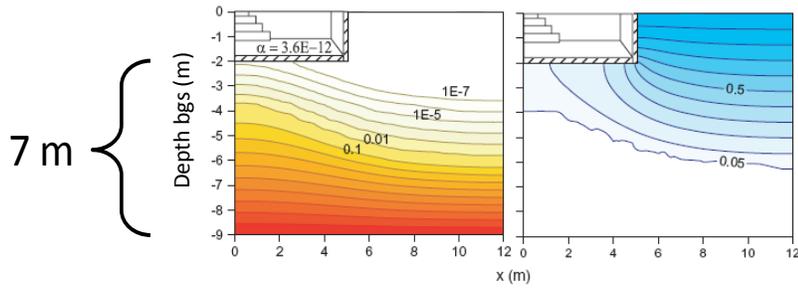


Figure 5. Effect of source depth on the soil-gas concentration distribution and vapor intrusion attenuation factors (α) for basement scenarios with a high vapor source concentration of 100,000 $\mu\text{g/L}$ and biodegradation rate $\lambda = 0.79 \text{ h}^{-1}$. Hydrocarbon and oxygen concentrations are normalized by source and atmospheric concentrations, respectively.

Figure 7 (modified) from Abreu et al. (2009)

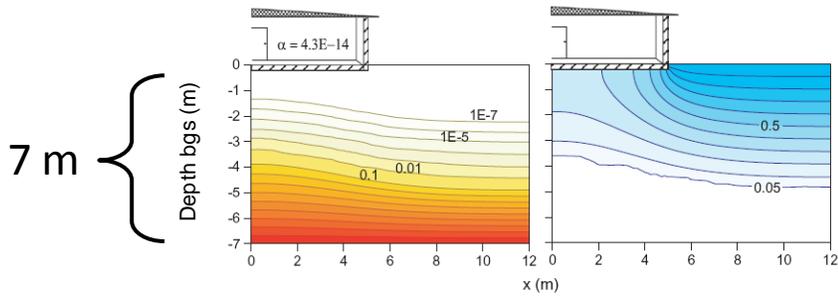


Figure 7. Effect of building type on soil-gas concentration distribution for high vapor source concentration (100,000 $\mu\text{g/L}$) and biodegradation rate $\lambda = 0.79 \text{ h}^{-1}$. Hydrocarbon and oxygen concentrations are normalized by source and atmospheric concentrations, respectively.


- For LNAPL and residual sources, field (soil-gas) data show full attenuation within 8 ft of the source (see figure, below, from R. Davis [2010] – also published in Hartman [2010]).

Figure from Davis (2010)

LNAPL & Soil Sources


**Benzene: 48 exterior/near-slab +
22 sub-slab = 70 total**

■ Benzene SV Sample Event over LNAPL & Soil Sources

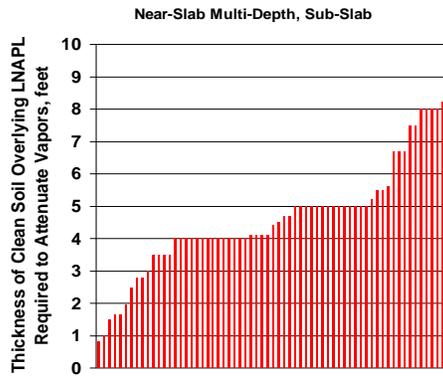

**TPH: 17 exterior/near-slab +
18 sub-slab = 35 total**


■ TPH SV Sample Event over LNAPL & Soil Sources

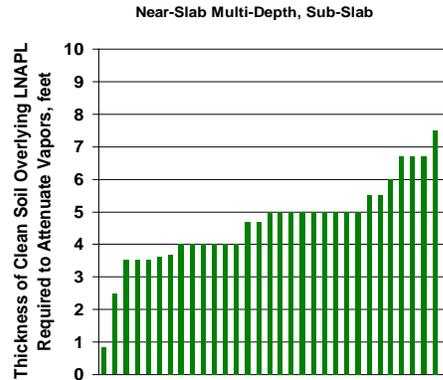

**~8 ft CLEAN overlying soil attenuates vapors
associated with LNAPL/Soil Sources**

The following figure from Lahvis (2011) shows a greater than 95% probability that benzene concentrations in soil gas will attenuate below a conservative screening level for benzene in soil gas of 50 and 100 $\mu\text{g}/\text{m}^3$ (alternatively, a < 5 % probability of observing benzene concentrations > 100 $\mu\text{g}/\text{m}^3$) at distances of > ~25 ft and > ~13 ft from a LNAPL (residual or free-phase) source, respectively.

Figure from Lahvis (2011)

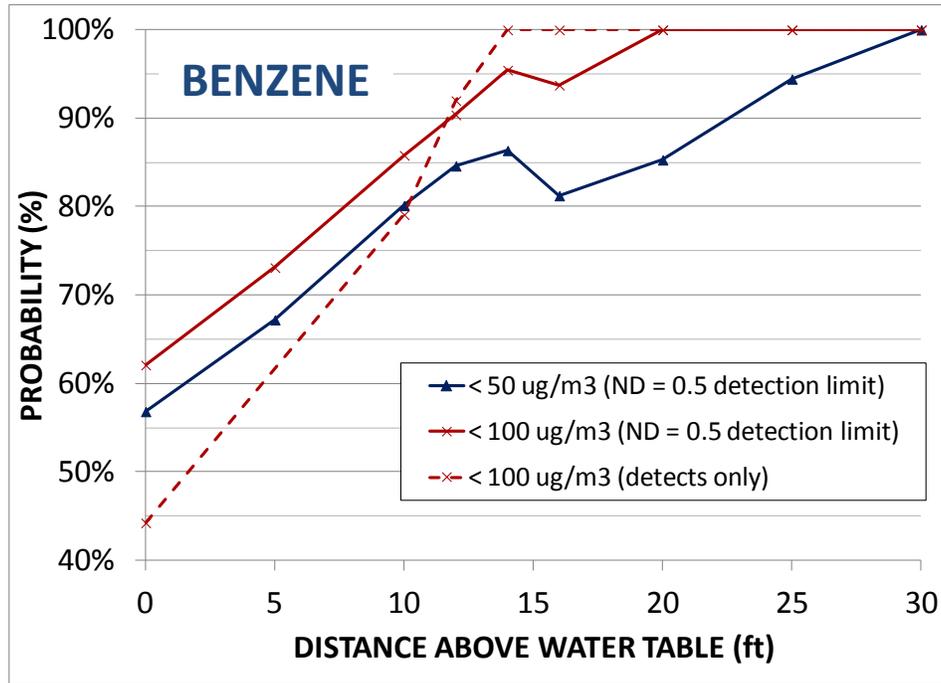

4.2 Scenario 2: Unweathered LNAPL in Soil

30 ft lateral and vertical source/building separation (exclusion) distance for an unweathered LNAPL (residual or free-phase) LNAPL source in soil and a building foundation

The same technical justification provided for Scenario 1 applies to Scenario 2. The proposed 30 feet lateral off-set distance is even more conservative for sources displaced laterally as indicated in the following figure from Abreu and Johnson (2005). For example, an additional order of magnitude of attenuation is predicted for plume centerlines displaced 10 m (~30 ft).

Figure 9 from Abreu and Johnson (2005)

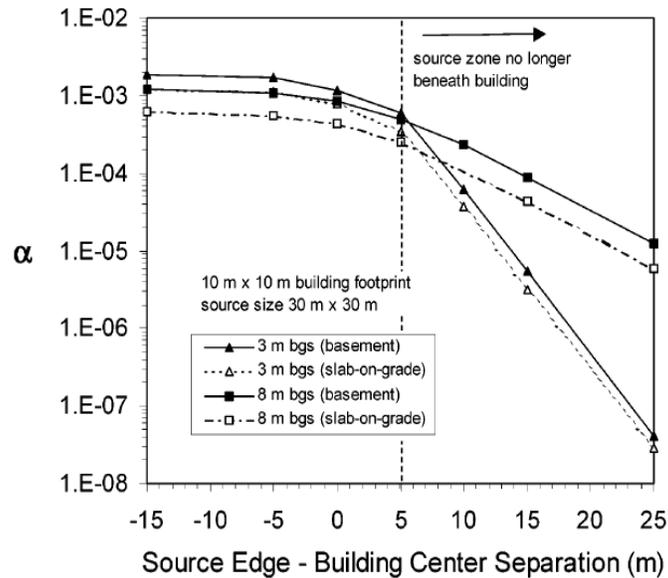


FIGURE 9. Changes in vapor attenuation coefficient (α) with vapor source–building separation and vapor source depth for basement and slab-on-grade foundation scenarios.

As discussed in the technical background section 3.2.2, 13 feet is more than adequate to fully attenuate vapors derived from LNAPL sources in soil and groundwater; therefore providing a 30' lateral distance screening criteria provides an additional safety factor.

4.3 Scenario 3: Dissolved Phase Benzene Concentrations in Groundwater

- 5 ft. vertical separation distance between a dissolved-phase source < 100 ug/L benzene and a building foundation (no oxygen (O₂) measurement)
- 10 ft. vertical exclusion distance for a dissolved-phase source < 1,000 ug/L benzene (no O₂ measurement)
- 5 ft. vertical separation distance between a dissolved-phase source < 1,000 ug/L and a building foundation (measured O₂ in soil gas ≥ 4%)

These separation distances are conservative with respect to protecting human health based on the following:

- Complete attenuation ($\sim 1E-07$) is predicted within 2 m (6 ft.) of a soil gas source of benzene < 10 mg/L (assumes an approximate 40 mg/L dissolved phase benzene concentration, based on an approximation of benzene partitioning between soil gas and groundwater [dimensionless Henry's Law constant = 0.25]- see attached Figure 10 from Abreu et al. [2009]¹⁰). Even greater

¹⁰ Note figure from Abreu et al. (2009) was slightly modified to highlight the technical justification

hydrocarbon attenuation (lesser exclusion distances) is predicted for dissolved-phase sources in other less permeable (e.g., silty clay) unsaturated zone systems (Abreu et al, 2009). The attenuation is complete for the entire vapor (dissolved-phase) concentration range. The dissolved phase concentrations (especially) (i.e., 100 ug/L) and proposed exclusion distance specified in this scenario are therefore assumed to be very conservative. Note: in the figure below, “L” is the distance to the foundation from the source.

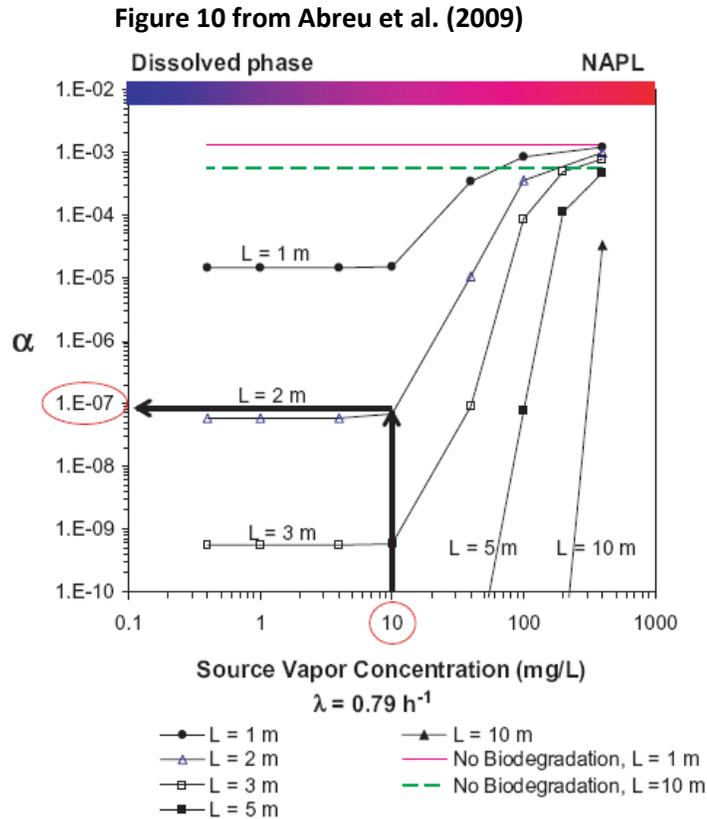


Figure 10. Use of the chart to select a semi-site-specific attenuation factor. For a source concentration of 10,000 $\mu\text{g/L}$ and a source-building separation of 2 m, the attenuation factor would be about $1\text{E}-7$.

- Model theory shows > 9 orders of magnitude (i.e. complete) attenuation (for reasonable approximations of the biodegradation rate $\lambda = 0.79 \text{ hr}^{-1}$) within a source/building separation distance of $L=3 \text{ m}$ (10 ft) in a sand unsaturated zone (Abreu et al. (2009)). This magnitude of attenuation is applicable for a benzene vapor source $< \sim 10 \text{ mg/L}$ (or $\sim 40 \text{ mg/L}$ dissolved phase source in groundwater assuming reasonable approximations for benzene partitioning between soil gas and groundwater (i.e., a dimensionless Henry’s Law constant = 0.25). Even greater hydrocarbon attenuation (lesser exclusion distances) is predicted for dissolved-phase sources in other less permeable (e.g., silty clay) unsaturated zone systems (Abreu et al, 2009). The attenuation is complete for the entire vapor (dissolved-phase) concentration range. The dissolved phase concentrations (especially) (1,000 $\mu\text{g/L}$) and proposed exclusion distance

specified in this scenario are therefore assumed to be very conservative. Note: in the figure below, “D” is the overall source depth and “L” is the distance to the foundation from the source.

Figure 6 from Abreu et al. (2009)


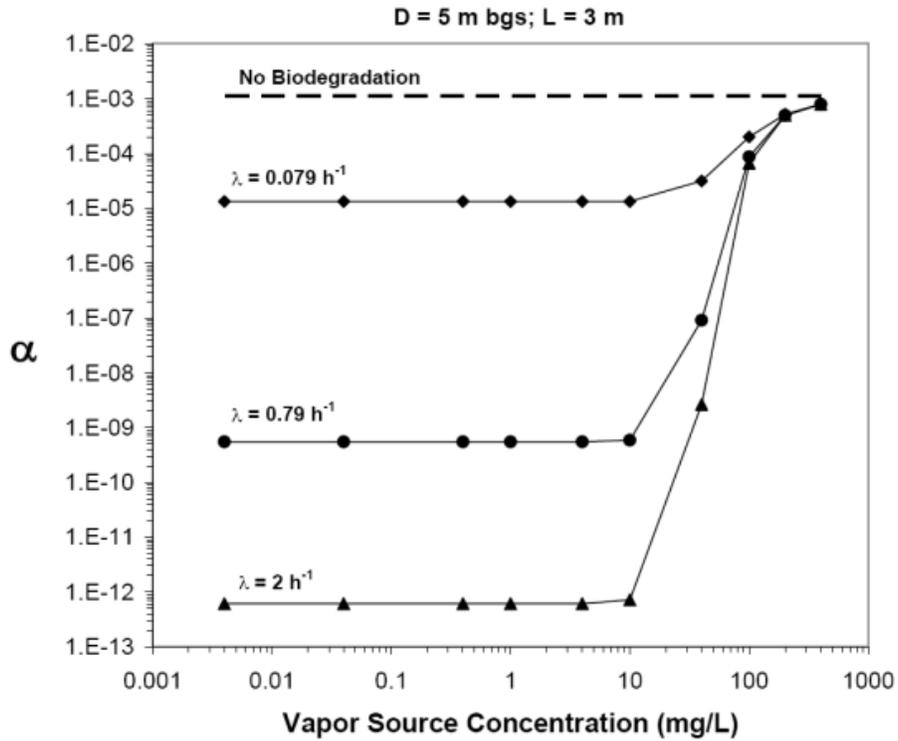


Figure 5—Influence of soil vapor source concentration and first-order biodegradation rates (λ) on vapor intrusion attenuation factors (α) for basement scenarios, homogeneous sand soil and source depth (D) of 5 m bgs (source-foundation separation L = 3 m).

- Field soil-gas data show complete soil-gas attenuation within 5 feet above benzene concentrations in groundwater of up to 6 mg/L (Davis, 2009).

Figure 5 from Davis (2009)

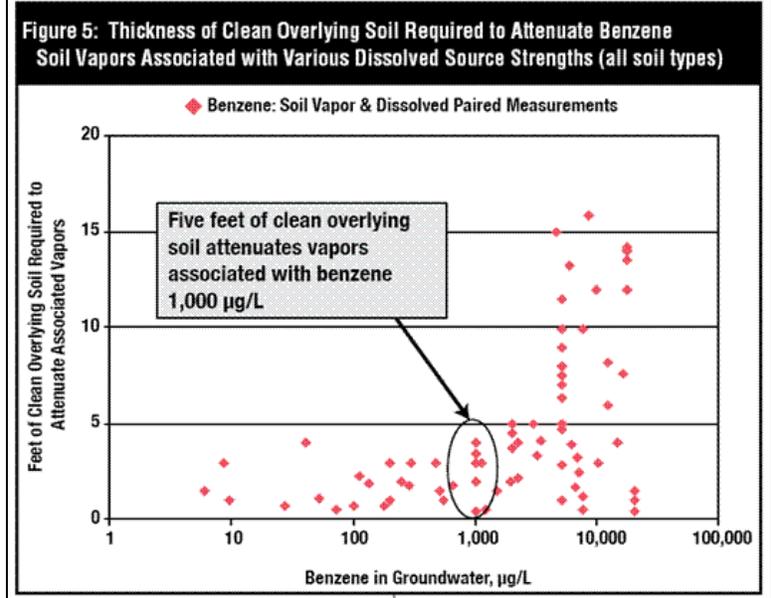

- Field (soil-gas) data from Davis (2009) and Wright (2011) show benzene concentrations in soil gas attenuate below 80 µg/m³ (see Figure 1) and 20 µg/m³ (see Figure 2) within 10 feet above the water table for dissolved-phase benzene concentrations up to 1,000 µg/L and 100 µg/L, respectively at petroleum UST release sites.

Figure 1 - Lahvis (written communication)

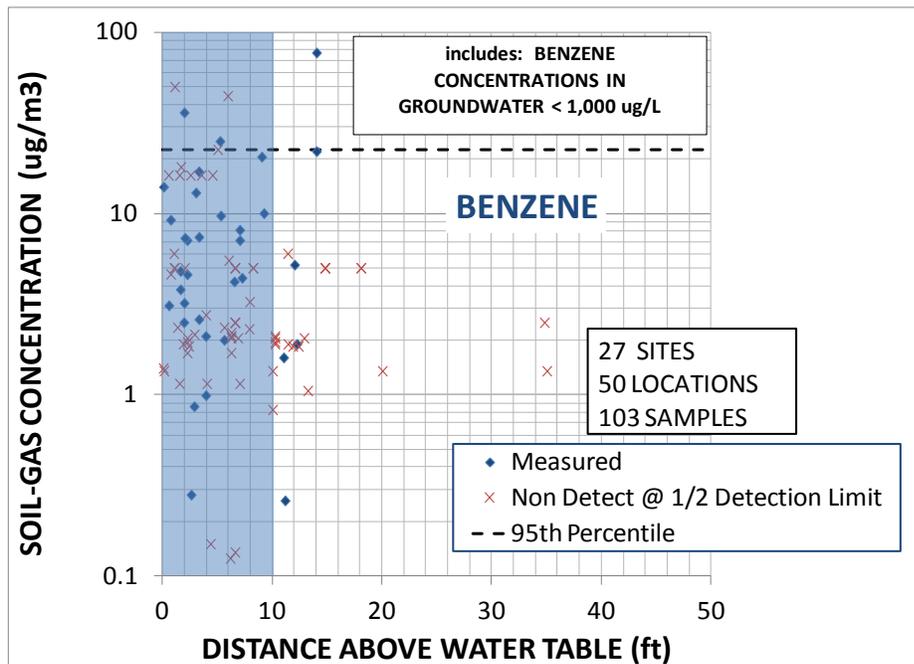


Figure 1. Benzene concentrations in soil gas as a function of distance above the water table for concentrations in groundwater < 1,000 µg/L. Analysis is based on soil gas data from Davis (2009) and Wright (2011).

Figure 2 - Lahvis (written communication)

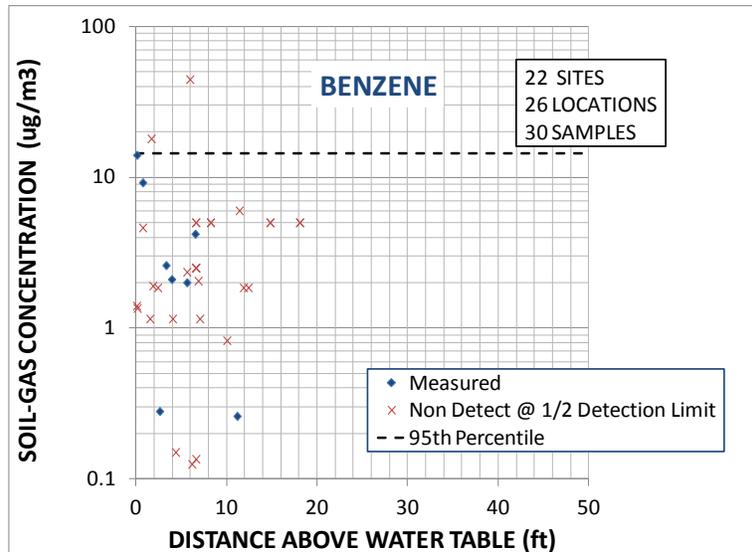


Figure 3 from Lahvis (written communication)

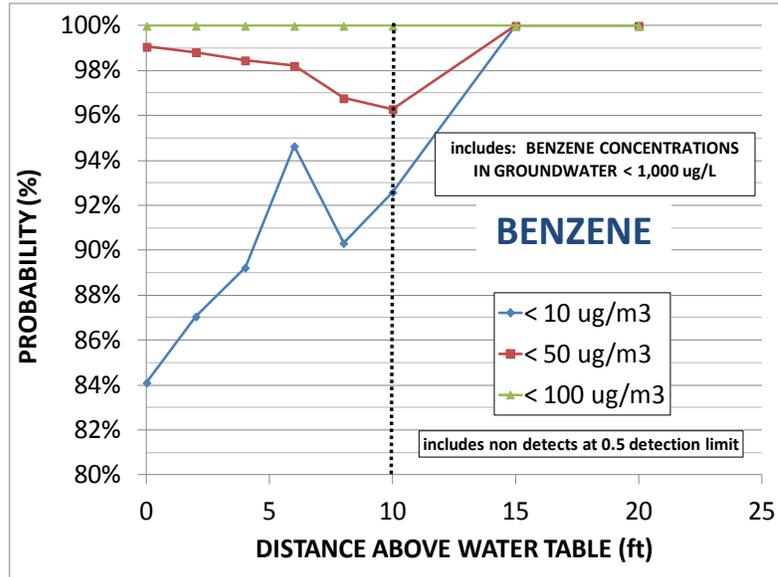


Figure 3. Probability of encountering benzene concentrations in soil gas above conservative screening-level concentrations of 10, 50, and 100 ug/m³ at various distances above the water table at retail-only locations. The data are associated benzene (source) concentrations in groundwater < 1,000 ug/L and are taken from the databases reported in Davis (2009) and Wright (2011).

- The probability of benzene vapor concentrations near the receptor exceeding a (very) conservative screening level (i.e., 10 ug/m³) at petroleum-UST release sites with benzene concentrations in groundwater < 100 ug/L is less than 5% regardless of the source-receptor separation distance (see Figure 4 from Lahvis [written communication]). The water table would have to essentially be in contact with a building foundation to create a potential concern for vapor intrusion at low concentration sites.

Figure 4 from Lahvis (written communication)

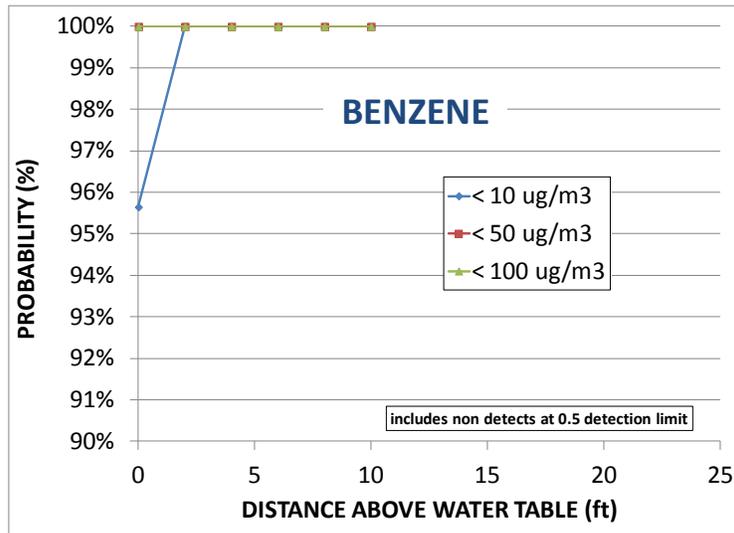


Figure 4. Probability of encountering benzene concentrations in soil gas above conservative screening-level concentrations of 10, 50, and 100 ug/m3 at various distances above the water table at retail-only locations. The data are associated benzene (source) concentrations in groundwater < 100 ug/L and are taken from the databases reported in Davis (2009) and Wright (2011).

- The model results from Abreu et al. (2009) (see Figure 3 below) show O₂ concentrations in excess of ~17% (0.8 * 21%) for a hydrocarbon (benzene) vapor source concentration of 1 mg/L (1,000 ug/L) (see plots in middle of the figure). This benzene (or BTEX) vapor source concentration is roughly equivalent to a dissolved phase source concentration of ~4,000 ug/L, which is > the maximum dissolved-phase benzene concentration “1,000 ug/L” defined for Scenario 3. This calculation assumes:
 - a) the dissolved-phase source is primarily BTEX (the most soluble hydrocarbon fraction)
 - b) vapor/aqueous partitioning occurs according to Henry’s law, and
 - c) a dimensionless Henry’s Law partition coefficient for benzene (or BTEX) of 0.25.
- Analyses of soil-gas data from Davis (2010) and Wright (2011) show that O₂ concentrations in soil gas are > 4% at sites with dissolved-phase sources of benzene in groundwater up to 15 mg/L (see Figure from Lahvis (2011)).

Figure 3 from Abreu et al (2009)

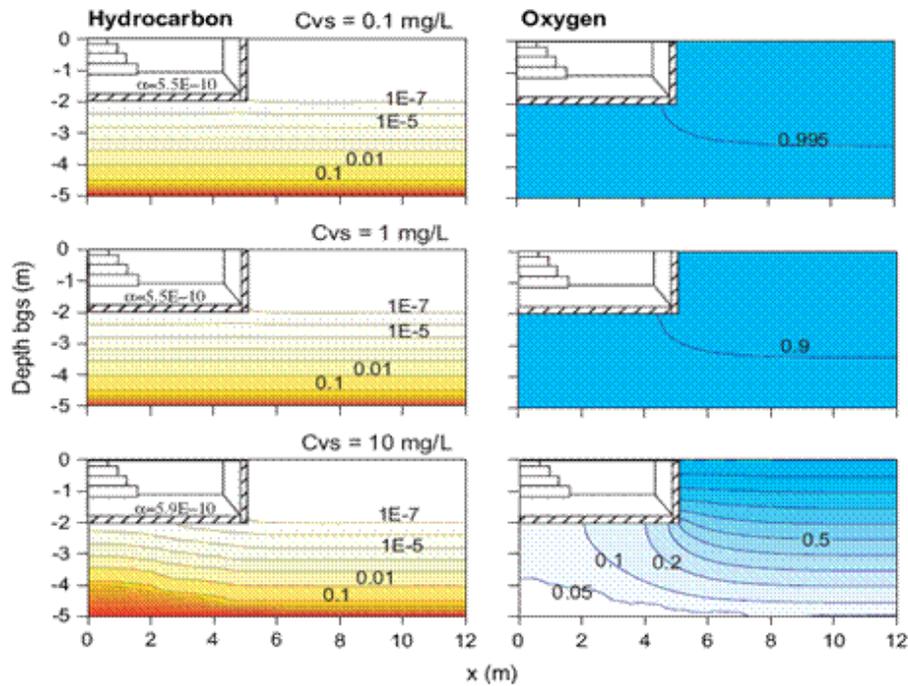


Figure 3. Effect of low vapor source concentration (C_{vs}) on soil-gas concentration distribution and vapor intrusion attenuation factors (α) for basement foundation scenarios and hydrocarbon biodegradation rate $\lambda = 0.79 \text{ h}^{-1}$. Hydrocarbon and oxygen concentrations are normalized by source and atmospheric concentrations, respectively.

Figure from Lahvis (2011)

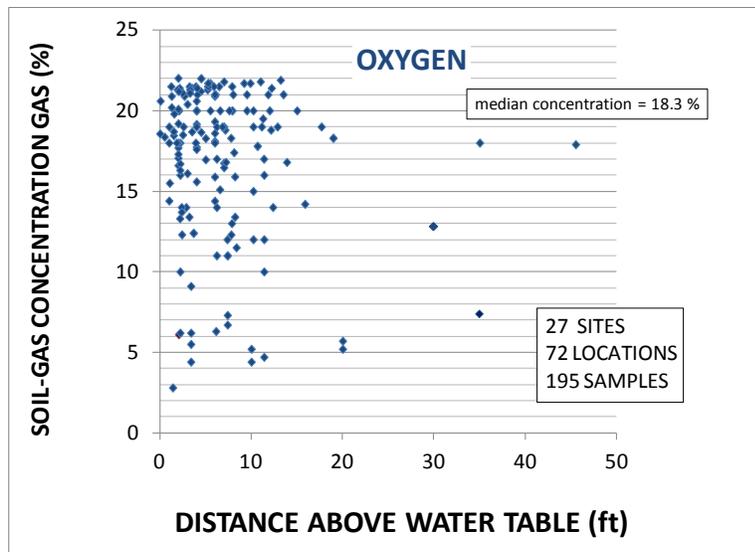


Figure. Oxygen concentrations measured in soil gas at various distances above dissolved-phase hydrocarbon (benzene) sources in groundwater with concentrations $< 15 \text{ mg/L}$. Analysis is based on soil gas data from Davis (2009) and Wright (2011).

Scenario 4: Direct Measurement of Soil Gas Concentrations

Application of a thousand-fold attenuation factor to risk-based soil-gas criteria (i.e. CHSSLs) for sources located more than 5 vertical feet from a building foundation.

- Model results (see Figure 10 from Abreu et al., 2009) show that biodegradation produces an approximate 10,000-fold attenuation of benzene concentrations in soil-gas up to ~10 mg/L or 10,000,000 ug/m³ within 2 m (5 ft) of a building foundation for reasonable approximations of the degradation rate in a sand unsaturated zone¹¹. The proposed one thousand-fold additional attenuation for benzene concentrations in soil gas up to 85,000 and 280,000 ug/m³ located more than vertical 5 feet from a building foundation is thus deemed conservative for residential and commercial settings, respectively.

Modified Figure 10 from Abreu et al. (2009)

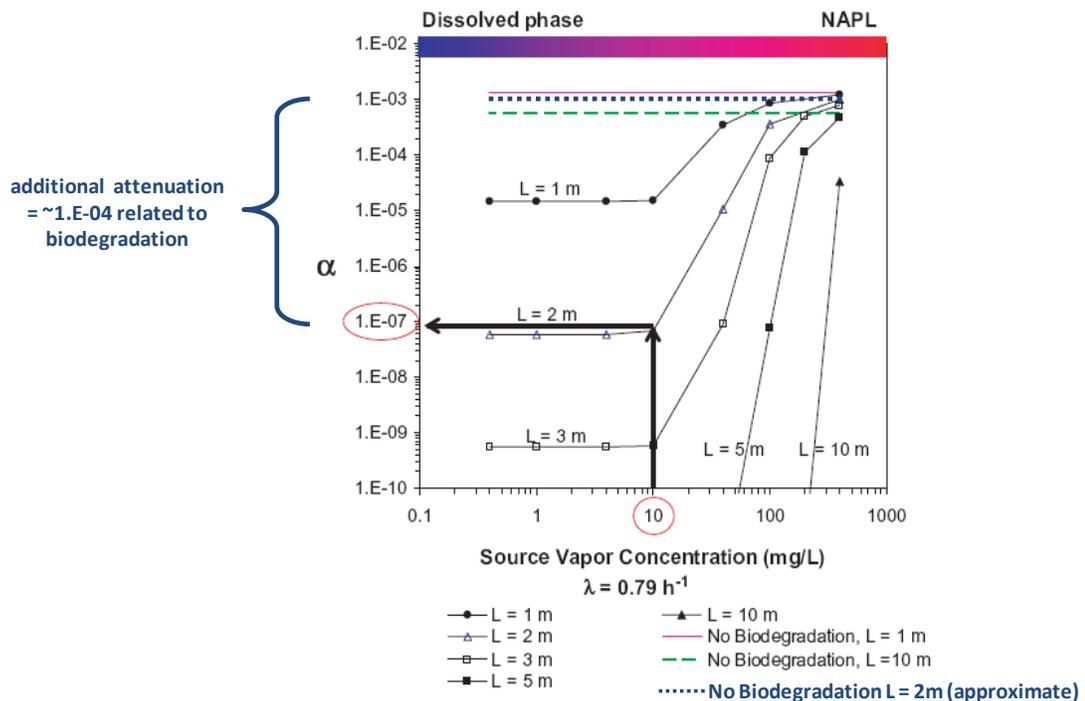



Figure 10. Use of the chart to select a semi-site-specific attenuation factor. For a source concentration of 10,000 µg/L and a source-building separation of 2 m, the attenuation factor would be about 1E-7.

- Measured field soil-gas (benzene) concentrations from Davis (2009) and Wright (2011) collected from vertically nested vapor probes support the model theory (see Figure below)

¹¹ Figure modified to show 'No Biodegradation L = 2 m (approximate)' and additional attenuation to highlight technical justification.

from Lahvis [written communication]). More specifically, these data show that benzene attenuation in the unsaturated zone generally exceeds 1000-fold within a 5 feet vertical distance of a benzene (source) soil-gas concentration range between 10,000 and 100,000 $\mu\text{g}/\text{m}^3$ (see Figure 5 – middle box). Similar attenuation is observed for benzene soil gas (source) concentrations ranging between 100,000 and 1,000,000 $\mu\text{g}/\text{m}^3$ (see Figure 5 – left hand box). Less attenuation is observed for benzene soil gas (source) concentrations ranging between 1,000 and 10,000 $\mu\text{g}/\text{m}^3$ (see Figure 5 – right hand box). The statistics are affected for this concentration range, however, by non-detect values reported at $\frac{1}{2}$ the detection limit. The soil-gas data are from the databases described by Davis (2009) and Wright (2011) for petroleum-UST release locations. This finding supports the model theory of Abreu et al. (2009) and the proposed use of a 1000-fold soil-gas bioattenuation factor..

Figure from Lahvis (written communication)

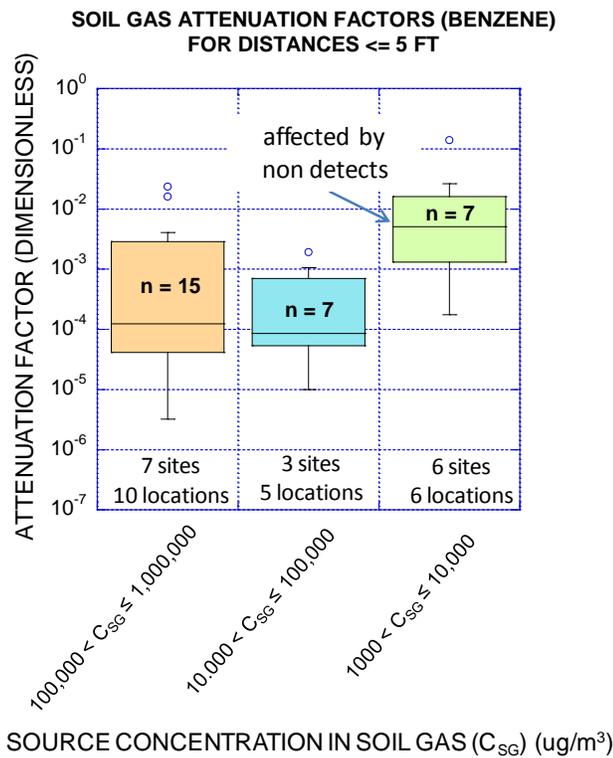

Each box encloses 50% of the data with the median value of the variable displayed as a line. The top and bottom of the box mark the limits of $\pm 25\%$ of the variable population. The lines extending from the top and bottom of each box mark the minimum and maximum values within the data set that fall within an acceptable range defined by the software. Any value outside of this range, called an outlier, is displayed as an individual point.

Figure 5. Box plots based on statistical analysis of benzene soil-gas data collected concurrently from vertically nested probe locations separated by distances \leq 5 ft. The soil-gas data are taken from the databases reported in Davis (2009) and Wright (2011).

5 REFERENCES

- Abreu, L.D., Ettinger, R. and T. McAlary , 2009, Simulated soil vapor intrusion attenuation factors including biodegradation for petroleum hydrocarbons. *Ground Water Mont. Rem.* 29, 105–177.
- Abreu, L.D. and P.C. Johnson, 2005, Effect of vapor source, building separation and building construction on soil vapor intrusion as studied with a three-dimensional numerical model, *Environ. Sci. and Technol.*, 39, 4550-4561.
- Alaska DEC, 2011, Hydrocarbon Risk Calculator User Manual, prepared for Alaska Department of Environmental Conservation by Lawrence Acomb Geosphere, Inc., January 4, 2011 (<http://www.dec.state.ak.us/spar/csp/guidance/hrc/HRC%20User%20Manual.pdf>)
- Andersen, R. G., Booth, E. C., Marr, Widdowson, M.A., Novak, J.T., 2008, Volatilization and biodegradation of naphthalene in the vadose zone impacted by phytoremediation, *Environ. Sci. Technol.*, 42, 2575–2581.
- API, 2009, Simulating the Effect of Aerobic Biodegradation on Soil Vapor Intrusion into Buildings—Evaluation of Low Strength Sources Associated with Dissolved Gasoline Plumes, Publication No. 4775; American Petroleum Institute: Washington, D.C., April 2009, pp. 37.
- ASTM E-2531–06, 2006, Standard Guide for Development of Conceptual Site Models and Remediation Strategies for Light Nonaqueous-Phase Liquids Released to the Subsurface, ASTM International, West Conshohocken, PA, 19428-2959 USA
- Bordon, R.C., and P.B. Bedient. 1986. Transport of dissolved hydrocarbons influenced by oxygen-limited biodegradation. 1. Theoretical development. *Water Resource Research* 22 no. 13: 1973–1982.
- Bruce, L., Miller, T., and B. Hockman, 1991, Solubility versus equilibrium saturation of gasoline compounds: A method to estimate fuel/water partition coefficient using solubility or Koc, proceedings of National Ground Water Association Petroleum Hydrocarbons and Organic Chemicals in Ground Water: Prevention, Detection, and Restoration, November 20-22, 1991, Houston, Tx, 571 -582.
- Davis, R.V., 2009, Bioattenuation of petroleum hydrocarbon vapors in the subsurface update on recent studies and proposed screening criteria for the vapor-intrusion pathway, LUSTLine Report 61, May 2009, New England Interstate Water Pollution Control Commission (NEIWPCC), pp. 11-14. (<http://www.neiwpcc.org>).
- Davis, R., 2010, Evaluating the vapor intrusion pathway: Subsurface petroleum hydrocarbons and recommended screening criteria, 22nd Annual US EPA National Tanks Conference, Boston, Massachusetts, September 20-22, 2010.
- DeVaull, 2007, Indoor vapor intrusion with oxygen-limited biodegradation for a subsurface gasoline source, *Environ. Sci. Technol.*, 41, 3241-3248.
- Fischer, D. and C. G. Uchirin, 1996, Laboratory simulation of VOC entry into residence basements from soil gas, *Environ. Sci. Technol.*, 30, 2598-2603.

GSI Environmental Inc., 2010, BioVapor, A 1-D Vapor Intrusion Model with Oxygen-Limited Aerobic Biodegradation, User's Manual, Published by American Petroleum Institute: Washington, D.C., April 2010.

Hartman, B., 2010, The vapor-intrusion pathway: Petroleum hydrocarbon issues, LUSTLine Report 66, December 2010, New England Interstate Water Pollution Control Commission (NEIWPCC), pp. 11-14. (<http://www.neiwpcc.org>).

Lahvis, M.A., 2011, Significance of biodegradation at petroleum hydrocarbon sites: Implications for vapor intrusion guidance, presentation at the 1st Annual Science Advisory Board for Contaminated Sites in British Columbia, September 29, 2011.

Lahvis, M.A., and A.L. Baehr, 1996, Estimating rates of aerobic hydrocarbon biodegradation by simulation of gas transport in the unsaturated zone: Water Resources Res., 32, 2231-2249.

Lahvis, M.A. (Written Communication).

Potter, T. and K.E. Simmons. 1998, Total Petroleum Hydrocarbon Criteria Working Group Series, Volume 2: Composition of Petroleum Mixtures.

Roggemans, S., C.L. Bruce, and P.C. Johnson, 2001, Vadose zone natural attenuation of hydrocarbon vapors: An empirical assessment of soil gas vertical profile data. API Technical Bulletin No. 15., Washington, D.C., American Petroleum Institute.

U.S. EPA, 2008, U.S. EPA's vapor intrusion database: Preliminary evaluation of attenuation factors, Draft document, Office of Solid Waste U.S. Environmental Protection Agency, Washington, DC, March 4, 2008, pp. 37. [http://www.envirogroup.com/publications/oswer_database_report_combined_3-4-08_\(2\).pdf](http://www.envirogroup.com/publications/oswer_database_report_combined_3-4-08_(2).pdf)

Wright, J. 2011. Establishing exclusion criteria from empirical data for assessing petroleum hydrocarbon vapour intrusion, Program and Proceedings of the 4th International Contaminated Site Remediation Conference - 2011 CleanUP, Adelaide, South Australia, September 11 – 15, 2011, pp. 195-196.