



Low-Threat Underground Storage Tank Case Closure Policy

Preamble

The State Water Resources Control Board (State Water Board) administers the petroleum UST (Underground Storage Tank) Cleanup Program, which was enacted by the Legislature in 1984 to protect health, safety and the environment. The State Water Board also administers the petroleum UST Cleanup Fund (Fund), which was enacted by the Legislature in 1989 to assist UST owners and operators in meeting federal financial responsibility requirements and to provide reimbursement to those owners and operators for the high cost of cleaning up unauthorized releases caused by leaking USTs.

The State Water Board believes it is in the best interest of the people of the State that unauthorized releases be prevented and cleaned up to the extent practicable in a manner that protects human health, safety and the environment. The State Water Board also recognizes that the technical and economic resources available for environmental restoration are limited, and that the highest priority for these resources must be the protection of human health and environmental receptors. Program experience has demonstrated the ability of remedial technologies to mitigate a substantial fraction of a petroleum contaminant mass with the investment of a reasonable level of effort. Experience has also shown that residual contaminant mass usually remains after the investment of reasonable effort, and that this mass is difficult to completely remove regardless of the level of additional effort and resources invested.

It has been well-documented in the literature and through experience at individual UST release sites that petroleum fuels naturally attenuate in the environment through adsorption, dispersion, dilution, volatilization, and biological degradation. This natural attenuation slows and limits the migration of dissolved petroleum plumes in groundwater. The biodegradation of petroleum, in particular, distinguishes petroleum products from other hazardous substances commonly found at commercial and industrial sites.

The characteristics of UST releases and the California UST Program have been studied extensively, with individual works including:

- a. Lawrence Livermore National Laboratory report (1995)
- b. SB1764 Committee report (1996)
- c. UST Cleanup Program Task Force report (2010)
- d. Cleanup Fund Task Force report (2010)
- e. Cleanup Fund audit (2010)
- f. State Water Resources Control Board site closure orders
- g. State Water Resources Control Board Resolution 2009-0081

In general, these efforts have recognized that many petroleum release cases pose a low threat to human health and the environment. Some of these studies also recommended establishing "low-threat" closure criteria in order to maximize the benefits to the people of the State of California through judicious application of available resources.

The purpose of this policy is to establish consistent statewide case closure criteria for low-threat petroleum UST sites. The policy is consistent with existing statutes, regulations, State Water Board precedential decisions, policies and resolutions, and is intended to provide

clear direction to responsible parties, their service providers, and regulatory agencies. The policy seeks to increase UST cleanup process efficiency. A benefit of improved efficiency is the preservation of limited resources for mitigation of releases posing a greater threat to human and environmental health.

This policy is based in part upon the knowledge and experience gained from the last 25 years of investigating and remediating unauthorized releases of petroleum from USTs. While this policy does not specifically address other petroleum release scenarios such as pipelines or above ground storage tanks, if a particular site with a different release scenario exhibits attributes similar to those which this policy addresses, the criteria for closure evaluation of these non-UST sites should be similar to those in this policy.

This policy is a state policy for water quality control and applies to all sites subject to Health and Safety Code section 25296.10. The term “regulatory agencies” in this policy means the State Water Board, Regional Water Quality Control Boards (Regional Water Boards) and local agencies authorized to implement Health and Safety Code section 25296.10.

Definitions: Unless expressly provided in this policy, the terms in this policy shall have the same definitions provided in Chapter 6.7 of Division 20 of the Health and Safety Code and Chapter 16 of Division 3 of Title 23 of the California Code of Regulations.

Criteria for Low-Threat Case Closure

In the absence of site-specific conditions that demonstrably increase the risk associated with residual petroleum constituents, cases that meet the general and media-specific criteria described in this policy do not pose a threat to human health, safety or the environment and are appropriate for closure pursuant to Health and Safety Code section 25296.10. Cases that meet the criteria in this policy do not require further corrective action and shall be issued a uniform closure letter consistent with Health and Safety Code section 25296.10. Annually, or at the request of the responsible party or party conducting the corrective action, the regulatory agency shall conduct a review to determine whether the site meets the criteria contained in this policy.

It is important to emphasize that the criteria described in this policy do not attempt to describe the conditions at all low-threat sites in the State. Regulatory agencies should issue a closure letter for a case that does not meet these criteria if the site is determined to be low-threat based upon a site specific analysis.

This policy recognizes that some petroleum-release sites may possess unique attributes and that some site specific conditions may make case closure under this policy inappropriate, despite the satisfaction of the stated criteria in this policy. It is impossible to completely capture those sets of attributes that may render a site ineligible for closure based on this low-threat policy. This policy relies on the regulatory agency’s use of the conceptual site model to identify the special attributes that would require specific attention prior to the application of low-threat criteria. In these cases, it is the regulatory agency’s responsibility to identify the conditions that make closure under the policy inappropriate.

General Criteria

General criteria that must be satisfied by all candidate sites are listed as follows:

- a. The unauthorized release is located within the service area of a public water system;
- b. The unauthorized release consists only of petroleum;
- c. The unauthorized ("primary") release from the UST system has been stopped;
- d. Free product has been removed to the maximum extent practicable;
- e. A conceptual site model has been developed;
- f. Secondary source removal has been addressed;
- g. Soil or groundwater has been tested for MTBE and results reported in accordance with Health and Safety Code section 25296.15; and
- h. Nuisance as defined by Water Code section 13050 does not exist at the site.

a. The unauthorized release is located within the service area of a public water system

This policy is protective of existing water supply wells. New water supply wells are unlikely to be installed in the shallow groundwater near former UST release sites. However, it is difficult to predict, on a statewide basis, where new wells will be installed, particularly in rural areas that are undergoing new development. This policy is limited to areas with available public drinking water supplies to reduce the likelihood that new wells in developing areas will be inadvertently impacted by residual petroleum in groundwater. Case closure outside of areas with a public water supply should be evaluated based upon the fundamental principles in this policy and a site specific evaluation of developing water supplies in the area.

b. The unauthorized release consists only of petroleum

For the purposes of this policy, petroleum is defined as crude oil, or any fraction thereof, which is liquid at standard conditions of temperature and pressure, which means **60 degrees Fahrenheit and 14.7 pounds per square inch absolute**, including the following substances: motor fuels, jet fuels, distillate fuel oils, residual fuel oils, lubricants, petroleum solvents and used oils, including any additives and blending agents such as oxygenates contained in the formulation of the substances.

c. The unauthorized release has been stopped

The tank, pipe, or other appurtenant structure that released petroleum into the environment (i.e. the primary source) has been removed, repaired or replaced. It is not the intent of this policy to allow sites with ongoing leaks from the UST system to qualify for low-threat closure.

d. Free product has been removed to the maximum extent practicable

At petroleum unauthorized release sites where investigations indicate the presence of free product, free product shall be removed to the maximum extent practicable. In meeting the requirements of this section:

- (a) Free product shall be removed in a manner that minimizes the spread of the unauthorized release into previously uncontaminated zones by using recovery and disposal techniques appropriate to the hydrogeologic conditions at the site, and that properly treats, discharges or disposes of recovery byproducts in compliance with applicable laws;
- (b) Abatement of free product migration shall be used as a minimum objective for the design of any free product removal system; and
- (c) Flammable products shall be stored for disposal in a safe and competent manner to prevent fires or explosions.

e. A conceptual site model has been developed

The Conceptual Site Model (CSM) is a fundamental element of a comprehensive site investigation. The CSM establishes the source and attributes of the unauthorized release, describes all affected media (including soil, groundwater, and soil vapor as appropriate), describes local geology, hydrogeology and other physical site characteristics that affect contaminant environmental transport and fate, and identifies all confirmed and potential contaminant receptors (including water supply wells, surface water bodies, structures and their inhabitants). The CSM is relied upon by practitioners as a guide for investigative design and data collection. Petroleum release sites in California occur in a wide variety of hydrogeologic settings. As a result, contaminant fate and transport and mechanisms by which receptors may be impacted by contaminants vary greatly from location to location. Therefore, the CSM is dynamic and unique to each individual release site. All relevant site characteristics identified by the CSM shall be assessed and supported by data so that the nature, extent and mobility of the release have been established to determine conformance with applicable criteria in this policy.

f. Secondary source removal has been addressed

“Secondary source” is defined as petroleum-impacted soil or groundwater located at or **immediately** beneath the point of release from the primary source. Unless site attributes prevent secondary source removal (e.g. physical or infrastructural constraints exist whose removal or relocation would be technically or economically infeasible), petroleum-release sites are required to undergo secondary source removal to the extent practicable as described herein. “To the extent practicable” means implementing a cost-effective corrective action which removes or destroys-in-place the most readily recoverable fraction of source-area mass. It is expected that most secondary mass removal efforts will be completed in one year or less. Following removal or destruction of the secondary source, additional removal or active remedial actions shall not be required by regulatory agencies unless (1) necessary to abate a demonstrated threat to human health or (2) the groundwater plume does not meet the definition of low threat as described in this policy.

g. Soil and groundwater have been tested for **MTBE** and results reported in accordance with Health and Safety Code section 25296.15

Health and Safety Code section 25296.15 prohibits closing a UST case unless the soil, groundwater, or both, as applicable have been tested for MTBE and the results of that testing are known to the Regional Water Board. The exception to this requirement is where a regulatory agency determines that the UST that leaked has only contained diesel or jet fuel. Before closing a UST case pursuant to this policy, the requirements of section 25296.15, if applicable, shall be satisfied.

h. Nuisance as defined by Water Code section 13050 does not exist at the site

Water Code section 13050 defines "nuisance" as anything which meets all of the following requirements:

- (1) Is injurious to health, or is indecent or offensive to the senses, or an obstruction to the free use of property, so as to interfere with the comfortable enjoyment of life or property.
- (2) Affects at the same time an entire community or neighborhood, or any considerable number of persons, although the extent of the annoyance or damage inflicted upon individuals may be unequal.
- (3) Occurs during, or as a result of, the treatment or disposal of wastes.

Media-Specific Criteria

Releases from USTs can impact human health and the environment through contact with any or all of the following contaminated media: groundwater, surface water, soil, and soil vapor. Although this contact can occur through ingestion, dermal contact, or inhalation of the various media, the most common drivers of health risk are ingestion of groundwater from drinking water wells, inhalation of vapors accumulated in buildings, contact with near surface contaminated soil, and inhalation of vapors in the outdoor environment. To simplify implementation, these media and pathways have been evaluated and the most common exposure scenarios have been combined into three media-specific criteria:

1. Groundwater
2. Vapor Intrusion to Indoor Air
3. Direct Contact and Outdoor Air Exposure

Candidate sites must satisfy all three of these media-specific criteria as described below.

1. Groundwater

This policy describes criteria on which to base a determination that risks to existing and anticipated future beneficial uses of groundwater have been mitigated or are de minimus, including cases that have not affected groundwater.

State Water Board Resolution 92-49, *Policies and Procedures for Investigation and Cleanup and Abatement of Discharges Under Water Code Section 13304* is a state policy for water quality control and applies to petroleum UST cases. Resolution 92-49 directs that water affected by an unauthorized release attain either background water quality or the best water quality that is reasonable if background water quality cannot be restored. Any alternative level of water quality less stringent than background must be consistent with the maximum benefit to the people of the state, not unreasonably affect current and anticipated beneficial use of affected water, and not result in water quality less than that prescribed in the water quality control plan for the basin within which the site is located. Resolution No. 92-49 does not require that the requisite level of water quality be met at the time of case closure; it specifies compliance with cleanup goals and objectives within a **reasonable time frame**.

Water quality control plans (Basin Plans) generally establish “background” water quality as a restorative endpoint. This policy recognizes the regulatory authority of the Basin Plans but underscores the flexibility contained in Resolution 92-49.

It is a fundamental tenet of this low-threat closure policy that if the closure criteria described in this policy are satisfied at a petroleum unauthorized release site, attaining background water quality is not feasible, establishing an alternate level of water quality not to exceed that prescribed in the applicable Basin Plan is appropriate, and that water quality objectives will be attained through natural attenuation within a reasonable time, prior to the expected need for use of any affected groundwater.

If groundwater with a designated beneficial use is affected by an unauthorized release, to satisfy the media-specific criteria for groundwater, the contaminant plume that exceeds water quality objectives must be stable or decreasing in areal extent, and meet all of the additional characteristics of one of the five classes of sites listed below. A plume that is “stable or decreasing” is a contaminant mass that has expanded to its maximum extent: the distance from the release where attenuation exceeds migration.

- (1) a. The contaminant plume that exceeds water quality objectives is less than 100 feet in length.
 - b. There is no free product.
 - c. The nearest existing water supply well or surface water body is greater than 250 feet from the defined plume boundary.
- (2) a. The contaminant plume that exceeds water quality objectives is less than 250 feet in length.
 - b. There is no free product.
 - c. The nearest existing water supply well or surface water body is greater than 1000 feet from the defined plume boundary.
 - d. The dissolved concentration of benzene is less than 3000 µg/l and the dissolved concentration of MTBE is less than 1000 µg/l.
- (3) a. The contaminant plume that exceeds water quality objectives is less than 250 feet in length.
 - b. Free product has been removed to the maximum extent practicable, may still be present below the site, but does not extend off-site.
 - c. The plume has been stable or decreasing for a minimum of five years.
 - d. The nearest existing water supply well or surface water body is greater than 1000 feet from the defined plume boundary.
 - e. The property owner is willing to accept a deed restriction if the regulatory agency requires a deed restriction as a condition of closure.
- (4) a. The contaminant plume that exceeds water quality objectives is less than 1000 feet in length.
 - b. There is no free product.
 - c. The nearest existing water supply well or surface water body is greater than 1000 feet from the defined plume boundary.
 - d. The dissolved concentration of benzene is less than 1000 µg/l and the dissolved concentration of MTBE is less than 1000 µg/l.
- (5) a. An analysis of site specific conditions determines that under current and reasonably anticipated near-term future scenarios, the contaminant plume poses a low threat to human health and safety and to the environment and water quality objectives will be achieved within a reasonable time frame.

Sites with Releases That Have Not Affected Groundwater

Sites with soil that does not contain sufficient mobile constituents [leachate, vapors, or light non-aqueous-phase liquids (LNAPL)] to cause groundwater to exceed the groundwater criteria in this policy shall be considered low-threat sites for the groundwater medium. Provided the general criteria and criteria for other media are also met, those sites are eligible for case closure.

For older releases, the absence of current groundwater impact is often a good indication that residual concentrations present in the soil are not a source for groundwater pollution.

2. Petroleum Vapor Intrusion to Indoor Air

Exposure to petroleum vapors migrating from soil or groundwater to indoor air may pose unacceptable human health risks. This policy describes conditions, including bioattenuation zones, which if met will assure that exposure to petroleum vapors in indoor air will not pose unacceptable health risks. In many petroleum release cases, potential human exposures to vapors are mitigated by bioattenuation processes as vapors migrate toward the ground surface. For the purposes of this section, the term “bioattenuation zone” means an area of soil with conditions that support biodegradation of petroleum hydrocarbon vapors.

The low-threat vapor-intrusion criteria described below apply to release sites and impacted or potentially impacted adjacent parcels when: (1) existing buildings are occupied or may be reasonably expected to be occupied in the future, or (2) buildings for human occupancy are reasonably expected to be constructed in the near future. Appendices 1 through 4 (attached) illustrate four potential exposure scenarios and describe characteristics and screening criteria associated with each scenario. Petroleum release sites shall satisfy the media-specific screening criteria for petroleum vapor intrusion to indoor air and be considered low-threat for the vapor-intrusion-to-indoor-air pathway if:

- a. Site-specific conditions at the release site satisfy all of the characteristics and screening criteria of scenarios 1 through 3 as applicable, *or* all of the characteristics and screening criteria of scenario 4 as applicable; *or*
- b. A site-specific risk assessment for the vapor intrusion pathway is conducted and demonstrates that human health is protected to the satisfaction of the regulatory agency.

Exception: Exposures to petroleum vapors associated with historical fuel system releases are comparatively insignificant relative to exposures from small surface spills and fugitive vapor releases that typically occur at active fueling facilities. Therefore, satisfaction of the media-specific criteria for petroleum vapor intrusion to indoor air is not required at active commercial petroleum fueling facilities, except in cases where release characteristics can be reasonably believed to pose an unacceptable health risk.

3. Direct Contact and Outdoor Air Exposure

This policy describes conditions where direct contact with contaminated soil or inhalation of contaminants volatilized to outdoor air poses an insignificant threat to human health. Release sites where human exposure may occur satisfy the media-specific criteria for direct contact and outdoor air exposure and shall be considered low-threat if they meet any of the following:

- a. Maximum concentrations of petroleum constituents in soil are less than or equal to those listed in Table 1 for the specified depth below ground surface (bgs). The concentration limits for 0 to 5 feet bgs protect from ingestion of soil, dermal contact with soil, inhalation of volatile soil emissions and inhalation of particulate emissions, and the 5 to 10 feet bgs concentration limits protect from inhalation of volatile soil emissions. Both the 0 to 5 feet bgs concentration limits and the 5 to 10 feet bgs concentration limits for the appropriate site classification (Residential or Commercial/Industrial) shall be satisfied. In addition, if exposure to construction workers or utility trench workers are reasonably anticipated, the concentration limits for Utility Worker shall also be satisfied; *or*

- b. Maximum concentrations of petroleum constituents in soil are less than levels that a site specific risk assessment demonstrates will have no significant risk of adversely affecting human health; or
- c. As a result of controlling exposure through the use of mitigation measures or through the use of institutional or engineering controls, the regulatory agency determines that the concentrations of petroleum constituents in soil will have no significant risk of adversely affecting human health.

Table 1
 Concentrations of Petroleum Constituents In Soil That Will Have No Significant Risk Of Adversely Affecting Human Health

Chemical	Residential		Commercial/ Industrial		Utility Worker
	0 to 5 feet bgs mg/kg	Volatilization to outdoor air (5 to 10 feet bgs) mg/kg	0 to 5 feet bgs mg/kg	Volatilization to outdoor air (5 to 10 feet bgs) mg/kg	0 to 10 feet bgs mg/kg
Benzene	1.9	2.8	28	810	180
Ethylbenzene	21	32	250	9,400	1,800
Naphthalene	9.7	9.7	3,100	3,100	2,100
PAH*	0.063	190	0.68	160,000	4.6

Notes:

* Based on the seven carcinogenic poly-aromatic hydrocarbons (PAHs) as benzo(a)pyrene toxicity equivalent [BaPe]. Sampling and analysis for PAH is only necessary where soil was affected by either waste oil or Bunker C fuel.

Low-Threat Case Closure

Cases that meet the general and media-specific criteria established in this policy satisfy the case-closure requirements of Health and Safety Code section 25296.10, including the requirement in State Water Board Resolution 92-49 that requires that cleanup goals and objectives be met within a reasonable time frame. If the case has been determined by the regulatory agency to meet the criteria in this policy, the regulatory agency shall notify responsible parties that they are eligible for case closure and that the following items, if applicable, shall be completed prior to the issuance of a uniform closure letter specified in Health and Safety Code section 25296.10. After completion of these items, and unless the regulatory agency revises its determination based on comments received on the proposed case closure, the regulatory agency shall issue a uniform closure letter within 30 days.


- a. Notification Requirements – Municipal and county water districts water replenishment districts, special act districts with groundwater management authority, agencies with authority to issue building permits land affected by the petroleum release, owners of the property, and the owners and occupants of all adjacent parcels and all parcels that are impacted by the unauthorized release shall be notified of the proposed case closure and provided a 30 day period to comment. The regulatory agency shall consider any comments received when determining if the case should be closed or if site specific conditions warrant otherwise.
- b. Monitoring Well Destruction – All wells and borings installed for the purpose of investigating, remediating, or monitoring the unauthorized release shall be properly destroyed prior to case closure unless a property owner certifies that they will keep and maintain the wells or borings in accordance with applicable local or state requirements.
- c. Waste Removal – All waste piles, drums, debris and other investigation or remediation derived materials shall be removed from the site and properly managed in accordance with regulatory agency requirements.

Closing Comments

This concludes the Low-Threat Underground Storage Tank Closure Policy. This policy is based on existing statutes, regulations and State Water Board resolutions. This policy clarifies aspects of prior guidance and establishes criteria to be used by technical practitioners and all regulatory agencies in California.

Appendix 1
Scenario 1: Unweathered* LNAPL in Groundwater

Required Characteristics of the Bioattenuation Zone

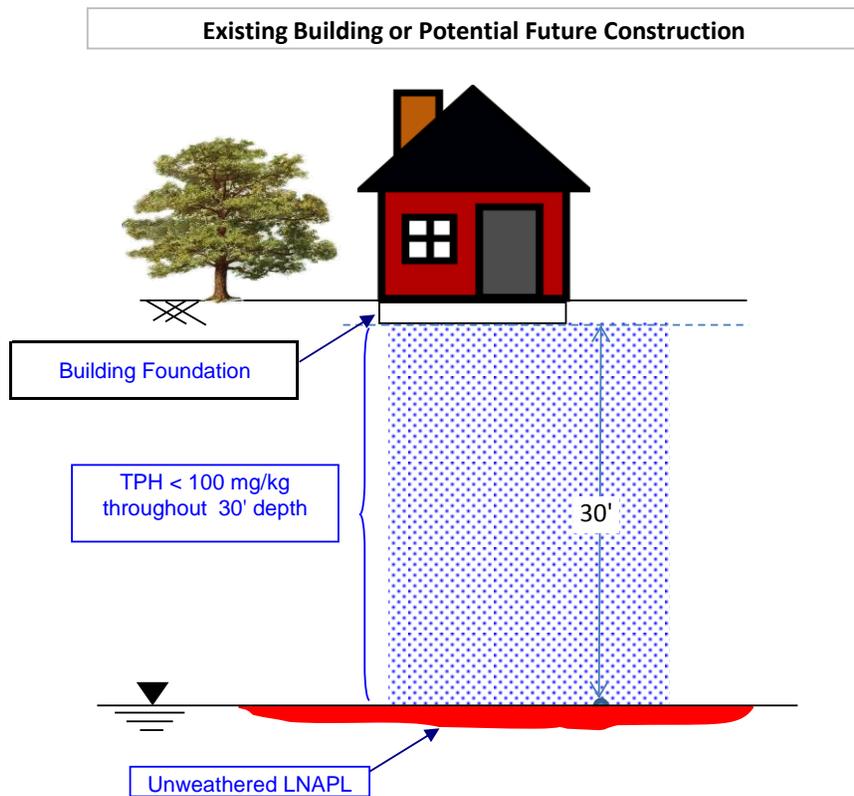


Required Characteristics of the Bioattenuation Zone:

1. The bioattenuation zone shall be a continuous zone that provides a separation of at least 30 feet vertically between the LNAPL in groundwater and the foundation of existing or potential buildings; and
2. Total TPH (TPH-g and TPH-d combined) are less than 100 mg/kg throughout the entire depth of the bioattenuation zone.

*As used in this context, unweathered LNAPL is generally understood to mean petroleum product that has not been subjected to significant volatilization or solubilization, and therefore has not lost a significant portion of its volatile or soluble constituents (e.g., comparable to recently dispensed fuel).

Appendix 3

Scenario 3 - Dissolved Phase Benzene Concentrations Only in Groundwater
(Low concentration groundwater scenarios with or without O₂ measurements)

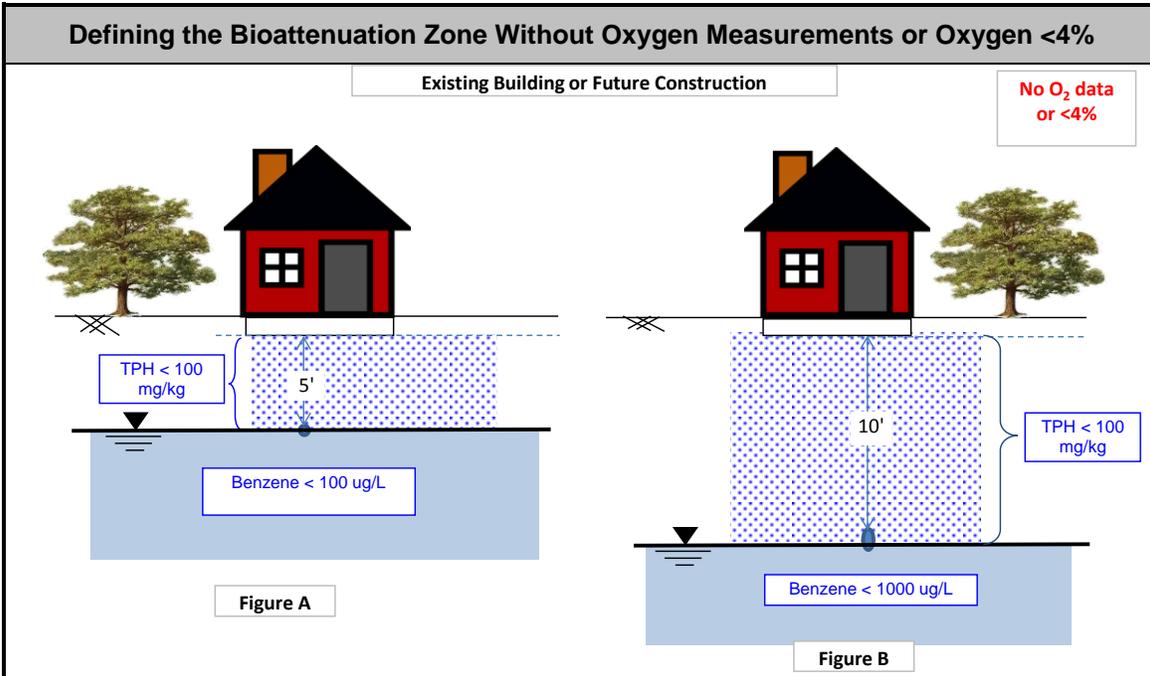


Required Characteristics of Bioattenuation Zone For Sites Without Oxygen Measurements

Figure A: 1) Where benzene concentrations are less than 100 ug/L, the bioattenuation zone:

- a) Shall be a continuous zone that provides a separation of at least 5 feet vertically between the dissolved phase Benzene and the foundation of existing or potential buildings; and
- b) Contain Total TPH (TPH-g and TPH-d combined) less than 100 mg/kg throughout the entire depth of the bioattenuation zone.

Figure B: 1) Where benzene concentrations are greater than 100 ug/L but less than 1000 ug/L, the bioattenuation zone:

- a) Shall be a continuous zone that provides a separation of at least 10 feet vertically between the dissolved phase Benzene and the foundation of existing or potential buildings; and
- b) Contain Total TPH (TPH-g and TPH-d combined) less than 100 mg/kg throughout the entire depth of the bioattenuation zone.

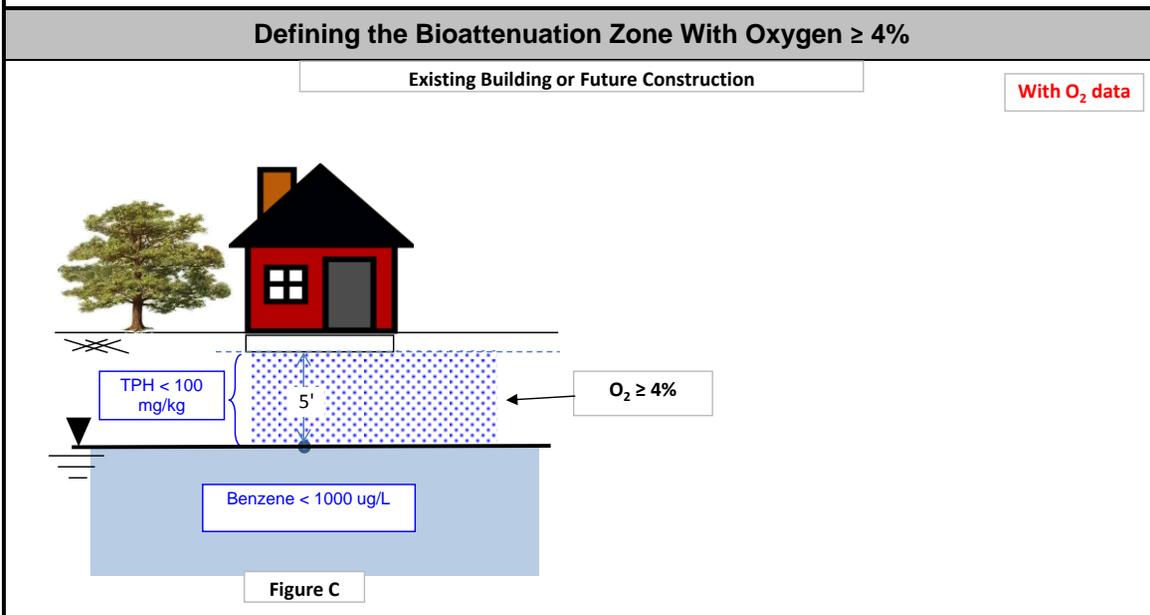


Required Characteristics of Bioattenuation Zone For Sites With Oxygen ≥ 4%

Where benzene concentrations are less than 1000 ug/L, the bioattenuation zone:

- 1. Shall be a continuous zone that provides a separation of least 5 feet vertically between the dissolved phase Benzene and the foundation of existing or potential buildings; and
- 2. Contain Total TPH (TPH-g and TPH-d combined) less than 100 mg/kg throughout the entire depth of the bioattenuation zone.

**Appendix 4
Scenario 4 - Direct Measurement of Soil Gas Concentrations**


Soil Gas Sampling – No Bioattenuation Zone

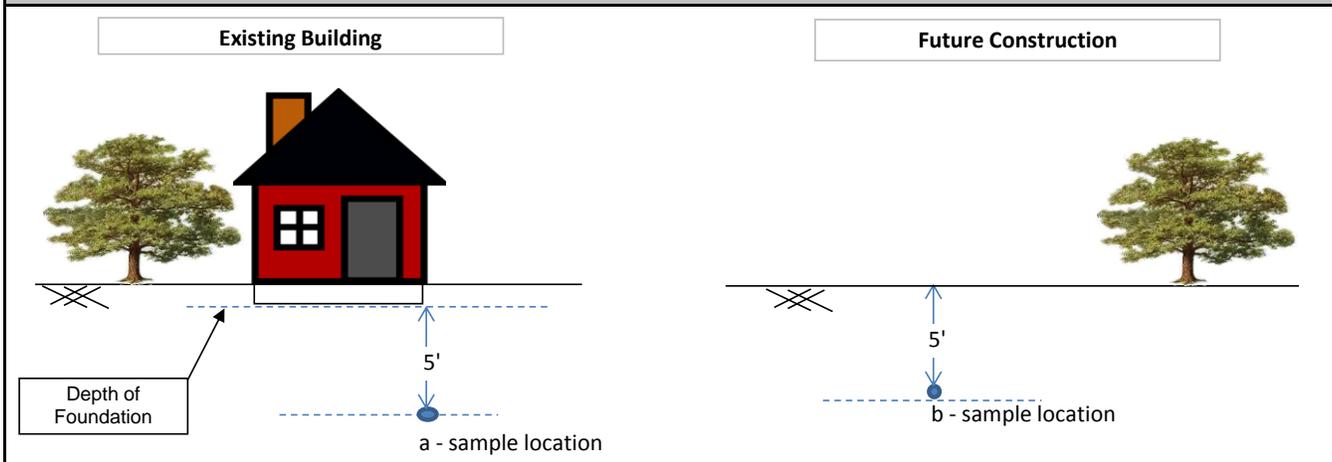

The criteria in Column B in the table below apply unless the requirements for a bioattenuation zone are satisfied. When applying the criteria in Column B, the soil gas sample must be obtained from the following locations:

- a. Beneath or adjacent to an existing building: The soil gas sample shall be collected at least five feet below the bottom of the building foundation.
- b. Future construction: The soil gas sample shall be collected from at least five feet below ground surface.

Soil Gas Sampling – with Bioattenuation Zone

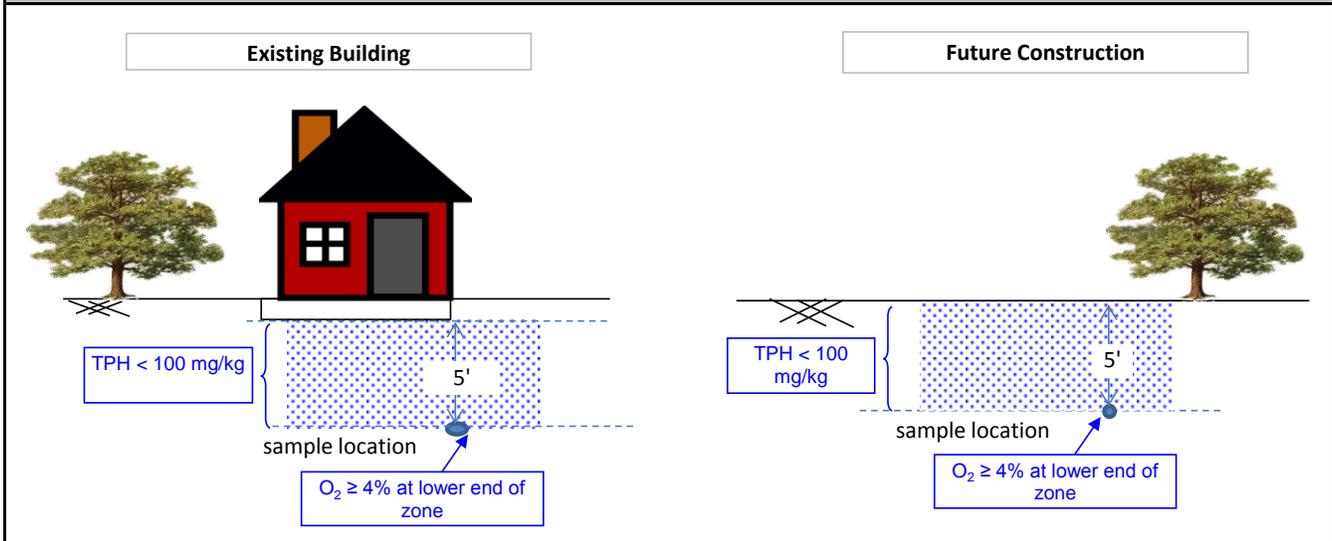

The criteria in Column A in the table below apply if the following requirements for a bioattenuation zone are satisfied:

1. There is a maximum of five vertical feet of soil between the soil vapor measurement and the foundation of an existing building or ground surface of future construction.
2. TPH (TPHg + TPHd) is less than 100 ppm (measured in at least two depths within the five-foot zone.)
3. Oxygen is greater than or equal to four percent measured at the bottom of the five-foot zone.

Soil Gas Criteria (ug/m³)

Constituent	A - With Bioattenuation Zone*		B - No Bioattenuation Zone	
	Residential	Commercial	Residential	Commercial
	Soil Gas Concentration (µg/m ³)		Soil Gas Concentration (µg/m ³)	
Benzene	< 85,000	< 280,000	< 85	< 280
Ethylbenzene	<1,100,000	<3,600,000	<1,100	<3,600
Naphthalene	< 93,000	< 310,000	< 93	< 310

Notes:

A 1000-fold bioattenuation of petroleum vapors is assumed for the bioattenuation zone.
For the no bioattenuation zone, the screening criteria are the same as the California Human Health Screening Levels (CHHSLs) with engineered fill below Sub-slab.

General Criteria

General criteria that must be satisfied by all candidate sites are listed as follows:

- a. The unauthorized release is located within the service area of a public water system;
- b. The unauthorized release consists only of petroleum;
- c. The unauthorized ("primary") release from the UST system has been stopped;
- d. Free product has been removed to the maximum extent practicable;
- e. A conceptual site model has been developed;
- f. Secondary source removal has been addressed;
- g. Soil or groundwater has been tested for MTBE and results reported in accordance with Health and Safety Code section 25296.15; and
- h. Nuisance as defined by Water Code section 13050 does not exist at the site.

a. The unauthorized release is located within the service area of a public water system

This policy is protective of existing water supply wells. New water supply wells are unlikely to be installed in the shallow groundwater near former UST release sites. However, it is difficult to predict, on a statewide basis, where new wells will be installed, particularly in rural areas that are undergoing new development. This policy is limited to areas with available public drinking water supplies to reduce the likelihood that new wells in developing areas will be inadvertently impacted by residual petroleum in groundwater. Case closure outside of areas with a public water supply should be evaluated based upon the fundamental principles in this policy and a site specific evaluation of developing water supplies in the area.

b. The unauthorized release consists only of petroleum

For the purposes of this policy, petroleum is defined as crude oil, or any fraction thereof, which is liquid at standard conditions of temperature and pressure, which means **60 degrees Fahrenheit and 14.7 pounds per square inch absolute**, including the following substances: motor fuels, jet fuels, distillate fuel oils, residual fuel oils, lubricants, petroleum solvents and used oils, including any additives and blending agents such as oxygenates contained in the formulation of the substances.

c. The unauthorized release has been stopped

The tank, pipe, or other appurtenant structure that released petroleum into the environment (i.e. the primary source) has been removed, repaired or replaced. It is not the intent of this policy to allow sites with ongoing leaks from the UST system to qualify for low-threat closure.

d. Free product has been removed to the maximum extent practicable

At petroleum unauthorized release sites where investigations indicate the presence of free product, free product shall be removed to the maximum extent practicable. In meeting the requirements of this section:

- (a) Free product shall be removed in a manner that minimizes the spread of the unauthorized release into previously uncontaminated zones by using recovery and disposal techniques appropriate to the hydrogeologic conditions at the site, and that properly treats, discharges or disposes of recovery byproducts in compliance with applicable laws;
- (b) Abatement of free product migration shall be used as a minimum objective for the design of any free product removal system; and
- (c) Flammable products shall be stored for disposal in a safe and competent manner to prevent fires or explosions.

 Include also metric units. Metric Conversion Act signed into law on December 23, 1975.

e. A conceptual site model has been developed

The Conceptual Site Model (CSM) is a fundamental element of a comprehensive site investigation. The CSM establishes the source and attributes of the unauthorized release, describes all affected media (including soil, groundwater, and soil vapor as appropriate), describes local geology, hydrogeology and other physical site characteristics that affect contaminant environmental transport and fate, and identifies all confirmed and potential contaminant receptors (including water supply wells, surface water bodies, structures and their inhabitants). The CSM is relied upon by practitioners as a guide for investigative design and data collection. Petroleum release sites in California occur in a wide variety of hydrogeologic settings. As a result, contaminant fate and transport and mechanisms by which receptors may be impacted by contaminants vary greatly from location to location. Therefore, the CSM is dynamic and unique to each individual release site. All relevant site characteristics identified by the CSM shall be assessed and supported by data so that the nature, extent and mobility of the release have been established to determine conformance with applicable criteria in this policy.

Incorrect use of immediately. "immediately" is a time-dependent term. The proper term is "directly"

Spell out

f. Secondary source removal has been addressed

"Secondary source" is defined as petroleum-impacted soil or groundwater located at or immediately beneath the point of release from the primary source. Unless site attributes prevent secondary source removal (e.g. physical or infrastructural constraints exist whose removal or relocation would be technically or economically infeasible), petroleum-release sites are required to undergo secondary source removal to the extent practicable as described herein. "To the extent practicable" means implementing a cost-effective corrective action which removes or destroys-in-place the most readily recoverable fraction of source-area mass. It is expected that most secondary mass removal efforts will be completed in one year or less. Following removal or destruction of the secondary source, additional removal or active remedial actions shall not be required by regulatory agencies unless (1) necessary to abate a demonstrated threat to human health or (2) the groundwater plume does not meet the definition of low threat as described in this policy.

g. Soil and groundwater have been tested for MTBE and results reported in accordance with Health and Safety Code section 25296.15

Health and Safety Code section 25296.15 prohibits closing a UST case unless the soil, groundwater, or both, as applicable have been tested for MTBE and the results of that testing are known to the Regional Water Board. The exception to this requirement is where a regulatory agency determines that the UST that leaked has only contained diesel or jet fuel. Before closing a UST case pursuant to this policy, the requirements of section 25296.15, if applicable, shall be satisfied.

h. Nuisance as defined by Water Code section 13050 does not exist at the site

Water Code section 13050 defines "nuisance" as anything which meets all of the following requirements:

- (1) Is injurious to health, or is indecent or offensive to the senses, or an obstruction to the free use of property, so as to interfere with the comfortable enjoyment of life or property.
- (2) Affects at the same time an entire community or neighborhood, or any considerable number of persons, although the extent of the annoyance or damage inflicted upon individuals may be unequal.
- (3) Occurs during, or as a result of, the treatment or disposal of wastes.

Media-Specific Criteria

Releases from USTs can impact human health and the environment through contact with any or all of the following contaminated media: groundwater, surface water, soil, and soil vapor. Although this contact can occur through ingestion, dermal contact, or inhalation of the various media, the most common drivers of health risk are ingestion of groundwater from drinking water wells, inhalation of vapors accumulated in buildings, contact with near surface contaminated soil, and inhalation of vapors in the outdoor environment. To simplify implementation, these media and pathways have been evaluated and the most common exposure scenarios have been combined into three media-specific criteria:

1. Groundwater
2. Vapor Intrusion to Indoor Air
3. Direct Contact and Outdoor Air Exposure

Candidate sites must satisfy all three of these media-specific criteria as described below.

1. Groundwater

This policy describes criteria on which to base a determination that risks to existing and anticipated future beneficial uses of groundwater have been mitigated or are de minimus, including cases that have not affected groundwater.

State Water Board Resolution 92-49, *Policies and Procedures for Investigation and Cleanup and Abatement of Discharges Under Water Code Section 13304* is a state policy for water quality control and applies to petroleum UST cases. Resolution 92-49 directs that water affected by an unauthorized release attain either background water quality or the best water quality that is reasonable if background water quality cannot be restored. Any alternative level of water quality less stringent than background must be consistent with the maximum benefit to the people of the state, not unreasonably affect current and anticipated beneficial use of affected water, and not result in water quality less than that prescribed in the water quality control plan for the basin within which the site is located. Resolution No. 92-49 does not require that the requisite level of water quality be met at the time of case closure; it specifies compliance with cleanup goals and objectives within a **reasonable time frame**.

Water quality control plans (Basin Plans) generally establish "background" water quality as a restorative endpoint. This policy recognizes the regulatory authority of the Basin Plans but underscores the flexibility contained in Resolution 92-49.

It is a fundamental tenet of this low-threat closure policy that if the closure criteria described in this policy are satisfied at a petroleum unauthorized release site, attaining background water quality is not feasible, establishing an alternate level of water quality not to exceed that prescribed in the applicable Basin Plan is appropriate, and that water quality objectives will be attained through natural attenuation within a reasonable time, prior to the expected need for use of any affected groundwater.

If groundwater with a designated beneficial use is affected by an unauthorized release, to satisfy the media-specific criteria for groundwater, the contaminant plume that exceeds water quality objectives must be stable or decreasing in areal extent, and meet all of the additional characteristics of one of the five classes of sites listed below. A plume that is "stable or decreasing" is a contaminant mass that has expanded to its maximum extent: the distance from the release where attenuation exceeds migration.

- (1) a. The contaminant plume that exceeds water quality objectives is less than 100 feet in length.
- b. There is no free product.
- c. The nearest existing water supply well or surface water body is greater than 250 feet from the defined plume boundary.
- (2) a. The contaminant plume that exceeds water quality objectives is less than 250 feet in length.
- b. There is no free product.
- c. The nearest existing water supply well or surface water body is greater than 1000 feet from the defined plume boundary.
- d. The dissolved concentration of benzene is less than 3000 µg/l and the dissolved concentration of MTBE is less than 1000 µg/l.
- (3) a. The contaminant plume that exceeds water quality objectives is less than 250 feet in length.
- b. Free product has been removed to the maximum extent practicable, may still be present below the site, but does not extend off-site.
- c. The plume has been stable or decreasing for a minimum of five years.
- d. The nearest existing water supply well or surface water body is greater than 1000 feet from the defined plume boundary.
- e. The property owner is willing to accept a deed restriction if the regulatory agency requires a deed restriction as a condition of closure.
- (4) a. The contaminant plume that exceeds water quality objectives is less than 1000 feet in length.
- b. There is no free product.
- c. The nearest existing water supply well or surface water body is greater than 1000 feet from the defined plume boundary.
- d. The dissolved concentration of benzene is less than 1000 µg/l and the dissolved concentration of MTBE is less than 1000 µg/l.
- (5) a. An analysis of site specific conditions determines that under current and reasonably anticipated near-term future scenarios, the contaminant plume poses a low threat to human health and safety and to the environment and water quality objectives will be achieved within a reasonable time frame.

Again, provide metric units. We already use mg/kg, etc., so make these metric as well. Throughout the document, all units should either be in metric (like concentration) or have a metric equivalent (like distance, temp, etc.).

The basis for 5 years is unfounded. Please site the number of cases where a stable or decreasing plume has shown to significantly increase in size between years 3 and year 5. This should be re-written at ... for a minimum of three years.

Sites with Releases That Have Not Affected Groundwater

Sites with soil that does not contain sufficient mobile constituents [leachate, vapors, or light non-aqueous-phase liquids (LNAPL)] to cause groundwater to exceed the groundwater criteria in this policy shall be considered low-threat sites for the groundwater medium. Provided the general criteria and criteria for other media are also met, those sites are eligible for case closure.

For older releases, the absence of current groundwater impact is often a good indication that residual concentrations present in the soil are not a source for groundwater pollution.

- b. Maximum concentrations of petroleum constituents in soil are less than levels that a site specific risk assessment demonstrates will have no significant risk of adversely affecting human health; or
- c. As a result of controlling exposure through the use of mitigation measures or through the use of institutional or engineering controls, the regulatory agency determines that the concentrations of petroleum constituents in soil will have no significant risk of adversely affecting human health.

This is poorly defined. So what this table appears to be saying is that a commercial site can be closed if it has PAHs of, say 150,000 mg/kg at 10 ft (3m), as long as there is never a utility worker on the property?

Table 1
Concentrations of Petroleum Constituents In Soil That Will Have No Significant Risk Of Adversely Affecting Human Health

Chemical	Residential		Commercial/ Industrial		Utility Worker
	0 to 5 feet bgs	Volatilization to outdoor air (5 to 10 feet bgs)	0 to 5 feet bgs	Volatilization to outdoor air (5 to 10 feet bgs)	0 to 10 feet bgs
	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg
Benzene	1.9	2.8	28	810	180
Ethylbenzene	21	32	250	9,400	1,800
Naphthalene	9.7	9.7	3,100	3,100	2,100
PAH*	0.063	190	0.68	160,000	4.6

Notes:

* Based on the seven carcinogenic poly-aromatic hydrocarbons (PAHs) as benzo(a)pyrene toxicity equivalent [BaPe]. Sampling and analysis for PAH is only necessary where soil was affected by either waste oil or Bunker C fuel.

Low-Threat Case Closure

Cases that meet the general and media-specific criteria established in this policy satisfy the case-closure requirements of Health and Safety Code section 25296.10, including the requirement in State Water Board Resolution 92-49 that requires that cleanup goals and objectives be met within a reasonable time frame. If the case has been determined by the regulatory agency to meet the criteria in this policy, the regulatory agency shall notify responsible parties that they are eligible for case closure and that the following items, if applicable, shall be completed prior to the issuance of a uniform closure letter specified in Health and Safety Code section 25296.10. After completion of these items, and unless the regulatory agency revises its determination based on comments received on the proposed case closure, the regulatory agency shall issue a uniform closure letter within 30 days.



Low-Threat Underground Storage Tank Case Closure Policy

Preamble

The State Water Resources Control Board (State Water Board) administers the petroleum UST (Underground Storage Tank) Cleanup Program, which was enacted by the Legislature in 1984 to protect health, safety and the environment. The State Water Board also administers the petroleum UST Cleanup Fund (Fund), which was enacted by the Legislature in 1989 to assist UST owners and operators in meeting federal financial responsibility requirements and to provide reimbursement to those owners and operators for the high cost of cleaning up unauthorized releases caused by leaking USTs.

The State Water Board believes it is in the best interest of the people of the State that unauthorized releases be prevented and cleaned up to the extent practicable in a manner that protects human health, safety and the environment. The State Water Board also recognizes that the technical and economic resources available for environmental restoration are limited, and that the highest priority for these resources must be the protection of human health and environmental receptors. Program experience has demonstrated the ability of remedial technologies to mitigate a substantial fraction of a petroleum contaminant mass with the investment of a reasonable level of effort. Experience has also shown that residual contaminant mass usually remains after the investment of reasonable effort, and that this mass is difficult to completely remove regardless of the level of additional effort and resources invested.

It has been well-documented in the literature and through experience at individual UST release sites that petroleum fuels naturally attenuate in the environment through adsorption, dispersion, dilution, volatilization, and biological degradation. This natural attenuation slows and limits the migration of dissolved petroleum plumes in groundwater. The biodegradation of petroleum, in particular, distinguishes petroleum products from other hazardous substances commonly found at commercial and industrial sites.

The characteristics of UST releases and the California UST Program have been studied extensively, with individual works including:

- a. Lawrence Livermore National Laboratory report (1995)
- b. SB1764 Committee report (1996)
- c. UST Cleanup Program Task Force report (2010)
- d. Cleanup Fund Task Force report (2010)
- e. Cleanup Fund audit (2010)
- f. State Water Resources Control Board site closure orders
- g. State Water Resources Control Board Resolution 2009-0081

In general, these efforts have recognized that many petroleum release cases pose a low threat to human health and the environment. Some of these studies also recommended establishing "low-threat" closure criteria in order to maximize the benefits to the people of the State of California through judicious application of available resources.

The purpose of this policy is to establish consistent statewide case closure criteria for low-threat petroleum UST sites. The policy is consistent with existing statutes, regulations, State Water Board precedential decisions, policies and resolutions, and is intended to provide

clear direction to responsible parties, their service providers, and regulatory agencies. The policy seeks to increase UST cleanup process efficiency. A benefit of improved efficiency is the preservation of limited resources for mitigation of releases posing a greater threat to human and environmental health.

This policy is based in part upon the knowledge and experience gained from the last 25 years of investigating and remediating unauthorized releases of petroleum from USTs. While this policy does not specifically address other petroleum release scenarios such as pipelines or above ground storage tanks, if a particular site with a different release scenario exhibits attributes similar to those which this policy addresses, the criteria for closure evaluation of these non-UST sites should be similar to those in this policy.

This policy is a state policy for water quality control and applies to all sites subject to Health and Safety Code section 25296.10. The term “regulatory agencies” in this policy means the State Water Board, Regional Water Quality Control Boards (Regional Water Boards) and local agencies authorized to implement Health and Safety Code section 25296.10.

Definitions: Unless expressly provided in this policy, the terms in this policy shall have the same definitions provided in Chapter 6.7 of Division 20 of the Health and Safety Code and Chapter 16 of Division 3 of Title 23 of the California Code of Regulations.

Criteria for Low-Threat Case Closure

In the absence of site-specific conditions that demonstrably increase the risk associated with residual petroleum constituents, cases that meet the general and media-specific criteria described in this policy do not pose a threat to human health, safety or the environment and are appropriate for closure pursuant to Health and Safety Code section 25296.10. Cases that meet the criteria in this policy do not require further corrective action and shall be issued a uniform closure letter consistent with Health and Safety Code section 25296.10. Annually, or at the request of the responsible party or party conducting the corrective action, the regulatory agency shall conduct a review to determine whether the site meets the criteria contained in this policy.

It is important to emphasize that the criteria described in this policy do not attempt to describe the conditions at all low-threat sites in the State. Regulatory agencies should issue a closure letter for a case that does not meet these criteria if the site is determined to be low-threat based upon a site specific analysis.

This policy recognizes that some petroleum-release sites may possess unique attributes and that some site specific conditions may make case closure under this policy inappropriate, despite the satisfaction of the stated criteria in this policy. It is impossible to completely capture those sets of attributes that may render a site ineligible for closure based on this low-threat policy. This policy relies on the regulatory agency’s use of the conceptual site model to identify the special attributes that would require specific attention prior to the application of low-threat criteria. In these cases, it is the regulatory agency’s responsibility to identify the conditions that make closure under the policy inappropriate.

General Criteria

General criteria that must be satisfied by all candidate sites are listed as follows:

- a. The unauthorized release is located within the service area of a public water system;
- b. The unauthorized release consists only of petroleum;
- c. The unauthorized ("primary") release from the UST system has been stopped;
- d. Free product has been removed to the maximum extent practicable;
- e. A conceptual site model has been developed;
- f. Secondary source removal has been addressed;
- g. Soil or groundwater has been tested for MTBE and results reported in accordance with Health and Safety Code section 25296.15; and
- h. Nuisance as defined by Water Code section 13050 does not exist at the site.

a. The unauthorized release is located within the service area of a public water system

This policy is protective of existing water supply wells. New water supply wells are unlikely to be installed in the shallow groundwater near former UST release sites. However, it is difficult to predict, on a statewide basis, where new wells will be installed, particularly in rural areas that are undergoing new development. This policy is limited to areas with available public drinking water supplies to reduce the likelihood that new wells in developing areas will be inadvertently impacted by residual petroleum in groundwater. Case closure outside of areas with a public water supply should be evaluated based upon the fundamental principles in this policy and a site specific evaluation of developing water supplies in the area.

b. The unauthorized release consists only of petroleum

For the purposes of this policy, petroleum is defined as crude oil, or any fraction thereof, which is liquid at standard conditions of temperature and pressure, which means **60 degrees Fahrenheit and 14.7 pounds per square inch absolute**, including the following substances: motor fuels, jet fuels, distillate fuel oils, residual fuel oils, lubricants, petroleum solvents and used oils, including any additives and blending agents such as oxygenates contained in the formulation of the substances.

c. The unauthorized release has been stopped

The tank, pipe, or other appurtenant structure that released petroleum into the environment (i.e. the primary source) has been removed, repaired or replaced. It is not the intent of this policy to allow sites with ongoing leaks from the UST system to qualify for low-threat closure.

d. Free product has been removed to the maximum extent practicable

At petroleum unauthorized release sites where investigations indicate the presence of free product, free product shall be removed to the maximum extent practicable. In meeting the requirements of this section:

- (a) Free product shall be removed in a manner that minimizes the spread of the unauthorized release into previously uncontaminated zones by using recovery and disposal techniques appropriate to the hydrogeologic conditions at the site, and that properly treats, discharges or disposes of recovery byproducts in compliance with applicable laws;
- (b) Abatement of free product migration shall be used as a minimum objective for the design of any free product removal system; and
- (c) Flammable products shall be stored for disposal in a safe and competent manner to prevent fires or explosions.

e. A conceptual site model has been developed

The Conceptual Site Model (CSM) is a fundamental element of a comprehensive site investigation. The CSM establishes the source and attributes of the unauthorized release, describes all affected media (including soil, groundwater, and soil vapor as appropriate), describes local geology, hydrogeology and other physical site characteristics that affect contaminant environmental transport and fate, and identifies all confirmed and potential contaminant receptors (including water supply wells, surface water bodies, structures and their inhabitants). The CSM is relied upon by practitioners as a guide for investigative design and data collection. Petroleum release sites in California occur in a wide variety of hydrogeologic settings. As a result, contaminant fate and transport and mechanisms by which receptors may be impacted by contaminants vary greatly from location to location. Therefore, the CSM is dynamic and unique to each individual release site. All relevant site characteristics identified by the CSM shall be assessed and supported by data so that the nature, extent and mobility of the release have been established to determine conformance with applicable criteria in this policy.

f. Secondary source removal has been addressed

“Secondary source” is defined as petroleum-impacted soil or groundwater located at or **immediately** beneath the point of release from the primary source. Unless site attributes prevent secondary source removal (e.g. physical or infrastructural constraints exist whose removal or relocation would be technically or economically infeasible), petroleum-release sites are required to undergo secondary source removal to the extent practicable as described herein. “To the extent practicable” means implementing a cost-effective corrective action which removes or destroys-in-place the most readily recoverable fraction of source-area mass. It is expected that most secondary mass removal efforts will be completed in one year or less. Following removal or destruction of the secondary source, additional removal or active remedial actions shall not be required by regulatory agencies unless (1) necessary to abate a demonstrated threat to human health or (2) the groundwater plume does not meet the definition of low threat as described in this policy.

g. Soil and groundwater have been tested for **MTBE** and results reported in accordance with Health and Safety Code section 25296.15

Health and Safety Code section 25296.15 prohibits closing a UST case unless the soil, groundwater, or both, as applicable have been tested for MTBE and the results of that testing are known to the Regional Water Board. The exception to this requirement is where a regulatory agency determines that the UST that leaked has only contained diesel or jet fuel. Before closing a UST case pursuant to this policy, the requirements of section 25296.15, if applicable, shall be satisfied.

h. Nuisance as defined by Water Code section 13050 does not exist at the site

Water Code section 13050 defines "nuisance" as anything which meets all of the following requirements:

- (1) Is injurious to health, or is indecent or offensive to the senses, or an obstruction to the free use of property, so as to interfere with the comfortable enjoyment of life or property.
- (2) Affects at the same time an entire community or neighborhood, or any considerable number of persons, although the extent of the annoyance or damage inflicted upon individuals may be unequal.
- (3) Occurs during, or as a result of, the treatment or disposal of wastes.

Media-Specific Criteria

Releases from USTs can impact human health and the environment through contact with any or all of the following contaminated media: groundwater, surface water, soil, and soil vapor. Although this contact can occur through ingestion, dermal contact, or inhalation of the various media, the most common drivers of health risk are ingestion of groundwater from drinking water wells, inhalation of vapors accumulated in buildings, contact with near surface contaminated soil, and inhalation of vapors in the outdoor environment. To simplify implementation, these media and pathways have been evaluated and the most common exposure scenarios have been combined into three media-specific criteria:

1. Groundwater
2. Vapor Intrusion to Indoor Air
3. Direct Contact and Outdoor Air Exposure

Candidate sites must satisfy all three of these media-specific criteria as described below.

1. Groundwater

This policy describes criteria on which to base a determination that risks to existing and anticipated future beneficial uses of groundwater have been mitigated or are de minimus, including cases that have not affected groundwater.

State Water Board Resolution 92-49, *Policies and Procedures for Investigation and Cleanup and Abatement of Discharges Under Water Code Section 13304* is a state policy for water quality control and applies to petroleum UST cases. Resolution 92-49 directs that water affected by an unauthorized release attain either background water quality or the best water quality that is reasonable if background water quality cannot be restored. Any alternative level of water quality less stringent than background must be consistent with the maximum benefit to the people of the state, not unreasonably affect current and anticipated beneficial use of affected water, and not result in water quality less than that prescribed in the water quality control plan for the basin within which the site is located. Resolution No. 92-49 does not require that the requisite level of water quality be met at the time of case closure; it specifies compliance with cleanup goals and objectives within a **reasonable time frame**.

Water quality control plans (Basin Plans) generally establish “background” water quality as a restorative endpoint. This policy recognizes the regulatory authority of the Basin Plans but underscores the flexibility contained in Resolution 92-49.

It is a fundamental tenet of this low-threat closure policy that if the closure criteria described in this policy are satisfied at a petroleum unauthorized release site, attaining background water quality is not feasible, establishing an alternate level of water quality not to exceed that prescribed in the applicable Basin Plan is appropriate, and that water quality objectives will be attained through natural attenuation within a reasonable time, prior to the expected need for use of any affected groundwater.

If groundwater with a designated beneficial use is affected by an unauthorized release, to satisfy the media-specific criteria for groundwater, the contaminant plume that exceeds water quality objectives must be stable or decreasing in areal extent, and meet all of the additional characteristics of one of the five classes of sites listed below. A plume that is “stable or decreasing” is a contaminant mass that has expanded to its maximum extent: the distance from the release where attenuation exceeds migration.

- (1) a. The contaminant plume that exceeds water quality objectives is less than 100 feet in length.
 - b. There is no free product.
 - c. The nearest existing water supply well or surface water body is greater than 250 feet from the defined plume boundary.
- (2) a. The contaminant plume that exceeds water quality objectives is less than 250 feet in length.
 - b. There is no free product.
 - c. The nearest existing water supply well or surface water body is greater than 1000 feet from the defined plume boundary.
 - d. The dissolved concentration of benzene is less than 3000 µg/l and the dissolved concentration of MTBE is less than 1000 µg/l.
- (3) a. The contaminant plume that exceeds water quality objectives is less than 250 feet in length.
 - b. Free product has been removed to the maximum extent practicable, may still be present below the site, but does not extend off-site.
 - c. The plume has been stable or decreasing for a minimum of five years.
 - d. The nearest existing water supply well or surface water body is greater than 1000 feet from the defined plume boundary.
 - e. The property owner is willing to accept a deed restriction if the regulatory agency requires a deed restriction as a condition of closure.
- (4) a. The contaminant plume that exceeds water quality objectives is less than 1000 feet in length.
 - b. There is no free product.
 - c. The nearest existing water supply well or surface water body is greater than 1000 feet from the defined plume boundary.
 - d. The dissolved concentration of benzene is less than 1000 µg/l and the dissolved concentration of MTBE is less than 1000 µg/l.
- (5) a. An analysis of site specific conditions determines that under current and reasonably anticipated near-term future scenarios, the contaminant plume poses a low threat to human health and safety and to the environment and water quality objectives will be achieved within a reasonable time frame.

Sites with Releases That Have Not Affected Groundwater

Sites with soil that does not contain sufficient mobile constituents [leachate, vapors, or light non-aqueous-phase liquids (LNAPL)] to cause groundwater to exceed the groundwater criteria in this policy shall be considered low-threat sites for the groundwater medium. Provided the general criteria and criteria for other media are also met, those sites are eligible for case closure.

For older releases, the absence of current groundwater impact is often a good indication that residual concentrations present in the soil are not a source for groundwater pollution.

2. Petroleum Vapor Intrusion to Indoor Air

Exposure to petroleum vapors migrating from soil or groundwater to indoor air may pose unacceptable human health risks. This policy describes conditions, including bioattenuation zones, which if met will assure that exposure to petroleum vapors in indoor air will not pose unacceptable health risks. In many petroleum release cases, potential human exposures to vapors are mitigated by bioattenuation processes as vapors migrate toward the ground surface. For the purposes of this section, the term “bioattenuation zone” means an area of soil with conditions that support biodegradation of petroleum hydrocarbon vapors.

The low-threat vapor-intrusion criteria described below apply to release sites and impacted or potentially impacted adjacent parcels when: (1) existing buildings are occupied or may be reasonably expected to be occupied in the future, or (2) buildings for human occupancy are reasonably expected to be constructed in the near future. Appendices 1 through 4 (attached) illustrate four potential exposure scenarios and describe characteristics and screening criteria associated with each scenario. Petroleum release sites shall satisfy the media-specific screening criteria for petroleum vapor intrusion to indoor air and be considered low-threat for the vapor-intrusion-to-indoor-air pathway if:

- a. Site-specific conditions at the release site satisfy all of the characteristics and screening criteria of scenarios 1 through 3 as applicable, *or* all of the characteristics and screening criteria of scenario 4 as applicable; *or*
- b. A site-specific risk assessment for the vapor intrusion pathway is conducted and demonstrates that human health is protected to the satisfaction of the regulatory agency.

Exception: Exposures to petroleum vapors associated with historical fuel system releases are comparatively insignificant relative to exposures from small surface spills and fugitive vapor releases that typically occur at active fueling facilities. Therefore, satisfaction of the media-specific criteria for petroleum vapor intrusion to indoor air is not required at active commercial petroleum fueling facilities, except in cases where release characteristics can be reasonably believed to pose an unacceptable health risk.

3. Direct Contact and Outdoor Air Exposure

This policy describes conditions where direct contact with contaminated soil or inhalation of contaminants volatilized to outdoor air poses an insignificant threat to human health. Release sites where human exposure may occur satisfy the media-specific criteria for direct contact and outdoor air exposure and shall be considered low-threat if they meet any of the following:

- a. Maximum concentrations of petroleum constituents in soil are less than or equal to those listed in Table 1 for the specified depth below ground surface (bgs). The concentration limits for 0 to 5 feet bgs protect from ingestion of soil, dermal contact with soil, inhalation of volatile soil emissions and inhalation of particulate emissions, and the 5 to 10 feet bgs concentration limits protect from inhalation of volatile soil emissions. Both the 0 to 5 feet bgs concentration limits and the 5 to 10 feet bgs concentration limits for the appropriate site classification (Residential or Commercial/Industrial) shall be satisfied. In addition, if exposure to construction workers or utility trench workers are reasonably anticipated, the concentration limits for Utility Worker shall also be satisfied; *or*

- b. Maximum concentrations of petroleum constituents in soil are less than levels that a site specific risk assessment demonstrates will have no significant risk of adversely affecting human health; or
- c. As a result of controlling exposure through the use of mitigation measures or through the use of institutional or engineering controls, the regulatory agency determines that the concentrations of petroleum constituents in soil will have no significant risk of adversely affecting human health.

Table 1
Concentrations of Petroleum Constituents In Soil That Will Have No Significant Risk Of Adversely Affecting Human Health

Chemical	Residential		Commercial/ Industrial		Utility Worker
	0 to 5 feet bgs mg/kg	Volatilization to outdoor air (5 to 10 feet bgs) mg/kg	0 to 5 feet bgs mg/kg	Volatilization to outdoor air (5 to 10 feet bgs) mg/kg	0 to 10 feet bgs mg/kg
Benzene	1.9	2.8	28	810	180
Ethylbenzene	21	32	250	9,400	1,800
Naphthalene	9.7	9.7	3,100	3,100	2,100
PAH*	0.063	190	0.68	160,000	4.6

Notes:

* Based on the seven carcinogenic poly-aromatic hydrocarbons (PAHs) as benzo(a)pyrene toxicity equivalent [BaPe]. Sampling and analysis for PAH is only necessary where soil was affected by either waste oil or Bunker C fuel.

Low-Threat Case Closure

Cases that meet the general and media-specific criteria established in this policy satisfy the case-closure requirements of Health and Safety Code section 25296.10, including the requirement in State Water Board Resolution 92-49 that requires that cleanup goals and objectives be met within a reasonable time frame. If the case has been determined by the regulatory agency to meet the criteria in this policy, the regulatory agency shall notify responsible parties that they are eligible for case closure and that the following items, if applicable, shall be completed prior to the issuance of a uniform closure letter specified in Health and Safety Code section 25296.10. After completion of these items, and unless the regulatory agency revises its determination based on comments received on the proposed case closure, the regulatory agency shall issue a uniform closure letter within 30 days.


- a. Notification Requirements – Municipal and county water districts water replenishment districts, special act districts with groundwater management authority, agencies with authority to issue building permits land affected by the petroleum release, owners of the property, and the owners and occupants of all adjacent parcels and all parcels that are impacted by the unauthorized release shall be notified of the proposed case closure and provided a 30 day period to comment. The regulatory agency shall consider any comments received when determining if the case should be closed or if site specific conditions warrant otherwise.
- b. Monitoring Well Destruction – All wells and borings installed for the purpose of investigating, remediating, or monitoring the unauthorized release shall be properly destroyed prior to case closure unless a property owner certifies that they will keep and maintain the wells or borings in accordance with applicable local or state requirements.
- c. Waste Removal – All waste piles, drums, debris and other investigation or remediation derived materials shall be removed from the site and properly managed in accordance with regulatory agency requirements.

Closing Comments

This concludes the Low-Threat Underground Storage Tank Closure Policy. This policy is based on existing statutes, regulations and State Water Board resolutions. This policy clarifies aspects of prior guidance and establishes criteria to be used by technical practitioners and all regulatory agencies in California.

Appendix 1
Scenario 1: Unweathered* LNAPL in Groundwater

Required Characteristics of the Bioattenuation Zone

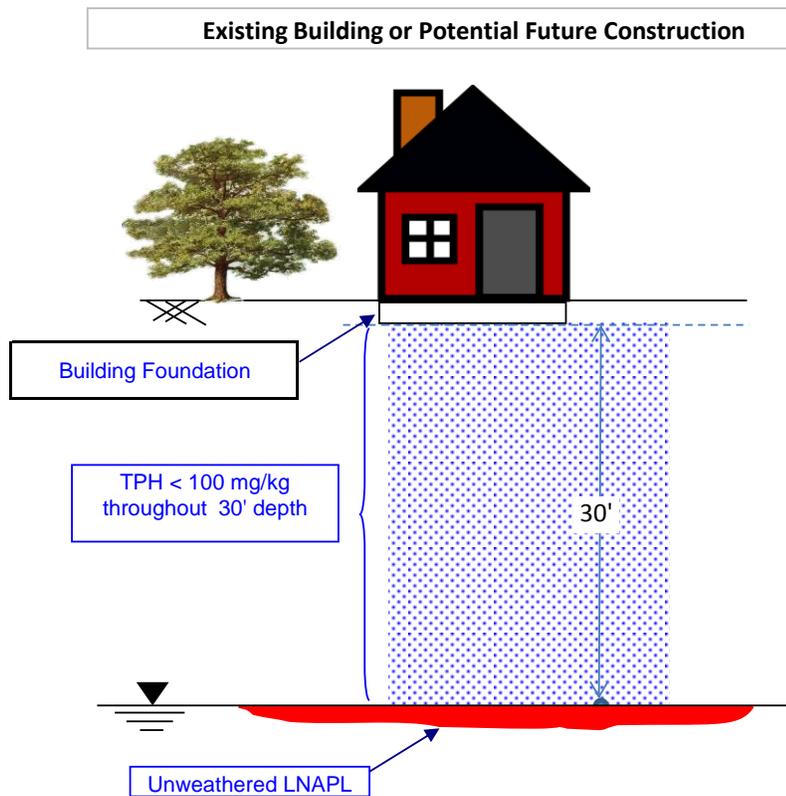

Required Characteristics of the Bioattenuation Zone:


1. The bioattenuation zone shall be a continuous zone that provides a separation of at least 30 feet vertically between the LNAPL in groundwater and the foundation of existing or potential buildings; and
2. Total TPH (TPH-g and TPH-d combined) are less than 100 mg/kg throughout the entire depth of the bioattenuation zone.

*As used in this context, unweathered LNAPL is generally understood to mean petroleum product that has not been subjected to significant volatilization or solubilization, and therefore has not lost a significant portion of its volatile or soluble constituents (e.g., comparable to recently dispensed fuel).

Appendix 2
Scenario 2: Unweathered* LNAPL in Soil

Required Characteristics of the Bioattenuation Zone

Existing Building or Potential Future Construction

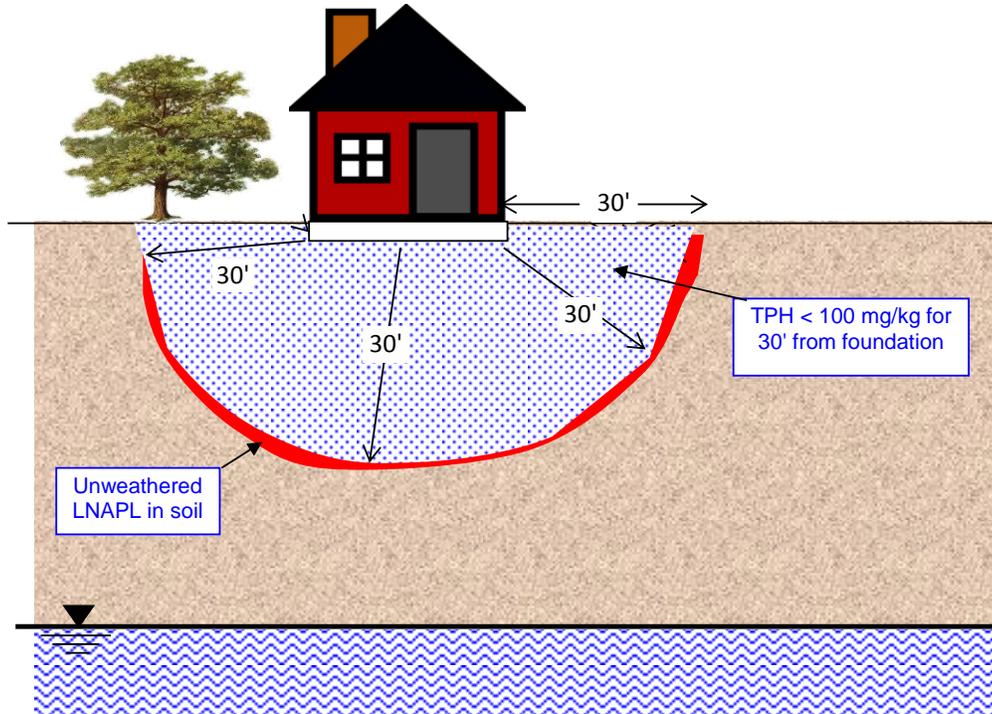


Required Characteristics of the Bioattenuation Zone:

1. The bioattenuation zone shall be a continuous zone that provides a separation of at least 30 feet both laterally and vertically between the LNAPL in soil and the foundation of existing or potential buildings, and
2. Total TPH (TPH-g and TPH-d combined) are less than 100 mg/kg throughout the entire depth of the bioattenuation zone.

*As used in this context, unweathered LNAPL is generally understood to mean petroleum product that has not been subjected to significant volatilization or solubilization, and therefore has not lost a significant portion of its volatile or soluble constituents (e.g., comparable to recently dispensed fuel).

Appendix 3

Scenario 3 - Dissolved Phase Benzene Concentrations Only in Groundwater
(Low concentration groundwater scenarios with or without O₂ measurements)

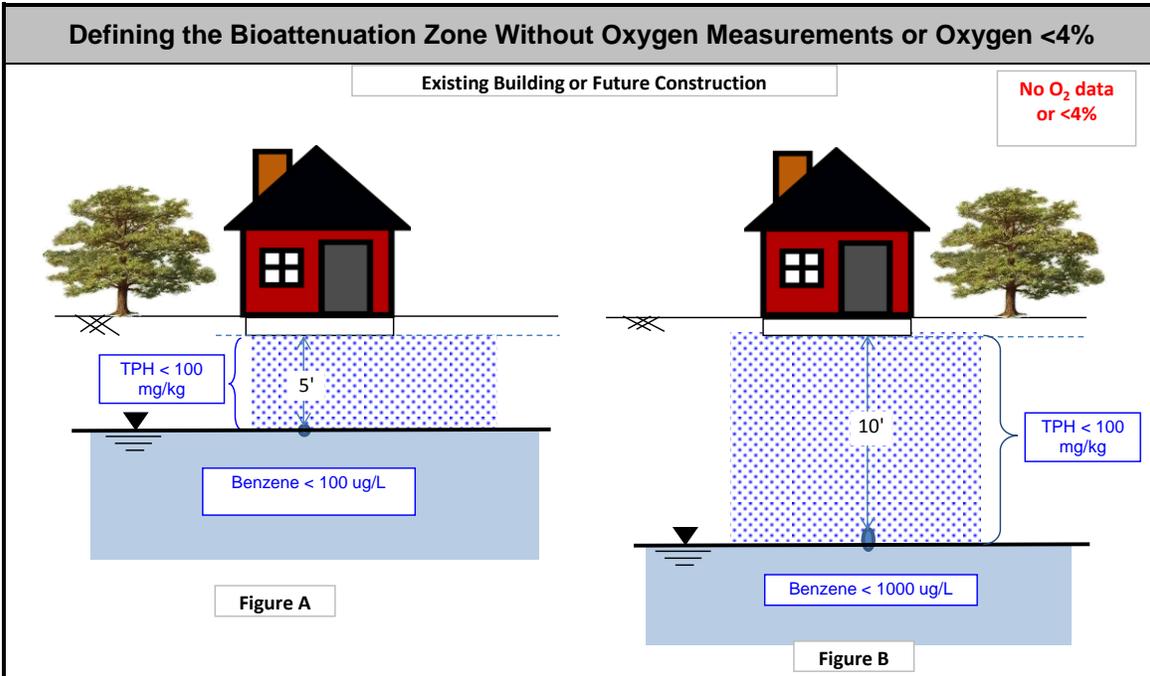


Required Characteristics of Bioattenuation Zone For Sites Without Oxygen Measurements

Figure A: 1) Where benzene concentrations are less than 100 ug/L, the bioattenuation zone:

- a) Shall be a continuous zone that provides a separation of at least 5 feet vertically between the dissolved phase Benzene and the foundation of existing or potential buildings; and
- b) Contain Total TPH (TPH-g and TPH-d combined) less than 100 mg/kg throughout the entire depth of the bioattenuation zone.

Figure B: 1) Where benzene concentrations are greater than 100 ug/L but less than 1000 ug/L, the bioattenuation zone:

- a) Shall be a continuous zone that provides a separation of at least 10 feet vertically between the dissolved phase Benzene and the foundation of existing or potential buildings; and
- b) Contain Total TPH (TPH-g and TPH-d combined) less than 100 mg/kg throughout the entire depth of the bioattenuation zone.

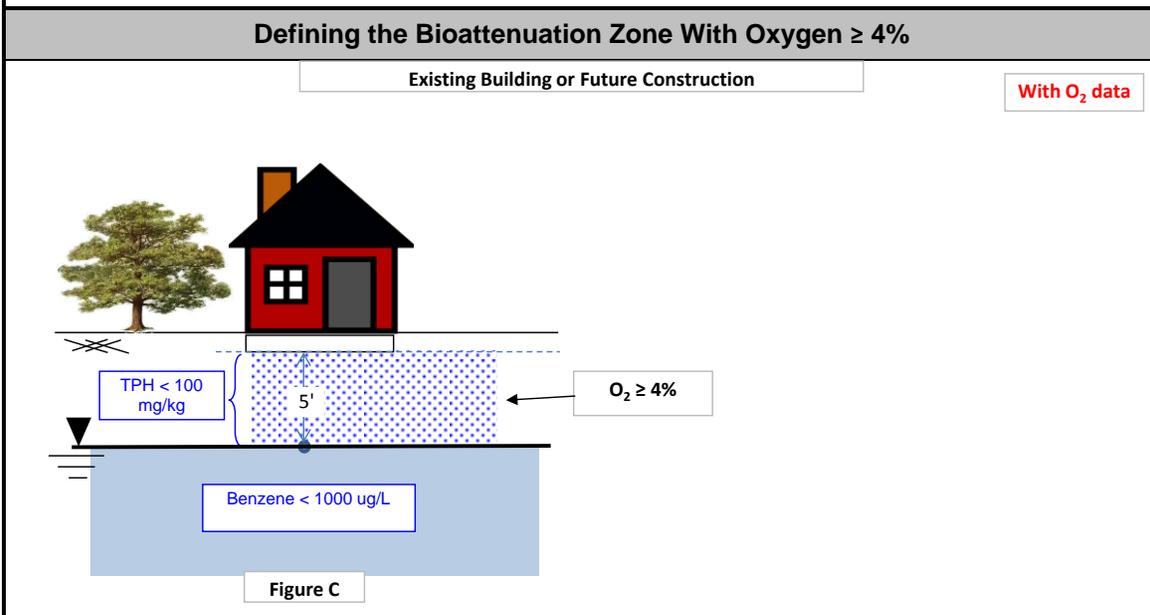


Required Characteristics of Bioattenuation Zone For Sites With Oxygen ≥ 4%

Where benzene concentrations are less than 1000 ug/L, the bioattenuation zone:

- 1. Shall be a continuous zone that provides a separation of least 5 feet vertically between the dissolved phase Benzene and the foundation of existing or potential buildings; and
- 2. Contain Total TPH (TPH-g and TPH-d combined) less than 100 mg/kg throughout the entire depth of the bioattenuation zone.

**Appendix 4
Scenario 4 - Direct Measurement of Soil Gas Concentrations**


Soil Gas Sampling – No Bioattenuation Zone

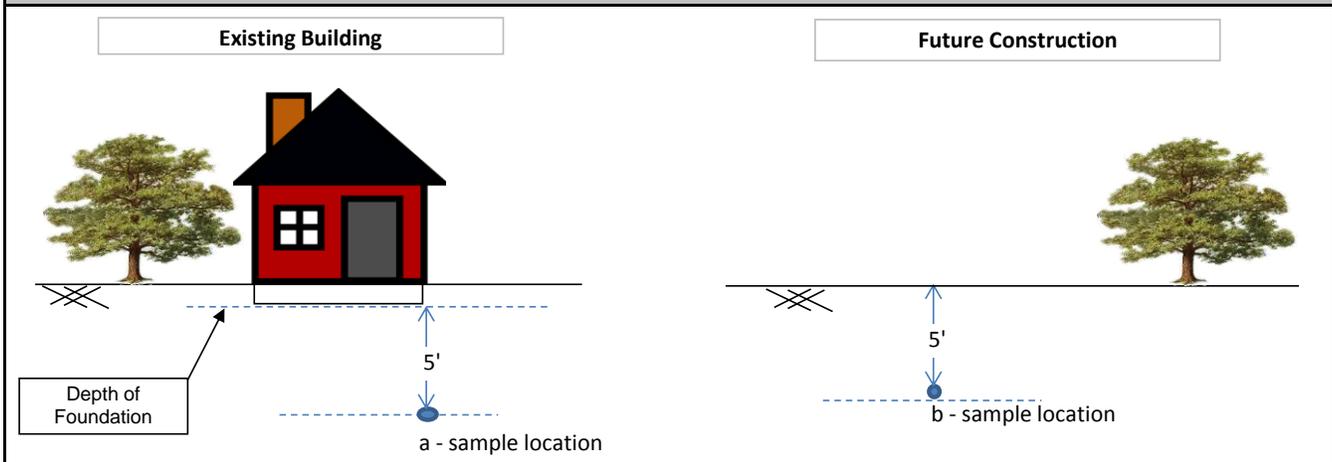

The criteria in Column B in the table below apply unless the requirements for a bioattenuation zone are satisfied. When applying the criteria in Column B, the soil gas sample must be obtained from the following locations:

- a. Beneath or adjacent to an existing building: The soil gas sample shall be collected at least five feet below the bottom of the building foundation.
- b. Future construction: The soil gas sample shall be collected from at least five feet below ground surface.

Soil Gas Sampling – with Bioattenuation Zone

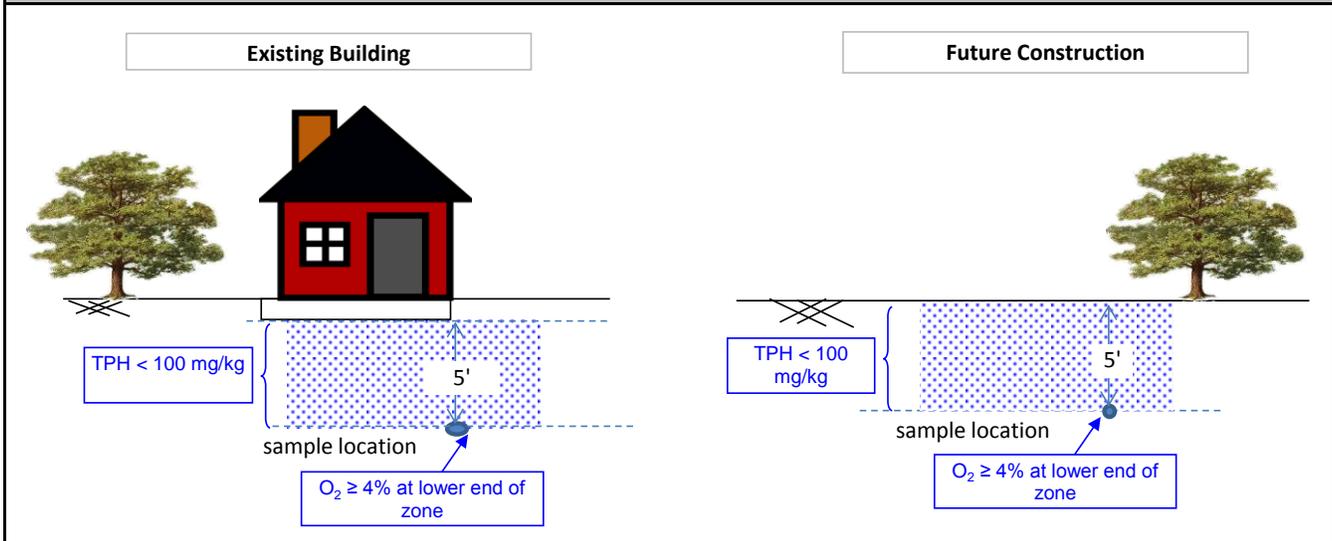

The criteria in Column A in the table below apply if the following requirements for a bioattenuation zone are satisfied:

1. There is a maximum of five vertical feet of soil between the soil vapor measurement and the foundation of an existing building or ground surface of future construction.
2. TPH (TPHg + TPHd) is less than 100 ppm (measured in at least two depths within the five-foot zone.)
3. Oxygen is greater than or equal to four percent measured at the bottom of the five-foot zone.

Soil Gas Criteria (ug/m³)

Constituent	A - With Bioattenuation Zone*		B - No Bioattenuation Zone	
	Residential	Commercial	Residential	Commercial
	Soil Gas Concentration (ug/m ³)		Soil Gas Concentration (ug/m ³)	
Benzene	< 85,000	< 280,000	< 85	< 280
Ethylbenzene	<1,100,000	<3,600,000	<1,100	<3,600
Naphthalene	< 93,000	< 310,000	< 93	< 310

Notes:

A 1000-fold bioattenuation of petroleum vapors is assumed for the bioattenuation zone.
For the no bioattenuation zone, the screening criteria are the same as the California Human Health Screening Levels (CHHSLs) with engineered fill below Sub-slab.