

---

# Work Plan: Salmon Creek Watershed Hydrology Model Development

---

SUBMITTED TO:

State Water Resources Control Board  
1001 I Street, 14th Floor  
Sacramento, CA 95814

PREPARED BY:



Paradigm Environmental  
9320 Chesapeake Drive, Suite 100  
San Diego, CA 92123

FINAL  
JANUARY 22, 2025

THIS PAGE INTENTIONALLY LEFT BLANK

## ACRONYMS

---

3DEP	3D ELEVATION PROGRAM
ASCE-PM	AMERICAN SOCIETY OF CIVIL ENGINEERS VERSION OF THE PENMAN-MONTEITH EQUATION
CA DWR	CALIFORNIA DEPARTMENT OF WATER RESOURCES
CAL FIRE	CALIFORNIA DEPARTMENT OF FORESTRY AND FIRE PROTECTION
CDEC	CALIFORNIA DATA EXCHANGE CENTER
CDL	CROPLAND DATA LAYER
CDT	CALIFORNIA DEPARTMENT OF TECHNOLOGY
CIMIS	CALIFORNIA IRRIGATION MANAGEMENT INFORMATION SYSTEM
DEM	DIGITAL ELEVATION MODEL
DWR	CALIFORNIA DEPARTMENT OF WATER RESOURCES
EOL	EARTH OBSERVING LABORATORY
ESU	EVOLUTIONARY SIGNIFICANT UNIT
ET	EVAPOTRANSPIRATION
ET <sub>0</sub>	REFERENCE EVAPOTRANSPIRATION
eWRIMS	ELECTRONIC WATER RIGHTS INFORMATION MANAGEMENT SYSTEM
FEMA	FEDERAL EMERGENCY MANAGEMENT AGENCY
GHCN	GLOBAL HISTORICAL CLIMATOLOGY NETWORK
GIS	GEOGRAPHIC INFORMATION SYSTEM
GSP	GROUNDWATER SUSTAINABILITY PLAN
HRU	HYDROLOGIC RESPONSE UNIT
HSG	HYDROLOGIC SOIL GROUP
HSPF	HYDROLOGIC SIMULATION PROGRAM - FORTRAN
HUC	HYDROLOGIC UNIT CODE
LCD	LOCAL CLIMATE DATA
LSM	LAND SURFACE MODEL
LSPC	LOADING SIMULATION PROGRAM IN C++
MODFLOW	USGS MODULAR HYDROLOGIC MODEL
MRLC	MULTI-RESOLUTION LAND CONSORTIUM
NCDC	NATIONAL CLIMATIC DATA CENTER
NHD	NATIONAL HYDROGRAPHY DATASET
NLCD	NATIONAL LAND COVER DATABASE
NLDAS	NORTH AMERICAN LAND DATA ASSIMILATION SYSTEM
NRCS	NATURAL RESOURCES CONSERVATION SERVICE
NSE	NASH-SUTCLIFE MODEL EFFICIENCY COEFFICIENT
PBIAS	PERCENT BIAS
PEVT	POTENTIAL EVAPOTRANSPIRATION
POD	POINT OF DIVERSION

PRISM	PARAMETER-ELEVATION REGRESSIONS ON INDEPENDENT SLOPES MODEL
RAWS	REMOTE AUTOMATED WEATHER STATIONS
SCWCP	SALMON CREEK WATER CONSERVATION PROGRAM
SGMA	SUSTAINABLE GROUNDWATER MANAGEMENT ACT
SSURGO	SOIL SURVEY GEOGRAPHIC DATABASE
STATSGO	STATE SOIL GEOGRAPHIC DATABASE
SWAT	SOIL AND WATER ASSESSMENT TOOL
SWRCB	STATE WATER RESOURCES CONTROL BOARD
USDA	UNITED STATES DEPARTMENT OF AGRICULTURE
USFS	UNITED STATES FOREST SERVICE
USGS	UNITED STATES GEOLOGICAL SURVEY
WBD	WATERSHED BOUNDARY DATASET

## Contents

ACRONYMS.....	i
1. Introduction.....	1
1.1 Project Objectives .....	1
1.2 Watershed Background.....	1
1.3 Model Approach.....	3
1.4 Data Availability .....	4
2 Meteorology .....	10
2.1 Precipitation .....	10
2.2 Evapotranspiration .....	14
3 Surface Hydrology .....	15
3.1 Watershed Segmentation .....	15
3.2 Streams and Channels.....	17
3.3 Streamflow .....	17
3.4 Surface Water Withdrawals .....	18
4 Subsurface Hydrology .....	20
4.1 Water Budget Components .....	21
4.2 Geology.....	21
5 Landscape Characterization .....	22
5.1 Elevation & Slope .....	23
5.2 Soils & Geology.....	23
5.3 Land Cover .....	25
5.4 Tree Canopy Cover.....	28
5.5 Agriculture & Crops .....	28
6 Data Gaps and Limitations .....	30
7 Model Configuration .....	30
7.1 Model Selection.....	30
7.2 Model Configuration .....	31
8 Model Calibration.....	33
9 Summary & Next Steps.....	36
10 References.....	37

## Figures

Figure 1-1. The Salmon Creek watershed.....	2
Figure 1-2. Conceptual schematic of model development cycle proposed for assessing instream flow needs in the Salmon Creek watershed. ....	4
Figure 2-1 Identified rainfall gauges and CIMIS ET Zones near the Salmon watershed.....	13
Figure 2-2. Hybrid approach to blend observed precipitation with gridded meteorological products. ....	14
Figure 3-1. Initial catchment segmentation for the Salmon Creek watershed.....	16
Figure 3-2. USGS streamflow stations in the Salmon Creek watershed. ....	18
Figure 3-3. Points of diversion and water system types in the Salmon Creek watershed.....	19
Figure 4-1. Groundwater basins delineated by DWR (2020), also known as Bulletin 118. ....	20
Figure 4-2. Geology types delineated by the California Geological Survey (CGS 2010).....	22
Figure 5-1. Digital elevation model of the Salmon Creek watershed. ....	23
Figure 5-2. SSURGO hydrologic soil groups within the Salmon Creek watershed. ....	25
Figure 5-3. NLCD 2021 land cover within the Salmon Creek watershed. ....	27
Figure 5-4 USDA 2022 Cropland Data within the Salmon Creek watershed.....	29

## Tables

Table 1-1. Inventory of meteorology datasets .....	5
Table 1-2. Inventory of surface water datasets .....	6
Table 1-3. Inventory of geospatial datasets .....	7
Table 1-4. Inventory of groundwater datasets.....	9
Table 2-1. Summary of precipitation stations with observations available after 2000s.....	12
Table 3-1. Summary of NHDPlus catchment sizes (acres) within the Salmon Creek HUC-12 .....	16
Table 3-2. Summary of USGS daily streamflow data.....	17
Table 5-1. NRCS Hydrologic soil group descriptions.....	24
Table 5-2. NRCS Hydrologic soil groups in the Salmon Creek watershed.....	24
Table 5-3. National Land Cover Database 2021 land cover summary in the Salmon Creek watershed .....	26
Table 5-4 USDA 2022 Cropland Data summary within the Salmon Creek watershed.....	29
Table 8-1. Summary of performance metrics used to evaluate hydrology calibration .....	35
Table 9-1. Proposed schedule and summary of deliverables .....	36

# 1. INTRODUCTION

---

## 1.1 Project Objectives

---

In April 2021, Governor Gavin Newsom issued a state of emergency proclamation for specific watersheds across California in response to exceptionally dry conditions throughout the state. The April 2021 proclamation, as well as subsequent proclamations, directed the State Water Resources Control Board (Water Board) to address these emergency conditions to ensure adequate, minimal water supplies for critical purposes. To support Water Board actions to address emergency conditions, hydrologic modeling and analysis tools are being developed to contribute to a comprehensive decision support system that assesses water supply and demand, and the flow needs for watersheds throughout California.

This work plan presents the available data and methodology that will be used to develop a hydrologic model of the Salmon watershed. This model will use historical records of precipitation, temperature, and evapotranspiration (ET) for simulation of processes associated with surface runoff, infiltration, interflow, and groundwater flow. The final calibrated model will be used to evaluate scenarios including current hydrologic conditions, water allocation, changes in demand, and the impact of extreme events such as droughts or atmospheric rivers.

## 1.2 Watershed Background

---

The Salmon Creek watershed originates from the town of Occidental before draining directly into the Pacific Ocean. The watershed shares a boundary with the Tomales Drake Bay watershed to the south, and Russian River watershed to the north. The drainage area of the watershed is approximately 35.1 square miles and has one main catchment: Salmon Creek (HUC-12:180101090201) (Figure 1-1). Salmon Creek originates about 2 miles west of the town of Occidental and parallels the Bohemian Highway to the town of Freestone. Multiple smaller tributaries, including Nolan Creek, Thurston Creek, Tannery Creek, Fay Creek, and Finley Creek flow into Salmon Creek before it discharges to the Pacific Ocean at the Salmon Creek Estuary.

The Salmon Creek watershed ranges in elevation from near sea level near the town of Bodega to over 400 meters at the northernmost portion of the watershed near Freestone Valley. The watershed has a Mediterranean climate with distinct wet and dry seasons with an estimated mean annual precipitation total of 47.5 inches (USGS 2019). The valley floor of the watershed is dominated by evergreen forest and shrubland, which cover approximately 41% and 27% of the total area, respectively. Beyond the valley floor, the watershed is predominantly grassland (18%), or mixed forest (6%). A large portion of the watershed is the jurisdiction of the Bureau of Land Management or the California Department of Parks and Recreation.

The Salmon Creek watershed represents an important habitat for native aquatic species and spawning ground for anadromous fish, especially steelhead trout. However, there have been substantial declines in salmonid populations over time; coho salmon were once present but extirpated in the mid-1990s (Fawcett et al. 2013). Changes in sediment transport within other watersheds in the region have been linked to declines in anadromous fish populations and other factors, including stream temperatures above those that support salmonid life and low dry season flows. These factors led to implementing the Salmon Creek Water Conservation Program (SCWCP) and the Salmonid Restoration Federation Program.

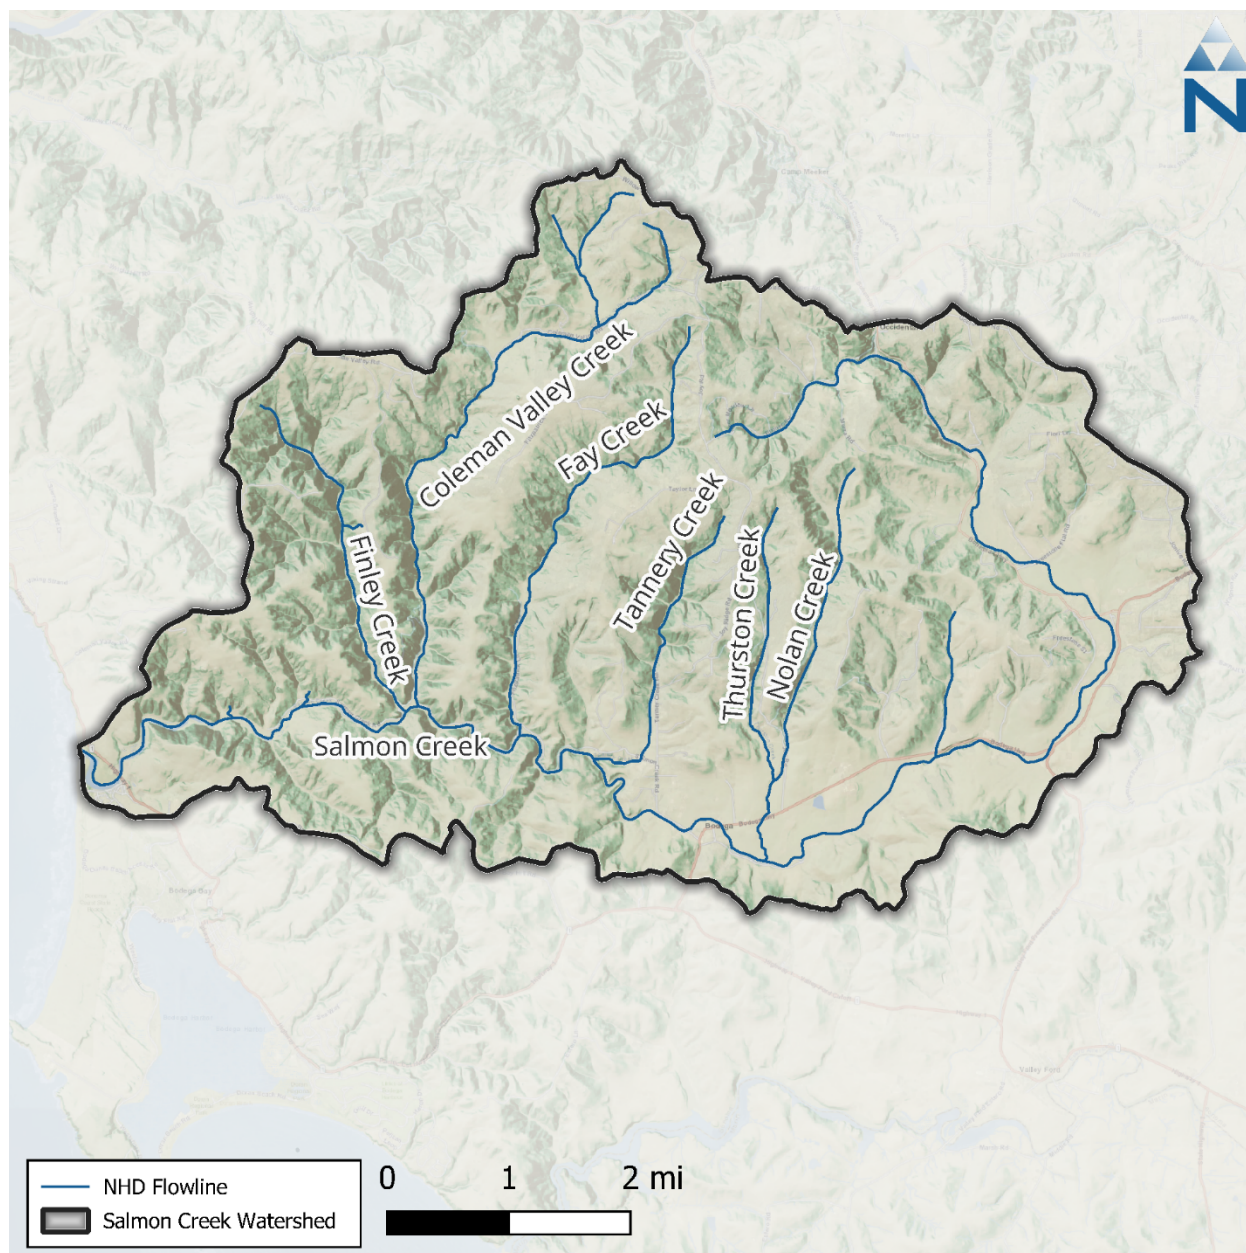


Figure 1-1. The Salmon Creek watershed.

## 1.3 Model Approach

---

The primary goal of this work plan is to outline an approach that is sufficiently robust to support an analytical assessment of the Salmon Creek watershed. This is presented first through a comprehensive inventory of available hydrologic, meteorological, and geographic information system (GIS) data available for the Salmon Creek watershed. The data compilation and assessment processes are outlined below and aim to highlight any existing data gaps that create limitations for the analysis. Based on the available data, any data gaps are identified that may be filled through additional outreach, data collection efforts, or noted as points of uncertainty in the model documentation.

This hydrologic analysis is based on a model development process that has been a tested platform for gaining valuable information and insight about hydrologic systems. The model development process proposed is an iterative and adaptive cycle that improves understanding of the system over time as better information becomes available. Figure 1-2 is a conceptual schematic of the proposed model development cycle, which is represented as circular as opposed to linear. The cycle is best summarized by the following six interrelated steps:

1. **Assess Available Data:** Data for source characterization, trends analysis, and defining modeling objectives.
2. **Delineate Model Domain:** Model segmentation and discretization needed to simulate streamflow at temporal and reach scales appropriate for assessing supply and demand.
3. **Set Required Model Inputs:** Spatial and temporal model inputs defining the appropriate hydrologic inputs and outputs.
4. **Represent Processes (Calibration):** Adjustment of model rates and constants to mimic observed physical processes of the natural system.
5. **Confirm Predictions (Validation):** Model testing with data not included in the calibration to assess predictive ability and robustness.
6. **Assess Applicability for Scenarios:** Sometimes the nature of modeled responses can indicate the influence of unrepresented physical processes in the modeled system. Sometimes that can be resolved with minor parameter adjustments, while other times the assessment exposes larger data gaps. A well-designed model can be adapted for future applications as new information about the system becomes available. Depending on the study objectives, data gaps sometimes provide a sound basis for future data collection efforts to refine the model. New information may require minor parameter adjustments affecting the configuration or calibration.

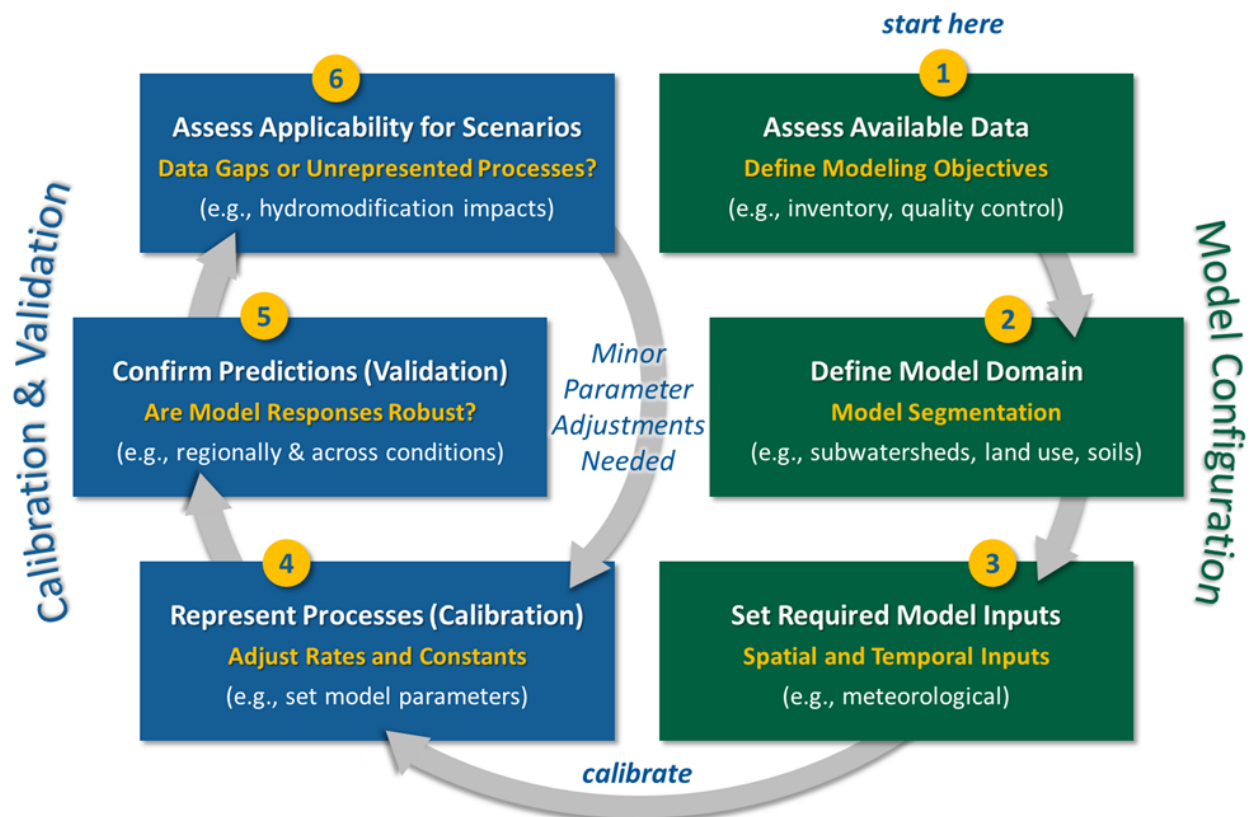


Figure 1-2. Conceptual schematic of model development cycle proposed for assessing instream flow needs in the Salmon Creek watershed.

## 1.4 Data Availability

Table 1-1 through Table 1-4 present an inventory of the initial data collected that will form the basis of this modeling workplan. These datasets were compiled from readily available sources, primarily those publicly available and published online by state and federal agencies. The data in the tables is organized by data type including:

- **Meteorology Datasets:** Time series that represent water balance inputs and outputs to the watershed primarily from precipitation and evapotranspiration. These time series are often used as forcing functions for hydrologic models.
- **Surface & Groundwater Datasets:** Datasets describing stream flow, groundwater, water use, and stream conditions for Salmon Creek. Time series observations of instream responses for Salmon Creek are often used as calibration and validation datasets for hydrologic models.
- **Geospatial Datasets:** Spatial datasets describing the landscape of the Salmon Creek watershed. These datasets include physical properties (e.g., soils, land cover, elevation).

Each of these types of datasets is described in the sections below.

Table 1-1. Inventory of meteorology datasets

Data Source	Data Set	Data Date	Description	Model Use
National Climatic Data Center (NCDC)	Global Historic Climate Network (GHCN)	--	Daily precipitation and temperature data (varied data quantity/quality).	Rainfall input boundary time series.
National Climatic Data Center (NCDC)	Local Climate Data (LCD)	--	Hourly precipitation, temperature, wind speed, dewpoint, cloud cover.	Rainfall input boundary time series.
Remote Automated Weather Stations (RAWS)	Hourly Climate Data	--	Meteorological records for SRFD Llano Rd.	Climate data boundary time series.
California Data Exchange Center (CDEC)	Precipitation, Temperature	--	No meteorological records available within 10 miles of the Salmon Creek watershed.	Rainfall input boundary time series.
PRISM Climate Group	AN81m Monthly	1900- Present	4-km grid resolution time series of precipitation (1900 – present).	Rainfall time series QA; address rainfall data gaps.
North American Land Data Assimilation System (NLDAS)	NLDAS-2 Forcing Data	1979 - Present	1/8th-degree grid resolution hourly time series of precipitation and other surface parameters (e.g., potential evapotranspiration, and solar radiation).	Rainfall hourly distributions; address rainfall data gaps. Daily potential evapotranspiration totals × hourly solar radiation distributions.
Earth Observing Laboratory (EOL)	Daily/Hourly Gridded Precipitation	--	Various gridded precipitation time series; both daily and hourly time steps.	Rainfall hourly distributions; address rainfall data gaps.
California Irrigation Management Information System (CIMIS)	Reference Evapotranspiration	1990 – Present	Relative evapotranspiration spatial zones and monthly scaling factors. There is also a grid-based model data product.	Deriving PEVT input forcing time series; estimation of irrigation demand.
OpenET	OpenET CONUS Ensemble Monthly Evapotranspiration	2016 - 2024	Satellite-based estimates (30-m res) of observed monthly evapotranspiration for the CONUS; data are bias corrected against observational weather station networks.	Parameterization & evaluation of ET; estimation of irrigation demand.

Table 1-2. Inventory of surface water datasets

Category	Scale	Data Source	Data Set	Data Date	Description	Model Use	Link
Streamflow	Local	USGS	Stream Gauge Discharge	1962 – 1975	Observed Streamflow at one inactive location on Salmon Creek	Hydrology calibration.	<a href="#">LINK</a>
Water Budget	State	CA DWR	Well Completion Reports	Current	Well completion logs and reports.	Water budget.	<a href="#">LINK</a>
		SWRCB eWRIMS	Water Rights Points of Diversion	Current	Locations where water is being drawn from a surface water source such as a stream or river.		<a href="#">LINK</a>
			Water Rights Overview Report	Current	This report will provide counts of various entities such as Applications, Registrations, Petitions etc. that will reflect the progress in processing such entities as of current date.		<a href="#">LINK</a>
			Annual Water Use Report	1906 – 2023	Annual reports that provide monthly diversion data for various entities such as Applications, Registrations, Petitions, etc.		<a href="#">LINK</a>
		CA DWR	Agricultural Land and Water Use Estimates	1998 – 2015	Water use estimates by various planning units.		<a href="#">LINK</a>
		CDT	Water Districts	2022	Boundaries of all public water agencies in California.		<a href="#">LINK</a>
			California Drinking Water System Locations	2024	Public California drinking water systems and state small drinking water system boundaries and information.		<a href="#">LINK</a>

Table 1-3. Inventory of geospatial datasets

Category	Scale	Data Source	Data Set	Data Date	Description	Model Use	Link
Watershed Boundaries	National	USGS	Watershed Boundaries (WBD)	2023	Hydrologic unit boundaries to the 12-digit (6th level).	Model segmentation	<a href="#">LINK</a>
Hydrology	National	USGS	National Hydrography Dataset (NHD) Plus High-Resolution National Release 1	2023	The NHDPlus HR combines the NHD, 3DEP DEMs, and WBD to create a stream network with linear referencing.		<a href="#">LINK</a>
			National Hydrography Dataset (NHD) Best Resolution	2023	1:24,000; represents reaches and other network elements.		<a href="#">LINK</a>
Soil	National	USDA NRCS	Gridded Soil Survey Geographic Database (gSSURGO)	2022	State-wide, 10-meter raster grid approximating the SSURGO vector dataset.	Represent infiltration process within land segments.	<a href="#">LINK</a>
Surficial Geology	National	USGS	The State Geologic Map Compilation (SGMC)	2017	1:1,000,000: Vector-based, state geologic map database.	As needed, hydrologic process with land segments.	<a href="#">LINK</a>
Land Cover	National	MRLC	National Land Cover Dataset (NLCD) Land Cover	2021	Broad, 30 m grid-based land characterization. Differentiates developed land from coarse classifications of forest, cropland, wetlands, etc.	Land segment representation.	<a href="#">LINK</a>
			National Land Cover Dataset (NLCD) Imperviousness All Years	2021	Broad, 30-meter grid-based land characterization. Represent percent impervious area within raster cells.		<a href="#">LINK</a>
Land Use	State	CA DWR	Statewide Crop Mapping	2020	Polygons attributed with DWR crop categories.	Identify crop distributions; estimate irrigation demand.	<a href="#">LINK</a>
Vegetation	National	MRLC	Tree Canopy Cover	2021	Percent tree canopy estimates for each 30-meter pixel across all land covers and types.	Land segment representation.	<a href="#">LINK</a>

Category	Scale	Data Source	Data Set	Data Date	Description	Model Use	Link
	State	USFS	Existing Vegetation	2018	1:24,000 to 1:100,000: Existing vegetation mapping.	As necessary, additional vegetation types for model land segments.	<a href="#">LINK</a>
Agriculture & Crop Cover	National	USDA	Cropland Data Layer	2022	30-meter grid-based crop-specific land cover data layer.	Identify crop distributions; estimate irrigation demand.	<a href="#">LINK</a>
Timber Harvesting	National	USDA	Timber Harvests	1820 - Present	Area planned and accomplished acres treated as a part of the timber harvest program of work.	Representing changes in land cover due to timber harvest activities.	<a href="#">LINK</a>
	State	CAL FIRE	CAL FIRE Nonindustrial Timber Management Plans TA83	1991 - Present	Timber management plans.		<a href="#">LINK</a>
			CAL FIRE Notices of Timber Operations TA83	1991 - Present	Notice of Timber Operations accepted by CAL FIRE.		<a href="#">LINK</a>
			CAL FIRE Working Forest Management Plans TA83	2019 - Present	Working forest management plans approved by CAL FIRE.		<a href="#">LINK</a>
Fire Perimeters & Burn Areas	State	CAL FIRE	California Fire Perimeters	1950 - Present	Wildfire perimeters.	Representing changes in land cover due to forest fire activities.	<a href="#">LINK</a>
			Prescribed Burns	1950 - Present	Prescribed burns perimeters.		<a href="#">LINK</a>
Elevation	National	USGS	USGS ten-meter resolution digital elevation model (DEM)	2020	10-meter resolution digital elevation model (DEM) produced through the 3D Elevation Program (3DEP).	Land segment representation.	<a href="#">LINK</a>

Table 1-4. Inventory of groundwater datasets

Category	Scale	Data Source	Data Set	Data Date	Description	Model Use	Link
Groundwater Basin Boundaries	State	CA DWR	DWR's Bulletin 118	2020	Groundwater basin boundaries represent alluvial basins delineated by DWR.	Groundwater domain	<a href="#">LINK</a>
Groundwater levels	State	CA DWR	Periodic Groundwater Level Measurements	2023	Groundwater levels	Model calibration	<a href="#">LINK</a>
Geologic information	State	CA DWR	Well Completion Reports (OSWCR)	2023	Geologic information	Groundwater stratigraphy and properties	<a href="#">LINK</a>

## 2 METEOROLOGY

Precipitation and evapotranspiration (ET) are key components of the water balance and critical inputs for developing a hydrologic model. The following subsections describe the primary data sources for precipitation and evapotranspiration.

### 2.1 Precipitation

The primary source of precipitation data for the Salmon Creek watershed will be the observed data from land-based stations within and in the vicinity of the watershed (Table 2-1). However, any gaps in observed data from the land-based stations will be filled with grid-based data. This is referred to as the “hybrid” approach, which has shown promising results by leveraging the strengths of both land-based and grid-based data. Use of a hybrid approach preserves locally sampled gauge data while increasing the spatial and temporal quantity and quality over the watershed. This approach has been applied for large watershed-scale modeling applications including the countywide model for Los Angeles County (LACFCD 2020).

Land-based observed precipitation data are mainly acquired from the National Climatic Data Center (NCDC), which maintains climate networks including the Global Historic Climate Network (GHCN), the Cooperative Observer Program (COOP), and the Community Collaborative Rain, Hail, and Snow Network (CoCoRaHS). These networks provide quality-controlled hourly or daily observed precipitation and temperature data. There are four GHCN gauges identified within or near the Salmon Creek watershed. These gauges all have data of varied quantities and quality. In addition to the daily precipitation gauges, NCDC also maintains the Local Climatological Data (LCD) network. However, no LCD stations are within 10 miles of the Salmon Creek watershed boundary. The California Data Exchange Center (CDEC) and Remote Automated Weather Stations (RAWS) networks also report hourly precipitation. There are no CDEC stations near the watershed, but there is one RAWS station east of the watershed boundary. Table 2-1 is an inventory of the precipitation stations near the Salmon Creek watershed with available data after 2000 and approximately 90% completeness or better; Figure 2-1 shows the location of the stations proposed for model development in Table 2-1.

The primary source of the grid-based data for Salmon Creek Watershed will be the Parameter-elevation Regressions on Independent Slopes Model (PRISM) (Daly et al. 1994, 2008; Gibson et al. 2002). PRISM is developed and maintained by the PRISM Climate Group at Oregon State University and provides gridded estimates of event-based climate parameters, including precipitation, temperature, and dew point. The algorithm uses observed point data, a digital elevation model, and other spatial datasets to capture influences such as high mountains, rain shadows, temperature inversions, coastal regions, and other complex climatic regimes (Gibson et al. 2002). Because of its spatial and temporal resolution and consistency across the lower 48 contiguous United States (4-km spatial resolution for the AN81d daily/monthly time series dataset and 800-m for the AN81m long term averages), PRISM is a commonly used and widely accepted source for meteorological data for hydrologic models (Behnke et al. 2016). The subset of the PRISM grid that covers the current study area is shown in Figure 2-1. To downscale the PRISM data to hourly, the North American Land Data Assimilation System (NLDAS) is used. NLDAS is a quality-controlled land surface model (LSM) dataset of meteorological data designed specifically to support continuous simulation modeling activities (Cosgrove et al. 2003; Mitchell et al. 2004). NLDAS provides real-time hourly predictions of meteorological data required for LSPC at a 1/8th degree spatial resolution (about 8.625-mile intervals) for North America, with retrospective simulations beginning in January 1979. NLDAS has undergone rounds of refinement, extensive peer review, and performance validation through case study applications, all of which have demonstrated it to be a more robust predictor of variable


meteorological conditions for continuous simulation modeling than using individual gauges (Xia et al. 2012).

**Table 2-1. Summary of precipitation stations with observations available after 2000s**

Agency	Station ID <sup>1</sup>	Name	Start Date	End Date	Lat.	Long.	Elevation (meters)	Data Coverage (%) <sup>2</sup>
NOAA-GHCN	GHCND:USC00043578	GRATON, CA US	12/31/1925	6/29/2024	38.4305	-122.865	61	99%
	GHCND:USC00046370	OCCIDENTAL, CA US	4/30/1943	4/5/2021	38.3858	-122.9661	263.7	92%
	GHCND:US1CASN0032	DUNCAN MILLS 1.4 NNE, CA US	1/31/2009	10/26/2010	38.47303	-123.052	124.7	96%
	GHCND:US1CASN0164	FORESTVILLE 1.4 SW, CA US	6/28/2020	8/2/2024	38.46563	-122.904	36.9	100%
RAWS	QSLC1	SRFD LLANO ROAD	5/2/2022	Present	38.37083	-122.764	95	100%

1. Stations presented have at least 90% data coverage.

2. NCDC and NOAA data coverage as reported; CDEC and RAWS estimated based on data flagging and count of time steps. Data completeness will be further assessed under Task 3.2 and additional stations may be considered as required.

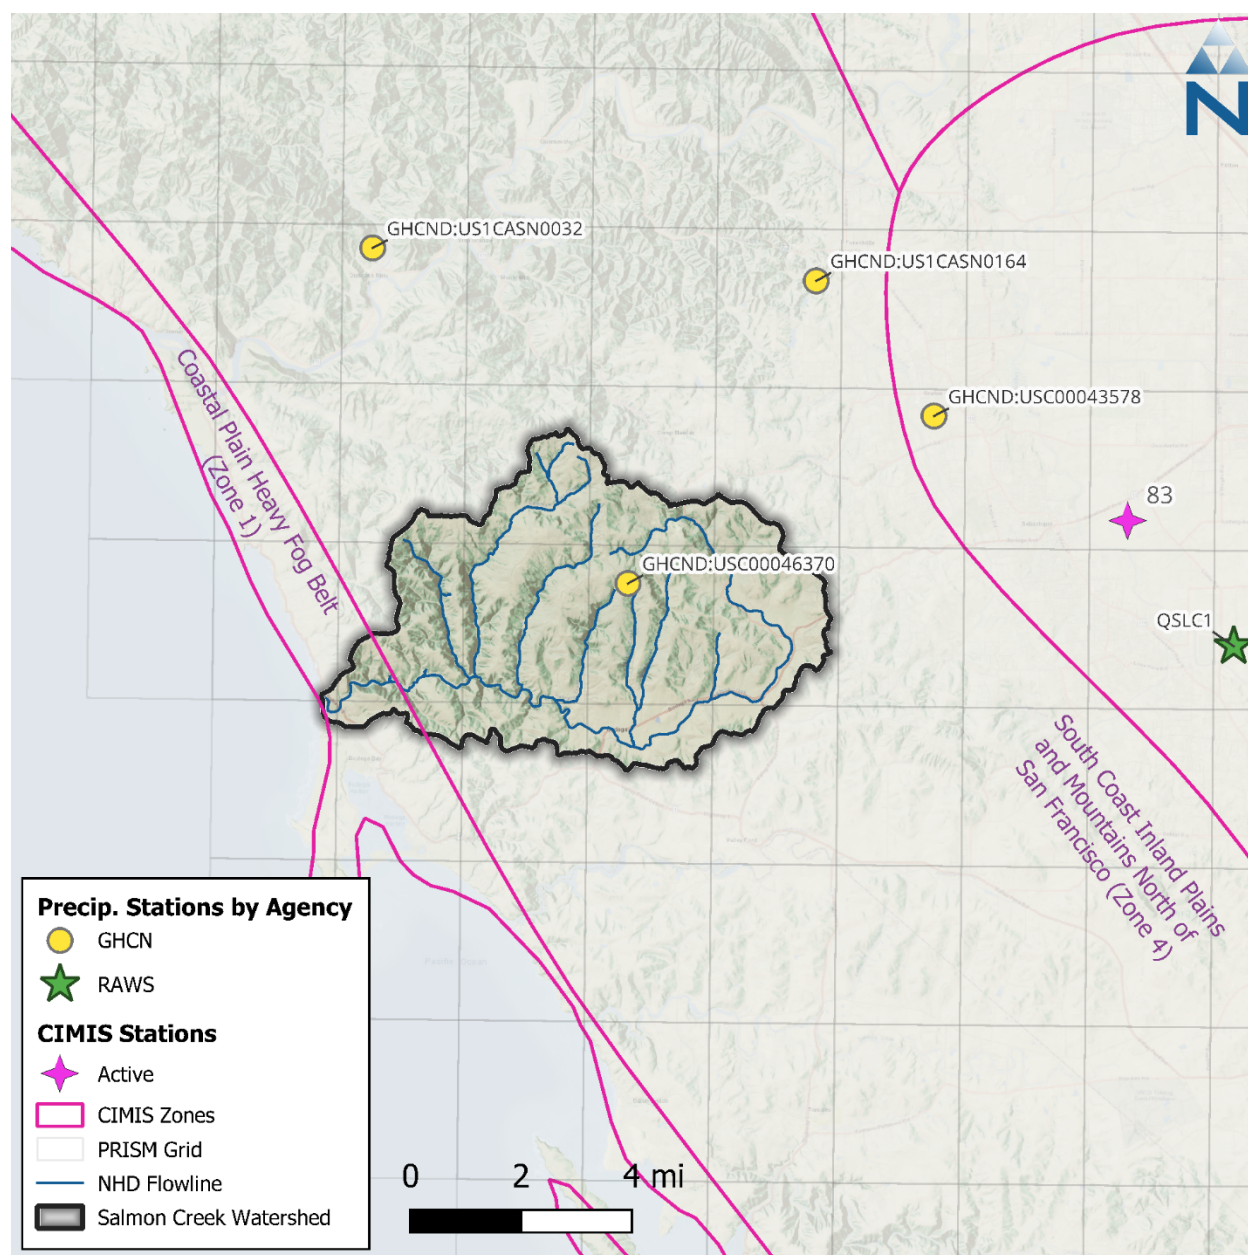

**Figure 2-1 Identified rainfall gauges and CIMIS ET Zones near the Salmon watershed.**

The hybrid approach entails three main steps. First, impaired intervals (i.e., missing, or accumulated) at observed stations will be patched with quality data from nearby gauges. Second, the PRISM grid cells and patched observed stations are mapped to the NLDAS grid cells to downscale the monthly PRISM and daily station data using normalized hourly data from NLDAS. Third, the downscaled gridded meteorological data from the PRISM are used to fill spatial and any remaining temporal gaps in the observed station network as needed. It should be noted that while PRISM gridded data also provides estimates of precipitation on daily time step, using monthly PRISM totals for downscaling with hourly observed data, as opposed to daily PRISM totals, eliminates the need to estimate distributions for instances where an hourly distribution does not coincide with a daily total.

Figure 2-2 presents a summary of the hybrid approach to blend observed precipitation with gridded meteorological products. Observed data and gridded products are to be processed in parallel to: (1) create a temporally complete set of hourly distributions and (2) identify spatial gaps in coverage to be

supplemented with downscaled gridded data. Assuming a 10-km buffer around observed gauges for this approach, the coverage shown in the lower right map in Figure 2-2 also shows what a hybrid dataset of observed time series, supplemented by gridded products would look like.

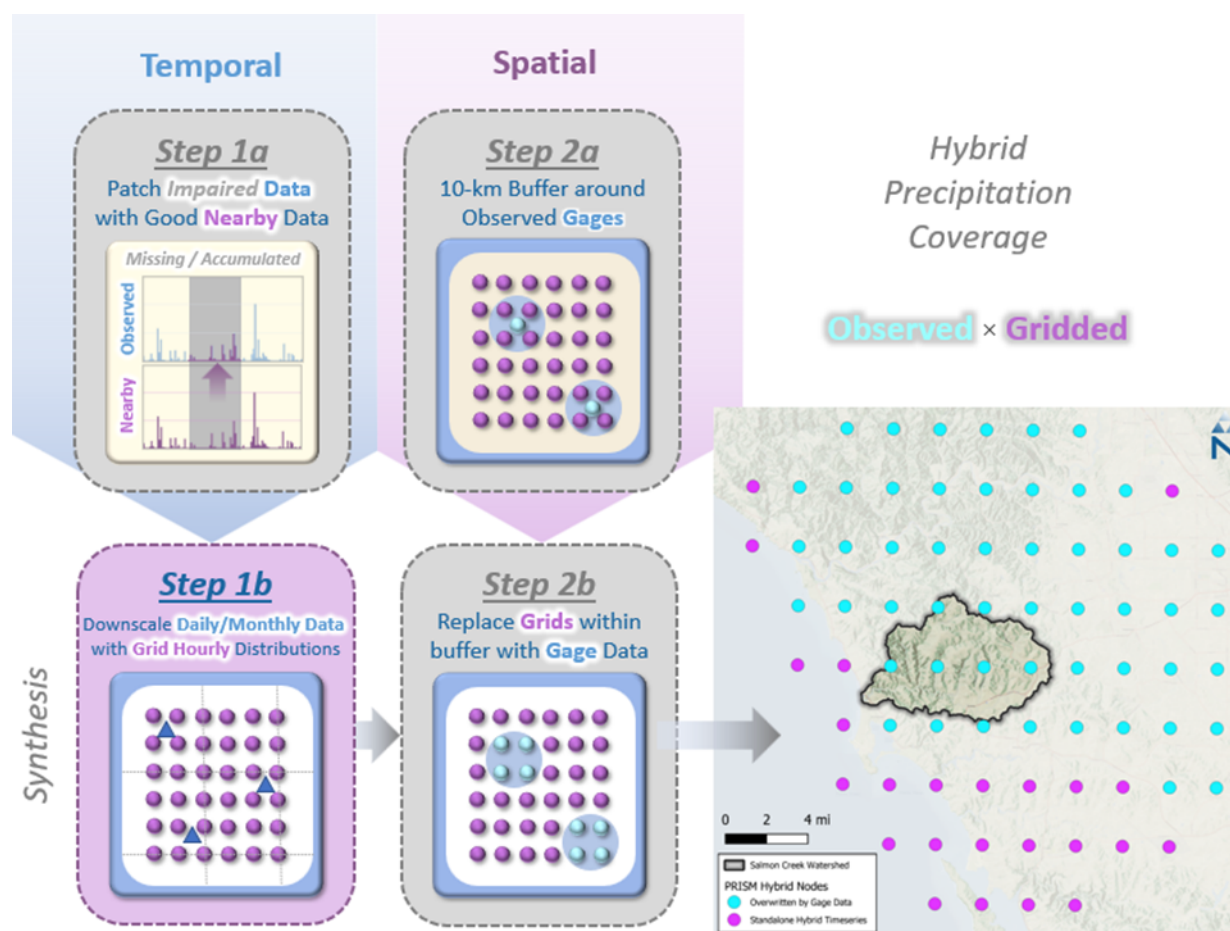


Figure 2-2. Hybrid approach to blend observed precipitation with gridded meteorological products.

## 2.2 Evapotranspiration

The primary evapotranspiration dataset identified for consideration is the California Irrigation Management Information System (CIMIS). CIMIS was developed in 1982 by the California Department of Water Resources (DWR) and the University of California, Davis. The network is composed of over 145 automated weather stations throughout California where primary weather data, including temperature, relative humidity, wind speed, and solar radiation, are monitored and quality controlled. Observations are measured over standardized reference surfaces (e.g., well-watered grass or alfalfa) and are used to estimate reference evapotranspiration ( $ET_0$ ) using versions of the Penman and Penman-Monteith equations. CIMIS has divided California into 18 zones based on long-term monthly average  $ET_0$  values calculated using data from CIMIS weather stations.

CIMIS operates one active station within 10 miles of the Salmon Creek watershed, the Santa Rosa station (ID 83), as seen in Figure 2-1. This station is located almost 6 miles east of the watershed boundary and has collected time series data since January 1990. There are no inactive stations near the watershed.

CIMIS also has a newly derived gridded product, CIMIS Spatial, that expresses daily  $ET_o$  estimates calculated at a statewide 2-km spatial resolution using the American Society of Civil Engineers version of the Penman-Monteith equation (ASCE-PM) (Allen et al. 2005). The ASCE-PM method calculates  $ET_o$  using solar radiation, air temperature, relative humidity, and wind speed at two meters height. This product provides a consistent spatial estimate of  $ET_o$  that is California-specific, implicitly captures macro-scale spatial variability and orographic influences, is available from 2003 through Present, and is routinely updated within a couple of days. As shown in Figure 2-1, the Salmon Creek watershed intersects two CIMIS zones with 96% of the watershed area in Zone 4 (South Coast Inland Plains and Mountains North of San Francisco), and 4% of the watershed area in Zone 1 (Coastal Plain Heavy Fog Belt). Most of the Salmon Creek watershed falls within Zone 4, and the western end of the watershed falls into Zone 1. These zones experience average annual reference evapotranspiration levels from 33.0 inches per year in Zone 1 to 46.6 inches per year in Zone 4.

Representative potential evapotranspiration (PEVT) time series can be estimated for the Salmon Creek watershed from daily data from CIMIS Spatial and downscaling the hourly time series using hourly distributions from land observation stations (e.g., RAWS, NCDC) or hourly distributions from NLDAS. Potential evapotranspiration is reported at 3-hour intervals; however, the hourly distributions of solar radiation from NLDAS, which have sinusoidal patterns over daylight hours, provide a sound basis for downscaling the daily CIMIS depths while maintaining the overall annual water budget reflected in CIMIS.

For LSPC, the user provides PEVT rates as model input. The LSPC model then uses these values along with other model parameters to estimate actual ET. Sometimes  $ET_o$  is provided instead, and Hydrologic Response Unit (HRU)-specific coefficient multipliers are used to stratify those inputs based on physical HRU properties such as vegetation density. Additionally, for applications where the study area has significant agricultural practice, the user can provide irrigation water usage rates to represent additional water beyond precipitation that is added to the system—that water would also be available for evapotranspiration.

The actual ET estimated by an LSPC model can be validated by comparing it with data from OpenET. The OpenET project is an operational system for generating and distributing ET data at a field scale using an ensemble of six well-established satellite-based approaches for mapping ET (Melton et al. 2022). OpenET has undergone extensive intercomparison and accuracy assessment conducted using ground measurements of ET; results of these assessments demonstrate strong agreement between the satellite-driven ET models and observed flux tower ET data. Within California, OpenET has data from 2016 and uses CIMIS meteorological datasets to compute  $ET_o$ . In addition to LSPC ET validation, OpenET data can be used to help inform irrigation estimation and parameterization.

---

## 3 SURFACE HYDROLOGY

---

### 3.1 Watershed Segmentation

---


The United States Geological Survey (USGS) delineates watersheds nationwide based on surface hydrological features and organizes the drainage units into a nested hierarchy using hydrologic unit codes (HUC). These HUCs have varying numbers of digits to denote scale, ranging from 2-digit HUCs (largest) at the region scale to 12-digit HUCs (smallest) at the subwatershed scale. The Salmon Creek watershed is defined by an HUC-12 watershed.

For units smaller than HUC-12 subwatersheds, catchment and tributary boundaries, flow lines, outlet points and related attribute information will rely on the National Hydrography Dataset (NHD) hydrologic unit code (HUC) and catchment delineations. This analysis primarily uses readily available

data to define the outer watershed boundary. Any available local data will be used to supplement and refine the understanding of tributary boundaries and reach geometry. The NHD Plus v2 (NHDPlus) further discretizes the watershed into 29 catchments ranging in size between 0.01 square miles to approximately 7.6 square miles. Table 3-1 presents summary statistics of NHDPlus catchment sizes by HUC-12 subwatershed. Figure 3-1 is a map of NHDPlus catchments within the Salmon Creek watershed (HUC-12).

**Table 3-1. Summary of NHDPlus catchment sizes (acres) within the Salmon Creek HUC-12**

HUC-12 Name	Count	Catchment Size (acres)			
		Minimum	Mean	Median	Maximum
Salmon Creek	29	6.7	772.1	626.7	4,855.3

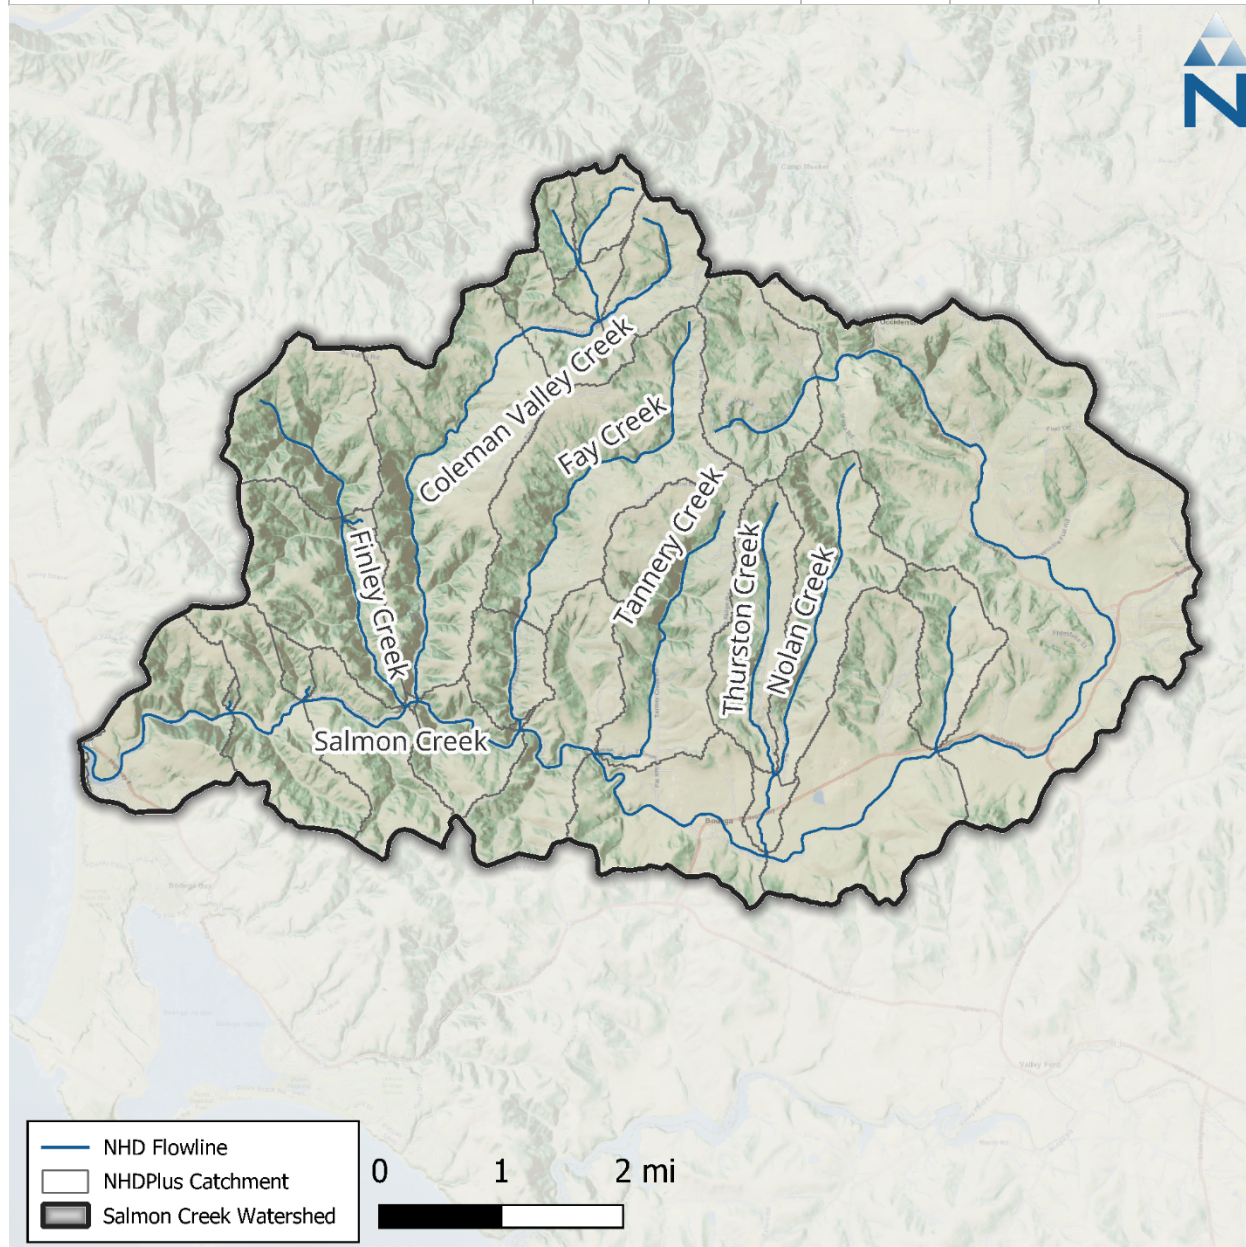

**Figure 3-1. Initial catchment segmentation for the Salmon Creek watershed.**

The NHDPlus dataset provides a good foundation for model segmentation at a spatial scale suitable for representing the watershed for modeling daily, seasonal, and annual streamflow. The NHDPlus catchment boundaries will be aggregated and/or adjusted as necessary to align with any selected points of interest (e.g., flow monitoring sites) to allow for direct output of model results for comparison and analysis.

## 3.2 Streams and Channels

The hydrographic characteristics of the streams and rivers within the Salmon Creek watershed (as shown in Figure 3-1) are primarily derived from NHDPlus. This dataset depicts primary flow paths based on a nation-wide 10-meter Digital Elevation Model (DEM) and includes additional attributes such as hydrologic sequence and flow line slope. These characteristics will be important for creating representative reach segments within the hydrologic model. Figure 3-1 maps the location of the Salmon Creek and its major tributaries.

## 3.3 Streamflow

The primary source of streamflow data is from the USGS, but within the Salmon Creek watershed, only one historical streamflow gauge is no longer active. Table 3-2 presents a summary of the available USGS streamflow data for the inactive Salmon Creek at Bodega, CA (USGS 11460920), which is located at the southern end of the watershed on mainstream Salmon Creek near Bodega, CA, as seen in Figure 3-2. This station concluded observations in 1975, though it could be useful for calibrating the model in the absence of other streamflow monitoring data.

**Table 3-2. Summary of USGS daily streamflow data**

Gauge Description	Station ID	Drainage Area (mi <sup>2</sup> )	Start Date	End Date	Gauge Active?
SALMON C A BODEGA CA	11460920	15.7	8/1/1962	10/1/1975	No

Even though these streamflow data are from several decades prior, it is still useful to leverage the available data from this station to investigate the performance validity of the model. Several approaches could be used to apply this data for model calibration, including:

1. Develop a flow duration curve based on the available gauge data, which could be representative of the general flow conditions and provide a means for conducting model calibration.
2. Extend the model simulation period back to the period with available data, including climate-forcing inputs, to directly calibrate the flow time series for the 1962-1975 period.
3. Identify one or more nearby streamflow gauges with data from 1962 through the Present that could be used to develop a statistical relationship between the streamflow records, which could be used to estimate the current flow for Salmon Creek. This approach would pair two daily streamflow time series and assess the strength of the regression relationship(s) between the two data sets. These would be compared directly and using a log transformation.

Finally, the Community Clean Water Institute has been conducting volunteer monitoring of local creeks in Sonoma County since 2003 (Community Clean Water Institute 2024). Streamflow is listed as a monitored parameter on the organization's portal; however, streamflow does not appear to be accessible through the web interface and may need to be requested if it is determined to be useful in supporting model development and calibration efforts.

More information on the limitations of the available data and potential calibration approaches are discussed in Section 6 and Section 8, respectively.

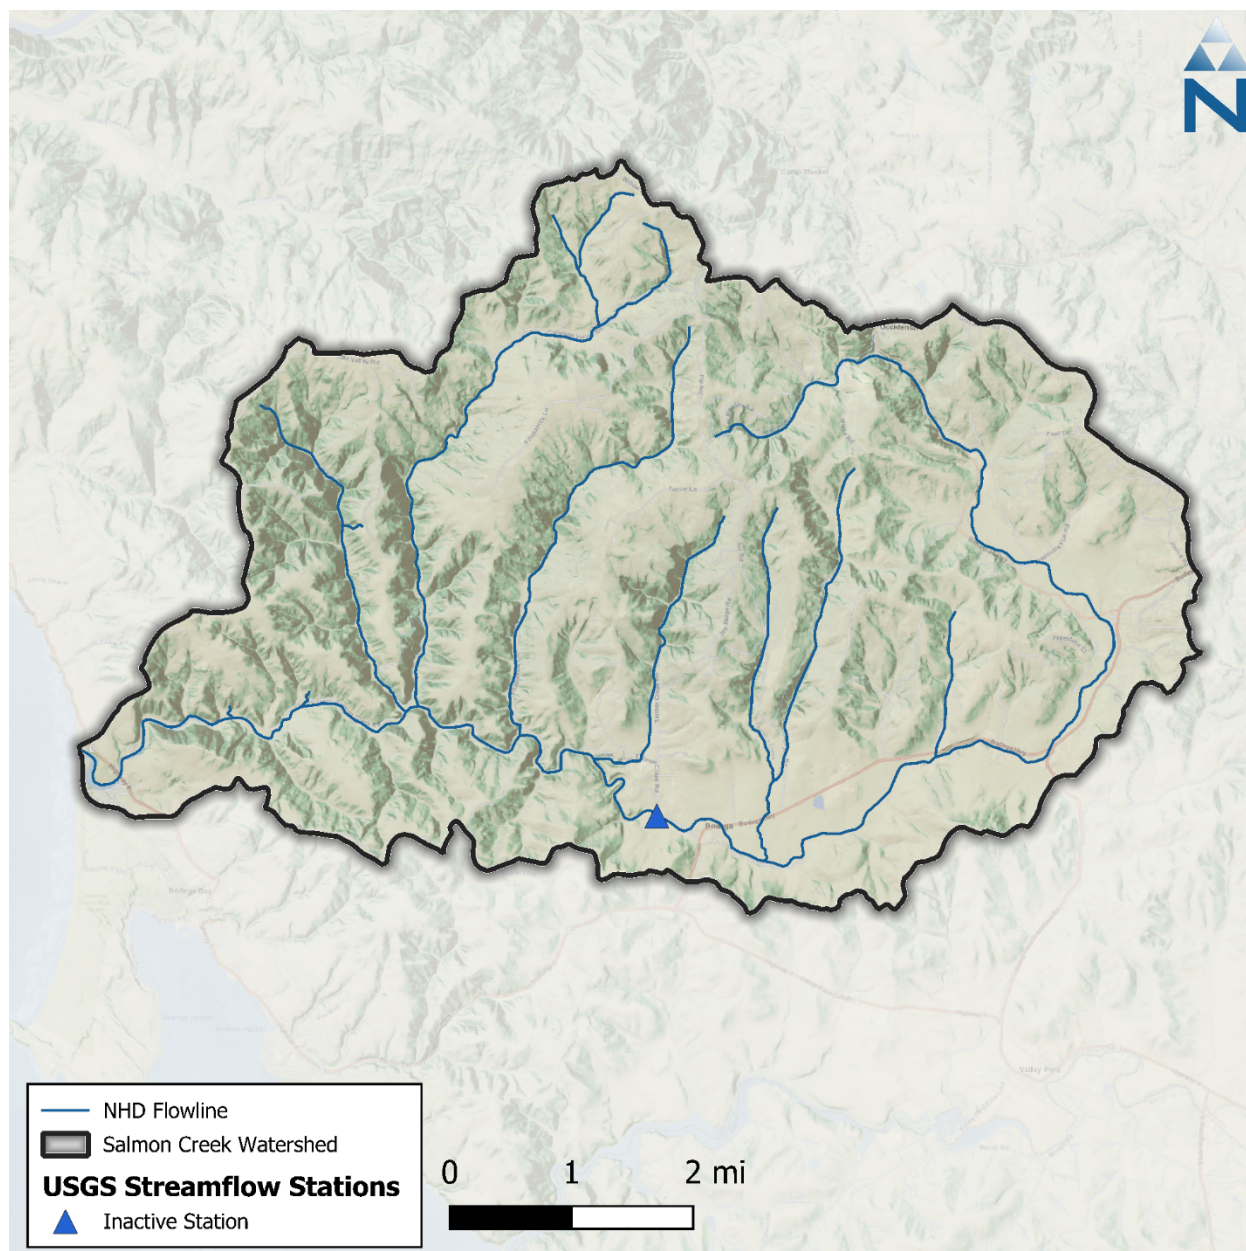


Figure 3-2. USGS streamflow stations in the Salmon Creek watershed.

### 3.4 Surface Water Withdrawals

Datasets related to water rights, points of diversion, and surface withdrawals will be identified through searches of the Water Board's Electronic Water Rights Information Management System database (eWRIMS) while estimates of irrigated crop acreages will be obtained from the CA DWR Agricultural Land and Water Use Estimates database (ALWU). These datasets can represent diversions, withdrawals, and irrigation practices in the watershed model. The volumes quantified in those datasets can be compared to annual and seasonal water budget estimates in the Salmon Creek watershed to assess the relative impacts based on observed precipitation, evapotranspiration, and streamflow data.

The impact of diversions or water usage may be localized along specific tributaries; however, the temporal resolution of the data determines the resolution of those impacts in the model. Additionally, the extent of modeled irrigation will depend on land-use classification, and water usage rates will be corrected against spatial variations in the observed evaporative deficit where necessary.

Figure 3-3 provides an overview of water systems distributed throughout the watershed and points of diversion (POD). The water systems include a mixture of surface water diversions from Salmon Creek and its primary tributaries and groundwater withdrawals for the Salmon Creek watershed groundwater basin. There are seven drinking water systems in the watershed. Four out of the seven drinking water systems have groundwater as the source, and the remaining three have surface water listed as the source.

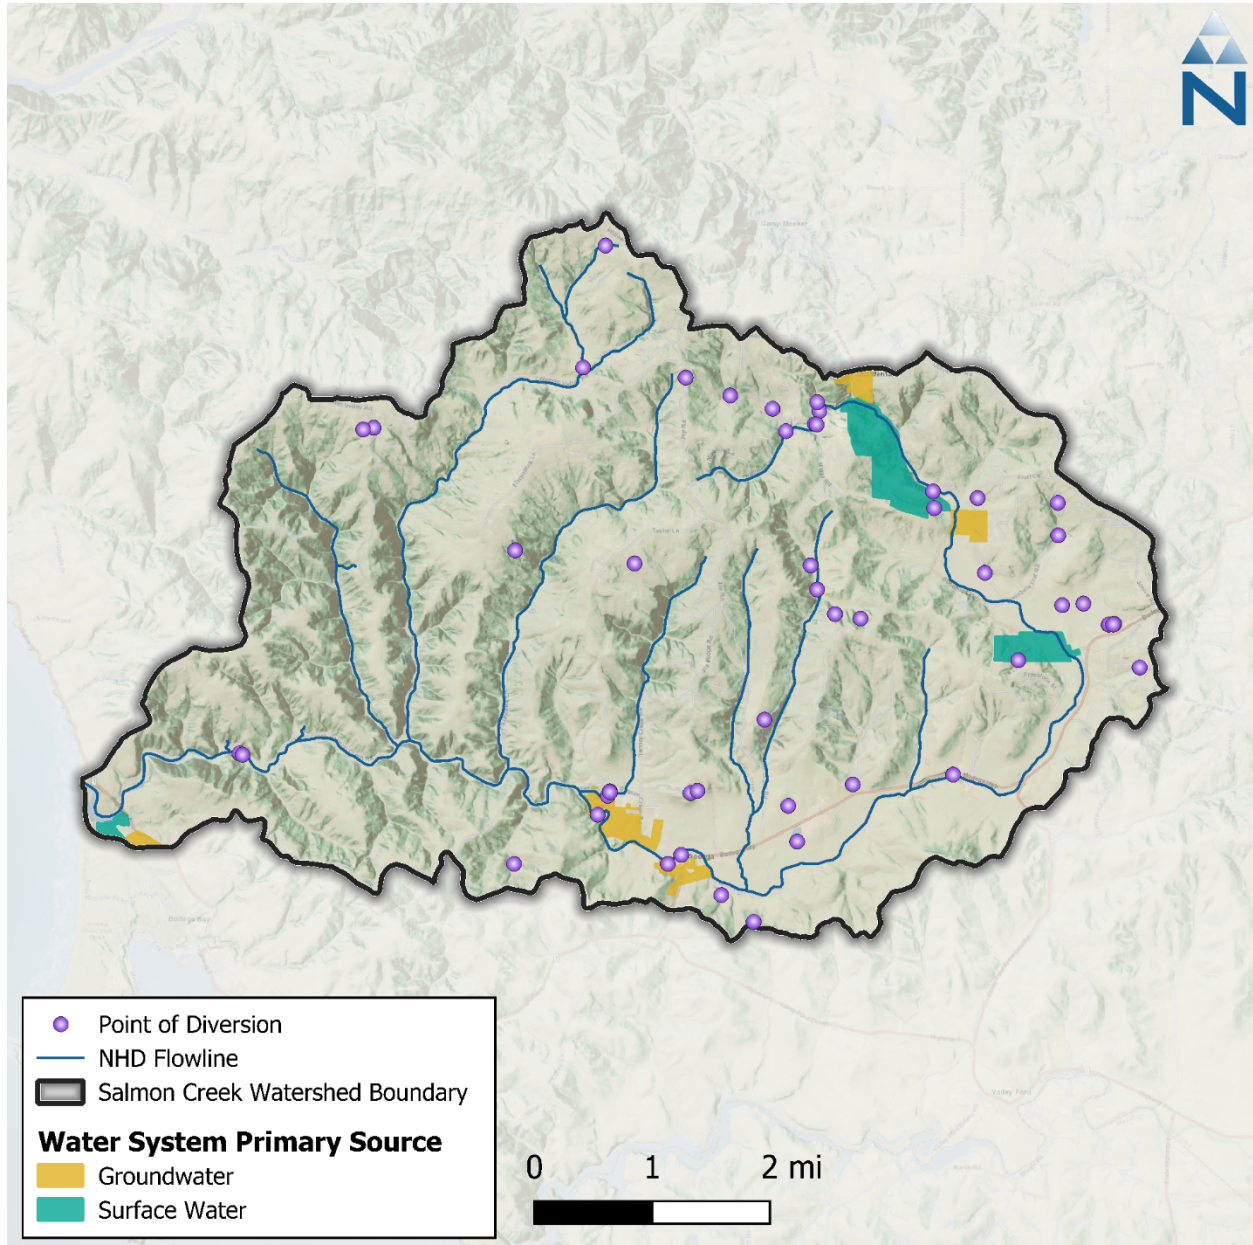


Figure 3-3. Points of diversion and water system types in the Salmon Creek watershed.

## 4 SUBSURFACE HYDROLOGY

The Salmon Creek watershed overlaps with several groundwater basins as delineated by Bulletin 118 (DWR 2020a). These groundwater basins primarily include the Wilson Grove Formation Highlands (number 1-059). Very small portions of Fort Ross Terrace Deposits (number 1-061) and Bodega Bay Area (number 1-057) overlap with the Salmon Creek watershed. Approximately 23% of the Salmon Creek watershed area falls within the groundwater basins delineated by Bulletin 118 and the remaining 77% is a highly faulted zone along the San Andreas Fault.

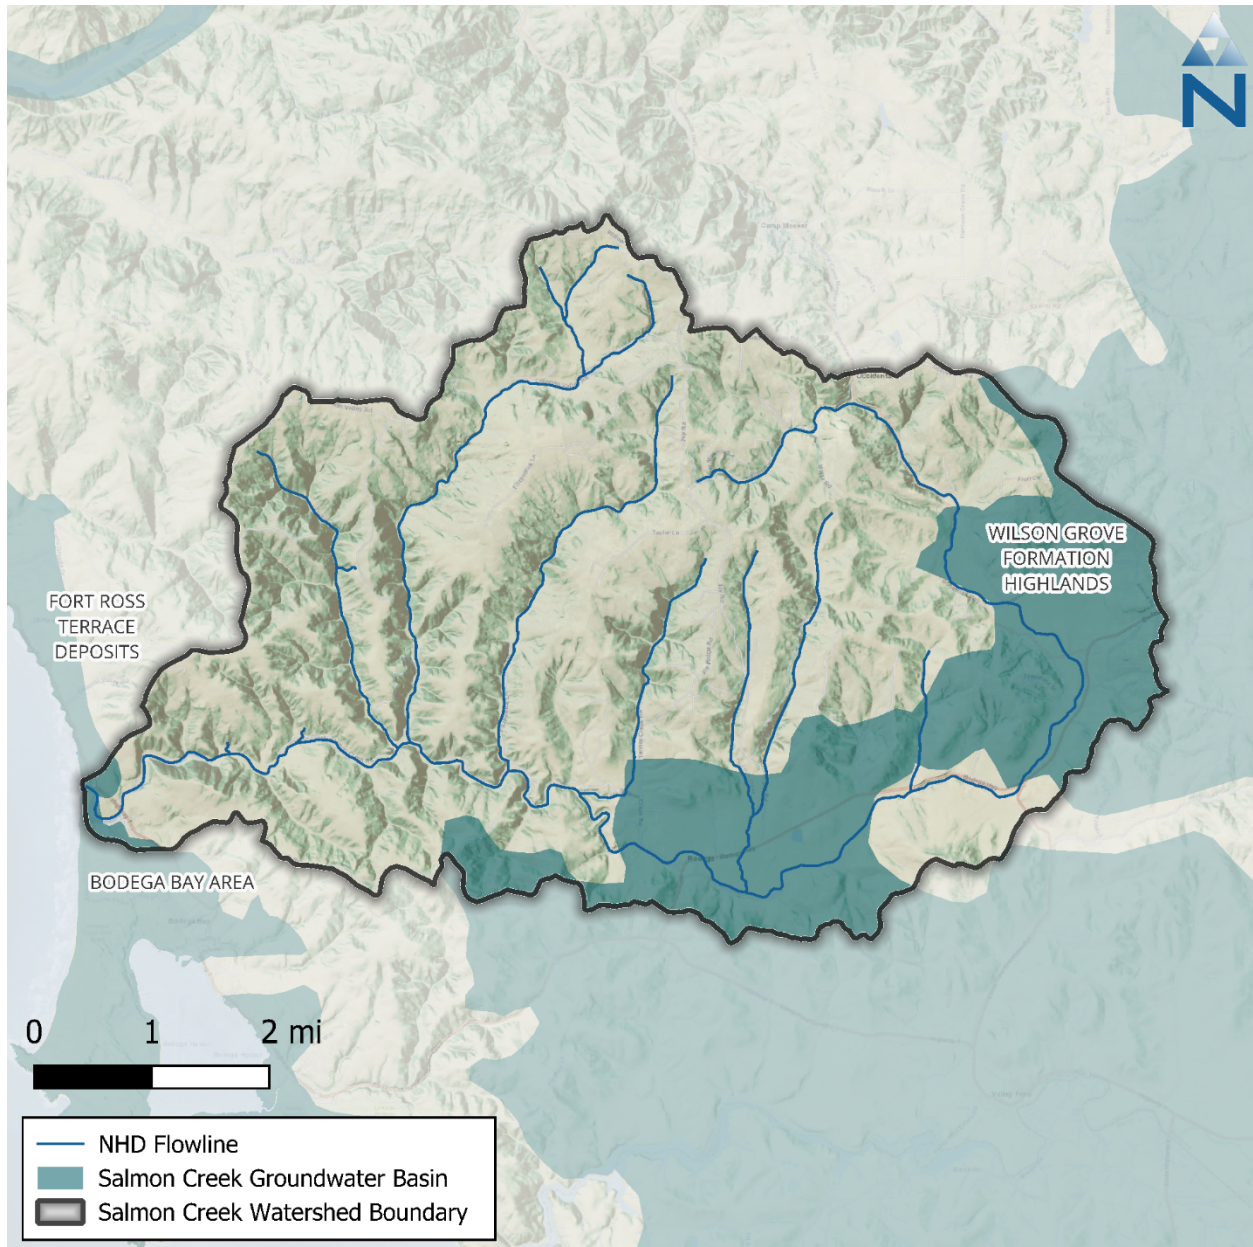


Figure 4-1. Groundwater basins delineated by DWR (2020), also known as Bulletin 118.

As per the respective basin priority details ([Sustainable Groundwater Management Act \(SGMA\) Basin Prioritization Dashboard](#)), all three overlapping basins are Very Low priority basins as designated by

SGMA's basin prioritization. Although the Wilson Grove Formation Highlands has a high density of public supply and total wells, and relies on groundwater for 74% of water supply, the basin is prioritized at Very Low priority due to a groundwater use of less than 9,500 acre-feet per year and no documented impacts to groundwater supplies, such as declining groundwater levels, saline intrusion or subsidence. No Groundwater Sustainability Agencies (GSAs) overlap with the Salmon Creek watershed.

## **4.1 Water Budget Components**

---

No publicly available groundwater models were located for the Salmon Creek Watershed. The Bulletin 118 reports for the three intersecting basins noted that no groundwater budget estimates were available. None of the US Geological Survey public domain models for Northern California (USGS 2024) overlap the Salmon Creek Watershed.

## **4.2 Geology**

---

Salmon Creek's geology is dominated by the Franciscan mélange in the west, a complex, diverse assemblage of rocks deposited at depth in the Mesozoic and later partially metamorphosed, and the Wilson Grove Formation Highlands to the east, comprising marine and alluvial sedimentary rocks deposited during the Pliocene in a subsiding embayment (Blakey, R.C, et al. 2018 and DWR). Due to their more recent age, moderate compaction, and lack of metamorphic activity, more groundwater is found in this formation than in the Franciscan assemblage (WRMA 2021). It is important to note that DWR's Bulletin 118 delineations do not account for any potential sources of 'non-basin' water within weathered bedrock formations, fractures, or other void space outside or underneath the designated basins.

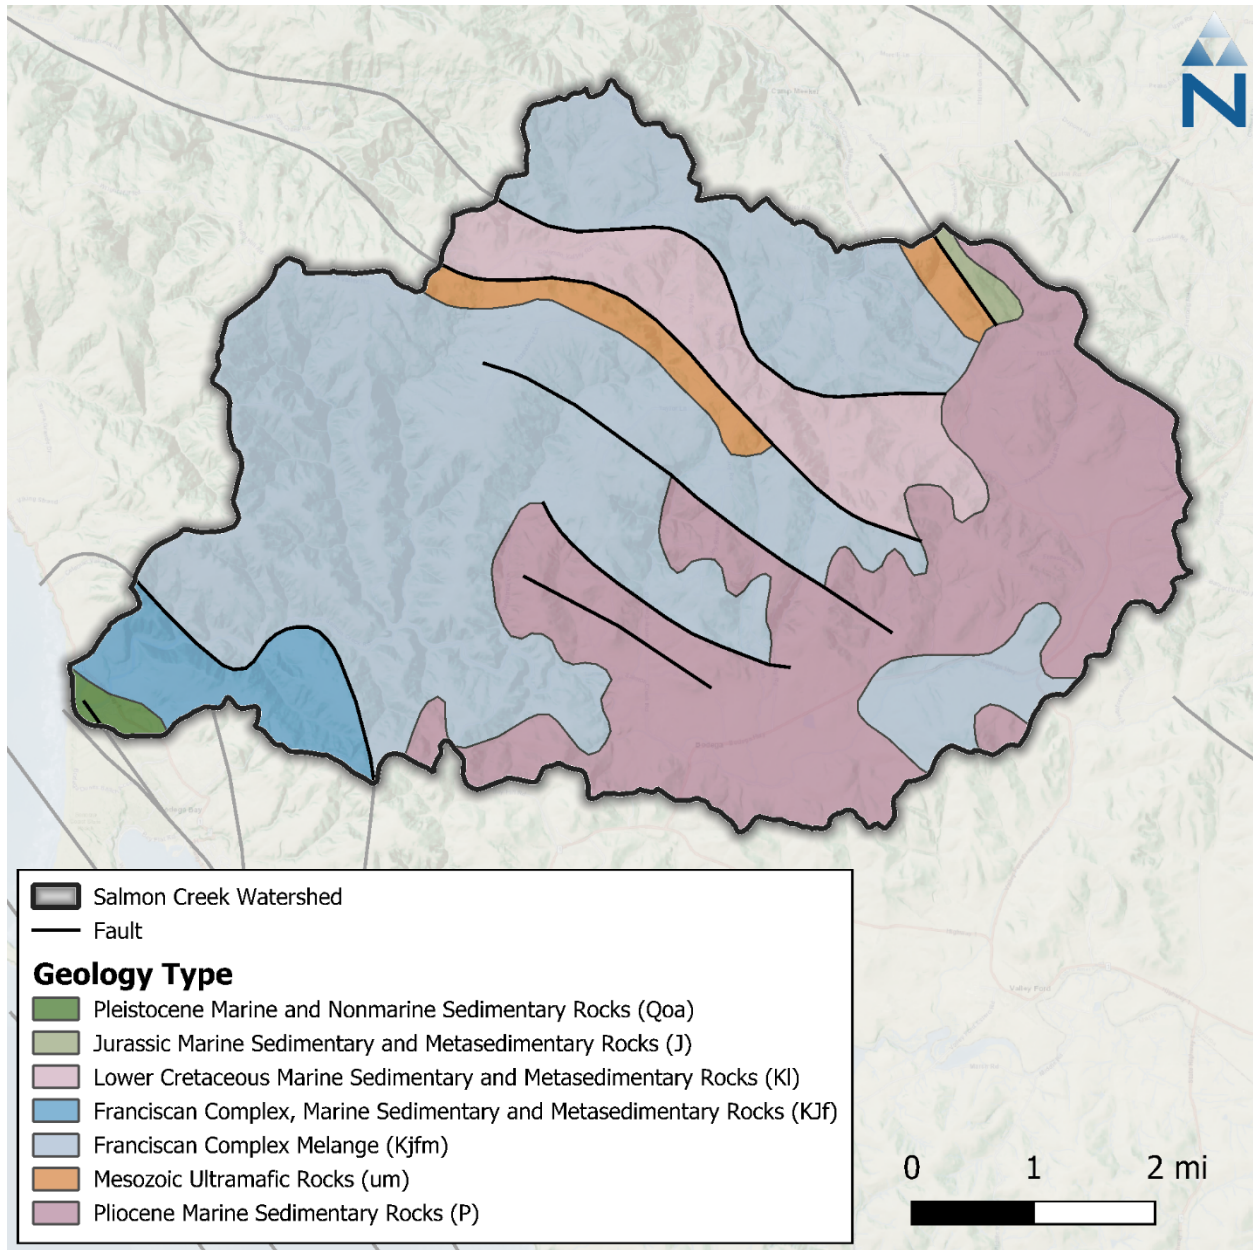


Figure 4-2. Geology types delineated by the California Geological Survey (CGS 2010).

## 5 LANDSCAPE CHARACTERIZATION

Landscape characterization describes the physical characteristics of the landscape including the types of soils and geology, topography, land cover, land use, and other physical properties that can be represented within the hydrologic model. HRUs are the core landscape unit in a watershed model. Each HRU represents areas of similar physical characteristics attributable to certain hydrologic processes. Spatial or geological characteristics such as land cover, soils, geology, and slopes are typically used to define HRUs. The spatial combinations of these various characteristics ultimately determine the number of meaningful HRU categories considered for the model. The following sections describe the component layers available to derive HRUs for the Salmon Creek watershed.

## 5.1 Elevation & Slope

The USGS publishes DEMs expressing landscape elevation through a raster grid data product with 30-meter resolution. The Salmon Creek watershed ranges in elevation from sea level (0 meters) along the southern part of the watershed to just over 400 meters in the northern most portion of the watershed. As a geoprocessing input, the DEM can be used to derive both slope and aspect as data inputs to a model. Figure 5-1 shows the change in elevation across the Salmon Creek watershed.

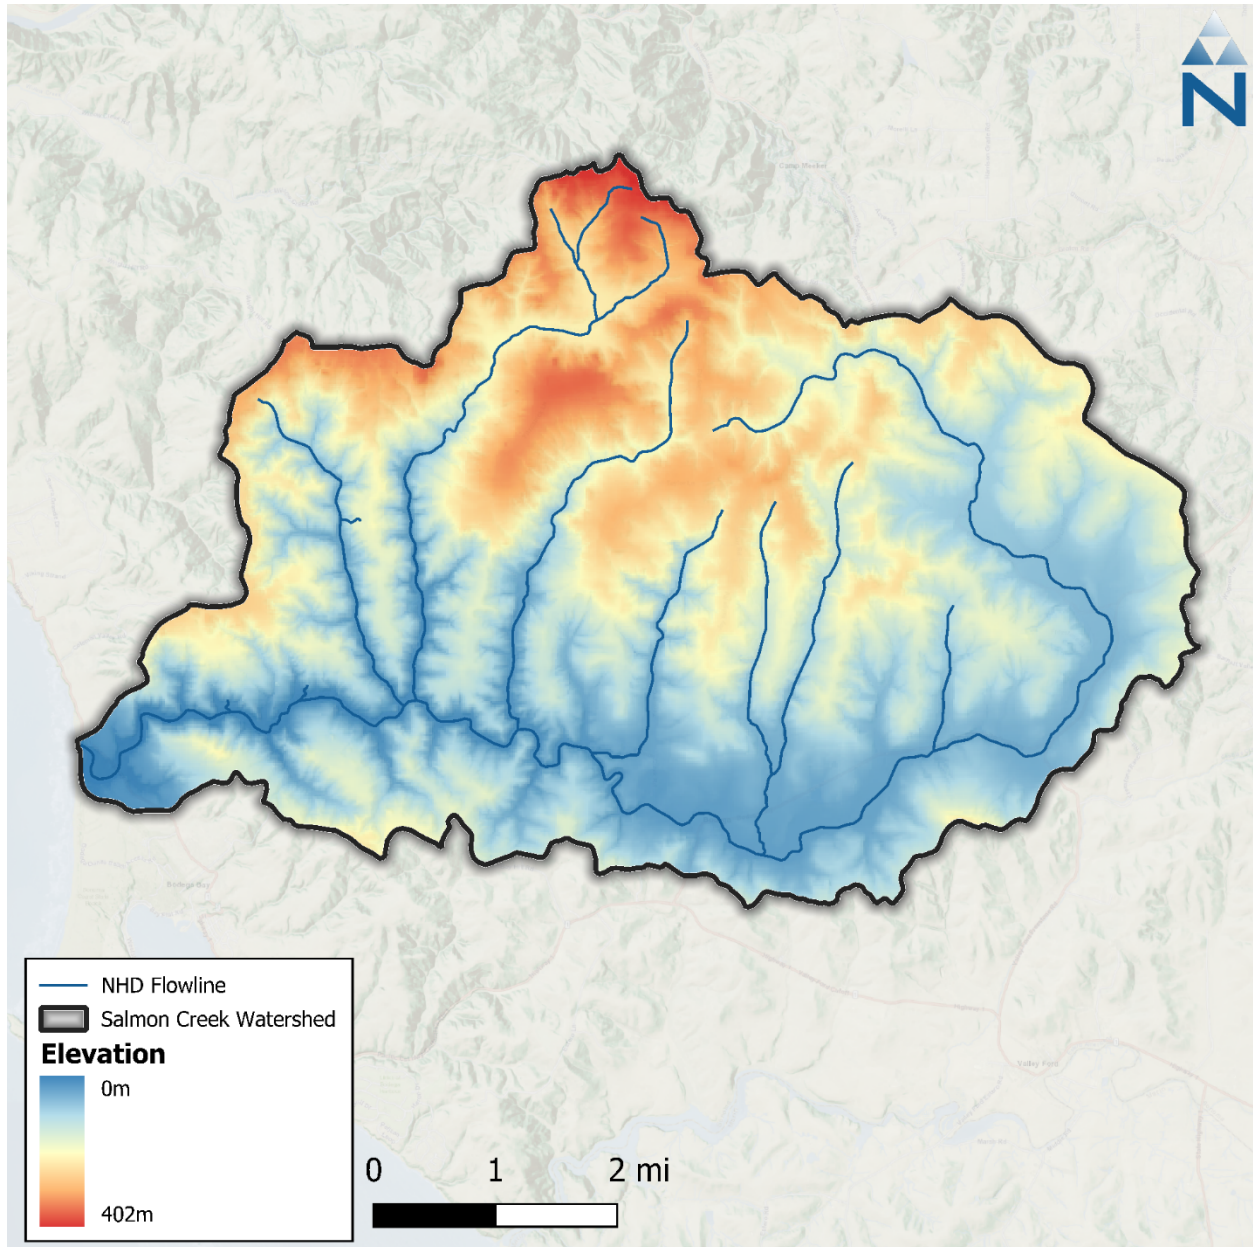


Figure 5-1. Digital elevation model of the Salmon Creek watershed.

## 5.2 Soils & Geology

Soil data for the Salmon Creek watershed were obtained from the Soil Survey Geographic Database (SSURGO) and State Soil Geographic Database (STATSGO), both published by the Natural

Resource Conservation Service (NRCS). Four primary hydrologic soil groups (HSG) are used to characterize soil runoff potential. Group A generally has the lowest runoff potential, whereas Group D has the highest runoff potential. Both SSURGO and STATSGO soil databases comprise a GIS polygon layer of map units and a linked database with multiple layers of soil property (USDA 2024a, USDA 2024b). Soil characteristics for predominant hydrologic soil groups are described in Table 5-1.

**Table 5-1. NRCS Hydrologic soil group descriptions**

Hydrologic Soil Group	Description
A	Sand, Loamy Sand, or Sandy Loam
B	Silt, Silt Loam or Loam
C	Sandy Clay Loam
D	Clay Loam, Silty Clay Loam, Sandy Clay, Silty Clay, or Clay

Source: Natural Resource Conservation Service (NRCS), Technical Release 55 (TR-55) (USDA 1986) .

Table 5-2 provides a summary of areas occupied by each SSURGO HSG, and Figure 5-2 shows the spatial distribution of these groups throughout the Salmon Creek watershed. The dominant soil group in the watershed is Group C (66%), containing sandy clay loam that typically has low infiltration rates. Group B (26%) is the next most common soil group in the watershed, containing moderately well to well-drained silt, silt loams, and loams. Group D makes up 6% of the watershed, with the lowest infiltration rates, containing clay loam, silty clay loam, sandy and silty clay, and clay. Group A, containing well-draining sand, loamy sand, and sandy loam, makes up nearly 1%. Only 0.05% of the watershed areas have mixed soils. For modeling purposes, mixed soils will be grouped with the nearest primary group as follows: A/D → B, B/D → C, and C/D → D. Finally, approximately 0.6% of the watershed HSG area is classified as unknown in the soils database and reside primarily within mountainous areas. For these areas, the corresponding HSG from the STATSGO dataset will be used to supplement the data gaps; some of these unknown soil areas may correspond to waterbodies.

**Table 5-2. NRCS Hydrologic soil groups in the Salmon Creek watershed**

Hydrologic Soil Group	Area (acres)	Percent Area
A	216.83	0.97%
B	5847.43	26.04%
C	14808.56	65.94%
C/D	12.27	0.05%
D	1437.18	6.40%
N/A	135.57	0.60%
<b>Total</b>	<b>22,457.84</b>	<b>100.0%</b>

Source: State Soil Geographic and Soil Survey Geographic Database (STATSGO/SSURGO)

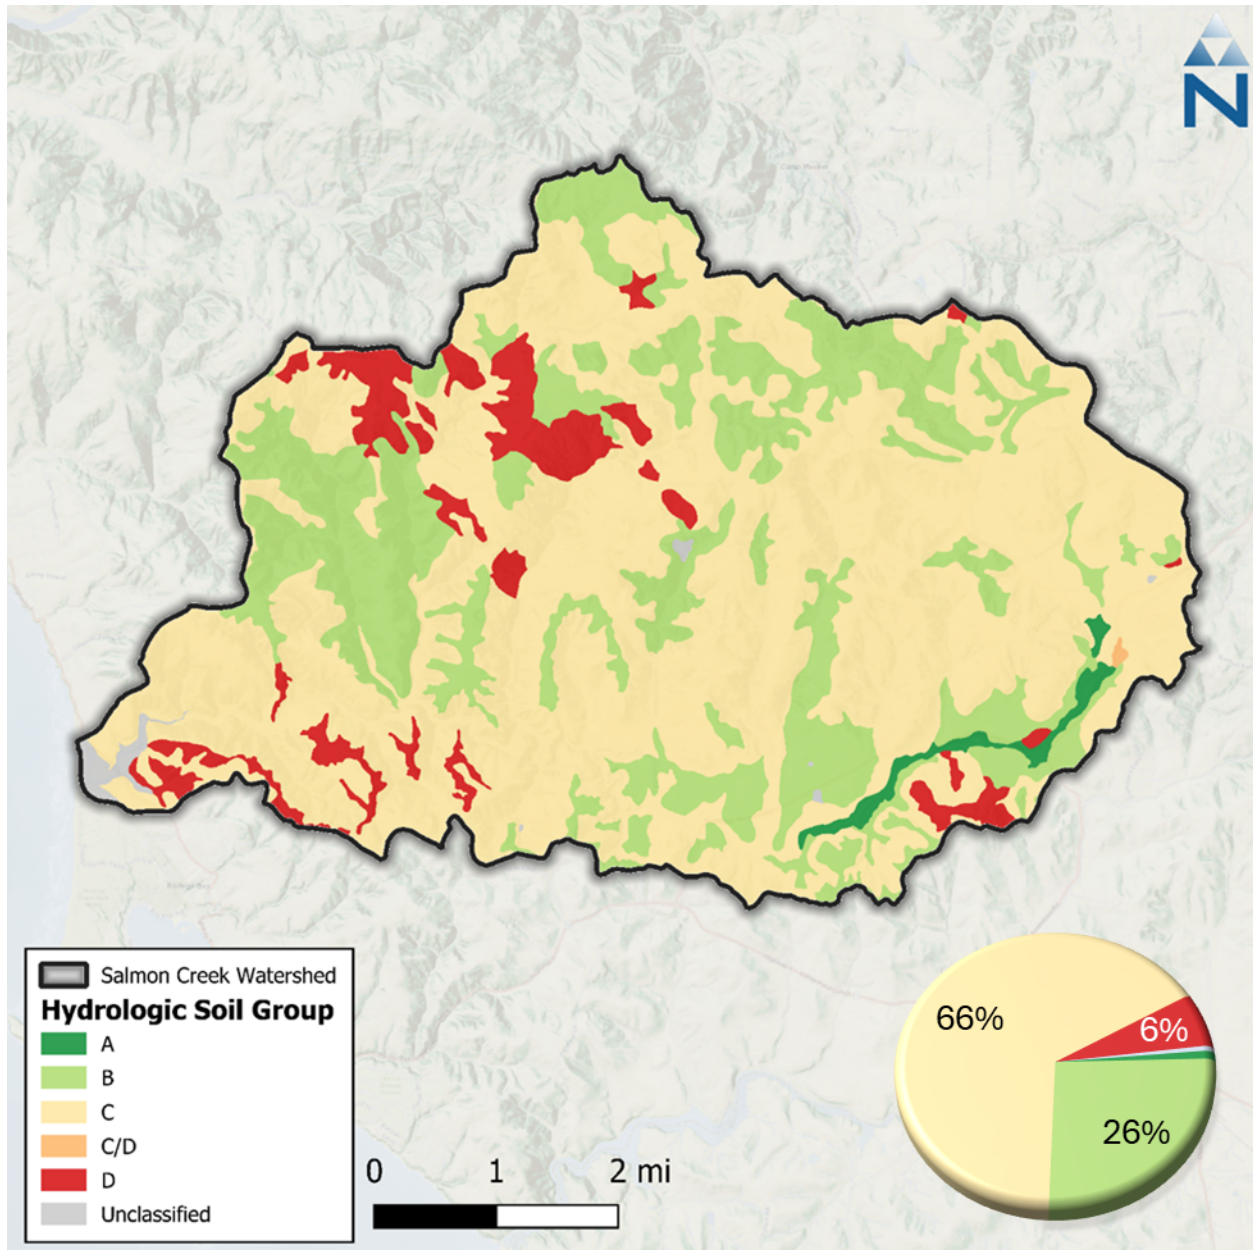


Figure 5-2. SSURGO hydrologic soil groups within the Salmon Creek watershed.

### 5.3 Land Cover

Land cover data are the primary basis layers for HRUs. The primary source of land cover data identified for this effort is the 2021 National Land Cover Database (NLCD) maintained by the Multi-Resolution Land Consortium (MRLC), a joint effort between multiple federal agencies. The primary objective of the MRLC NLCD is to provide a current data product in the public-domain with a consistent characterization of land cover across the United States. The first iteration of the NLCD dataset was in 1992. Since the 2001 NLCD version, a consistent 16-class land cover classification scheme has been adopted nationwide. The 2021 NLCD adopted this 16-class scheme at a 30-meter grid resolution.

Table 5-3. summarizes areal coverage of land use classes from a subset of the 2021 NLCD dataset that covers the Salmon Creek watershed, and Figure 5-3 shows the spatial distribution of these classifications. Evergreen Forest is the dominant land cover class covering approximately 41% of the watershed. When combined, deciduous forest, evergreen forest, mixed forest, shrub/scrub, and grassland/herbaceous account for 92% of the total watershed area. Developed land cover makes up approximately 5% of the total watershed area, and almost all developed land is developed open space (<20% impervious). There is no significant cultivated cropland in the watershed area, but this may potentially be underestimated as individual cultivated areas in the watershed may be smaller than the NLCD's 2.7-acre minimum mapping unit.


**Table 5-3. National Land Cover Database 2021 land cover summary in the Salmon Creek watershed**

NLCD Class	Classification Description	Area (acres)	Percent
11	Open Water	25.38	0.11%
21	Developed, Open Space <sup>1</sup>	1,057.39	4.71%
22	Developed, Low Intensity <sup>1</sup>	125.80	0.56%
23	Developed, Medium Intensity <sup>1</sup>	40.08	0.18%
24	Developed, High Intensity <sup>1</sup>	3.56	0.02%
31	Barren Land (Rock/Sand/Clay)	1.11	0.00%
41	Deciduous Forest	93.07	0.41%
42	Evergreen Forest	9,104.40	40.54%
43	Mixed Forest	1,357.09	6.04%
52	Shrub/Scrub	6,110.12	27.21%
71	Grassland/Herbaceous	4,095.09	18.23%
81	Pasture/Hay	23.60	0.11%
90	Woody Wetlands	161.43	0.72%
95	Emergent Herbaceous Wetlands	259.84	1.16%
<b>TOTAL*</b>		<b>22,457.96</b>	<b>100.00%</b>

Source: 2021 National Land Cover Database

1: Imperviousness: Open Space (<20%); Low Intensity (20-49%); Medium Intensity (50-79%); High Intensity (≥80%).

\* Note that because of the raster resolution, this total is approximately 0.1 acre more than the model domain.

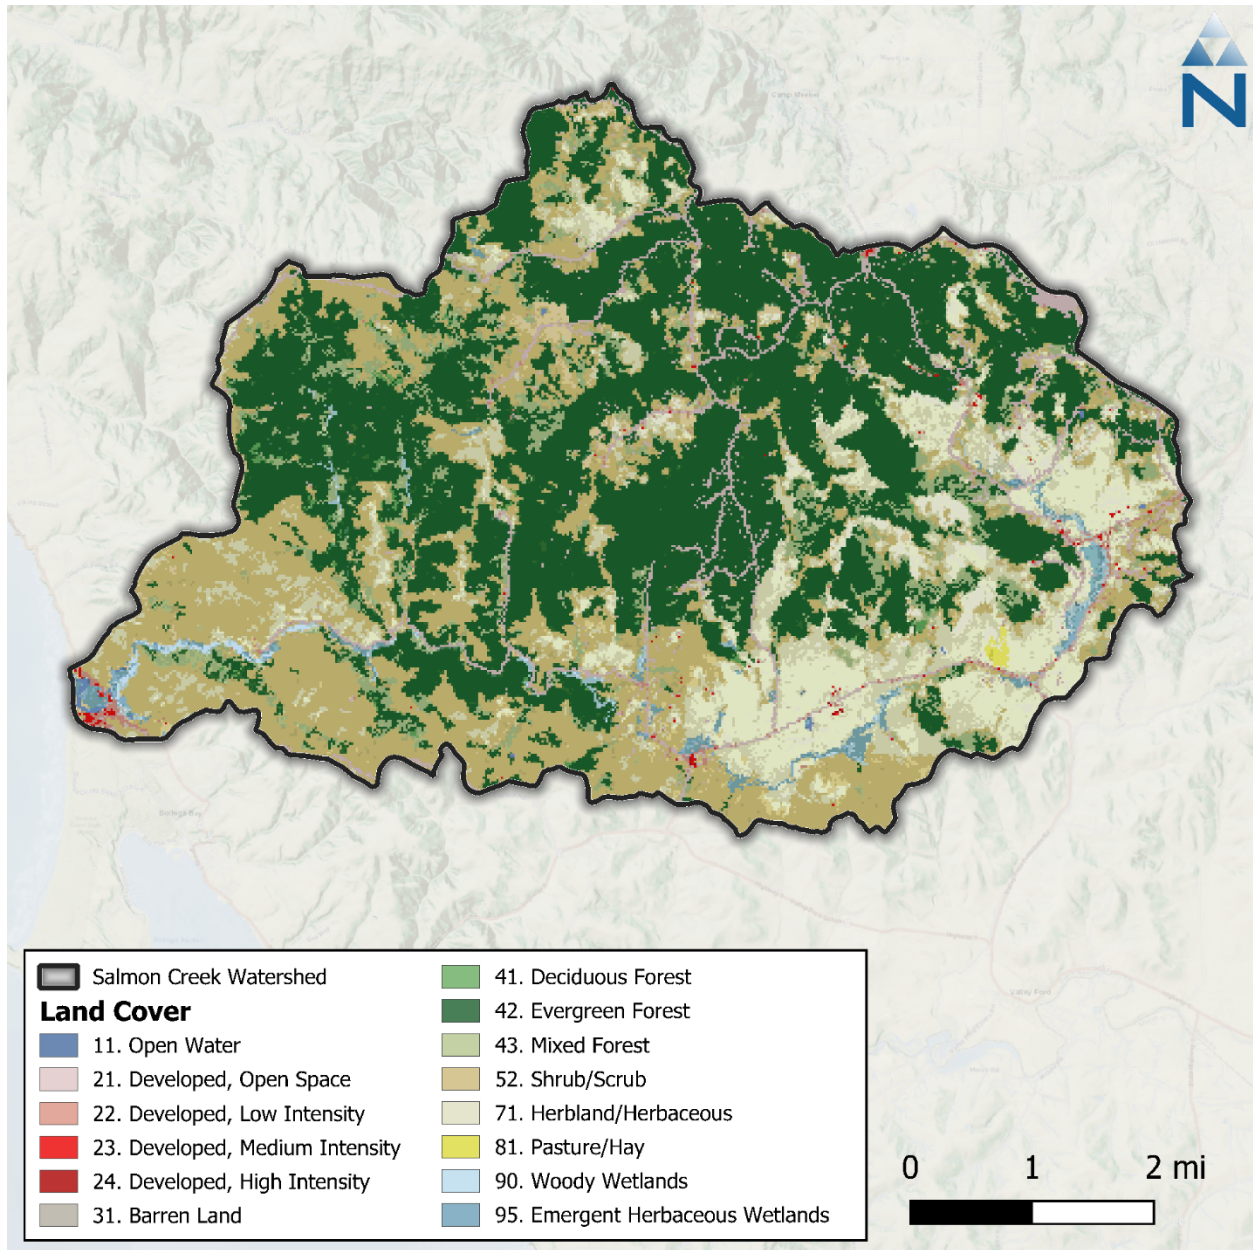

**Figure 5-3. NLCD 2021 land cover within the Salmon Creek watershed.**

MRLC publishes a developed impervious cover dataset as a companion to the NLCD land cover; this dataset is also provided as a raster with a 30-meter grid resolution. Impervious cover is expressed in each raster pixel as a percentage of total area ranging from 0 to 100 percent. Because this dataset provides impervious cover estimates for areas classified as *developed*, non-zero values closely align with developed areas (NLCD classification codes 21 through 24). Review of the Salmon Creek watershed using this dataset shows that just over 5% of the area is developed, or impervious. The developed area is classified further into open space, and low, medium, and high intensity development. Of those subcategories, open space and low intensity development make up most of the total developed area. Therefore, the total watershed area is largely undeveloped, and the areas that are developed are mostly developed to a small degree.

Because land cover can vary significantly over time due to anthropogenic changes (e.g., development, timber harvest) or naturally occurring events (e.g., forest fires, landslides), it may be necessary to also

time-vary land cover through the model simulation or, at a minimum, align the dataset used to represent land cover with the same time period as streamflow data used for model calibration. The NLCD 1992, 2001, 2006, 2011, and 2021 snapshots are all available for representing land cover changes within the model depending on the period, or multiple periods, or time selected for model calibration and validation. Land use change in the Salmon Creek watershed will be assessed as part of the model development, and a decision will be made based on the results as to whether land use change is represented explicitly, or a single land use snapshot is used.

Furthermore, the California Department of Forestry and Fire Protection (CAL FIRE) maintains databases of timber harvest plans and fire perimeters (see Table 1-3) which may be used in conjunction with the basic NLCD land cover snapshots to vary the land cover representing dynamic processes like timber harvests or episodic fire-related activities.

---

## 5.4 Tree Canopy Cover

MRLC publishes a tree canopy dataset as a companion to the NLCD land cover dataset that estimates the percentage of tree canopy cover spatially. The underlying data model was developed by the United States Forest Service (USFS) and is available through their partnership with the MRLC. This dataset is also provided as a raster with a 30-meter grid resolution. Like the impervious cover dataset, each raster pixel expresses the percent of the total area covered by tree canopy with values ranging from 0 to 100 percent. The percent tree canopy cover layer was produced by the USFS using a Random Forests regression algorithm (Housman et al. 2023). Across the Salmon Creek watershed, an average of 39% of the total watershed area is covered by tree canopy. Tree canopy cover data can be used to estimate model parameters like interception storage and lower-zone evapotranspiration rates.

---

## 5.5 Agriculture & Crops

Land cover data for the Salmon Creek Watershed (see Section 5.3) was analyzed to identify predominant cropland vegetation classes. Figure 5-4 shows the spatial distribution of these classes through the study area, and Table 5-4 summarizes their areal coverage. This analysis revealed that most of the Salmon Creek watershed is classified as either Forest (class 141-143) at 46% coverage, Shrubland (class 152) at 36% coverage, or Grassland/Pasture (class 176) at 8% coverage. Of the area that is classified as shrub or grassland, a portion may include areas of cultivated crops that were not automatically recognized through the processing of the remote sensing data or include cultivated crops on a rotating schedule. To reflect these situations, supplemental information published by the United States Department of Agriculture (USDA) can be used. The USDA Cropland Data Layer (CDL) is an annually updated raster dataset that geo-references crop-specific land use (USDA 2024). The dataset comes as a 30-meter resolution raster with a linked lookup table of 85 standard crop types, which can be used to classify agricultural land. The purpose of the CDL dataset is to provide a supplemental estimate of annual acreage used for major crop commodities. Additionally, a large-scale crop and land use identification dataset for the year 2020 is made available by CA DWR and could be used to supplement data gaps if necessary (DWR 2019). This dataset is intended to quantify crop acreage statewide and was constructed by analyzing remote sensing data gathered at the field scale.

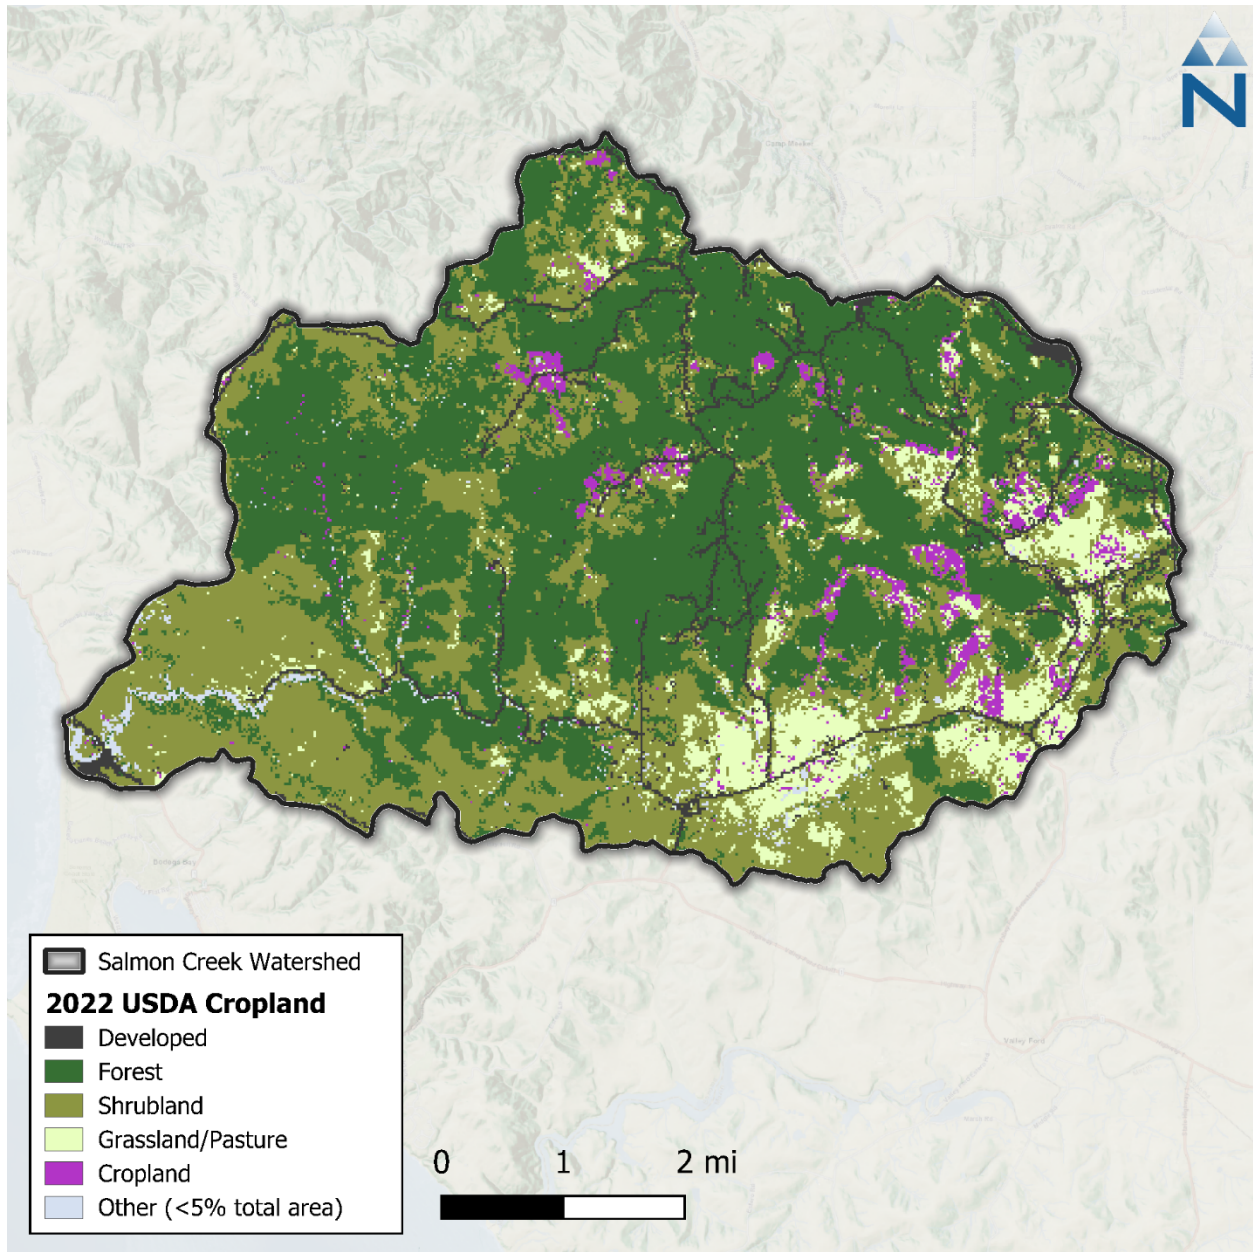


Figure 5-4 USDA 2022 Cropland Data within the Salmon Creek watershed.

Table 5-4 USDA 2022 Cropland Data summary within the Salmon Creek watershed

Crop Type	Area (ac)	Area (%)
Developed	1,210.58	5.39%
Forest	10,357.95	46.13%
Shrubland	8,134.96	36.23%
Grassland/Pasture	1,870.31	8.33%
Cropland	615.20	2.71%
Other (<5% Total Area)	265.41	1.21%
<b>Totals</b>	<b>22,454.41</b>	<b>100.00%</b>

## 6 DATA GAPS AND LIMITATIONS

---

Based on review of the hydrology datasets presented in Table 1-2, one potential limitation is the availability of daily streamflow data to support model calibration and testing. The only USGS gauge identified in the Salmon Creek watershed stopped monitoring in 1975. The 2022 USDA Crop Data show 5.4% of the watershed as “Developed” (Figure 5-4), and the 2021 NLCD shows that 4.7% of the watershed is “Developed Pervious” (Table 5-3). After adjusting the modeled developed area for directly connected imperviousness, the watershed is likely to be effectively pervious (about 99%), suggesting that the land cover and development footprint has not substantially changed since the time when flow data were available. Given the heavily forested landscape and relatively low-intensity, dispersed development in the watershed based on the most recent land use data, using the streamflow data available for the 1962-1975 period could produce a suitable reference condition for model calibration assuming the weather forcing inputs available for that period are robust.

Upon further investigation, the modeling period could be extended back to the period when the retired gauge has flow measurement records. This will provide the opportunity to calibrate the model. Additional evaluation of conditions during the years with available data will be necessary to corroborate how this older data set is representative of current conditions given the potential anthropogenic influences and climatic changes in recent years.

As noted in Section 3.3, it appears the Community Clean Water Institute has been conducting volunteer monitoring of local creeks in Sonoma County since 2003. It does not appear these data are accessible through the organization’s web interface and may need to be requested; however, depending on the locations of these gauges it may be a useful data set to evaluate locations not directly represented by the USGS gauge and should be explored further.

Another potential limitation is the availability, quality, and temporal resolution of data for surface water diversions within the watershed. The eWRIMS point of diversion dataset identifies major surface water diversions that are likely to have data to integrate into the model; however, other surface water diversions, such as water use to support cannabis cultivation, may not be mapped or have available data. These diversions may need to be mapped, and assumptions could be needed to represent water demand in the model if these demands are needed for model calibration purposes.

## 7 MODEL CONFIGURATION

---

Model configuration encompasses model selection and data integration. Model selection considered not only available data and the ability of available models to address key study objectives, but also, considered how existing or on-going modeling efforts could be leveraged to address the specific objectives of this study (Section 1). This section elaborates further on model selection and model configuration.

### 7.1 Model Selection

---

This modeling study’s objectives influence hydrologic model selection and technical approach development. The available data presented in Section 2 through Section 6 for characterizing the watershed also influence model selection. The key study objectives to be addressed with the selected hydrologic model are summarized below:

- Representation of unimpaired flows and baseline flows (e.g., water use and other human activities that impact instream flows and how they affect the water balance)

- The model simulation period should be long enough to capture variability between water years to represent conditions such as dry and wet year flows, environmental flows, drought curtailment, and other hydrological impacts.

To simulate streamflow, the model must be able to represent seasonal variability on the landscape and be responsive to both natural changes (e.g., meteorological conditions, vegetation cycles) and anthropogenic/hydromodification impacts (e.g., stream diversions, impoundments, groundwater pumping, timber harvest). An ideal platform should also be adaptable for simulating (1) spatial changes like those associated with representing pre-developed/unimpaired land cover states, (2) temporal changes like those associated with modeling climate change impacts, or (3) catastrophic impacts like those associated with extreme events such as 100-year storms and wildfires.

Public-domain models that can address those study objectives include the Hydrologic Simulation Program – Fortran (HSPF) (Barnwell and Johanson 1981), LSPC (Shen, Parker, and Riverson 2005), the Precipitation-Runoff Modeling System (PRMS) (Markstrom et al. 2015), and Soil and Water Assessment Tool (SWAT) (Neitsch et al. 2011). LSPC has been used extensively throughout California to model the unique hydrologic characteristics of the State’s watersheds and to inform regulatory decisions (i.e., development of TMDLs and associated amendments to Water Quality Control Plans), watershed management, or climate change analyses. Watersheds in California where LSPC modeling has been conducted include those in the San Francisco Bay region (SCVURPPP 2019; SMCWPPP 2020; Zi et al. 2021 and 2022), the Clear Lake watershed in the Central Valley Region (CVRWQCB 2006), the Lake Tahoe watershed in the Lahontan Region (LRWQCB and NDEP 2010; Riverson et al. 2013), all coastal watersheds of Los Angeles County (LACFCD 2020; LARWQCB 2010, 2012, 2013a, 2013b, and 2015; LARWQCB and USEPA 2005a, 2005b, 2006, and 2011; Tariq et al. 2017), the San Jacinto River watershed in the Santa Ana Region (SAWPA 2003 and 2004), and most coastal watersheds of the San Diego Region (City of San Diego and Caltrans 2016; City of Vista 2008; Los Peñasquitos Responsible Agencies 2015; San Diego Bay Responsible Parties 2016; SDRWQCB 2008, 2010, and 2012). These efforts have included comprehensive peer review processes and public comment, requiring demonstration of model accuracy based on standard practices for quantifying and documenting model performance. All the modeling documentation and reports cited here have withstood peer review and have supported amendments to Water Quality Control Plans or the approval of watershed plans submitted to the Water Board or Regional Water Quality Control Boards to demonstrate regulatory compliance.

LSPC is a modernized version of the HSPF platform that is now organized around a Microsoft Access relational database; otherwise, the LSPC model is functionally identical to the HSPF model. The relational database provides efficient data management, model maintenance, and development of alternative scenarios. The LSPC model runs using hourly input boundary conditions and can be sufficiently configured using the meteorological datasets discussed in Section 2. LSPC also has a feature that can vary land use over time when needed to explicitly represent dynamic processes such as timber harvests and wildfires—that feature needs supporting spatial and temporal data to represent dynamic land use changes. Based on the extensive history of successful LSPC model applications and its strengths and flexibility for potential coupling with a groundwater model (e.g., MODFLOW), LSPC is recommended as the watershed model for this study.

## 7.2 Model Configuration

---

An LSPC model will be configured using the data sets presented in Section 2 through Section 4.1. A hydrologic analysis will be developed with the primary goal of simulating instream flow time series for a minimum of 20 years through Water Year 2023 (10/1/2003 – 9/30/2023) and capable of representing both current/managed flow conditions and natural (pre-development) conditions. The

following briefly describes how major elements of the model will be constructed using the available data sets. Further details about each process and underlying assumptions will be documented in a modeling report:

- **Climate Forcing Inputs:** Climate forcing inputs to the model will include both precipitation and evapotranspiration. To create a dataset with the highest coverage, and spatial and temporal resolution, a hybrid land-based/grid-based approach will be used as explained in Section 2. A hybrid approach using the 4-km gridded PRISM monthly precipitation to promote the most accurate representation of the long-term water balance will be used in areas where gauge data are not available. Monthly PRISM precipitation totals will be downscaled using daily and hourly NCDC observed time series. Evapotranspiration will be represented using the 2-km gridded CIMIS daily reference evapotranspiration dataset downscaled to hourly based on the distribution of clear sky solar radiation from NLDAS. As proposed in Section 6, the climate data will be extended back to the 1960s to support calibration using the inactive USGS streamflow gauge. These time-series will use the available observed precipitation data at NCDC gauges and reference evapotranspiration data developed to capture long-term trends for CIMIS Zones 1 & 4, as daily CIMIS data are not available for that period.
- **Model Segmentation:** watershed delineations will be based on HUC-12 boundaries and use NHDPlus catchment boundaries to subdivide the HUC-12 boundaries to represent key points of interest in the network (e.g., confluence of tributaries, points of diversion, etc.). One primary reach segment will be represented per catchment and will use a cross-section calculated using trapezoidal geometry as a function of the cumulative upstream drainage area. If additional cross-sectional information is available, these geometries can be updated per catchment in the model.
- **Hydrologic Response Units:** HRUs represent unique combinations of landscape characteristics that will be derived by overlaying GIS data sets describing land cover, hydrologic soil group, and slope. The unique combinations of these three elements will form a set of HRUs that will be configured within the LSPC model. Due to the relatively small area of land cover with a specific crop type, we anticipate relying on the 2021 NLCD data to represent land cover; However, the USDA 2022 CDL may be considered if necessary during model configuration and calibration based on results. In the final model configuration, some HRUs may be reclassified and grouped when appropriate for model parameterization (e.g., multiple types of forest may be grouped into a single “forest” HRU category unless there is reason to represent different responses in the model for each type).
- **Water Use & Inflows:** To the extent that major sources of water use (e.g., groundwater pumping, surface diversions) or inter-basin transfers are known, these volumes will be included as withdrawals or inputs to the model. Assumptions may need to be made and documented for some of these sources/sinks and others may need to be excluded entirely if the impact(s) on the model prediction raises questions about the accuracy of the data. Priority will be given to representing these features when they influence points where the model is being compared to observed data for calibration purposes.

Based on the current understanding of the groundwater basins presented in Section 4 and associated data gaps describing the groundwater system, a fully linked groundwater model is not planned for this effort. However, if initial calibration efforts suggest a groundwater model would benefit the analysis, the information obtained from well data available from well completion reports will be useful in estimating the depth of aquifers and water production zones. A MODFLOW model (Langevin et al 2017) would be constructed approximating the bedrock units and the alluvial groundwater basins and will be integrated with a surface water model. Groundwater pumping would be estimated from water demand calculations based on land use information.

## 8 MODEL CALIBRATION

Since the streamflow data for Salmon Creek is available from 1962-1975, several approaches were discussed in Section 3.3 for model calibration. This work plan proposes a combined model calibration approach that includes:

1. Developing the model using an extended simulation back to the period with available data to directly calibrate the flow time series for the 1962-1975 period (Section 3.3, Approach 2).
2. Using one or more nearby streamflow gauges with data from 1962 through the Present to develop a statistical relationship between the streamflow records. The resulting regression relationship will be used to estimate the current flow for Salmon Creek to use for model validation (Section 3.3, Approach 3).

The first approach will include a narrative assessment of annual rainfall statistics and land use/land cover to compare rainfall trends and land use/land cover changes between the 1962-1975 period and present conditions.

The second approach will include a narrative comparison of watershed characteristics (e.g., land use distribution, climate trends, etc.) to assess similarities and differences between Salmon Creek and other watersheds that are used to develop streamflow relationships. Initially, an active USGS gauge to the north (USGS 11467200: AUSTIN C NR CAZADERO CA) was identified as a possible gauge to evaluate for correlation with Salmon Creek. While Austin Creek watershed is around 40,167 acres (1.79 times larger than Salmon Creek), both gauges have limited urban development and are free of major impoundments. Similarly to the Salmon Creek watershed, Austin Creek has a low percentage of cropland (0.06%) with grapes being the majority crop type. Up to two additional gauges will be evaluated, if necessary, to develop regression-based estimates if the relationship with the Austin Creek gauge does not satisfy statistical tests.

A combination of visual assessments and computed numerical evaluation metrics will be used to assess model performance during calibration. Model performance will be assessed using graphical comparisons or modeled vs. observed data (e.g., time-series plots, flow duration curves, cumulative distribution plots, and others) quantitative metrics and qualitative thresholds recommended by Moriasi et al. (2015) and Duda et al. (2012), which are considered highly conservative. Moriasi et al. (2007 and 2015) assign narrative grades for hydrology and water quality modeling to the percent bias (PBIAS), the ratio of the root mean square error to the standard deviation of measured data (RSR), and the Nash-Sutcliffe model efficiency (NSE). These metrics are defined as follows:

- The percent bias (PBIAS) quantifies systematic overprediction or underprediction of observations. A bias towards underestimation is reflected in positive values of PBIAS while a bias towards overestimation is reflected in negative values. Low magnitude values of PBIAS indicate better fit, with a value of 0 being optimal.
- The ratio of the root mean square error to the standard deviation of measured data (RSR) provides a measure of error based on the root mean square error (RMSE), which indicates error results in the same units as the modeled and observed data but normalized based on the standard deviation of observed data. Values for RSR can be greater than or equal to 0, with a value of 0 indicating perfect fit. Moriasi et al. (2007) provide narrative grades for RSR.
- The Nash-Sutcliffe efficiency (NSE) is a normalized statistic that determines the relative magnitude of the residual variance compared to the measured data variance (Nash and Sutcliffe 1970). NSE indicates how well the plot of observed versus simulated data fits the 1:1 line. Values for NSE can range between  $-\infty$  and 1, with  $NSE = 1$  indicating a perfect fit.

Other metrics can also be computed and used to assess calibrated model performance, including the Kling-Gupta Efficiency (KGE). This metric can provide additional or complementary information on model performance to the three metrics listed above and is defined as follows:

- The Kling-Gupta Efficiency (KGE) metric is based on the Euclidean Distance between an idealized reference point and a sample's bias, standard deviation, and correlation within a three-dimensional space (Gupta et al. 2009). KGE attempts to address documented shortcomings of NSE, but the two metrics are not directly comparable. A KGE value of 1 indicates perfect fit, with agreement becoming worse for values less than 1. Knoben, Freer, and Woods (2019) have suggested a KGE value  $> -0.41$  as a benchmark that indicates a model has more predictive skill than using the mean observed flow.

Both modeled time series and observed data will be binned into subsets of time to highlight seasonal performance and different flow conditions. Those bins include annual average streamflow, highest 10% of flows (to isolate model performance during high flows), lowest 50% of flows (to isolate model performance during low flows). Hydrograph separation will also be performed to assess stormwater runoff vs. baseflow periods. Table 8-1 is a summary of performance metrics that will be used to evaluate hydrology calibration; as shown in this table, "All Conditions" (i.e., annual interval) for R-squared and NSE is the primary condition typically evaluated during model calibration. For sub-annual intervals, the pattern established in the literature for PBIAS/RME when going from "All Conditions" to sub-annual intervals is to shift the qualitative assessment by one category (e.g., use the "good" range for "very good," "satisfactory" for "good," and so on). This pattern will also be followed for R-squared and NSE qualitative assessments of sub-annual intervals.

The LSPC calibration performance in the Salmon Creek watershed will be assessed to see if linkage of the LSPC model with a groundwater model (e.g., MODFLOW) could improve performance and process interactions. This could be manifested through a significant mismatch between the simulated and observed baseflow during dry periods. Other indicators include the mismatch between the simulated and observed hydrograph shape, demonstrating significant flow timing and magnitude differences. The presence of substantial agricultural operations in the watershed, which alters the overall hydrologic budgets through groundwater pumping, stream flow diversions, and return flows, could also necessitate the linkage of the LSPC model with a groundwater model.

**Table 8-1. Summary of performance metrics used to evaluate hydrology calibration**

Performance Metric	Hydrological Condition	Performance Threshold for Hydrology Simulation			
		Very Good	Good	Fair	Poor
Percent Bias (PBIAS)	All Conditions <sup>1</sup>	<5%	5% - 10%	10% - 15%	>15%
	Seasonal Flows <sup>2</sup>	<10%	10% - 15%	15% - 25%	>25%
	Highest 10% of Daily Flow Rates <sup>3</sup>				
	Lowest 50% of Daily Flow Rates <sup>4</sup>				
	Days Categorized as Storm Flow <sup>5</sup>				
	Days Categorized as Baseflow <sup>5</sup>				
	Highest 10% of Daily Flow Rates <sup>3</sup>				
	Lowest 50% of Daily Flow Rates <sup>4</sup>				
	Days Categorized as Storm Flow <sup>5</sup>				
	Days Categorized as Baseflow <sup>5</sup>				
RMSE – Std Dev Ratio (RSR)	All Conditions <sup>1</sup>	≤0.50	0.50 - 0.60	0.60 - 0.70	>0.70
	Seasonal Flows <sup>2</sup>	≤0.40	0.40 - 0.50	0.50 - 0.60	>0.60
Nash-Sutcliffe Efficiency (NSE)	All Conditions <sup>1</sup>	>0.80	0.70 - 0.80	0.50 - 0.70	≤0.50
	Seasonal Flows <sup>2</sup>	>0.70	0.50 - 0.70	0.40 - 0.50	≤0.40
Kling-Gupta Efficiency (KGE)	All Conditions <sup>6</sup>	≥0.90	0.90 - 0.75	0.75 - 0.50	<0.50

1. All Flows considers all daily time steps in the model time series.
2. Seasonal Flows considers daily flows during a predefined, six-month seasonal period (e.g., Wet Season and Dry Season). The Wet Season includes the months of November through April. The Dry Season includes the months of May through October.
3. Highest 10% of Flows considers the top 10% of daily flows by magnitude as determined from the flow duration curve.
4. Lowest 50% of Flows considers the bottom 50% of daily flows by magnitude as determined from the flow duration curve.
5. Baseflows and Storm flows were determined from analyzing the daily model time series by applying the USGS hydrograph separation approach (Sloto and Crouse 1996).
6. KGE evaluated using thresholds developed for monthly aggregated time series (Kouchi et al. 2017).

## 9 SUMMARY & NEXT STEPS

This work plan presented the available data and proposed methods for developing a hydrologic model of the Salmon Creek watershed. Once this work plan is finalized, the data sets described in this memo will be used to develop an LSPC model as described in Section 7. After finalizing the work plan, the first step of that process will be to present and finalize watershed boundaries and subcatchment delineations that capture key points of interest in the watershed (e.g., tributary confluences, gauge locations, and the like). Once built, this model will be calibrated using the metrics presented in Section 8 and documented in a model development report. Table 9-1 presents a summary of the deliverables planned for the Salmon Creek watershed.

**Table 9-1. Proposed schedule and summary of deliverables**

Task	Subtask	Deliverable	Due Date
2	2.1	Data Compilation Inventory in Excel Format	--
	2.2	Draft Work Plan	--
	2.3	Final Work Plan	Two (2) weeks after receiving comments
3	3.1	Subbasin delineation and stream GIS files	Two (2) weeks after completing Task 2.3
	3.2	LSPC database, model inputs, and GIS files <sup>1</sup>	Twelve (12) weeks after completing Task 3.1
4	4.1	Draft Calibration Slide Deck	Six (6) weeks after completing Task 3.2
		Final Calibration Slide Deck	Four (4) weeks after receiving comments on Draft Calibration Slide Deck
5	5.1	Partial Draft Model Development Report <sup>1</sup>	Twelve (12) weeks after completing Task 3.1
		Draft Model Development Report	Six (6) weeks after completing Task 3.2
	5.2	Final Model Development Report	Four (4) weeks after receiving comments on Task 5.1 Draft MDR
	5.3	Final LSPC Model Code & Software	Two (2) weeks after Task 5.2
	5.4	Final Model Files including LSPC executable, LSPC database, LSPC model inputs, final GIS files	Two (2) weeks after Task 5.2

1. Partial Draft Model Development Report under Task 5.1 will be delivered in conjunction with Task 3.2 to document the model configuration.

## 10 REFERENCES

---

- Allen, R. G., Walter, I. A., Elliott, R., Howell, T., Itenfisu, D., & Jensen, M. 2005. The ASCE Standardized Reference Evapotranspiration Equation.
- Barnwell, T. O., & Johanson, R. 1981. HSPF: A comprehensive package for simulation of watershed hydrology and water quality.
- Behnke, R., Vavrus, S., Allstadt, A., Albright, T., Thogmartin, W. E., & Radeloff, V. C. 2016. Evaluation of downscaled, gridded climate data for the conterminous United States. *Ecological Applications*, 26(5), 1338–1351. <https://doi.org/10.1002/15-1061>
- CA Mines (California Division of Mines and Geology). 1982. Geologic Map of the Santa Rosa Quadrangle, California, 1:250,000.
- CGS (Department of Conservation, California Geological Survey). 2010. Geologic Map of California: Version 2.0 (California Geological Survey 150th Anniversary Edition). <https://maps.conservation.ca.gov/geology/>
- City of San Diego and Caltrans. 2016. Mission Bay Watershed Management Area Water Quality Improvement Plan. Submitted to the San Diego Regional Water Quality Control Board by the City of San Diego and Caltrans. San Diego, CA.
- City of Vista. (2008). Agua Hedionda Watershed Management Plan – Final. Prepared by Tetra Tech for the City of Vista, CA.
- Community Clean Water Institute. 2024. Stream Data. Retrieved August 26, 2024, from <https://www.communitycleanwater.org/stream-data/>
- Cosgrove, B. A., Lohmann, D., Mitchell, K. E., Houser, P. R., Wood, E. F., Schaake, J. C., Robock, A., Marshall, C., Sheffield, J., Duan, Q., Luo, L., Higgins, R. W., Pinker, R. T., Tarpley, J. D., & Meng, J. (2003). Real-time and retrospective forcing in the North American Land Data Assimilation System (NLDAS) project. *Journal of Geophysical Research: Atmospheres*, 108(22), 8842. <https://doi.org/10.1029/2002jd003118>
- CVRWQCB (Central Valley Regional Water Quality Control Board). 2006. Amendment to the Water Quality Control Plan for the Sacramento River and San Joaquin River Basins for The Control of Nutrients in Clear Lake. California Water Quality Control Board, Central Valley Region. Rancho Cordova, CA.
- Daly, C., Halbleib, M., Smith, J. I., Gibson, W. P., Doggett, M. K., Taylor, G. H., Curtis, J., & Pasteris, P. P. 2008. Physiographically sensitive mapping of climatological temperature and precipitation across the conterminous United States. *International Journal of Climatology*, 28(15), 2031–2064. <https://doi.org/10.1002/joc.1688>
- Daly, C., Neilson, R. P., & Phillips, D. L. 1994. A Statistical-Topographic Model for Mapping Climatological Precipitation over Mountainous Terrain. *Journal of Applied Meteorology*, 33(2), 140–158. [https://doi.org/10.1175/1520-0450\(1994\)033<0140:ASTMFM>2.0.CO;2](https://doi.org/10.1175/1520-0450(1994)033<0140:ASTMFM>2.0.CO;2)

- Duda, P. B., Hummel, P. R., Donigian Jr., A. S., & Imhoff, J. C. 2012. BASINS/HSPF: Model Use, Calibration, and Validation. Transactions of the ASABE, 55(4), 1523–1547. <https://doi.org/10.13031/2013.42261>
- DWR (California Department of Water Resources). 2019. Statewide Crop Mapping - Datasets - California Natural Resources Agency Open Data. <https://data.cnra.ca.gov/dataset/statewide-crop-mapping>
- DWR (California Department of Water Resources). 2020. California's Groundwater Basin Boundary Descriptions. <https://data.cnra.ca.gov/dataset/ca-gw-basin-boundary-descriptions>
- Fawcett, M. H., Cantor, S., & Michaud, J. 2013. Salmon Creek Coho Monitoring 2008-2013 Final Report. Prepared for the Gold Ridge Resource Conservation District.
- Gibson, W. P., Daly, C., Kittel, T., Nychka, D., Johns, C., Rosenbloom, N., McNab, A., & Taylor, G. (2002). Development of a 103-year high-resolution climate data set for the conterminous United States.
- Gupta, H. V., Kling, H., Yilmaz, K. K., & Martinez, G. F. 2009. Decomposition of the mean squared error and NSE performance criteria: Implications for improving hydrological modelling. Journal of Hydrology, 377(1–2), 80–91. <https://doi.org/10.1016/j.jhydrol.2009.08.003>
- Knoben, W. J. M., Freer, J. E., & Woods, R. A. 2019. Technical note: Inherent benchmark or not? Comparing Nash–Sutcliffe and Kling–Gupta efficiency scores. Hydrology and Earth System Sciences, 23(10), 4323–4331. <https://doi.org/10.5194/hess-23-4323-2019>
- Kouchi, D.H., K. Esmaili, A. Faridhosseini, S.H. Sanaeinejad, D. Khalili, and K.C. Abbaspour, 2017. Sensitivity of Calibrated Parameters and Water Resource Estimates on Different Objective Functions and Optimization Algorithms. Water, 9. <https://doi.org/10.3390/w9060384>
- LACFCD (Los Angeles County Flood Control District). 2020. WMMS Phase I Report: Baseline Hydrology and Water Quality Model. Prepared for the Los Angeles County Flood Control District by Paradigm Environmental. Alhambra, CA.
- Langevin, C. D., Hughes, J. D., Banta, E. R., Niswonger, R. G., Panday, S., & Provost, A. M. 2017. Documentation for the MODFLOW 6 Groundwater Flow Model. U.S. Geological Survey Techniques and Methods, Book 6, Chap. A55, 197 p.
- LARWQCB (Los Angeles Regional Water Quality Control Board). 2010. Los Angeles River Watershed Bacteria Total Maximum Daily Load. California Regional Water Quality Control Board, Los Angeles Region. Los Angeles, CA.
- LARWQCB (Los Angeles Regional Water Quality Control Board). 2012. Reconsideration of Certain Technical Matters of the Malibu Creek and Lagoon Bacteria TMDL. California Regional Water Quality Control Board, Los Angeles Region. Los Angeles, CA.
- LARWQCB (Los Angeles Regional Water Quality Control Board). 2013a. Reconsideration of Certain Technical Matters of the Santa Monica Bay Beaches Bacteria TMDLs; Marina del Rey Harbor Mothers' Beach and Back Basins TMDL; and the Los Angeles Harbor Inner Cabrillo Beach and Main Ship Channel Bacteria TMDL. California Regional Water Quality Control Board, Los Angeles Region. Los Angeles, CA.

- LARWQCB (Los Angeles Regional Water Quality Control Board). 2013b. Reconsideration of Certain Technical Matters of the TMDL for Bacteria Indicator Densities in Ballona Creek, Ballona Estuary, and Sepulveda Channel. California Regional Water Quality Control Board, Los Angeles Region. Los Angeles, CA.
- LARWQCB (Los Angeles Regional Water Quality Control Board). 2015. Total Maximum Daily Loads for Indicator Bacteria in San Gabriel River, Estuary and Tributaries. California Regional Water Quality Control Board, Los Angeles Region. Los Angeles, CA.
- LARWQCB (Los Angeles Regional Water Quality Control Board) and USEPA (U.S. Environmental Protection Agency). 2005a. Total Maximum Daily Load for Metals in Ballona Creek. California Regional Water Quality Control Board, Los Angeles Region, and U.S. Environmental Protection Agency Region 9. Los Angeles, CA.
- LARWQCB (Los Angeles Regional Water Quality Control Board) and USEPA (U.S. Environmental Protection Agency). 2005b. Total Maximum Daily Load for Metals in Ballona Creek. California Regional Water Quality Control Board, Los Angeles Region, and U.S. Environmental Protection Agency Region 9. Los Angeles, CA.
- LARWQCB (Los Angeles Regional Water Quality Control Board) and USEPA (U.S. Environmental Protection Agency). 2006a. Total Maximum Daily Loads for Metals and Selenium, San Gabriel River and Tributaries. California Regional Water Quality Control Board, Los Angeles Region, and U.S. Environmental Protection Agency, Region 9. Los Angeles, CA.
- LARWQCB (Los Angeles Regional Water Quality Control Board) and USEPA (U.S. Environmental Protection Agency). 2006b. Total Maximum Daily Loads for Metals and Selenium, San Gabriel River and Tributaries. California Regional Water Quality Control Board, Los Angeles Region, and U.S. Environmental Protection Agency, Region 9. Los Angeles, CA.
- LARWQCB (Los Angeles Regional Water Quality Control Board) and USEPA (U.S. Environmental Protection Agency). 2011. Dominguez Channel and Greater Los Angeles and Long Beach Harbor Waters Toxics Total Maximum Daily Loads. California Regional Water Quality Control Board, Los Angeles Region, and U.S. Environmental Protection Agency Region 9. Los Angeles, CA.
- Los Peñasquitos Responsible Agencies. 2015. Los Peñasquitos Watershed Management Area Water Quality Improvement Plan and Comprehensive Load Reduction Plan. Submitted to the San Diego Regional Water Quality Control Board by the City of San Diego, County of San Diego, City of Del Mar, Caltrans, and City of Poway. San Diego, CA.
- LRWQCB (Lahontan Regional Water Quality Control Board) and NDEP (Nevada Division of Environmental Protection). 2010. Lake Tahoe Total Maximum Daily Load Technical Report. California Regional Water Quality Control Board, Lahontan Region. South Lake Tahoe, CA.
- Markstrom, S. L., Regan, R. S., Hay, L. E., Viger, R. J., Webb, R. M., Payn, R. A., & LaFontaine, J. H. (2015). PRMS-IV, the precipitation-runoff modeling system, version 4.
- Melton, F. S., Huntington, J., Grimm, R., Herring, J., Hall, M., Rollison, D., Erickson, T., Allen, R., Anderson, M., Fisher, J. B., Kilic, A., Senay, G. B., Volk, J., Hain, C., Johnson, L., Ruhoff, A., Blankenau, P., Bromley, M., Carrara, W., ... Anderson, R. G. (2022). OpenET: Filling a Critical

- Data Gap in Water Management for the Western United States. JAWRA Journal of the American Water Resources Association, 58(6), 971–994. <https://doi.org/10.1111/1752-1688.12956>
- Mitchell, K. E., Lohmann, D., Houser, P. R., Wood, E. F., Schaake, J. C., Robock, A., Cosgrove, B. A., Sheffield, J., Duan, Q., Luo, L., Higgins, R. W., Pinker, R. T., Tarpley, J. D., Lettenmaier, D. P., Marshall, C. H., Entin, J. K., Pan, M., Shi, W., Koren, V., ... Bailey, A. A. (2004). The multi-institution North American Land Data Assimilation System (NLDAS): Utilizing multiple GCIP products and partners in a continental distributed hydrological modeling system. *Journal of Geophysical Research: Atmospheres*, 109(7). <https://doi.org/10.1029/2003jd003823>
- Moriasi, D. N., Arnold, J. G., Van Liew, M. W., Bingner, R. L., Harmel, R. D., & Veith, T. L. 2007. Model Evaluation Guidelines for Systematic Quantification of Accuracy in Watershed Simulations. *Transactions of the ASABE*, 50(3), 885–900. <https://doi.org/10.13031/2013.23153>
- Moriasi, D. N., Gitau, M. W., Pai, N., & Daggupati, P. 2015. Hydrologic and water quality models: Performance measures and evaluation criteria. *Transactions of the ASABE*, 58(6), 1763–1785. <https://doi.org/10.13031/trans.58.10715>
- Nash, J. E., & Sutcliffe, J. V. 1970. River flow forecasting through conceptual models part I - A discussion of principles. *Journal of Hydrology*, 10(3), 282–290. [https://doi.org/10.1016/0022-1694\(70\)90255-6](https://doi.org/10.1016/0022-1694(70)90255-6)
- Neitsch, S. L., Arnold, J. G., Kiniry, J. R., & Williams, J. R. 2011. Soil and Water Assessment Tool Theoretical Documentation.
- Riverson, J., Coats, R., Costa-Cabral, M., Dettinger, M., Reuter, J., Sahoo, G., & Schladow, G. (2013). Modeling the transport of nutrients and sediment loads into Lake Tahoe under projected climatic changes. *Climatic Change*, 116(1), 35–50. <https://doi.org/10.1007/s10584-012-0629-8>
- San Diego Bay Responsible Parties. 2016. San Diego Bay Watershed Management Area Water Quality Improvement Plan. Submitted to the San Diego Regional Water Quality Control Board by the San Diego Bay Responsible Parties. San Diego, CA.
- SAWPA (Santa Ana Watershed Project Authority). 2003. Lake Elsinore and Canyon Lake Nutrient Source Assessment. Prepared by Tetra Tech for the Santa Ana Watershed Project Authority. Riverside, CA.
- SAWPA (Santa Ana Watershed Project Authority). 2004. San Jacinto Nutrient Management Plan. Prepared by Tetra Tech for the Santa Ana Watershed Project Authority. Riverside, CA.
- SCVURPPP (Santa Clara Valley Urban Runoff Pollution Prevention Program). 2019. Santa Clara Valley Reasonable Assurance Analysis Addressing PCBs and Mercury: Phase II Green Stormwater Infrastructure Modeling Report. Prepared by Paradigm Environmental for the Santa Clara Valley Urban Runoff Pollution Prevention Program. Sunnyvale, CA.
- SDRWQCB (San Diego Regional Water Quality Control Board). 2008. Total Maximum Daily Loads (TMDLs) for Copper, Lead, and Zinc in Chollas Creek. California Regional Water Quality Control Board, San Diego Region. San Diego, CA.
- SDRWQCB (San Diego Regional Water Quality Control Board). 2010. Revised Total Maximum Daily Loads for Indicator Bacteria Project I – Twenty Beaches and Creeks in the San Diego

- Region (Including Tecolote Creek). California Regional Water Quality Control Board, San Diego Region. San Diego, CA.
- SDRWQCB (San Diego Regional Water Quality Control Board). 2012. Los Peñasquitos Lagoon Sediment/Siltation TMDL. California Regional Water Quality Control Board, San Diego Region. San Diego, CA.
- Shen, J., Parker, A., & Riverson, J. 2005. A new approach for a Windows-based watershed modeling system based on a database-supporting architecture. *Environmental Modelling & Software*, 20(9), 1127–1138. <https://doi.org/10.1016/j.envsoft.2004.07.004>
- Sloto, R. A., & Crouse, M. Y. 1996. HYSEP: A Computer Program for Streamflow Hydrograph Separation and Analysis: U.S. Geological Survey Water-Resources Investigations Report 1996–4040. <https://doi.org/10.3133/wri964040>
- SMCWPPP (San Mateo Countywide Water Pollution Prevention Program). 2020. San Mateo County-wide Reasonable Assurance Analysis Addressing PCBs and Mercury: Phase II Green Infrastructure Modeling. Prepared by Paradigm Environmental and Larry Walker Associates for the San Mateo Countywide Water Pollution Prevention Program. Redwood City, CA.
- Tariq, A., Lempert, R. J., Riverson, J., Schwartz, M., & Berg, N. (2017). A climate stress test of Los Angeles’ water quality plans. *Climatic Change*, 144(4), 625–639. <https://doi.org/10.1007/s10584-017-2062-5>
- USDA (United States Department of Agriculture). 1986. Urban Hydrology for Small Watersheds, Technical Release 55 (TR-55).
- USDA (United States Department of Agriculture). 2024a. Digital General Soil Map of the United States (STATSGO2).
- USDA (United States Department of Agriculture). 2024b. Digital General Soil Map of the United States (STATSGO2).
- USDA (United States Department of Agriculture). 2024. Cropland Data Layer. Accessed January 31, 2024. <https://croplandcros.scinet.usda.gov/>
- USEPA (U.S. Environmental Protection Agency). 2009. Loading Simulation Program C++. Science Inventory. Record ID: 75860.
- USGS (United States Geological Survey). 2019. The StreamStats program. The StreamStats Program. <https://www.usgs.gov/streamstats>
- USGS (United States Geological Survey). 2024. Sustainable Groundwater, California Groundwater Model Archive. Sustainable Groundwater, California Groundwater Model Archive
- Xia, Y., Mitchell, K., Ek, M., Cosgrove, B., Sheffield, J., Luo, L., Alonge, C., Wei, H., Meng, J., Livneh, B., Duan, Q., & Lohmann, D. (2012). Continental-scale water and energy flux analysis and validation for North American Land Data Assimilation System project phase 2 (NLDAS-2): 2. Validation of model-simulated streamflow. *Journal of Geophysical Research Atmospheres*, 117(3). <https://doi.org/10.1029/2011JD016051>

- Zi, T., Braud, A., McKee, L., & Foley, M. 2022. San Francisco Bay Watershed Dynamic Model (WDM) Progress Report, Phase 2. Report prepared for the Sources Pathways and Loadings Workgroup of the Regional Monitoring Program for Water Quality. SFEI Contribution #1091. <https://www.sfei.org/documents/san-francisco-bay-watershed-dynamic-model-wdm-progress-report-phase-2>
- Zi, T., McKee, L., Yee, D., & Foley, M. 2021. San Francisco Bay Regional Watershed Modeling Progress Report, Phase 1. Report prepared for the Sources Pathways and Loadings Workgroup of the Regional Monitoring Program for Water Quality. SFEI Contribution #1038. <https://www.sfei.org/documents/san-francisco-bay-regional-watershed-modeling-progress-report-phase-1>